


The Advanced Research WRF (ARW) Dynamics Solver

Bill Skamarock

skamaroc@ucar.edu

Jimmy Dudhia

dudhia@ucar.edu

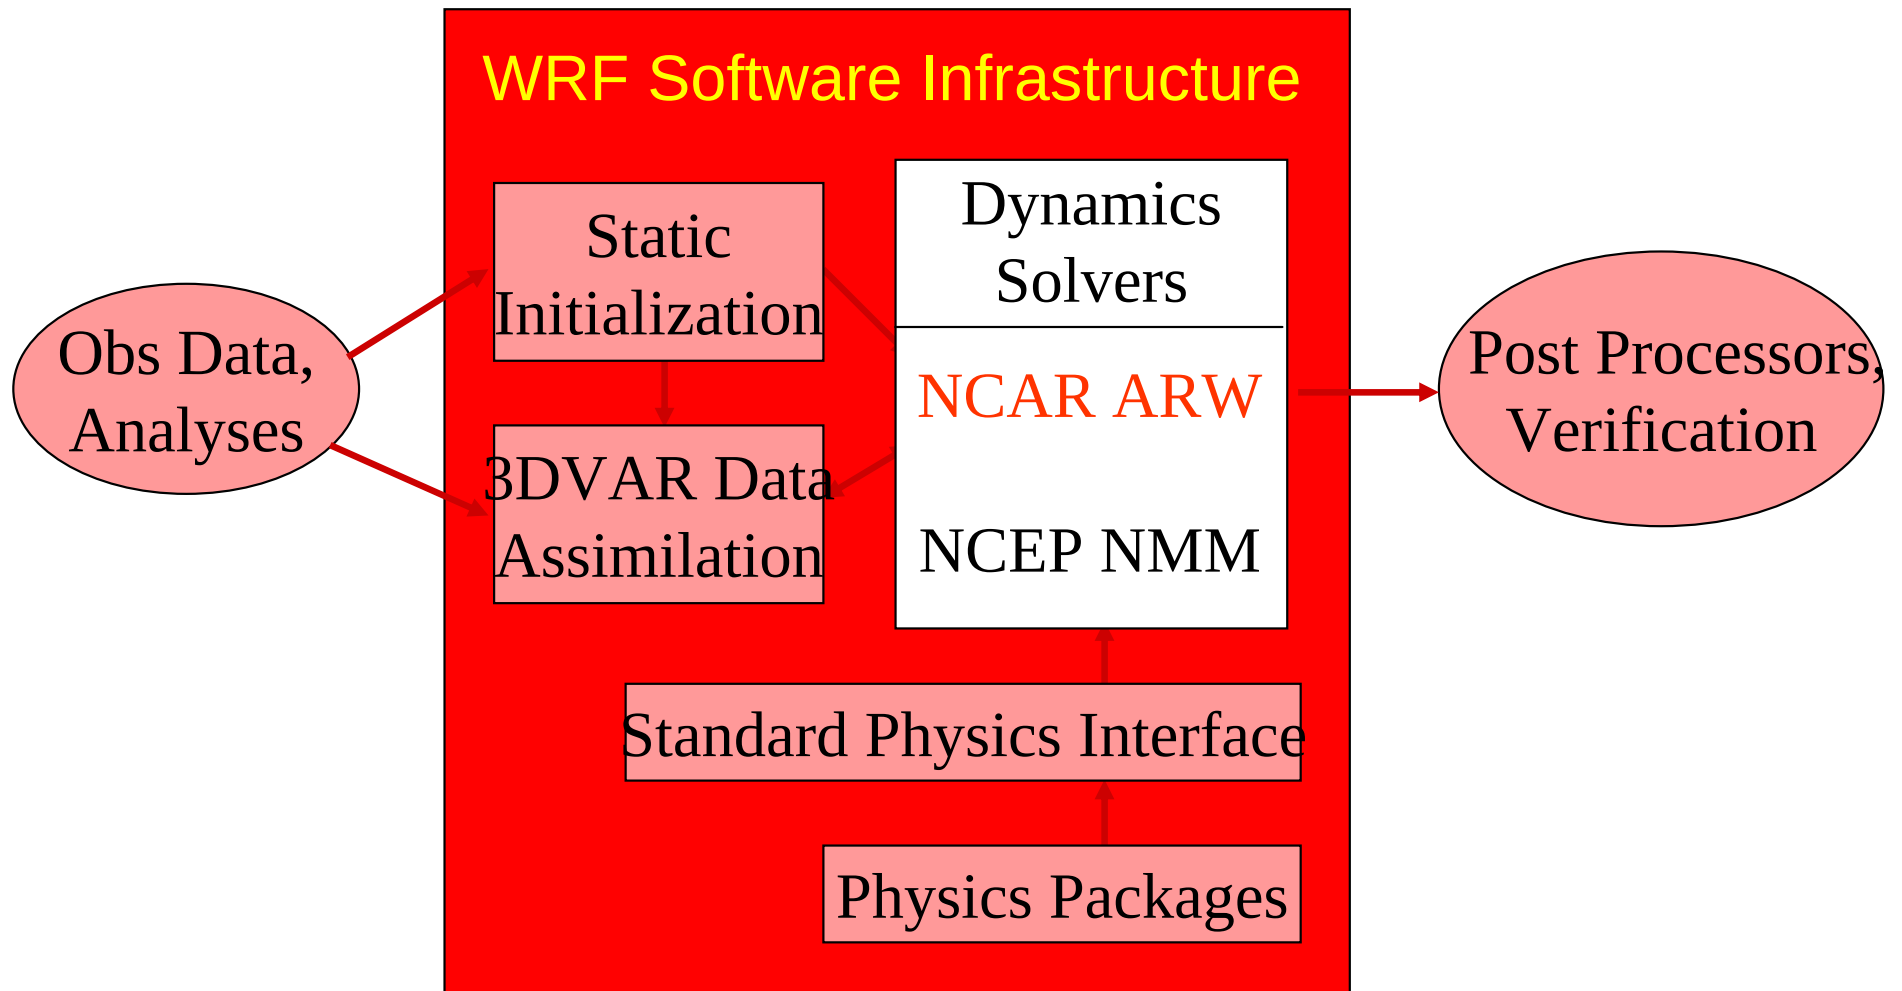

ARW Dynamical Solver

- Terrain representation
- Vertical coordinate
- Equations / variables
- Grid staggering
- Time integration scheme
- Advection scheme
- Time step parameters
- Filters
- Boundary conditions
- Nesting
- Map projections

WRF-ARW

- Terrain-following hydrostatic pressure vertical coordinate
- Arakawa C-grid
- 3rd order Runge-Kutta split-explicit time integration
- Conserves mass, momentum, entropy, and scalars using flux form prognostic equations
- 5th order upwind or 6th order centered differencing for advection


MM5

- Terrain-following height (sigma-z) vertical coordinate
- B-grid
- 1st order (time-filtered) Leapfrog time integration
- Advective formulation (no conservation properties)
- 2nd order centered differencing for advection

ARW, Terrain Representation

Lower boundary condition for the geopotential ($\phi = gz$) specifies the terrain elevation, and specifying the lowest coordinate surface to be the terrain results in a terrain-following coordinate.

$$\frac{\partial \phi}{\partial t} + u \frac{\partial \phi}{\partial x} + v \frac{\partial \phi}{\partial y} + \omega \frac{\partial \phi}{\partial \eta} = gw$$

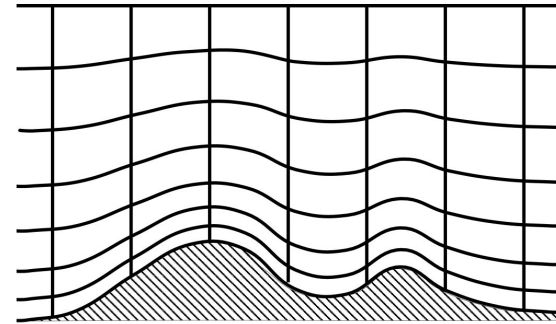

Vertical coordinate:

$$\text{hydrostatic pressure } \pi \quad \eta = \frac{(\pi - \pi_t)}{\mu}, \quad \mu = \pi_s - \pi_t$$

Flux-Form Equations in ARW

Hydrostatic pressure coordinate:

hydrostatic pressure π

$$\eta = \frac{(\pi - \pi_t)}{\mu}, \quad \mu = \pi_s - \pi_t$$

Conserved state variables:

$$\mu, \quad U = \mu u, \quad V = \mu v, \quad W = \mu w, \quad \Theta = \mu \theta$$

Non-conserved state variable: $\phi = gz$

Flux-Form Equations in ARW

Inviscid, 2-D
equations

without rotation:

$$\frac{\partial U}{\partial t} + \mu \alpha \frac{\partial p}{\partial x} + \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x} = - \frac{\partial U u}{\partial x} - \frac{\partial \Omega u}{\partial \eta}$$

$$\frac{\partial W}{\partial t} + g \left(\mu - \frac{\partial p}{\partial \eta} \right) = - \frac{\partial U w}{\partial x} - \frac{\partial \Omega w}{\partial \eta}$$

$$\frac{\partial \Theta}{\partial t} + \frac{\partial U \theta}{\partial x} + \frac{\partial \Omega \theta}{\partial \eta} = \mu Q$$

$$\frac{\partial \mu}{\partial t} + \frac{\partial U}{\partial x} + \frac{\partial \Omega}{\partial \eta} = 0$$


$$\frac{d\phi}{dt} = g w$$

Diagnostic
relations:


$$\frac{\partial \phi}{\partial \eta} = -\mu \alpha, \quad p = \left(\frac{R \theta}{p_0 \alpha} \right)^\gamma, \quad \Omega = \mu \dot{\eta}$$

ARW model, grid staggering

C-grid staggering

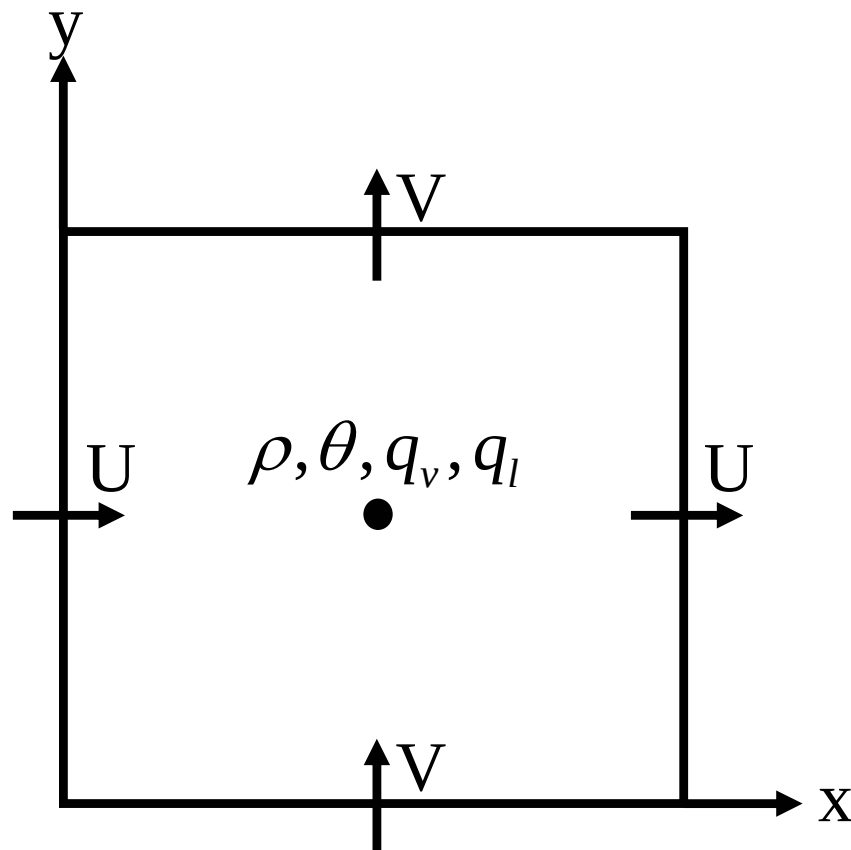

horizontal

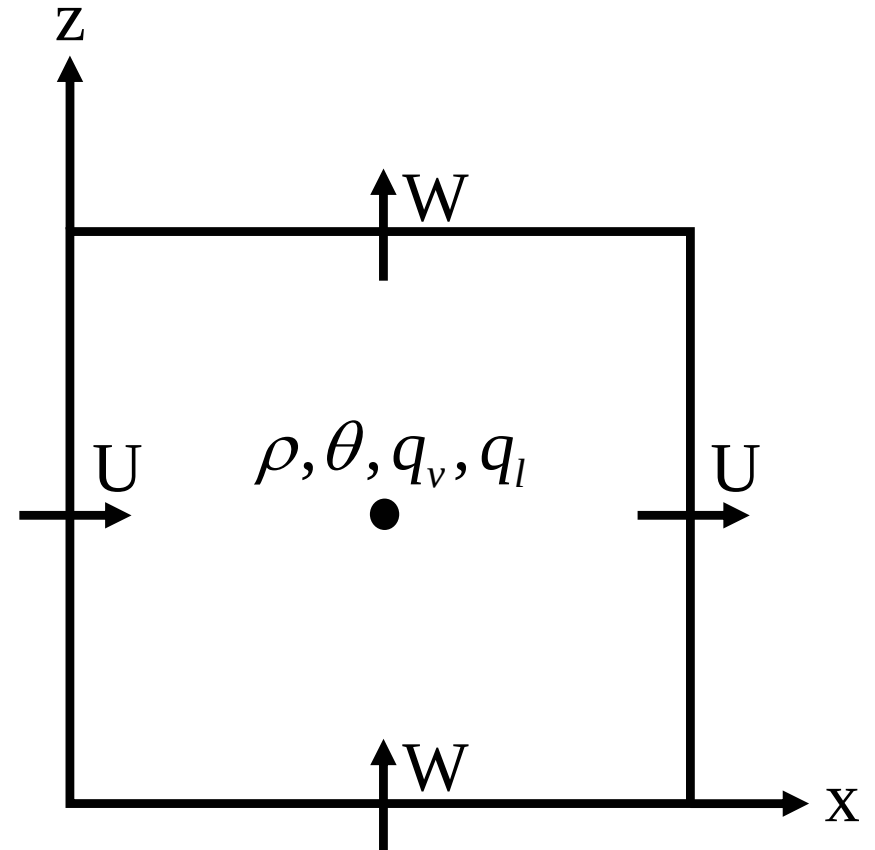

vertical

Flux-Form Perturbation Equations : Large Timestep

Introduce the
perturbation variables:

$$\begin{aligned}\phi &= \bar{\phi}(z) + \phi', \quad \mu = \bar{\mu}(z) + \mu'; \\ p &= \bar{p}(z) + p', \quad \alpha = \bar{\alpha}(z) + \alpha'\end{aligned}$$

Note – $\phi = \bar{\phi}(z) = \bar{\phi}(x, y, \eta),$
likewise $\bar{p}(x, y, \eta), \bar{\alpha}(x, y, \eta)$

Momentum and hydrostatic equations become:

$$\begin{aligned}\frac{\partial U}{\partial t} + \mu\alpha \frac{\partial p'}{\partial x} + \eta\mu\alpha' \frac{\partial \bar{\mu}}{\partial x} + \mu \frac{\partial \phi'}{\partial x} + \frac{\partial \phi'}{\partial x} \left(\frac{\partial p}{\partial \eta} - \mu' \right) &= - \frac{\partial Uu}{\partial x} - \frac{\partial \Omega u}{\partial \eta} \\ \frac{\partial W}{\partial t} + g \left(\mu' - \frac{\partial p'}{\partial \eta} \right) &= - \frac{\partial Uw}{\partial x} - \frac{\partial \Omega w}{\partial \eta} \\ \frac{\partial \phi'}{\partial \eta} &= -\bar{\mu}\alpha' - \bar{\alpha}\mu'\end{aligned}$$

Flux-Form Perturbation Equations: Acoustic Step

Acoustic mode separation:

Recast Equations in terms of perturbation about time t

$$U' = U'^t + U'', \quad V' = V'^t + V'', \quad W' = W'^t + W'',$$

$$\Theta' = \Theta'^t + \Theta'', \quad \mu' = \mu'^t + \mu'', \quad \phi' = \phi'^t + \phi'';$$

$$p' = p'^t + p'', \quad \alpha' = \alpha'^t + \alpha''$$

Linearize ideal gas law
about time t

$$p'' = \frac{c_s^2}{\alpha^t} \left(\frac{\Theta''}{\Theta^t} - \frac{\alpha''}{\alpha^t} - \frac{\mu''}{\mu^t} \right)$$

$$\alpha'' = \frac{1}{\mu^t} \left(\frac{\partial \phi''}{\partial \eta} + \alpha^t \mu'' \right)$$

Vertical pressure gradient
becomes

$$\frac{\partial p''}{\partial \eta} = \frac{\partial}{\partial \eta} \left(\frac{c_s^2}{\mu^t \alpha^{t^2}} \frac{\partial \phi''}{\partial \eta} + \frac{c_s^2}{\mu^t} \frac{\Theta''}{\Theta^t} \right)$$

Flux-Form Perturbation Equations: Acoustic Step

Small (acoustic) timestep equations:

$$\delta_\tau U'' + \mu^t \alpha^t \frac{\partial p''}{\partial x} + \eta \mu^t \frac{\partial \bar{\mu}}{\partial x} \alpha'' + \mu^t \frac{\partial \phi''}{\partial x} + \frac{\partial \phi^t}{\partial x} \left(\frac{\partial p''}{\partial \eta} - \mu'' \right) = R_u^t$$

$$\delta_\tau \mu'' + \left(\nabla \cdot \mathbf{V}'' \right)_\eta^{\tau+\Delta\tau} = R_\mu^t$$

$$\delta_\tau \Theta'' + \left(\nabla \cdot \mathbf{V}'' \theta^t \right)_\eta^{\tau+\Delta\tau} = R_\Theta^t$$

$$\delta_\tau W'' + g \left[\overline{\mu'' - \frac{\partial}{\partial \eta} \left(\frac{c_s^2}{\mu^t \alpha^{t^2}} \frac{\partial \phi''}{\partial \eta} + \frac{c_s^2}{\alpha^t} \frac{\Theta''}{\Theta^t} \right)} \right]^\tau = R_w^t$$

$$\delta_\tau \phi'' + \frac{1}{\mu^t} \left[\left(\mathbf{V}'' \cdot \nabla \phi^t \right)_\eta^{\tau+\Delta\tau} - g \overline{W''}^\tau \right] = R_\phi^t$$

Acoustic Integration in ARW

Forward-backward scheme, first advance the horizontal momentum

$$\delta_\tau U'' + \mu^t \alpha^t \frac{\partial p''}{\partial x} + \eta \mu^t \frac{\partial \bar{\mu}}{\partial x} \alpha'' + \mu^t \frac{\partial \phi''}{\partial x} + \frac{\partial \phi^t}{\partial x} \left(\frac{\partial p''}{\partial \eta} - \mu'' \right) = R_u^t$$

Second, advance continuity equation,
diagnose omega,
and advance thermodynamic equation

$$\delta_\tau \mu'' + (\nabla \cdot \mathbf{V}'')_{\eta}^{\tau+\Delta\tau} = R_\mu^t$$

$$\delta_\tau \Theta'' + (\nabla \cdot \mathbf{V}'' \theta^t)_{\eta}^{\tau+\Delta\tau} = R_\Theta^t$$

Finally, vertically-implicit integration of the acoustic and gravity wave terms

$$\delta_\tau W'' + g \left[\overline{\mu'' - \frac{\partial}{\partial \eta} \left(\frac{c_s^2}{\mu^t \alpha^{t^2}} \frac{\partial \phi''}{\partial \eta} + \frac{c_s^2}{\alpha^t} \frac{\Theta''}{\Theta^t} \right)} \right]^\tau = R_w^t$$

$$\delta_\tau \phi'' + \frac{1}{\mu^t} \left[(\mathbf{V}'' \cdot \nabla \phi^t)_{\eta}^{\tau+\Delta\tau} - g \overline{W''}^\tau \right] = R_\phi^t$$

Moist Equations in ARW

Moist Equations:

$$\frac{\partial U}{\partial t} + \alpha \mu_d \frac{\partial p}{\partial x} + \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x} = - \frac{\partial U u}{\partial x} - \frac{\partial \Omega u}{\partial \eta}$$

$$\frac{\partial W}{\partial t} + g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right) = - \frac{\partial U w}{\partial x} - \frac{\partial \Omega w}{\partial \eta}$$

$$\frac{\partial \mu_d}{\partial t} + \frac{\partial U}{\partial x} + \frac{\partial \Omega}{\partial \eta} = 0$$

$$\frac{\partial (\mu_d q_{v,l})}{\partial t} + \frac{\partial U (\mu_d q_{v,l})}{\partial x} + \frac{\partial \Omega (\mu_d q_{v,l})}{\partial \eta} = \mu Q_{v,l}$$

Diagnostic relations:

$$\frac{\partial \phi}{\partial \eta} = -\alpha_d \mu_d, \quad p = \left(\frac{R\Theta}{p_o \mu_d \alpha_v} \right)^\gamma$$

Time Integration in ARW

3rd Order Runge-Kutta time integration

advance $\phi^t \rightarrow \phi^{t+\Delta t}$

$$\phi^* = \phi^t + \frac{\Delta t}{3} R(\phi^t)$$


$$\phi^{**} = \phi^t + \frac{\Delta t}{2} R(\phi^*)$$

$$\phi^{t+\Delta t} = \phi^t + \Delta t R(\phi^{**})$$

Amplification factor $\phi_t = i k \phi$; $\phi^{n+1} = A \phi^n$; $|A| = 1 - \frac{(k\Delta t)^4}{24}$




Time-Split Runge-Kutta Integration Scheme

Integrate
 $U_t = L_f(U) + L_s(U)$

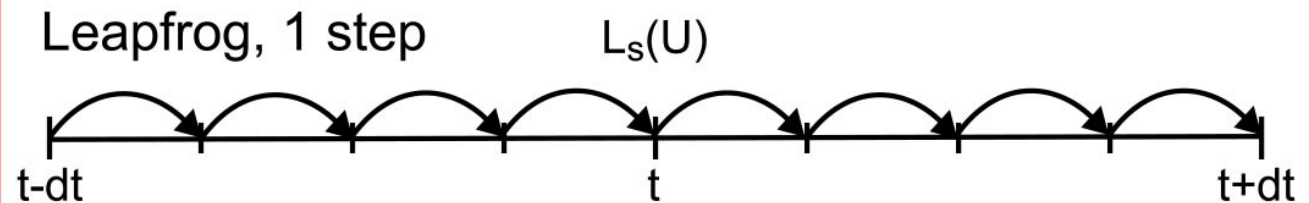


- LF is formally 1st order accurate, RK3 is 3rd order accurate
- RK3 stable for centered and upwind advection schemes, LF only stable for centered schemes.
- RK3 is stable for timesteps 2 to 3 times larger than LF.
- LF requires only one advection evaluation per timestep, RK3 requires three per timestep.

3rd order Runge-Kutta, 3 steps

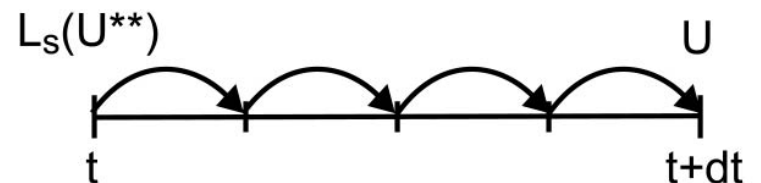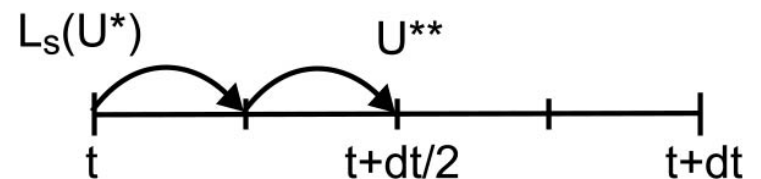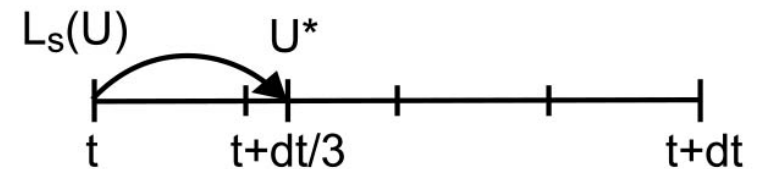

WRF ARW Model Integration Procedure

Begin time step

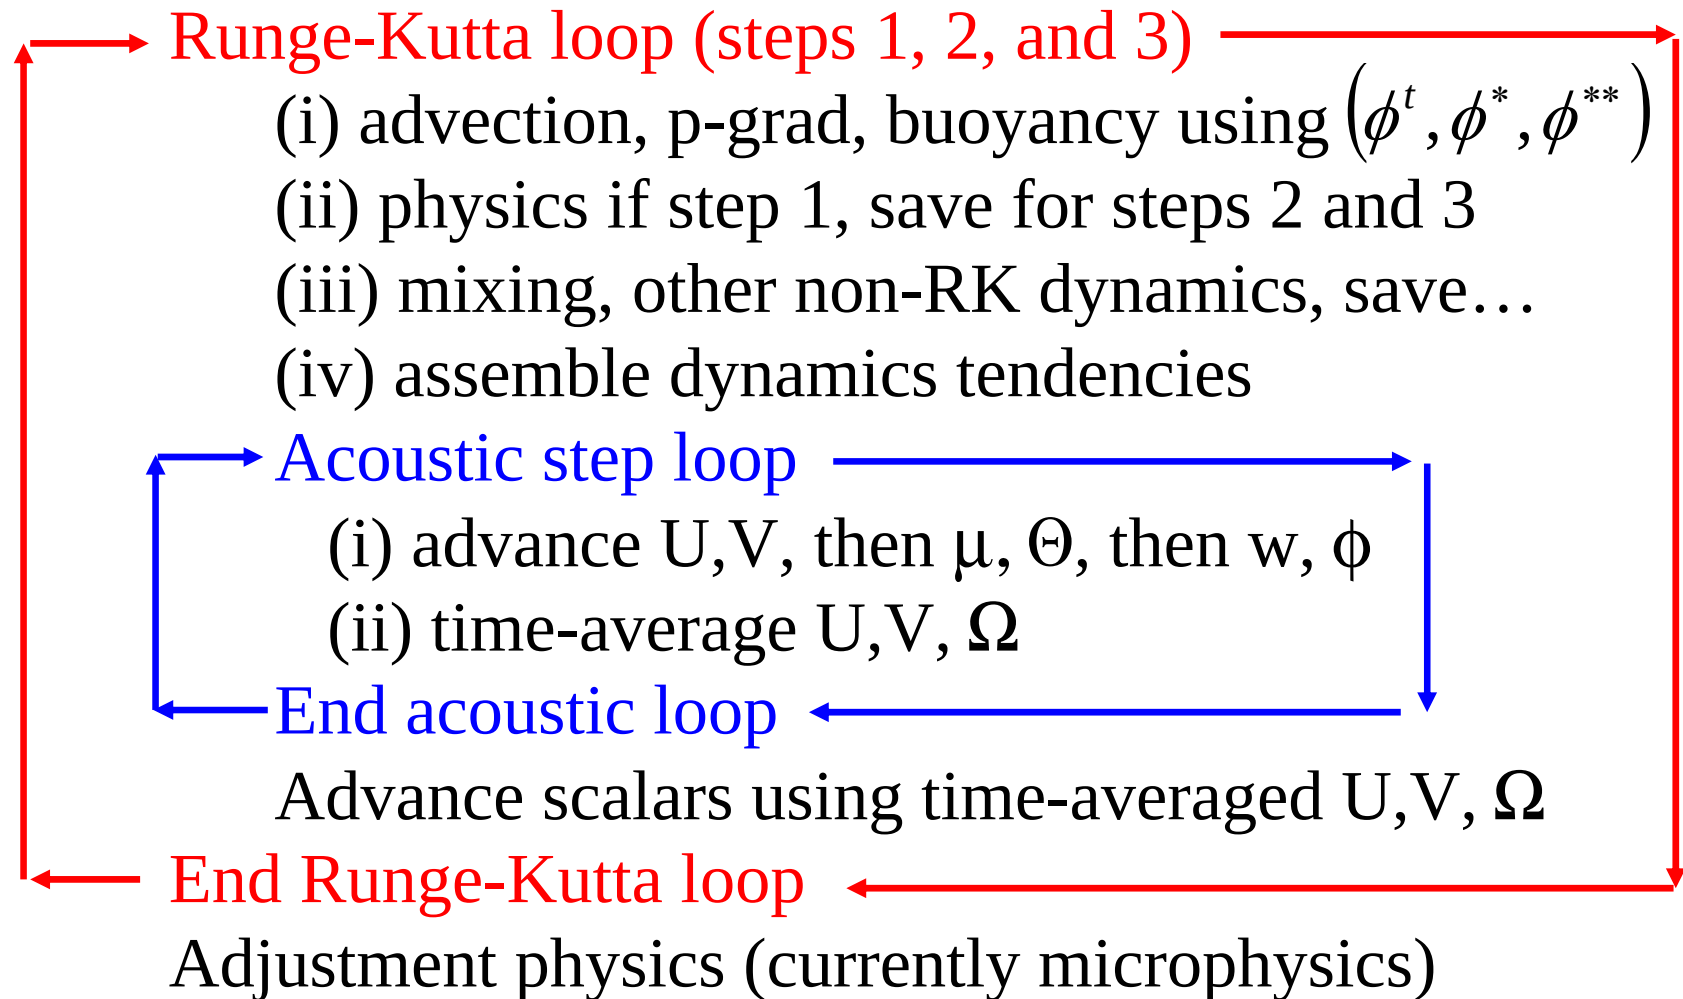


End time step


Phase and amplitude errors for LF, RK3

Oscillation
equation
analysis

$$\phi_t = ik\phi$$

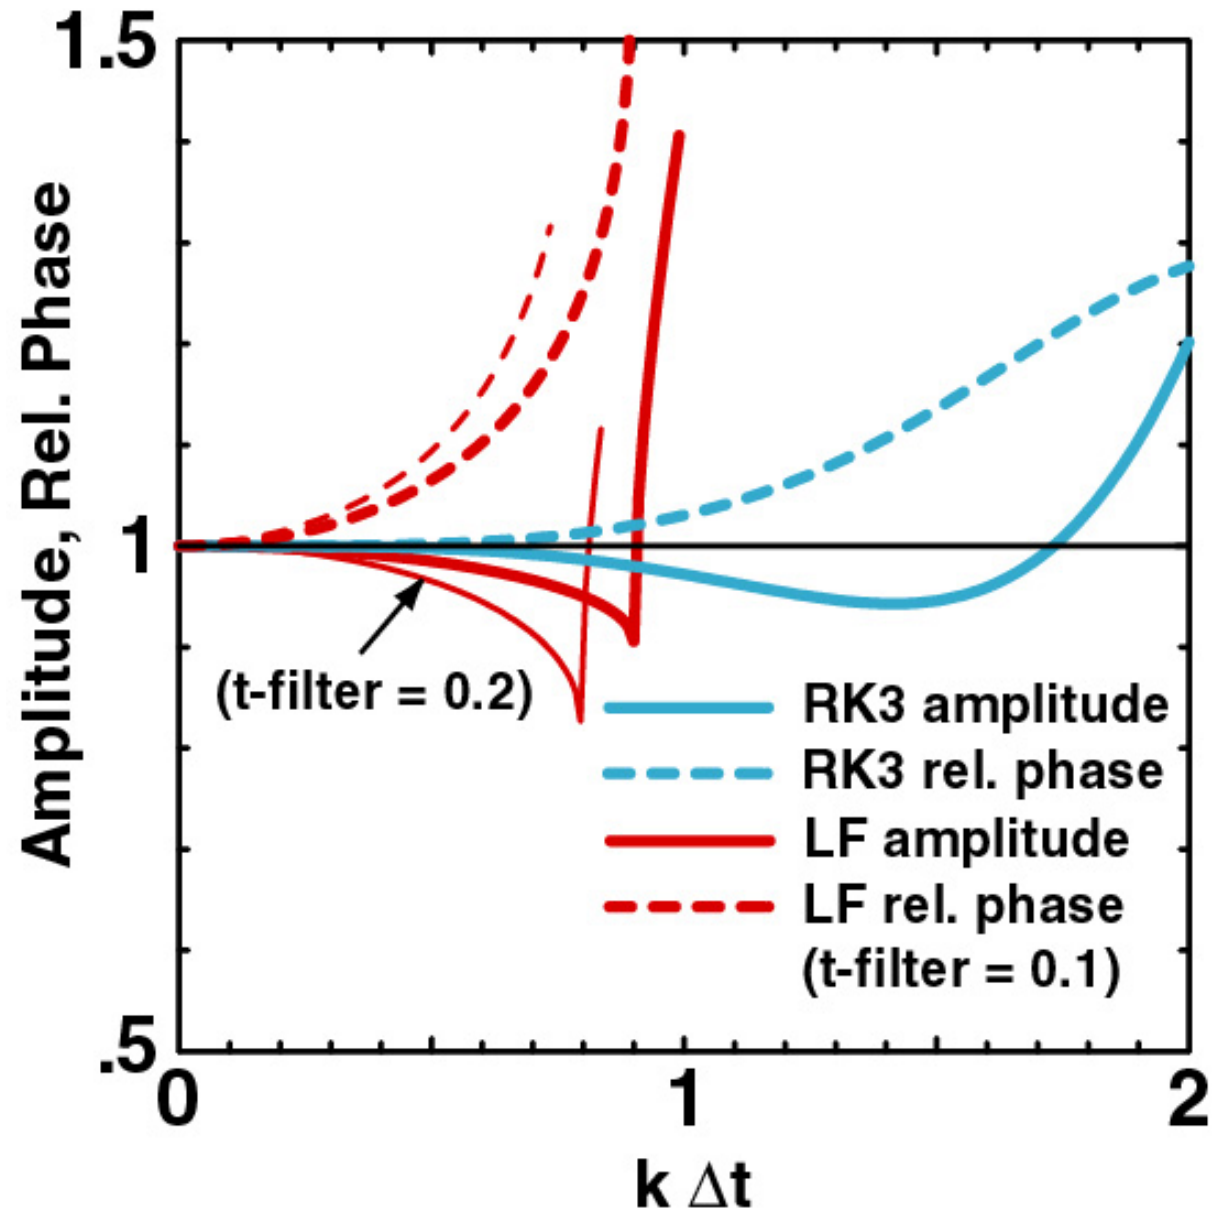

Mass Conservation in the ARW Model

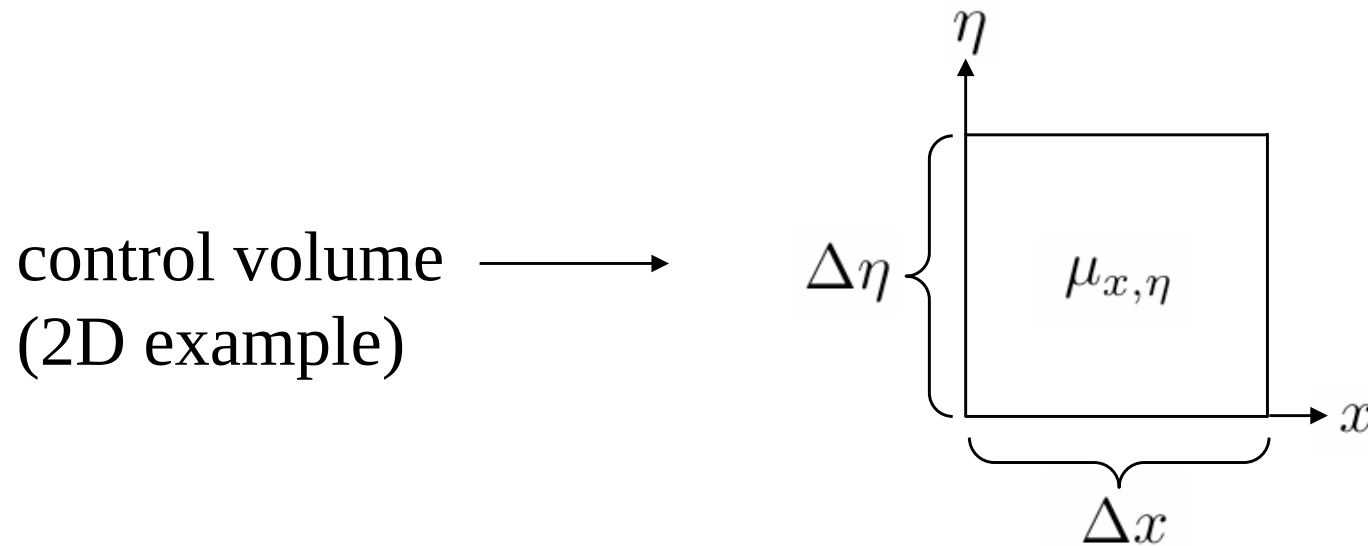

Mass in a control volume

$$(\Delta x \Delta \eta)(\mu)^t$$

Mass Conservation in the ARW Model

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$
2D example

Mass conservation equation

$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

Change in mass over a time step


mass fluxes through
control volume faces

Mass Conservation in the ARW Model

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$

Mass conservation equation

$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = \boxed{(\mu u \Delta \eta)_{x-\Delta x/2, \eta}} - \boxed{(\mu u \Delta \eta)_{x+\Delta x/2, \eta}} + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

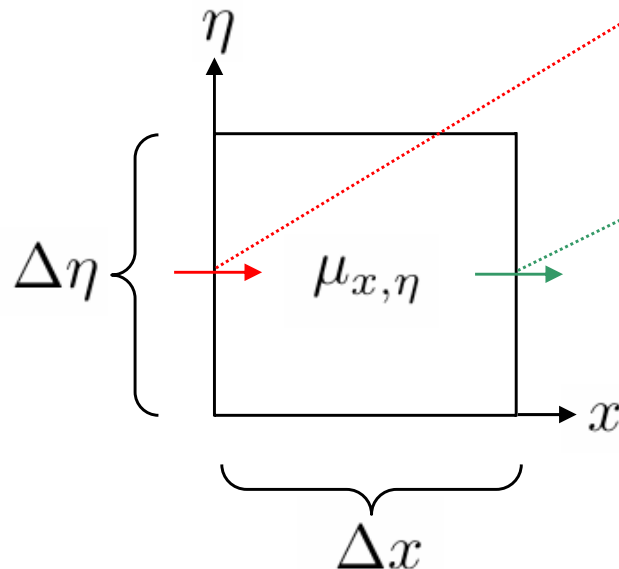

Horizontal fluxes through the vertical control-volume faces

Mass Conservation in the ARW Model


Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$

Mass conservation equation

$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2,\eta} - (\mu u \Delta \eta)_{x+\Delta x/2,\eta}] +$$


$$[(\mu \omega \Delta x)_{x,\eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x,\eta+\Delta \eta/2}]$$

Vertical fluxes through the
horizontal control-volume faces

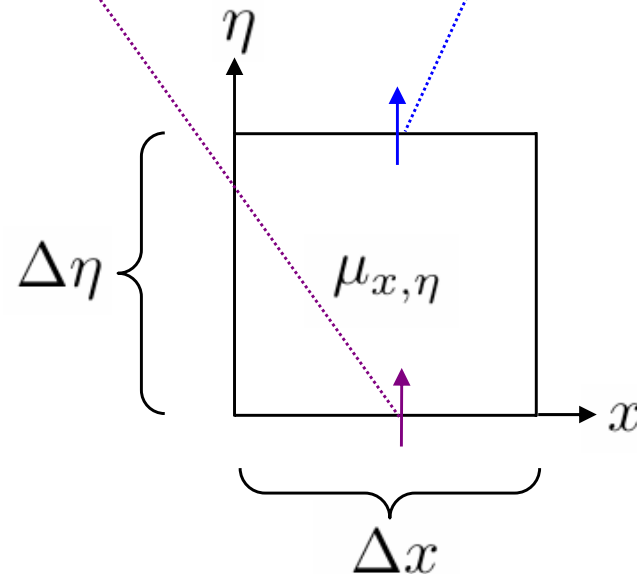

Mass Conservation in the ARW Model

The same mass fluxes are used for neighboring grid cells - hence mass is conserved locally and globally.

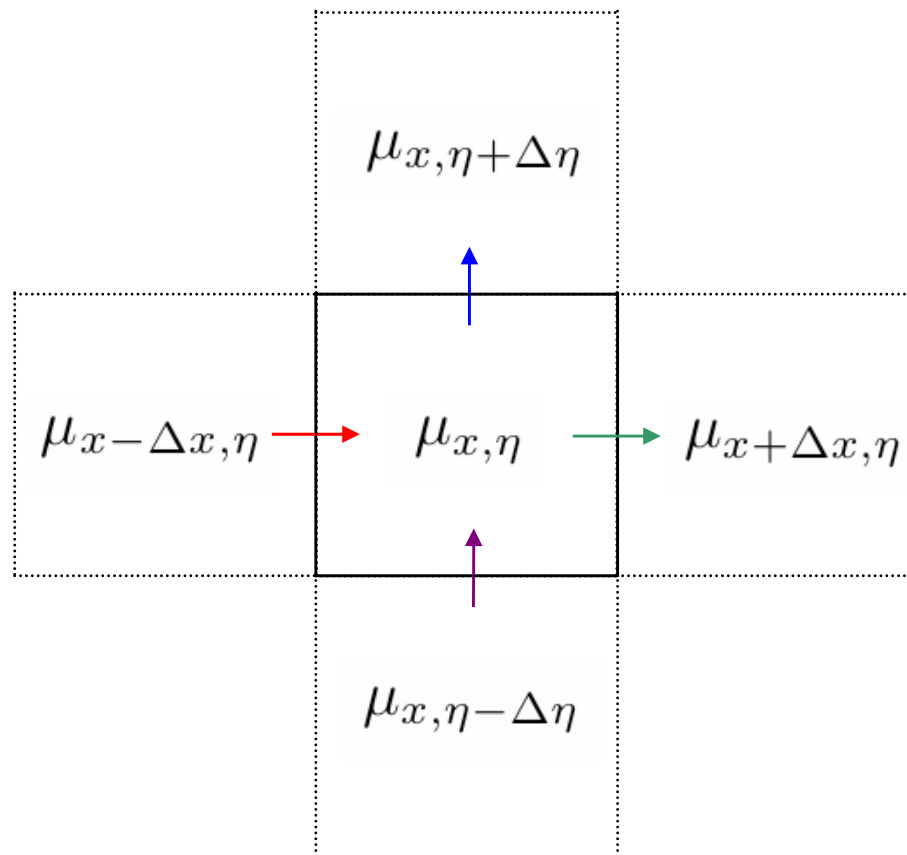

Scalar Mass Conservation in the ARW Model

Mass in a control volume	$(\Delta x \Delta \eta)(\mu)^t$
Scalar mass	$(\Delta x \Delta \eta)(\mu \phi)^t$

Mass conservation equation:

$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t]$	$= [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$
↑	
change in mass over a time step	mass fluxes through control volume faces

Scalar mass conservation equation:

$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu \phi)^{t+\Delta t} - (\mu \phi)^t]$	$= [(\mu u \phi \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \phi \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \phi \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \phi \Delta x)_{x, \eta+\Delta \eta/2}]$
↑	
change in tracer mass over a time step	tracer mass fluxes through control volume faces

Advection in the ARW Model

2nd, 3rd, 4th, 5th and 6th order centered and upwind-biased schemes are available in the ARW model.

Example: 5th order scheme

$$\frac{\partial(U\phi)}{\partial x} = \frac{1}{\Delta x} \left(F_{i+\frac{1}{2}}(U\phi) - F_{i-\frac{1}{2}}(U\phi) \right)$$

where

$$F_{i-\frac{1}{2}}(U\phi) = U_{i-\frac{1}{2}} \left\{ \frac{37}{60}(\phi_i + \phi_{i-1}) - \frac{2}{15}(\phi_{i+1} + \phi_{i-2}) + \frac{1}{60}(\phi_{i+2} + \phi_{i-3}) \right\} \\ - \text{sign}(1, U) \frac{1}{60} \{ (\phi_{i+2} - \phi_{i-3}) - 5(\phi_{i+1} - \phi_{i-2}) + 10(\phi_i - \phi_{i-1}) \}$$

Advection in the ARW Model

For constant U , the 5th order flux divergence tendency becomes

$$\begin{aligned} \Delta t \frac{\delta(U\phi)}{\Delta x} \Big|_{5th} &= \Delta t \frac{\delta(U\phi)}{\Delta x} \Big|_{6th} \\ &\quad - \underbrace{\left| \frac{U\Delta t}{\Delta x} \right| \frac{1}{60} (-\phi_{i-3} + 6\phi_{i-2} - 15\phi_{i-1} + 20\phi_i - 15\phi_{i+1} + 6\phi_{i+2} - \phi_{i+3})}_{\frac{Cr}{60} \frac{\partial^6 \phi}{\partial x^6} + H.O.T} \end{aligned}$$

The odd-ordered flux divergence schemes are equivalent to the next higher ordered (even) flux-divergence scheme plus a dissipation term of the higher even order with a coefficient proportional to the Courant number.

ARW Model: Dynamics Parameters

3rd order Runge-Kutta time step

Courant number limited, 1D: $C_r = \frac{U\Delta t}{\Delta x} < 1.73$

Generally stable using a timestep approximately twice as large as used in a leapfrog model.

Acoustic time step

2D horizontal Courant number limited: $C_r = \frac{C_s \Delta \tau}{\Delta h} < \frac{1}{\sqrt{2}}$

$\Delta \tau_{sound} = \Delta t_{RK} / (\text{number of acoustic steps})$

Guidelines for time step

Δt in seconds should be about $6 * \Delta x / 1000$ (grid size in kilometers). Larger Δt can be used in smaller-scale dry situations, but *time_step_sound* (=4) should increase proportionately if >6 factor is used.

ARW Filters: Divergence Damping

Purpose: filter acoustic modes

$$p^{*\tau} = p^\tau + \gamma_d (p^\tau - p^{\tau - \Delta\tau})$$

$$\begin{aligned} \delta_\tau U'' + \mu^{t*} \alpha^{t*} \partial_x p''^\tau + (\mu^{t*} \partial_x \bar{p}) \alpha''^\tau \\ + (\alpha/\alpha_d) [\mu^{t*} \partial_x \phi''^\tau + (\partial_x \phi^{t*}) (\partial_\eta p'' - \mu'')^\tau] = R_U^{t*} \end{aligned}$$

$$\begin{aligned} \delta_\tau V'' + \mu^{t*} \alpha^{t*} \partial_y p''^\tau + (\mu^{t*} \partial_y \bar{p}) \alpha''^\tau + \\ + (\alpha/\alpha_d) [\mu^{t*} \partial_y \phi''^\tau + (\partial_y \phi^{t*}) (\partial_\eta p'' - \mu'')^\tau] = R_V^{t*} \end{aligned}$$

$\gamma_d = 0.1$ recommended (default)

ARW Filters: External Mode Filter

Purpose: filter the external mode
(primarily for real-data applications)

Additional terms:

$$\delta_{\tau}U'' = \dots - \underline{\gamma_e \delta_x(\delta_{\tau-\Delta\tau}\mu_d'')}$$

$$\delta_{\tau}V'' = \dots - \underline{\gamma_e \delta_y(\delta_{\tau-\Delta\tau}\mu_d'')}$$

$$\delta_{\tau}\mu_d = m^2 \int_1^0 [\partial_x U'' + \partial_y V'']^{\tau+\Delta\tau} d\eta$$

$\gamma_e = 0.01$ recommended (default)

ARW Filters: Vertically Implicit Off-Centered Acoustic Step

Purpose: damp vertically-propagating acoustic modes

$$\delta_\tau W'' - m^{-1} g \left[(\alpha/\alpha_d)^{t^*} \partial_\eta (C \partial_\eta \phi'') + \partial_\eta \left(\frac{c_s^2}{\alpha^{t^*}} \frac{\Theta''}{\Theta^{t^*}} \right) - \mu_d'' \right]^\tau = R_W^{t^*}$$
$$\delta_\tau \phi'' + \frac{1}{\mu_d^{t^*}} [m \Omega^{\tau+\Delta\tau} \phi_\eta - \overline{g W''}^\tau] = R_\phi^{t^*}.$$

$$\bar{a}^\tau = \frac{1+\beta}{2} a^{\tau+\Delta\tau} + \frac{1-\beta}{2} a^\tau$$

$\beta = 0.1$ recommended (default)

ARW Filters: Vertical Velocity Damping

Purpose: damp anomalously-large vertical velocities
(usually associated with anomalous physics tendencies)

Additional term:

$$\partial_t W = \dots - \mu_d \operatorname{sign}(W) \gamma_w (Cr - Cr_\beta)$$

$$Cr = \left| \frac{\Omega dt}{\mu d\eta} \right|$$

$Cr_\beta = 1.0$ typical value (default)

$\gamma_w = 0.3 \text{ m/s}^2$ recommended (default)

ARW Filters: 2nd-Order Horizontal Mixing, Horizontal-Deformation-Based K_h

Purpose: mixing on horizontal coordinate surfaces
(real-data applications, $2 \text{ km} < \Delta x \leq 10 \text{ km}$)

$$K_h = C_s^2 l^2 \left[0.25(D_{11} - D_{22})^2 + \overline{D_{12}^2}^{xy} \right]^{\frac{1}{2}}$$

where $l = (\Delta x \Delta y)^{1/2}$

$$D_{11} = 2 m^2 [\partial_x(m^{-1}u) - z_x \partial_z(m^{-1}u)]$$

$$D_{22} = 2 m^2 [\partial_y(m^{-1}v) - z_y \partial_z(m^{-1}v)]$$

$$D_{12} = m^2 [\partial_y(m^{-1}u) - z_y \partial_z(m^{-1}u) \\ + \partial_x(m^{-1}v) - z_x \partial_z(m^{-1}v)]$$

$C_s = 0.25$ (Smagorinsky coefficient, default value)

ARW Model: Boundary Condition Options

Lateral boundary conditions

1. Specified (Coarse grid, real-data applications).
2. Open lateral boundaries (gravity-wave radiative).
3. Symmetric lateral boundary condition (free-slip wall).
4. Periodic lateral boundary conditions.
5. Nested boundary conditions (specified).

Top boundary conditions

1. Constant pressure.
2. Rayleigh damping upper layer.
3. Absorbing upper layer (increased horizontal diffusion).
4. Gravity-wave radiative condition (not yet implemented).

Bottom boundary conditions

1. Free slip.
2. Various B.L. implementations of surface drag, fluxes.

ARW Model: Nesting

2-way nesting

1. Multiple domains run concurrently
2. Multiple levels, multiple nests per level
3. Any integer ratio grid size and time step
4. Parent domain provides nest boundaries
5. Nest feeds back interior values to parent

1-way nesting

1. Parent domain is run first
2. *ndown* uses coarse output to generate nest boundary conditions
3. Nest initial conditions from fine-grid input file
4. Nest is run after *ndown*

Note: In V2.0, nest has to start at same time as coarse mesh if using fine-scale input file, but can start any time if just using interpolation from coarse mesh to initialize it in 2-way nesting.

ARW Model: Coordinate Options

1. Cartesian geometry:
idealized cases
2. Lambert Conformal:
mid-latitude applications
3. Polar Stereographic:
high-latitude applications
4. Mercator:
low-latitude applications

WRF ARW code

