
ARW Nesting

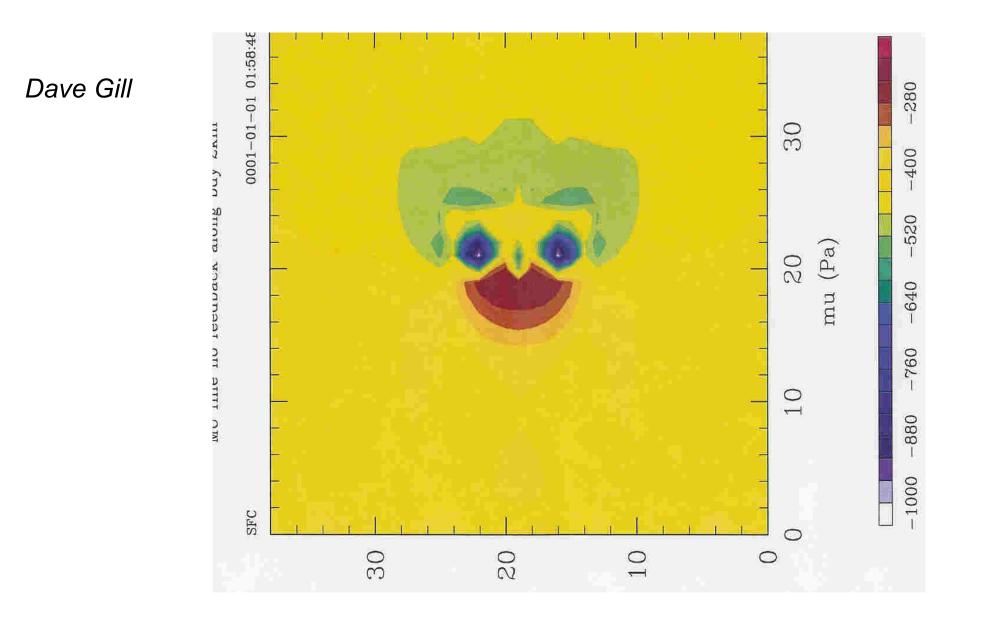

- Nesting definitions
- WRF nesting capabilities
- Domains, staggering, feedback
- Nesting performance
- Data routing for nesting forecasts
- Intermediate domains
- Masked interpolation and feedback
- IO from the Registry
- Some suggestions

Nesting Basics - What is a nest

- A nest is a *finer-resolution* model run. It may be *embedded* simultaneously within a coarser-resolution (parent) model run, or *run independently* as a separate model forecast.
- The nest *covers a portion* of the parent domain, and is driven along its *lateral boundaries* by the parent domain.
- Nesting enables running at finer resolution without the following problems:
 - Uniformly high resolution over a large domain prohibitively expensive
 - High resolution for a very small domain with mismatched time and spatial lateral boundary conditions


Nesting Basics - NMM

- Static, one- or two-way nesting
 - Static: The nest location is fixed in space
 - One-way: Information exchange between the parent and the nest is strictly down-scale. The nest solution does not feedback to the coarser/parent solution.
 - Two-way: Information exchange between the parent and the nest is bi-directional. The nest feedback impacts the coarse-grid domain's solution.
 - Fine grid input is for non-meteorological variables.
- Automatic moving nests are available, primarily for hurricane tracking (HWRF)

Nesting Basics - ARW


- One-way nesting via multiple model forecasts
- One-way nesting with a single model forecast, without feedback
- One-way/two-way nesting with a single input file, all fields interpolated from the coarse grid
- One-way/two-way nesting with multiple input files, each domain with a full input data file
- One-way/two-way nesting with the coarse grid data including all meteorological fields, and the fine-grid domains including only the static files
- One-way/two-way nesting with a specified move for each nest
- One-way/two-way nesting with an automatic move on the nest determined through 500 mb low tracking

Two nests on the same "level", with a common parent domain

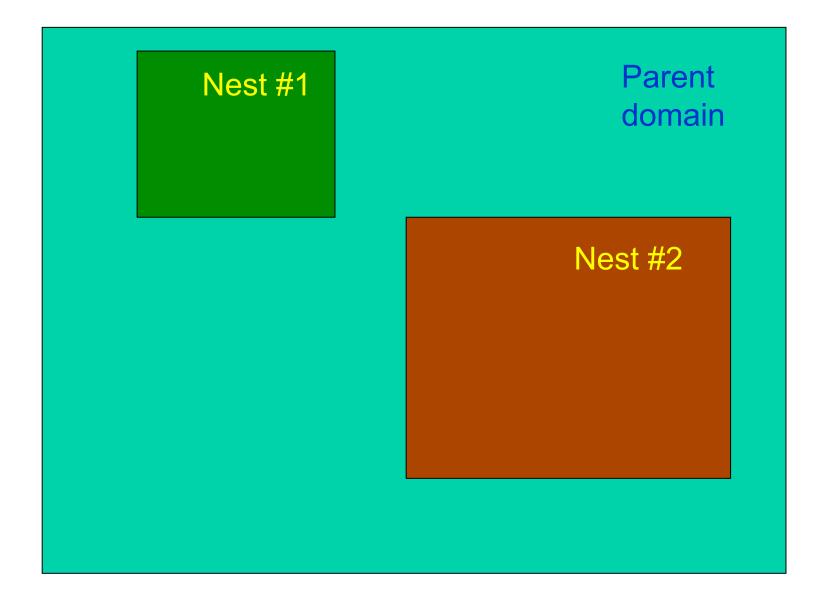


Two levels of nests, with nest #1 acting as the parent

for nest #2

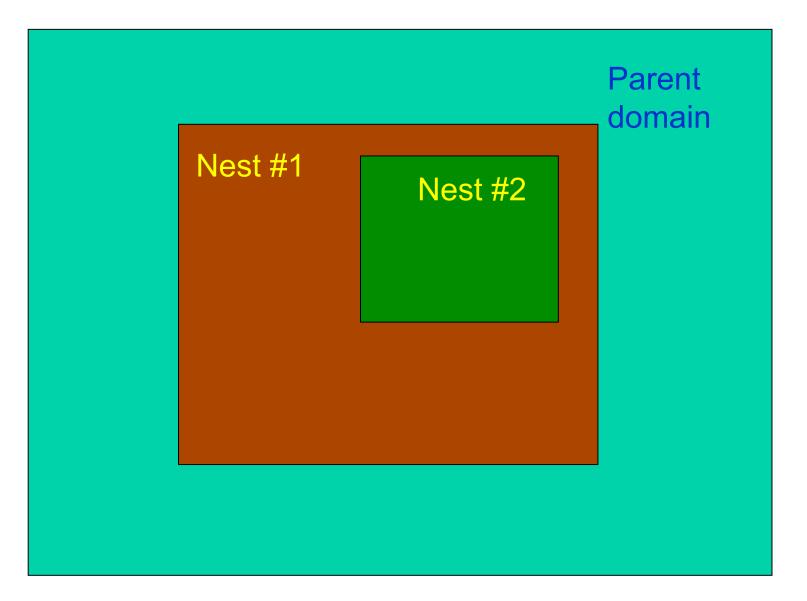


These are all OK

Telescoped to any depth Any number of siblings

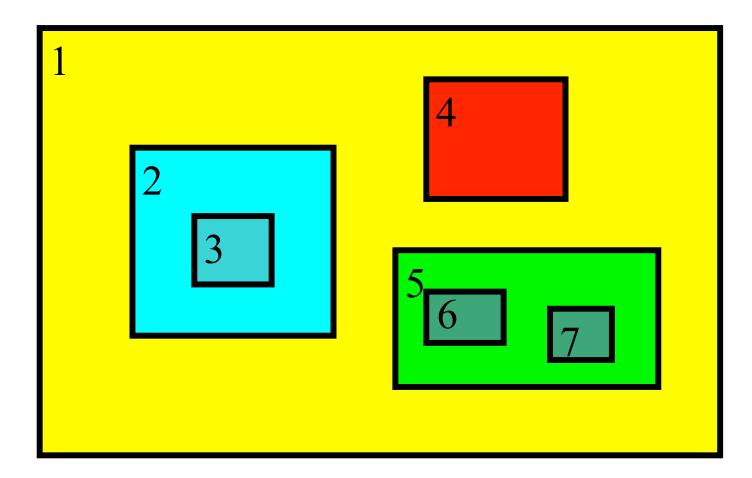


Not OK for 2-way

Child domains *may not* have overlapping points in the parent domain (1-way nesting excluded).

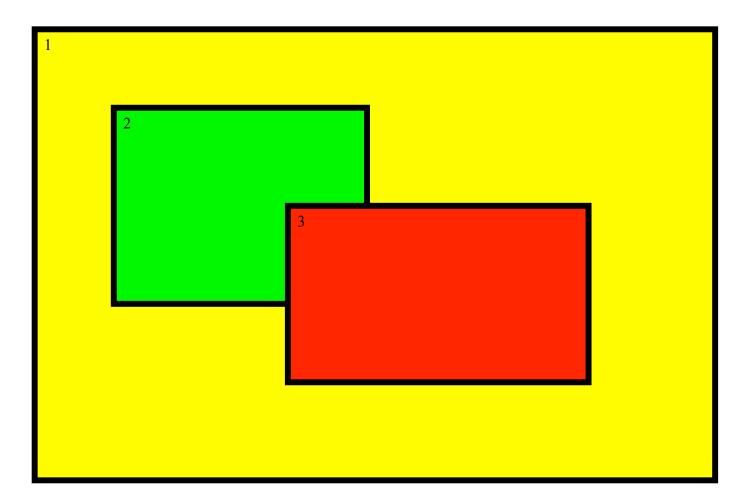

Not OK either


Domains have one, and only one, parent - (domain 4 is NOT acceptable even with 1-way nesting)

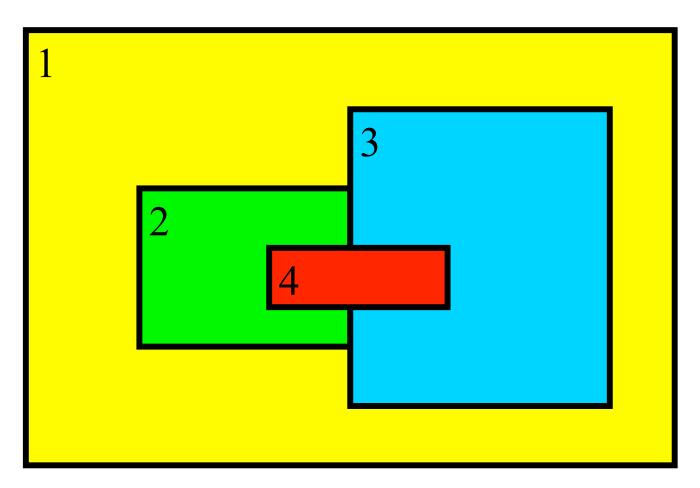


WRF Coarse-Fine Overlap

- The rectangular fine grid is coincident with a portion of the highresolution grid that covers the entire coarse grid cell
- The nested domain can be placed anywhere within the parent domain and the nested grid cells will exactly overlap the parent cells at the coincident cell boundaries.
- Coincident parent/nest grid points eliminate the need for complex, generalized remapping calculations, and enhances model performance and portability.
- The grid design was created with moving nests in mind.

ARW Coarse Grid Staggering

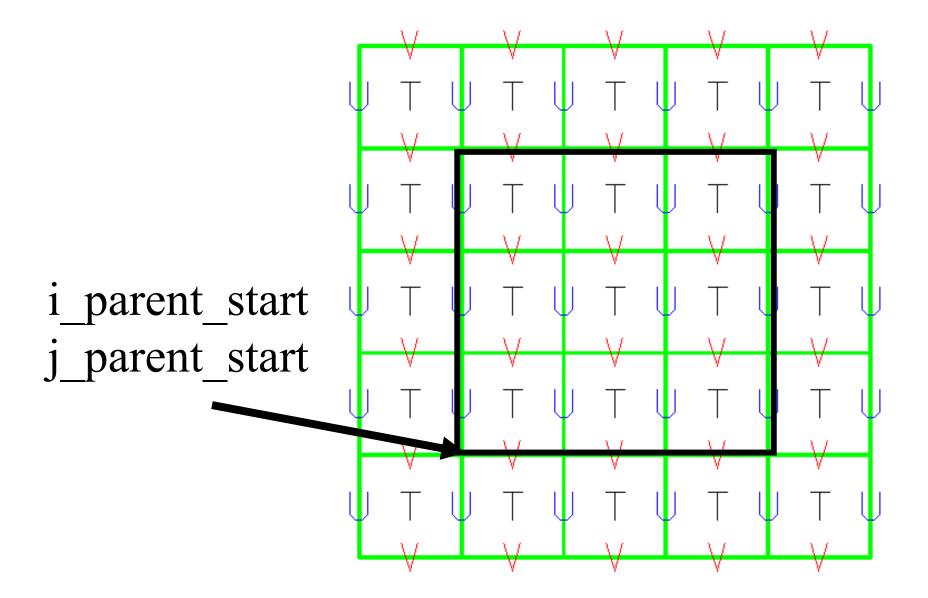



Real-Data Lateral Boundary Condition: Location of Specified and Relaxation Zones

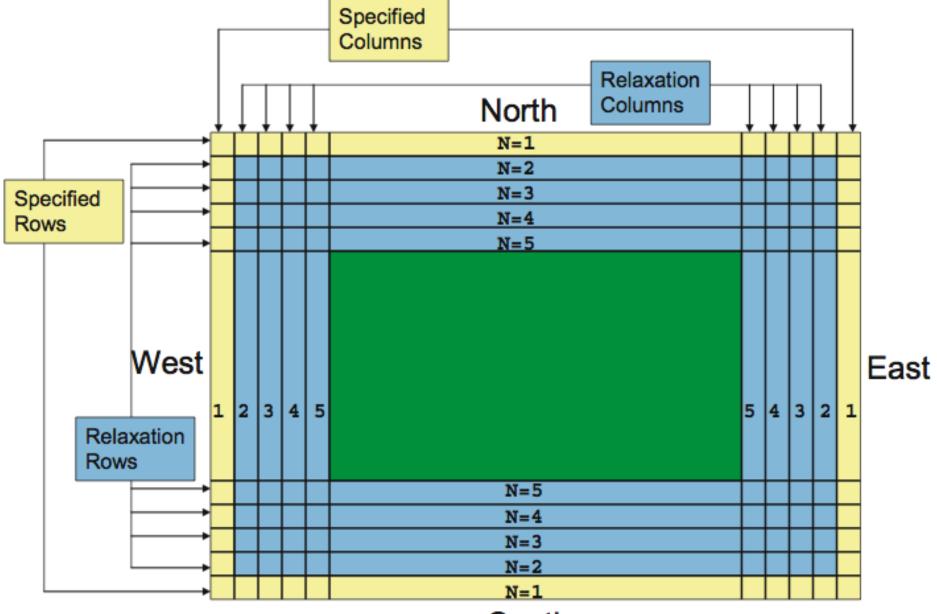


South


ARW Lateral Smoothing

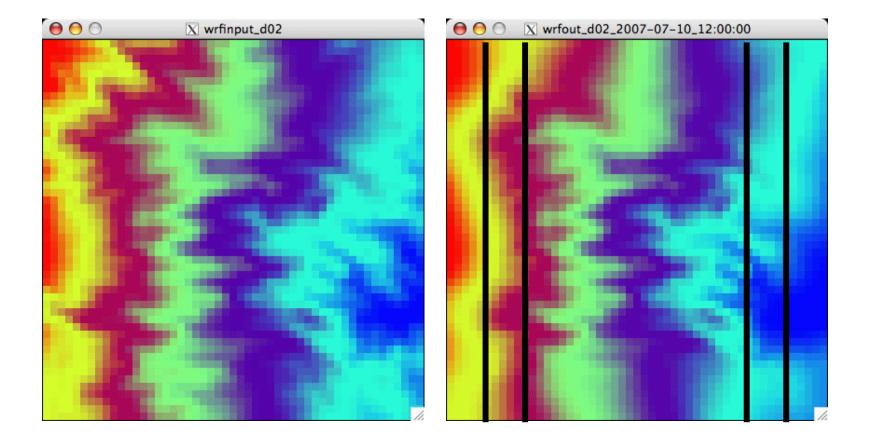

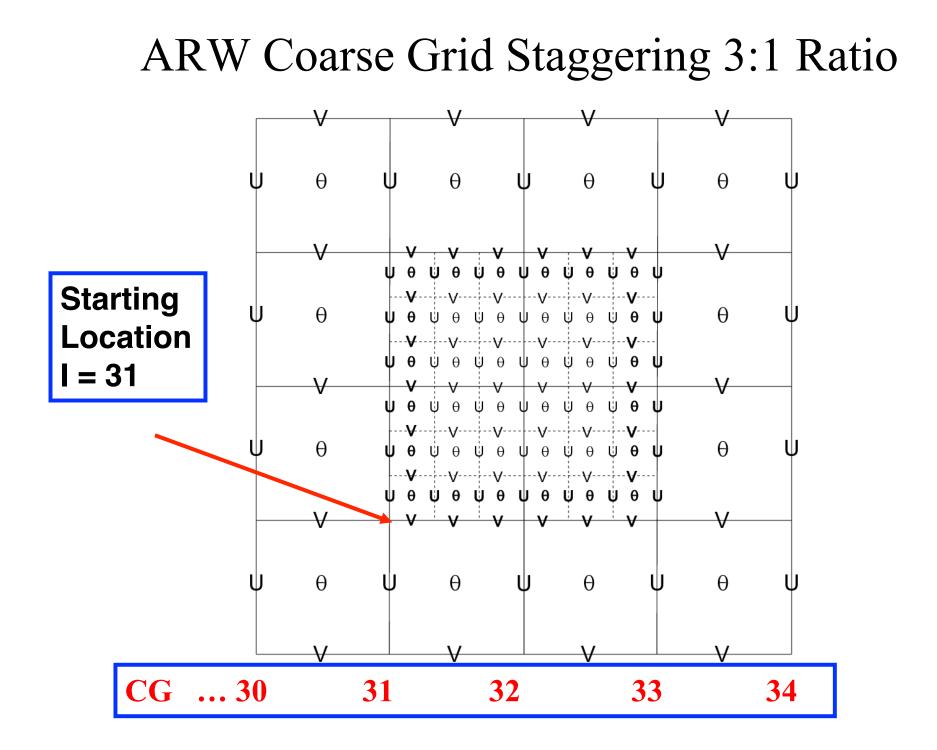


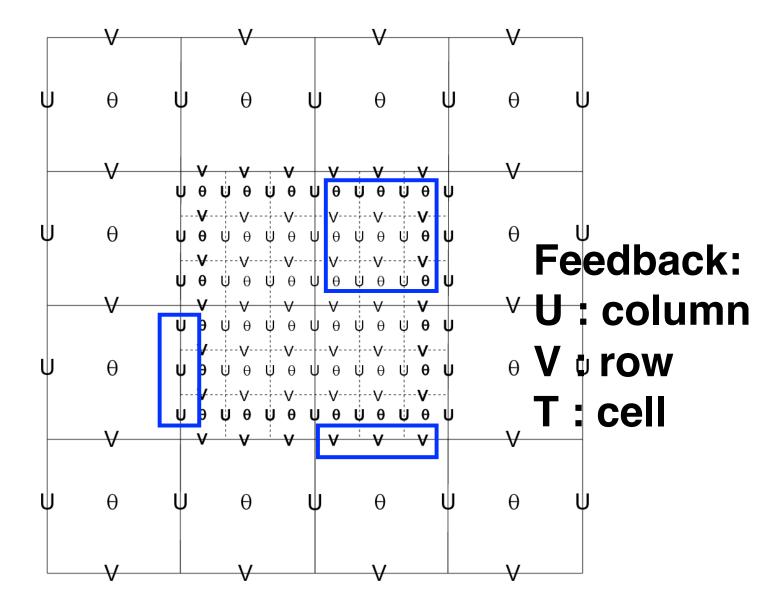


Feedback: U:column V:row T:cell

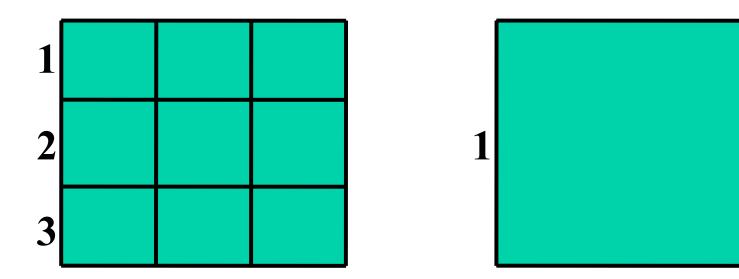


Feedback: U : column V : row T : cell

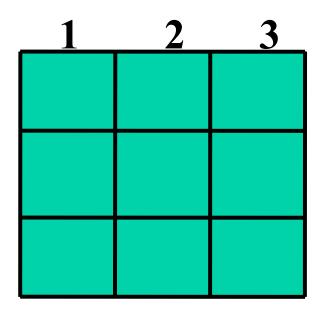

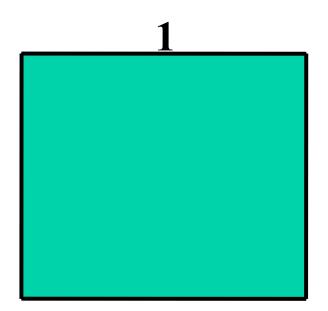

Feedback: U : column V : row T : cell

1	2	3
4	5	6
7	8	9

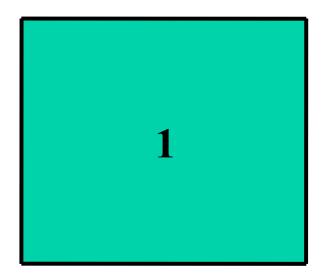

- The size of the nested domain may need to be chosen with computing performance in mind.
- Assuming a 3:1 ratio and the same number of grid cells in the parent and nest domains, the fine grid will require 3x as many time steps to keep pace with the coarse domain.
- A simple nested domain forecast is approximately 4x the cost of just the coarse domain.
- Don't be *cheap* on the coarse grid, doubling the CG points results in only a 25% nested forecast time increase.

• Example: assume 3:1 nest ratio

If the nest has the same number of grid cells, then the **amount of CPU** to do a single time step for a coarse grid (CG) and a fine grid step (FG) is **approximately the same**.

Since the fine grid (3:1 ratio) has 1/3 the grid distance, it requires 1/3 the model time step. Therefore, the FG requires 3x the CPU to catch up with the CG domain.

• Example: assume 3:1 nest ratio

If you try to cover the SAME area with a FG domain as a CG domain, you need (ratio)² grid points.

With the associated FG time step ratio, you require a **(ratio)^3**.

With a 3:1 ratio, a FG domain covering the same area as a CG domain **requires 27x CPU**.

• Example: assume **10:1 nest ratio**

To change your test case from 50-km resolution to a finer 5-km resolution would be **1000x more** expensive.


ARW: 2-Way Nest with 2 Inputs

Coarse and fine grid domains must start at the same time, fine domain may end at any time

Feedback may be shut off to produce a 1-way nest (cell face and cell average)

Any integer ratio for coarse to fine is permitted, odd is usually chosen for real-data cases

Options are available to ingest only the static fields from the fine grid, with the coarse grid data horizontally interpolated to the nest

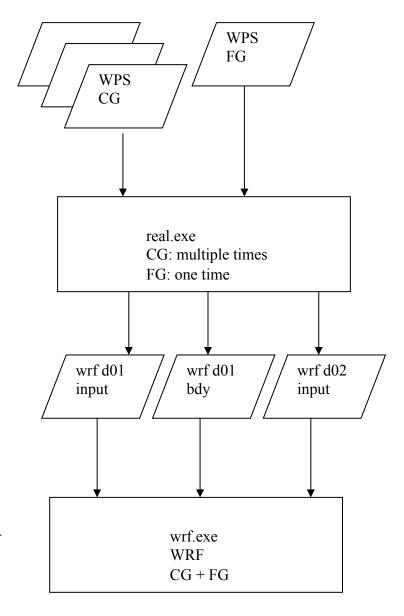

ARW: 2-Way Nest with 2 Inputs


No vertical nesting


Usually the same physics are run on all of the domains (excepting cumulus)

The grid distance ratio is not strictly tied to the time step ratio

Topography smoothly ramps from coarse grid to the fine grid along the interface along the nest boundary

All fine grids must use the nested lateral boundary condition

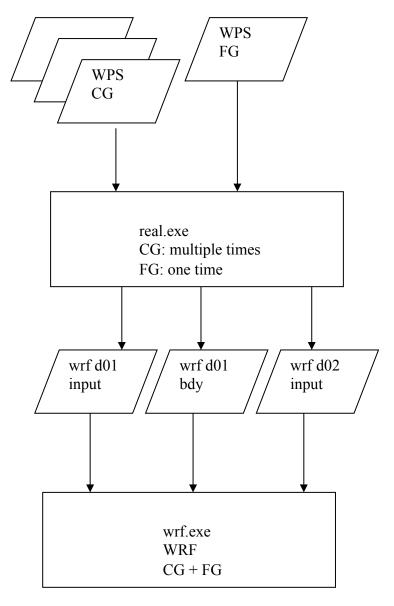

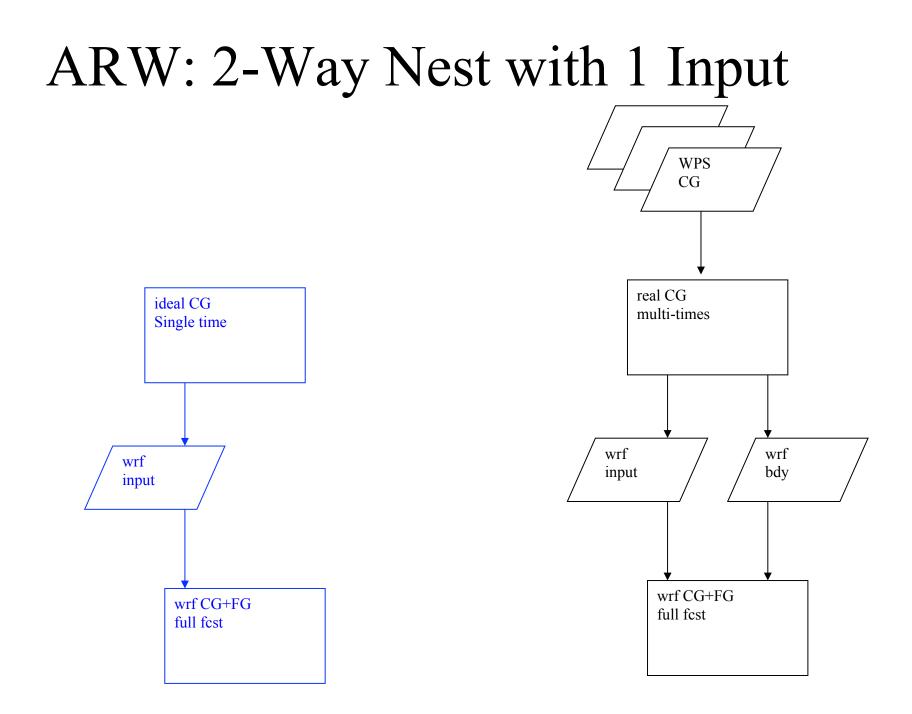


ARW: 2-Way Nest with 1 Input

A single namelist column entry is tied to each domain


The horizontal interpolation method, feedback, and smoothing are largely controlled through the Registry file

For a 3:1 time step ratio, after the coarse grid is advanced, the lateral boundaries for the fine grid are computed, the fine grid is advanced three time steps, then the fine grid is fed back to the coarse grid (recursively, depth first)

Helpful run*.tar files are located in the ./WRFV3/test/em_real directory

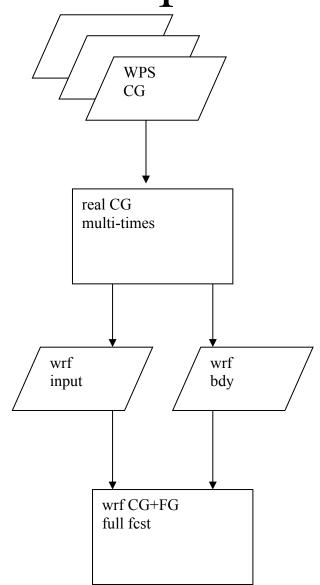

ndown: 1-Way Nest with 2 Inputs

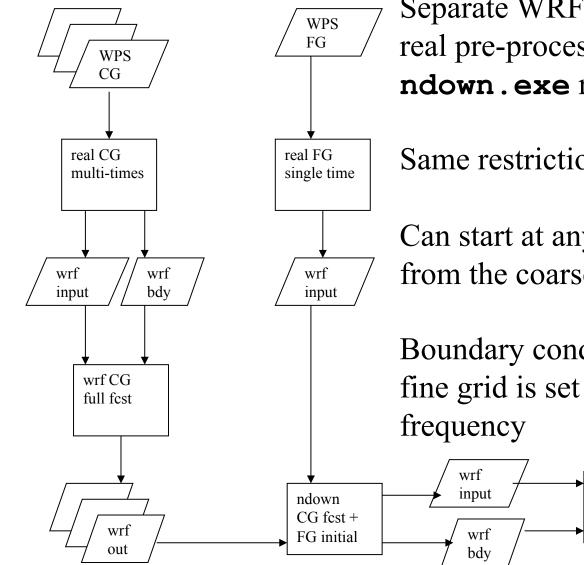

Separate WRF forecast runs, separate
real pre-processor runs, intervening
ndown.exe run

Same restrictions for horizontal nest ratios


Can start at any time that an output time from the coarse grid was created

Boundary condition frequency for the fine grid is set to coarse grid output frequency

wrf FG

full fcst

ndown: 1-Way Nest with 2 Inputs

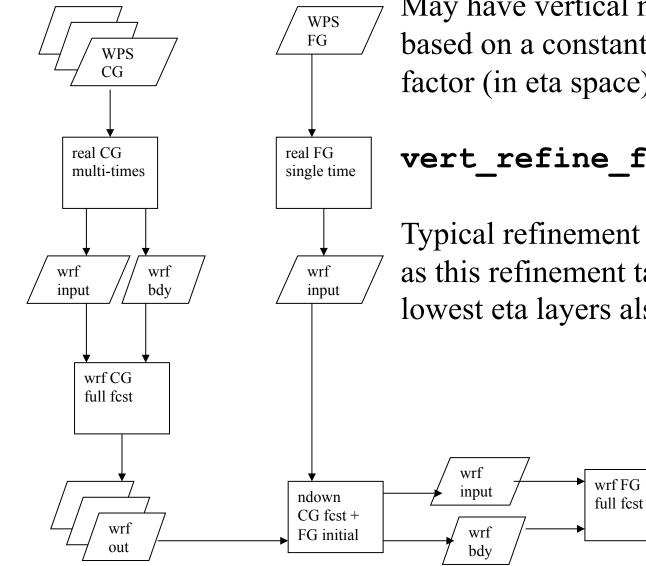

May have vertical nesting on the fine grid based on a constant vertical refinement factor (in eta space)


vert refine fact


Typical refinement factors 2-5 (be careful, as this refinement takes place in the lowest eta layers also)

West East Cross section Shaded: v; Contour: theta 6-h Forecast, from Mohamed Moustaoui

3x Refinement


Standard Levels

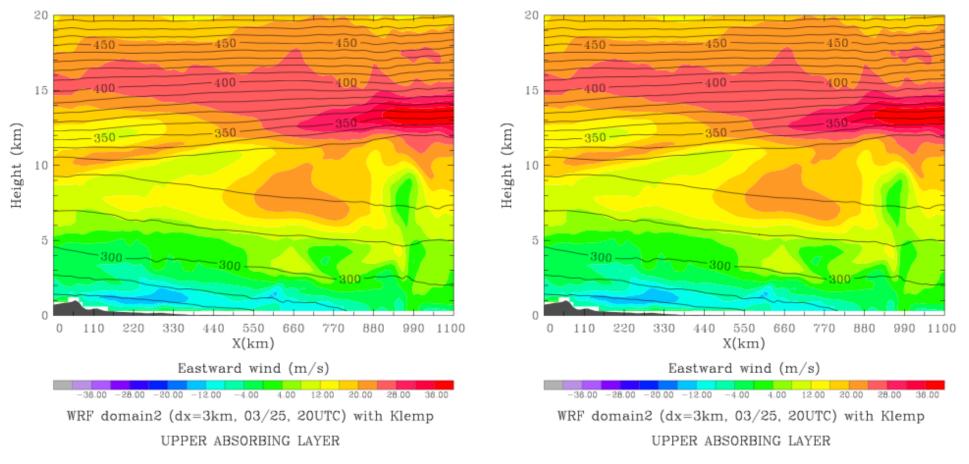


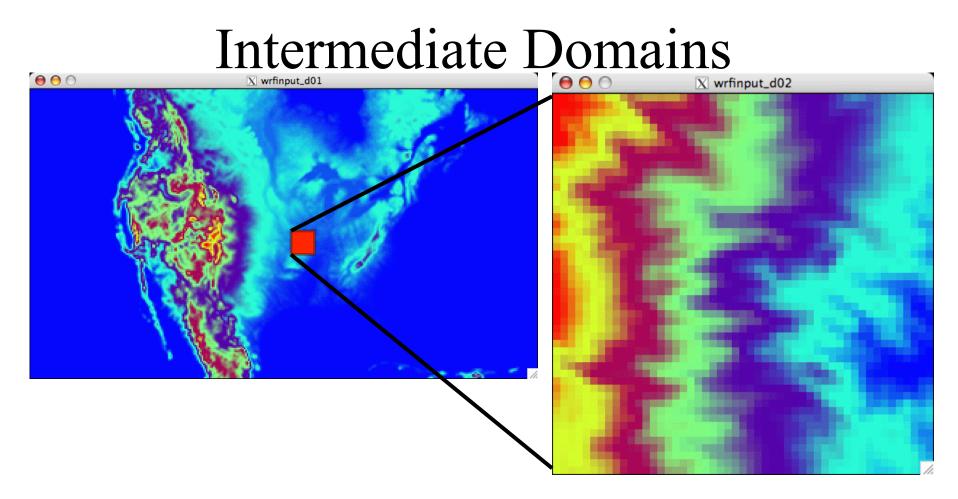


The intermediate domain between a parent and a child is the resolution of the coarse grid over the size of the fine grid. It allows the model to re-decompose the domain among all of the processors.


ARW Masked Interpolation

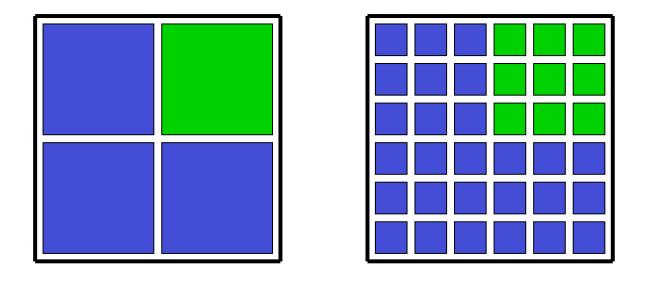


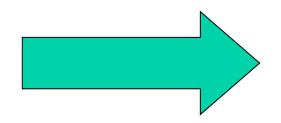

ARW Masked Feedback

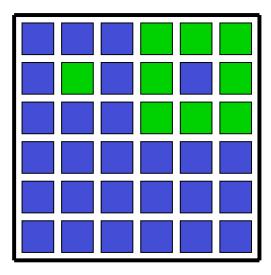

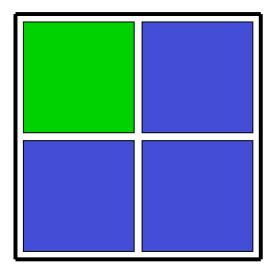

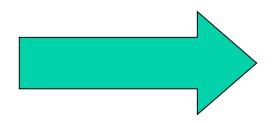

What are those "usdf" Options

```
state real u ikjb dyn_em 2 X \
    i01rhusdf=(bdy_interp:dt) \
    "U" "x-wind component" "m s-1"
```

"f" defines what lateral boundary forcing routine (found in share/interp_fcn.F) is utilized, colon separates the
 additional fields that are required (fields must be
 previously defined in the Registry)

What are those "usdf" Options

state real landmask ij misc 1 - \
 i012rhd=(interp_fcnm)u=(copy_fcnm) \
 "LANDMASK" "LAND MASK (1=LAND, 0=WATER)"

"u" and "d" define which feedback (up-scale) and horizontal interpolation (down-scale) routines (found in share/ interp_fcn.F) are utilized

Default values (i.e. not a subroutine name listed in the parentheses) assume non-masked fields

At compile-time, users select options

What are those "usdf" Options

state real ht ij misc 1 - i012rhdus "HGT" \
 "Terrain Height" "m"


"s" if the run-time option for smoothing is activated, this field is to be smoothed - only used for the parent of a nest domain, smoothing is in the area of the nest, excluding the outer row and column of the nest coverage

Whether or not smoothing is enabled is a run-time option from the namelist

Special IO Stream #2 Fields


- state real msft ij misc 1 \ i012rhdu= (copy_fcnm) "MAPFAC_M" \ "Map scale factor on mass grid" ""
- state real msfu ij misc 1 X \ i012rhdu= (copy_fcnm) "MAPFAC_U" \ "Map scale factor on u-grid" ""
- state real msfv ij misc 1 Y \ i012rhdu=
 (copy_fcnm) "MAPFAC_V" \
 "Map scale factor on v-grid" ""


- The minimum distance between the nest boundary and the parent boundary is FOUR grid cells
- You should have a **MUCH** larger buffer zone
- It is not unreasonable to have approximately 1/3 of your coarse-grid domain surrounding each side of your nest domain

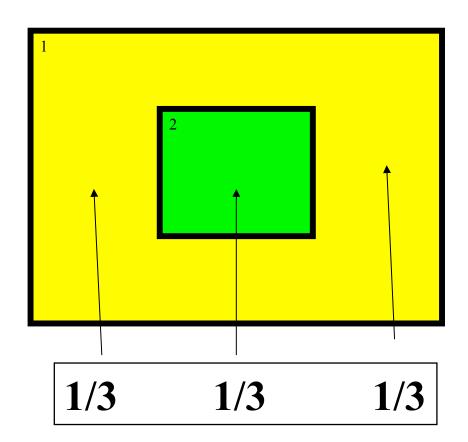

- Start with designing your inner-most domain. For a traditional forecast, you want everything important for that forecast to be entirely contained inside the domain.
- Then start adding parent domains at a 3:1 or 5:1 ratio. A parent should not have a smaller size (in grid points). Keep adding domains until the most coarse WRF grid has a no more than a 3:1 to 5:1 ratio to the external model (first guess) data.

- Larger domains tend to be better than smaller domains.
- A 60 m/s parcel moves at > 200 km/h. A 2-km resolution grid with 100x100 grid points could have most of the upper-level initial data swept out of the domain within a couple of hours.

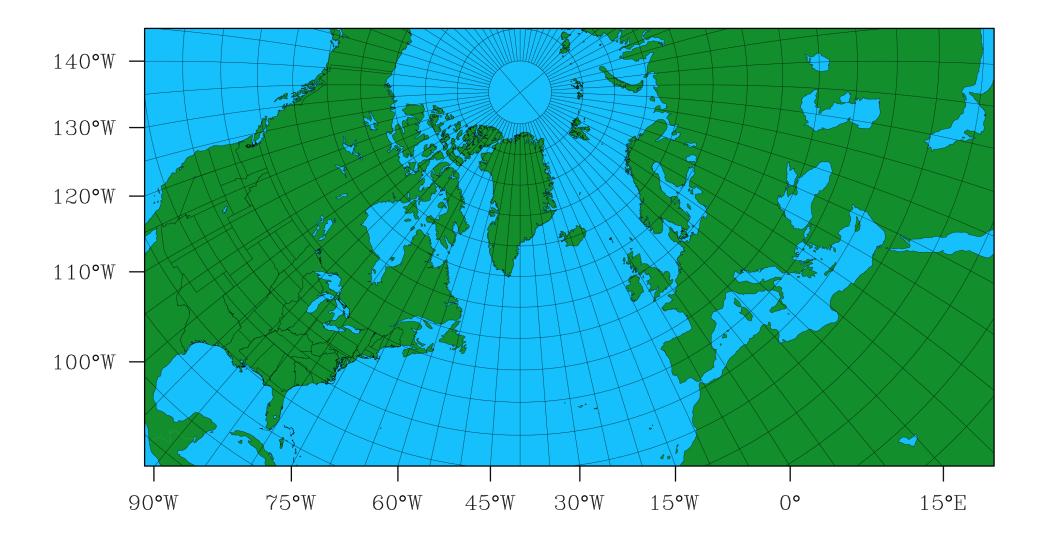

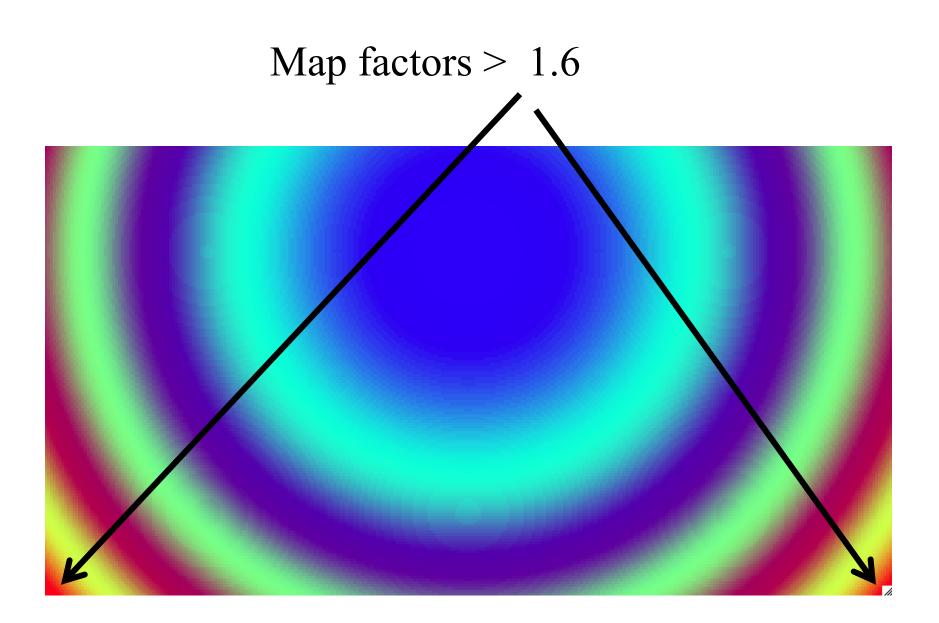

• The most-coarse domain may have a geographic extent that causes large map factors.

```
time_step = 300 (BLOWS UP)
dx = 45000,15000,5000
grid_id = 1, ,2 ,3
parent_id = 0, ,1 ,2
parent_grid_ratio = 1, ,3 ,3
parent_time_step_ratio = 1, ,3 ,3
```

• Reducing the time step so that the coarse grid is stable makes the model too expensive. 1.6x

```
time_step = 180 (STABLE, PRICEY)
dx = 45000,15000,5000
grid_id = 1, ,2 ,3
parent_id = 0, ,1 ,2
parent_grid_ratio = 1, ,3 ,3
parent_time_step_ratio = 1, ,3 ,3
```

• Only reduce the time step on the coarse grid, and keep the fine grid time steps at their approx original values.

```
time_step = 180 (STABLE, CHEAP)
dx = 45000,15000,5000
grid_id = 1, ,2 ,3
parent_id = 0, ,1 ,2
parent_grid_ratio = 1, ,3 ,3
parent time step ratio = 1, ,2 ,3
```

- Model time step is always proportional to the time step of the most coarse grid.
- The coarse grid is the only grid impacted with large map factors: dt(s) = 6*dx(km) but the nominal grid distance needs to be scaled: dt(s) = dx(km) / MAX (map factor)
- Reducing the coarse grid time step does not significantly reduce model performance if you can tweak the time step ratio.

- The time step ratio and grid distance ratio are not necessarily identical, and may used effectively when large map factors in the coarse grid domain force a time step reduction for stability.
- If map factors are causing stability troubles, it is usually only the most coarse grid that is impacted since the fine grid is usually in the middle of the domain.

- Set up domain first to provide good valid forecast, then deal with efficiency
- Selecting a set of domains with the reason "it is all I can afford" gets you into trouble
- Numerically stable and computationally expedient do not imply scientifically or physically valid