


The Advanced Research WRF (ARW) Dynamics Solver

1. Terrain, vertical coordinate
2. Equations and variables
3. Time integration scheme
4. Grid staggering
5. Advection (transport) and conservation
6. Time step parameters
7. Filters
8. Map projections and global configuration

Dynamics: Introduction

WRF Modeling System Flow Chart

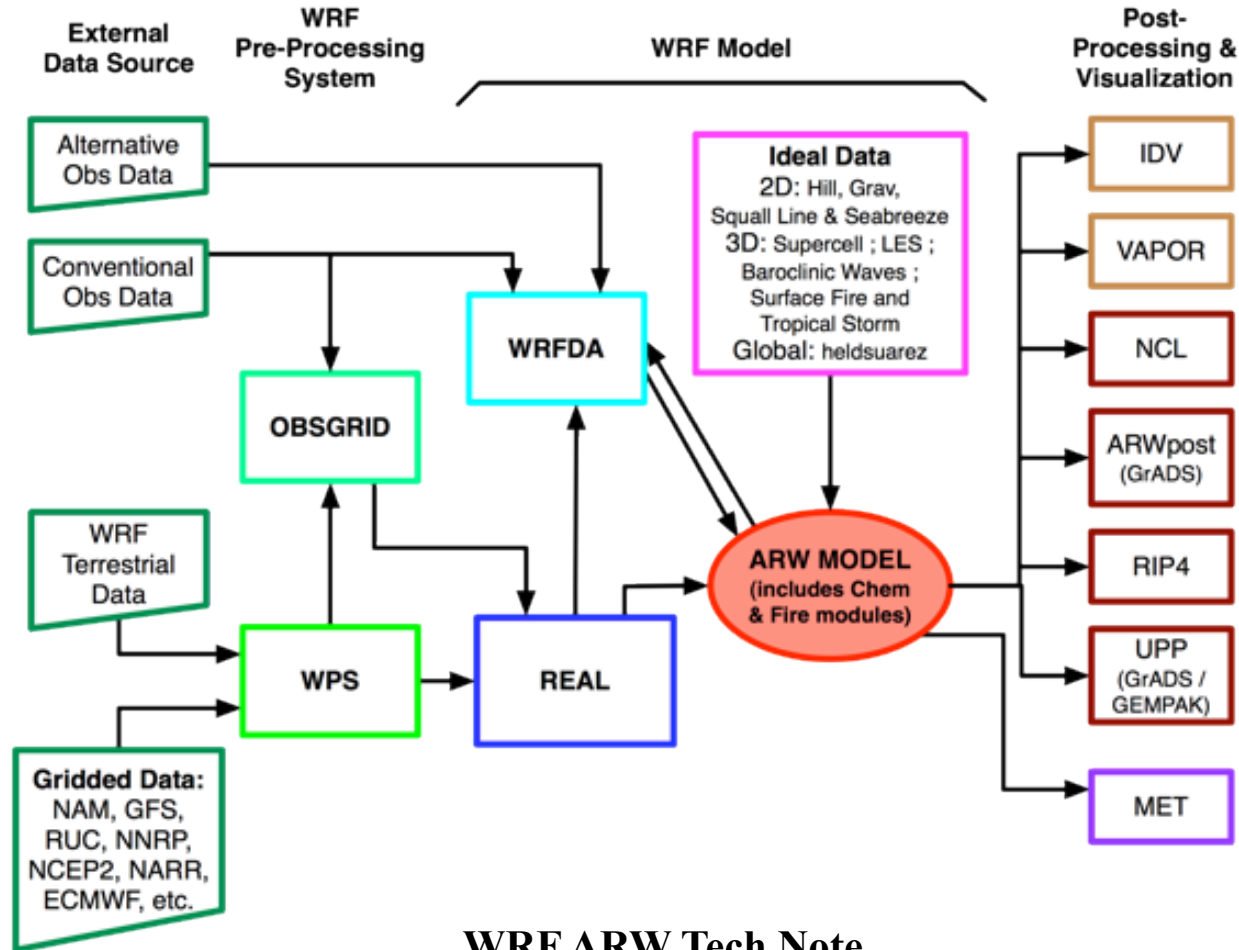

A Description of the Advanced Research WRF Version 3

<http://www.mmm.ucar.edu/wrf/users/pub-doc.html>


Dynamics: 1. Terrain, vertical coordinate

Hydrostatic pressure π

Column mass $\mu = \pi_s - \pi_t$
(per unit area)

Vertical coordinate $\eta = \frac{(\pi - \pi_t)}{\mu}$

Layer mass $\mu \Delta \eta = \Delta \pi = g \rho \Delta z$
(per unit area)

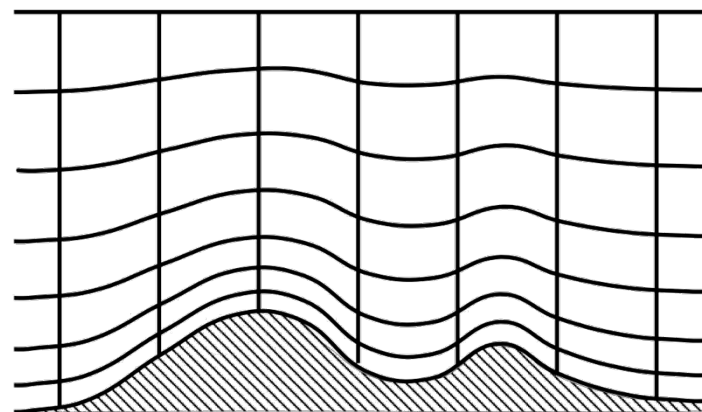

Conserved state (prognostic) variables:

$$\mu, \quad U = \mu u, \quad V = \mu v, \quad W = \mu w, \quad \Theta = \mu \theta$$

Non-conserved state variable: $\phi = gz$

Dynamics: 2. Equations and variables – moist equations

Moist Equations:
$$\frac{\partial U}{\partial t} + \alpha \mu_d \frac{\partial p}{\partial x} + \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x} = - \frac{\partial U u}{\partial x} - \frac{\partial \Omega u}{\partial \eta}$$

$$\frac{\partial W}{\partial t} + g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right) = - \frac{\partial U w}{\partial x} - \frac{\partial \Omega w}{\partial \eta}$$

$$\frac{\partial \mu_d}{\partial t} + \frac{\partial U}{\partial x} + \frac{\partial \Omega}{\partial \eta} = 0$$

$$\frac{\partial \Theta}{\partial t} + \frac{\partial U \theta}{\partial x} + \frac{\partial \Omega \theta}{\partial \eta} = \mu Q$$

$$\frac{d\phi}{dt} = g w$$

$$\frac{\partial(\mu_d q_{v,l})}{\partial t} + \frac{\partial(U q_{v,l})}{\partial x} + \frac{\partial(\Omega q_{v,l})}{\partial \eta} = \mu Q_{v,l}$$

Diagnostic relations:
$$\frac{\partial \phi}{\partial \eta} = -\alpha_d \mu_d, p = \left(\frac{R_d \Theta_m}{p_o \mu_d \alpha_d} \right)^\gamma, \quad \Theta_m = \Theta \left(1 + \frac{R_v}{R_d} q_v \right)$$

Dynamics: 2. Equations and variables – velocities

Vertical momentum eqn.
$$\frac{\partial W}{\partial t} + g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right) = - \frac{\partial U w}{\partial x} - \frac{\partial \Omega w}{\partial \eta}$$

Subscript d denotes *dry*, and


$$\alpha_d = \frac{1}{\rho_d} \quad \alpha = \alpha_d (1 + q_v + q_c + q_r \cdots)^{-1}$$

$$\rho = \rho_d (1 + q_v + q_c + q_r \cdots)$$

covariant (u, ω) and
contravariant w velocities

$$u = \frac{dx}{dt}, \quad w = \frac{dz}{dt}, \quad \omega = \frac{d\eta}{dt}$$

$$U = \mu u, \quad W = \mu w, \quad \Omega = \mu \omega$$

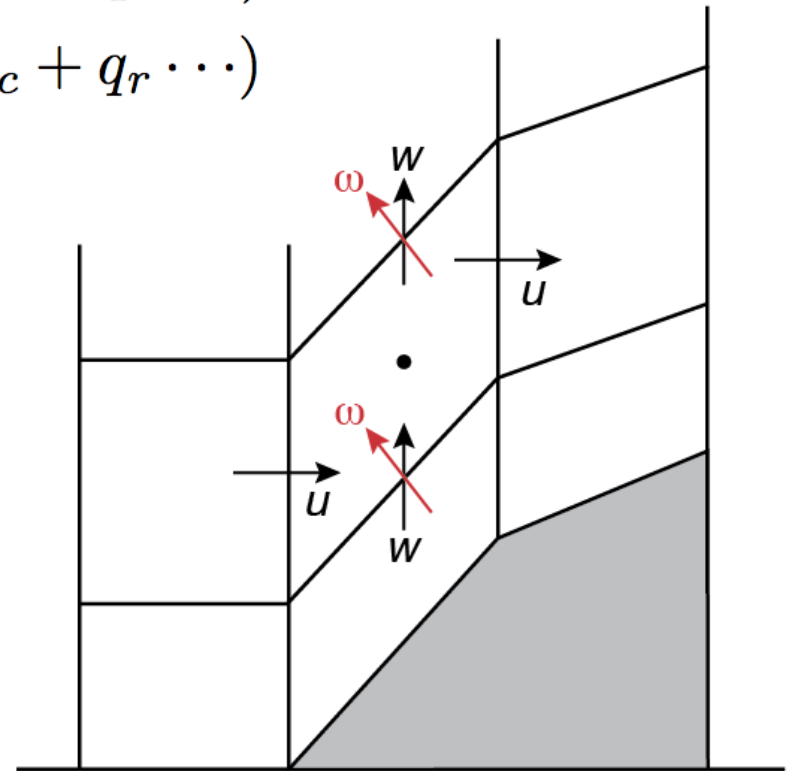

3rd Order Runge-Kutta time integration

advance $\phi^t \rightarrow \phi^{t+\Delta t}$

$$\phi^* = \phi^t + \frac{\Delta t}{3} R(\phi^t)$$

$$\phi^{**} = \phi^t + \frac{\Delta t}{2} R(\phi^*)$$


$$\phi^{t+\Delta t} = \phi^t + \Delta t R(\phi^{**})$$

Amplification factor $\phi_t = i k \phi$; $\phi^{n+1} = A \phi^n$; $|A| = 1 - \frac{(k \Delta t)^4}{24}$

Phase and amplitude errors for LF, RK3

Oscillation
equation
analysis


$$\psi_t = ik\psi$$

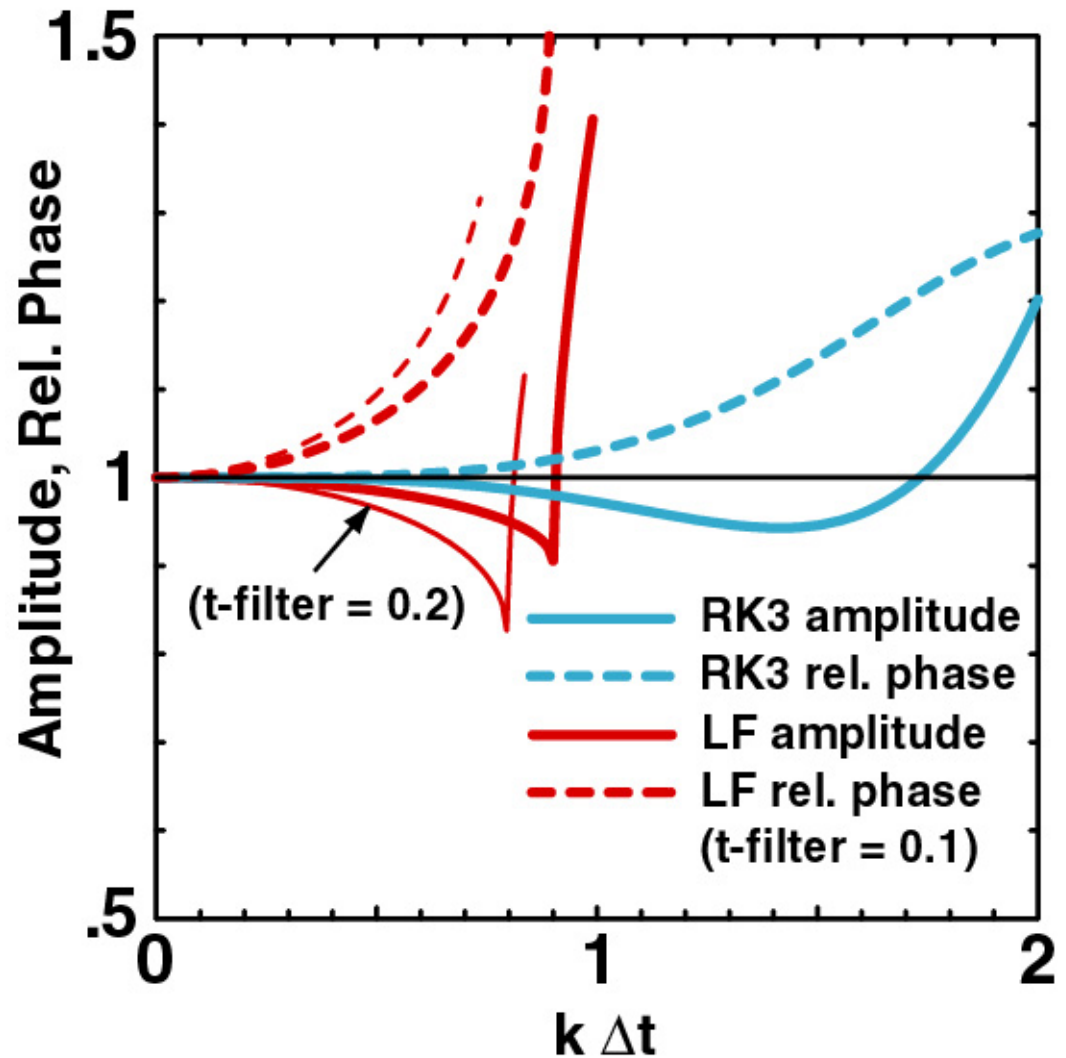

Dynamics: 3. Time integration scheme – time splitting

$$U_t = L_{\text{fast}}(U) + L_{\text{slow}}(U)$$


3rd order Runge-Kutta, 3 steps

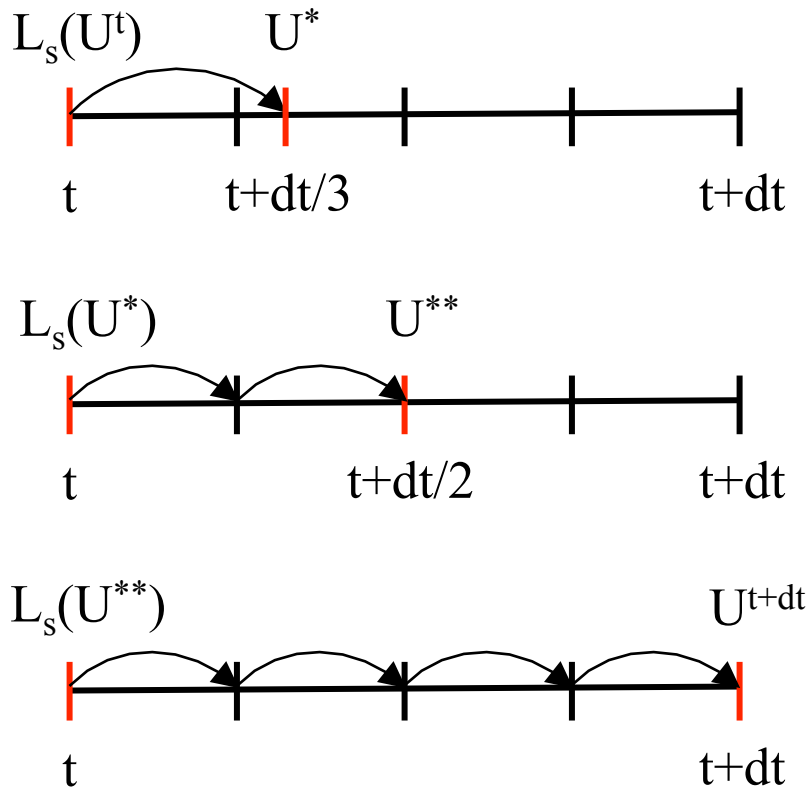

- RK3 is 3rd order accurate for linear eqns, 2nd order accurate for nonlinear eqns.
- Stable for centered and upwind advection schemes.
- Stable for Courant number $Udt/dx < 1.73$
- Three $L_{\text{slow}}(U)$ evaluations per timestep.

Dynamics: 3. Time integration scheme - implementation

Begin time step

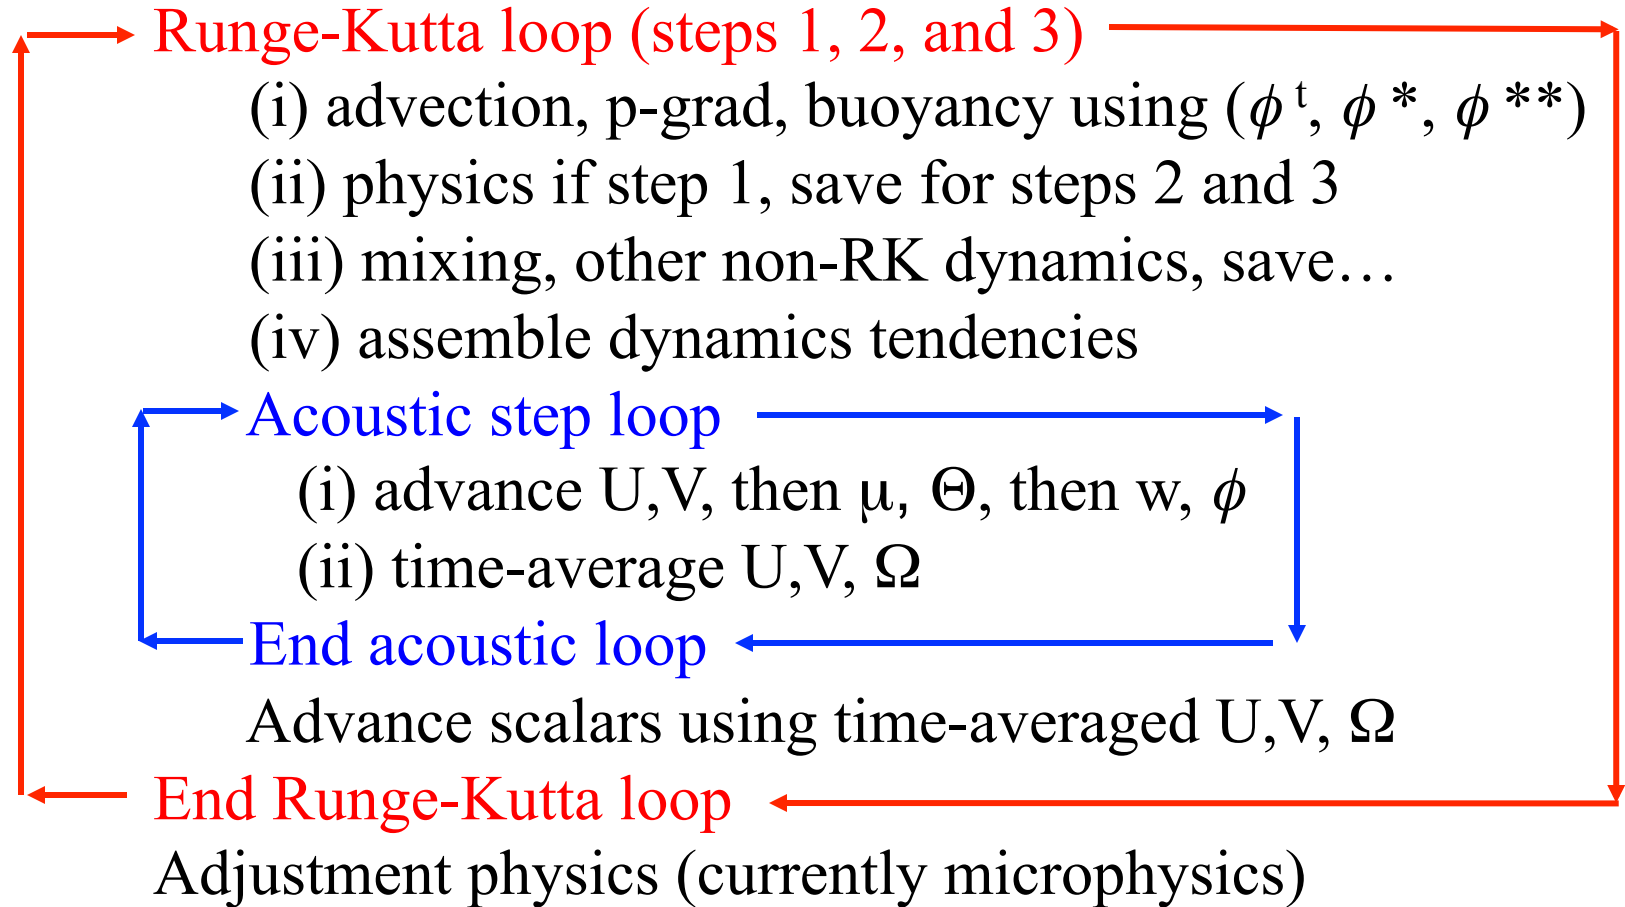

End time step

Dynamics: 3. Time integration scheme – perturbation variables

Introduce the
perturbation variables:

$$\phi = \bar{\phi}(\bar{z}) + \phi', \mu = \bar{\mu}(\bar{z}) + \mu';$$
$$p = \bar{p}(\bar{z}) + p', \alpha = \bar{\alpha}(\bar{z}) + \alpha'$$

Note – $\phi = \bar{\phi}(\bar{z}) = \bar{\phi}(x, y, \eta),$
likewise $\bar{p}(x, y, \eta), \bar{\alpha}(x, y, \eta)$

Reduces horizontal pressure-gradient errors.

For small time steps, recast variables as perturbations from time t

$$U' = U'^t + U'', \quad V' = V'^t + V'', \quad W' = W'^t + W'',$$
$$\Theta' = \Theta'^t + \Theta'', \quad \mu' = \mu'^t + \mu'', \quad \phi' = \phi'^t + \phi'';$$
$$p' = p'^t + p'', \quad \alpha' = \alpha'^t + \alpha''$$

Allows vertical pressure gradient to be expressed in terms of ϕ'' .

Dynamics: 3. Time integration scheme – acoustic step

(Without expanding variables into perturbation form)

$$U^{\tau+\Delta\tau} \quad \frac{\partial U}{\partial t} + \left(\mu_d \alpha \frac{\partial p}{\partial x} + \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x} \right)^{\tau} = R_U^t$$

$$\mu_d^{\tau+\Delta\tau} \quad \Omega^{\tau+\Delta\tau} \quad \frac{\partial \mu_d}{\partial t} + \frac{\partial U^{\tau+\Delta\tau}}{\partial x} + \frac{\partial \Omega^{\tau+\Delta\tau}}{\partial \eta} = 0$$

$$\Theta^{\tau+\Delta\tau} \quad \frac{\partial \Theta}{\partial t} + \left(\frac{\partial U \theta^t}{\partial x} + \frac{\partial \Omega \theta^t}{\partial \eta} \right)^{\tau+\Delta\tau} = R_{\Theta}^t$$

$$W^{\tau+\Delta\tau} \quad \frac{\partial W}{\partial t} + g \overline{\left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right)^{\tau}} = R_W^t$$

$$\phi^{\tau+\Delta\tau} \quad \left\{ \begin{array}{l} \mu_d^t \frac{\partial \phi}{\partial t} + U^{\tau+\Delta\tau} \frac{\partial \phi^t}{\partial x} + \Omega^{\tau+\Delta\tau} \frac{\partial \phi^t}{\partial \eta} - g \overline{W^{\tau}} = R_{\phi}^t \end{array} \right.$$

- Forward-backward differencing on U , Θ , and μ equations
- Vertically implicit differencing on W and ϕ equations

Dynamics: 3. Time integration scheme – hydrostatic option

Instead of solving vertically implicit equations for W and ϕ

Integrate the hydrostatic equation to obtain p (π):

$$\frac{\partial p}{\partial \eta} = \left(\frac{\alpha_d}{\alpha} \right)^t \mu_d$$


Recover α and ϕ from:

$$p = \left(\frac{R_d \Theta_m}{p_o \mu_d \alpha_d} \right)^\gamma, \quad \Theta_m = \Theta \left(1 + \frac{R_v}{R_d} q_v \right),$$
$$\text{and } \frac{\partial \phi}{\partial \eta} = -\mu_d \alpha_d$$


W is no longer required during the integration.

Dynamics: 4. Grid staggering – horizontal and vertical

C-grid staggering

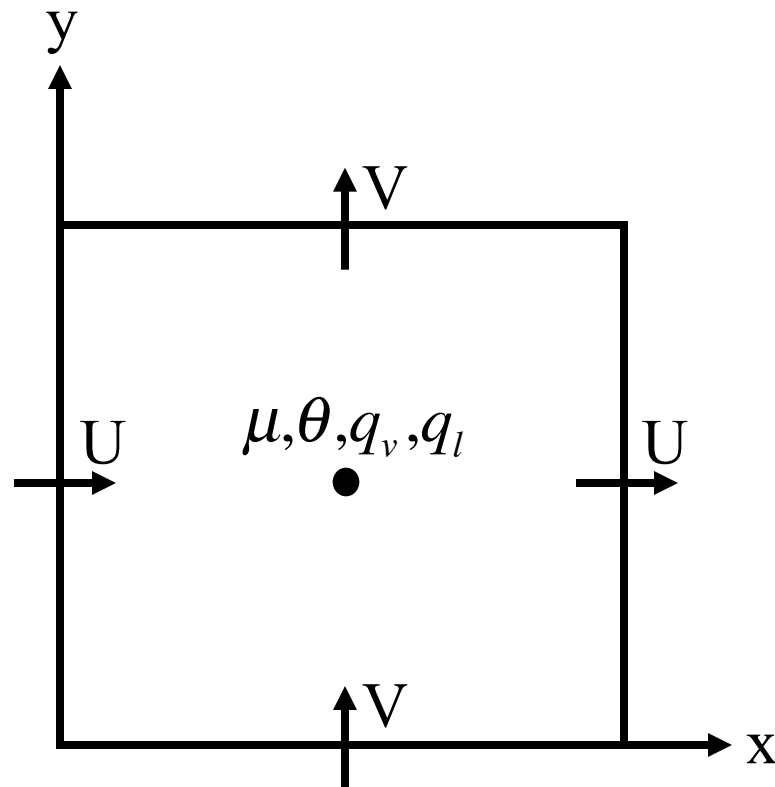

horizontal

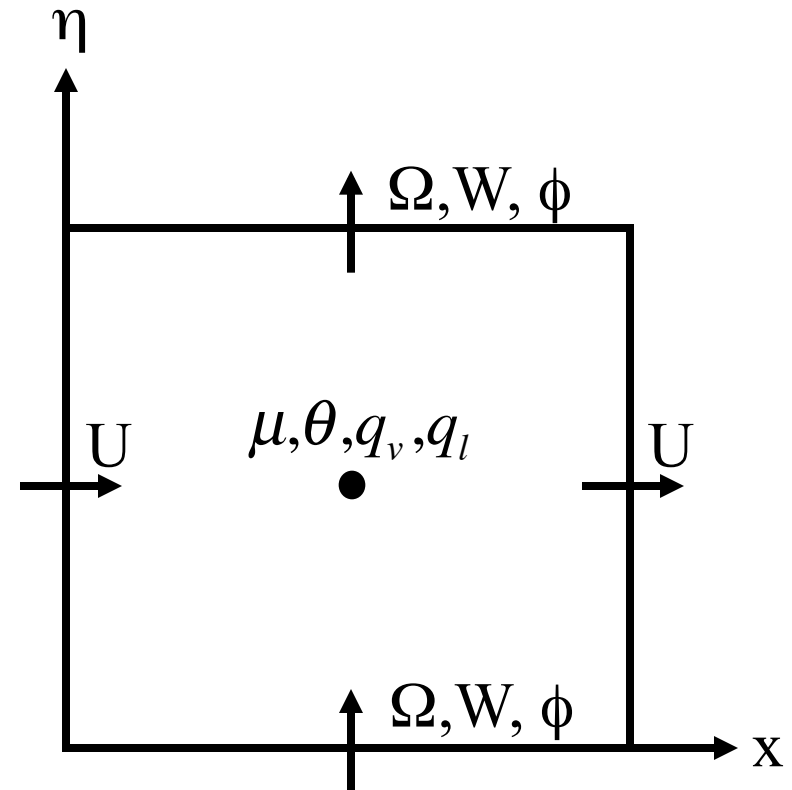

vertical

Dynamics: 5. Advection (transport) and conservation

2nd, 3rd, 4th, 5th and 6th order centered and upwind-biased schemes are available in the ARW model.

Example: 5th order scheme

$$\frac{\partial(U\psi)}{\partial x} = \frac{1}{\Delta x} \left(F_{i+\frac{1}{2}}(U\psi) - F_{i-\frac{1}{2}}(U\psi) \right)$$

where

$$F_{i-\frac{1}{2}}(U\psi) = U_{i-\frac{1}{2}} \left\{ \frac{37}{60}(\psi_i + \psi_{i-1}) - \frac{2}{15}(\psi_{i+1} + \psi_{i-2}) + \frac{1}{60}(\psi_{i+2} + \psi_{i-3}) \right\} \\ - \text{sign}(1, U) \frac{1}{60} \left\{ (\psi_{i+2} - \psi_{i-3}) - 5(\psi_{i+1} - \psi_{i-2}) + 10(\psi_i - \psi_{i-1}) \right\}$$

Dynamics: 5. Advection (transport) and conservation

For constant U , the 5th order flux divergence tendency becomes

$$\begin{aligned} \Delta t \frac{\delta(U\psi)}{\Delta x} \Big|_{5th} &= \Delta t \frac{\delta(U\psi)}{\Delta x} \Big|_{6th} \\ &- \underbrace{\left| \frac{U\Delta t}{\Delta x} \right| \frac{1}{60} (-\psi_{i-3} + 6\psi_{i-2} - 15\psi_{i-1} + 20\psi_i - 15\psi_{i+1} + 6\psi_{i+2} - \psi_{i+3})}_{\frac{Cr}{60} \frac{\partial^6 \psi}{\partial x^6} + H.O.T} \end{aligned}$$

The odd-ordered flux divergence schemes are equivalent to the next higher ordered (even) flux-divergence scheme plus a dissipation term of the higher even order with a coefficient proportional to the Courant number.

Maximum Courant Number for Advection


$$C_a = U \Delta t / \Delta x$$

<i>Time Integration Scheme</i>	<i>Advection Scheme</i>				
	<i>2nd</i>	<i>3rd</i>	<i>4th</i>	<i>5th</i>	<i>6th</i>
Leapfrog ($\gamma=0.1$)	0.91	U	0.66	U	0.57
RK2	U	0.90	U	0.39	U
RK3	1.73	1.63	1.26	1.43	1.09

U = unstable

(Wicker & Skamarock, 2002)

Dynamics: 5. Advection (transport) and conservation – dry-air mass

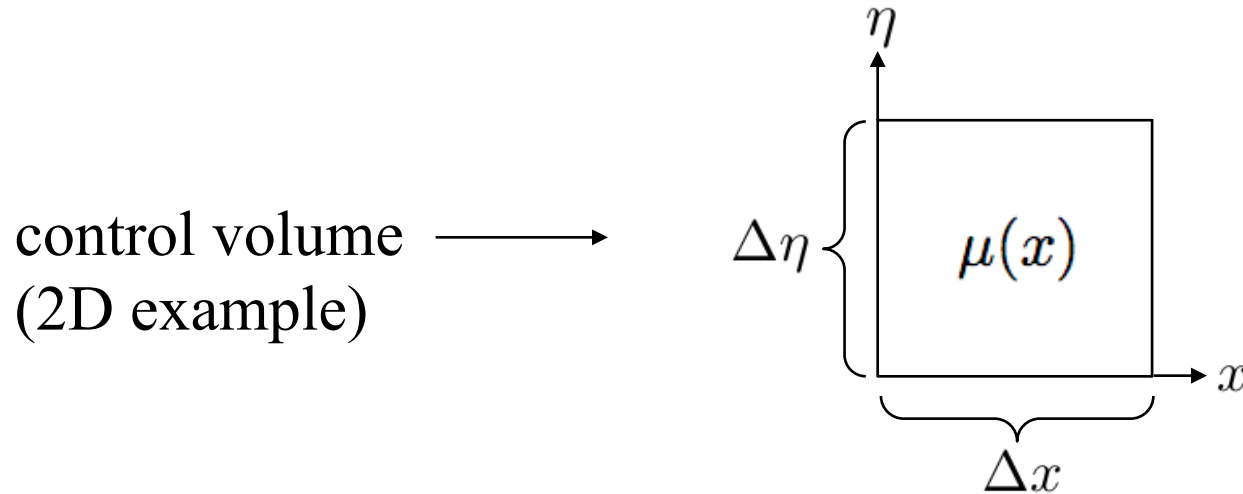

Mass in a control volume is proportional to

$$(\Delta x \Delta \eta)(\mu)^t$$

since $\mu(x)\Delta\eta = \Delta\pi = -g\rho\Delta z$

Dynamics: 5. Advection (transport) and conservation – dry-air mass

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$
2D example

Mass conservation equation

$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

Change in mass over a time step


mass fluxes through
control volume faces

Dynamics: 5. Advection (transport) and conservation – dry-air mass

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$

Mass conservation equation

$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

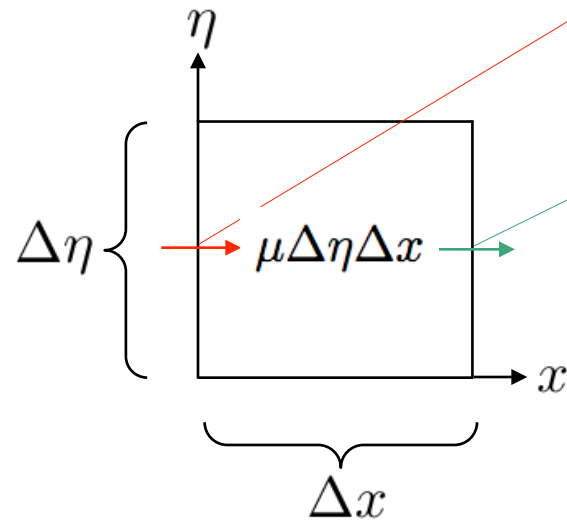

Horizontal fluxes through the vertical control-volume faces


Dynamics: 5. Advection (transport) and conservation – dry-air mass

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$

Mass conservation equation


$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

Vertical fluxes through the horizontal control-volume faces

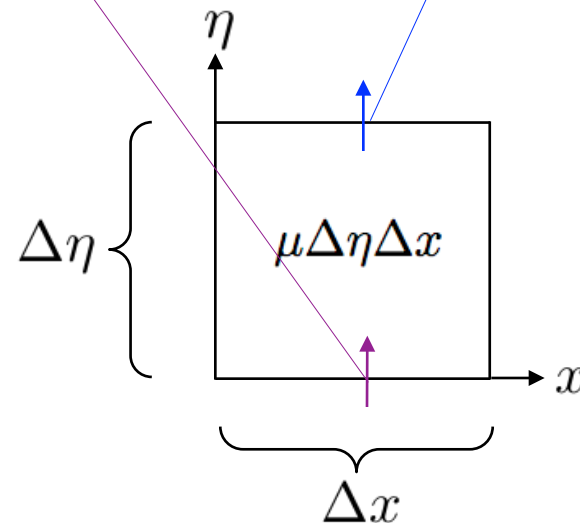

Dynamics: 5. Advection (transport) and conservation – dry-air mass

The same mass fluxes are used for neighboring grid cells - hence mass is conserved locally and globally.

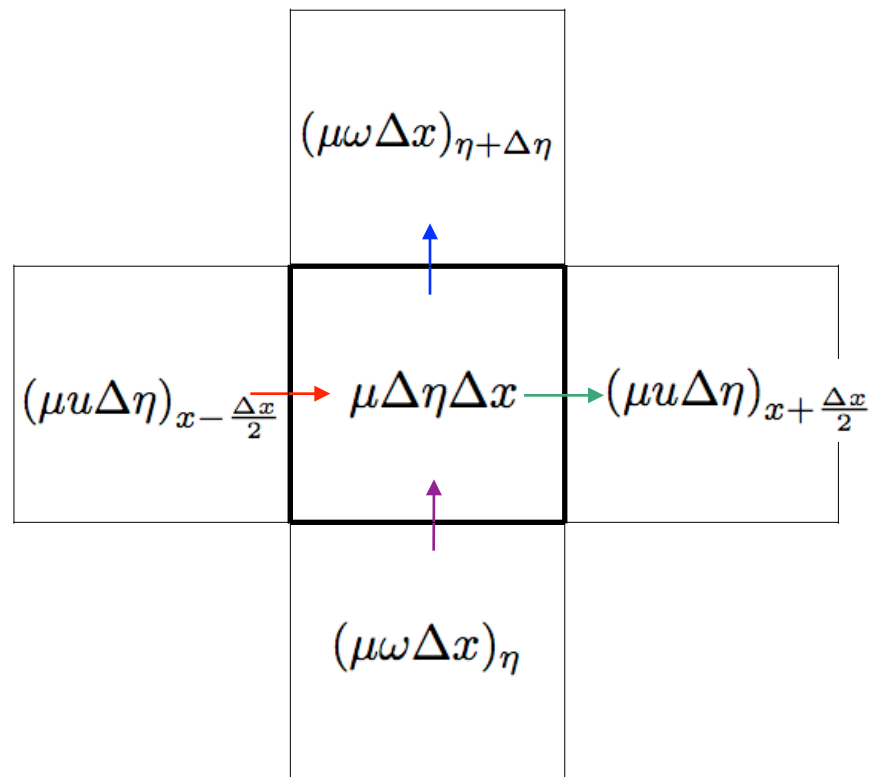

Dynamics: 5. Advection (transport) and conservation – scalars

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$

Scalar mass $(\Delta x \Delta \eta)(\mu \phi)^t$

Mass conservation equation:

$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

change in mass over a time step mass fluxes through control volume faces


Scalar mass conservation equation:

$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu \phi)^{t+\Delta t} - (\mu \phi)^t] = [(\mu u \phi \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \phi \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \phi \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \phi \Delta x)_{x, \eta+\Delta \eta/2}]$$

change in tracer mass over a time step tracer mass fluxes through control volume faces

Dynamics: 5. Advection (transport) and conservation – shape preserving

1D advection

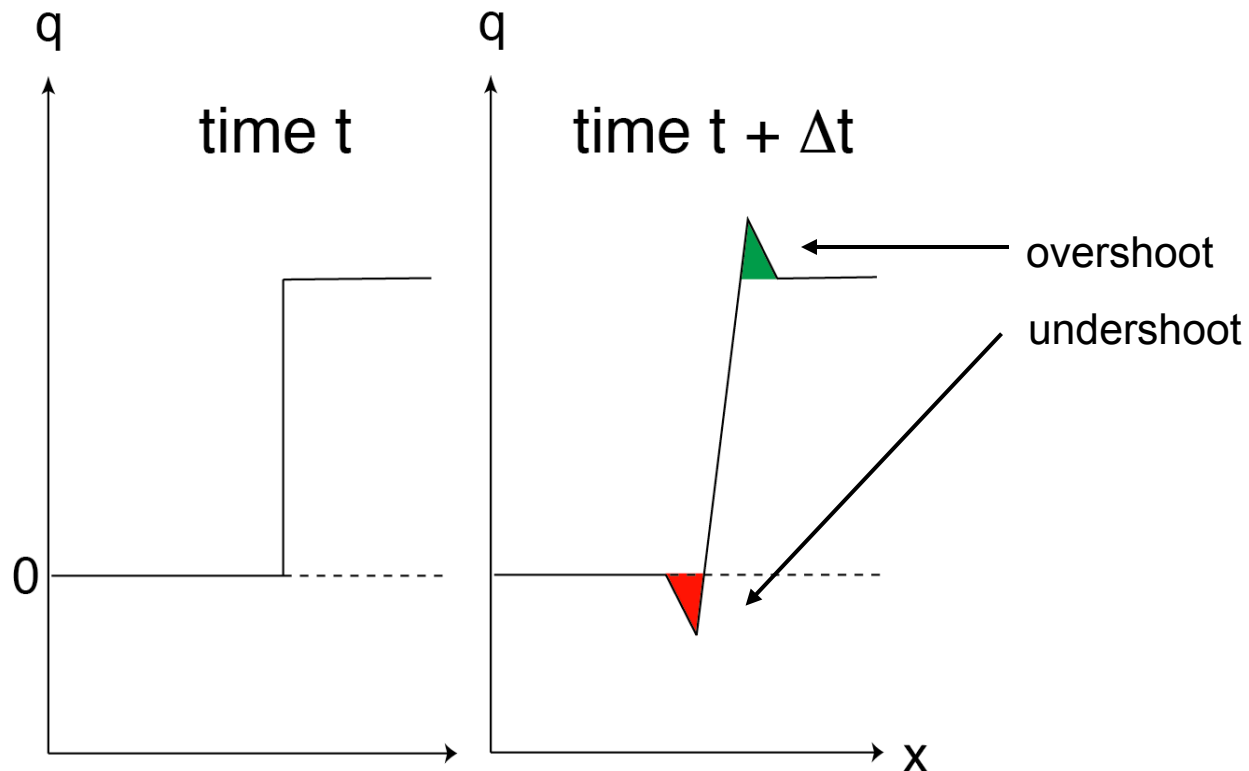

ARW transport is conservative,
but not positive definite nor monotonic.

Removal of negative q ■
results in spurious source of q ■ .

Dynamics: 5. Advection (transport) and conservation – shape preserving

Scalar update, last RK3 step

$$(\mu\phi)^{t+\Delta t} = (\mu\phi)^t - \Delta t \sum_{i=1}^n \delta_{x_i} [f_i] \quad (1)$$

(1) Decompose flux: $f_i = f_i^{upwind} + f_i^c$

(2) Renormalize high-order correction fluxes f_i^c such that solution is positive definite or monotonic: $f_i^c = R(f_i^c)$


(3) Update scalar eqn. (1) using $f_i = f_i^{upwind} + R(f_i^c)$

Skamarock, MWR 2006, 2241-2250


Dynamics: 5. Advection (transport) and conservation – examples

1D Example: Top-Hat Advection


1D Top-hat transport $Cr = 0.5$, 1 revolution, 200 steps

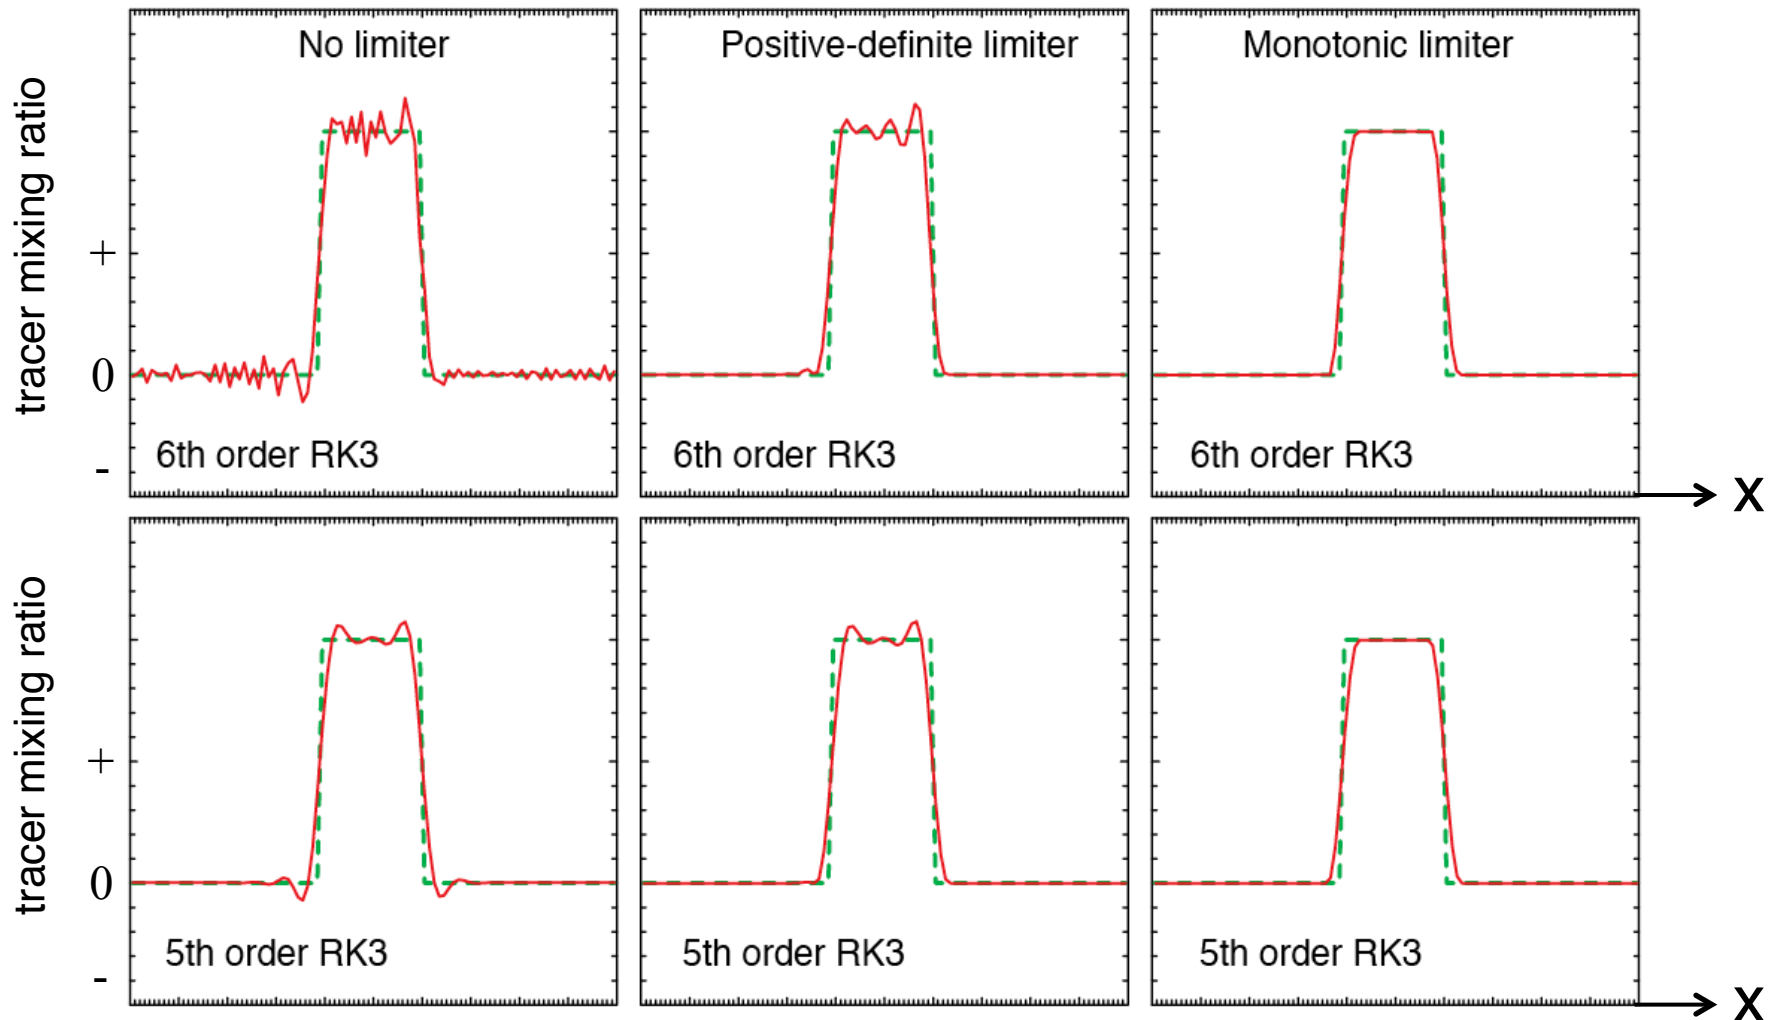

Dynamics: 5. Advection (transport) and conservation – examples

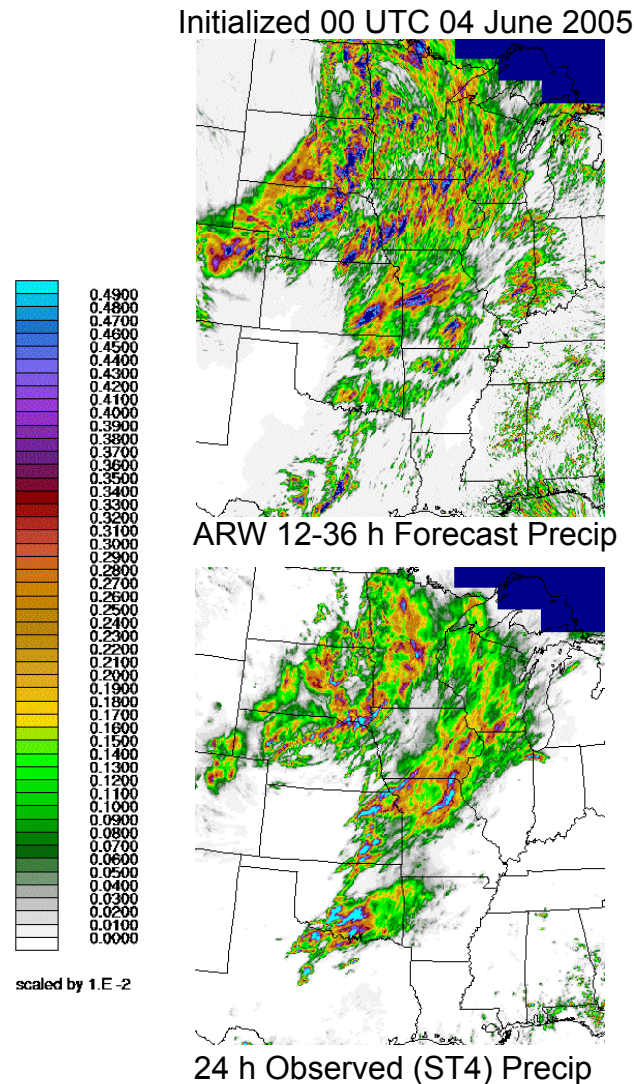


2005 ARW 4 km Forecasts (standard advection)

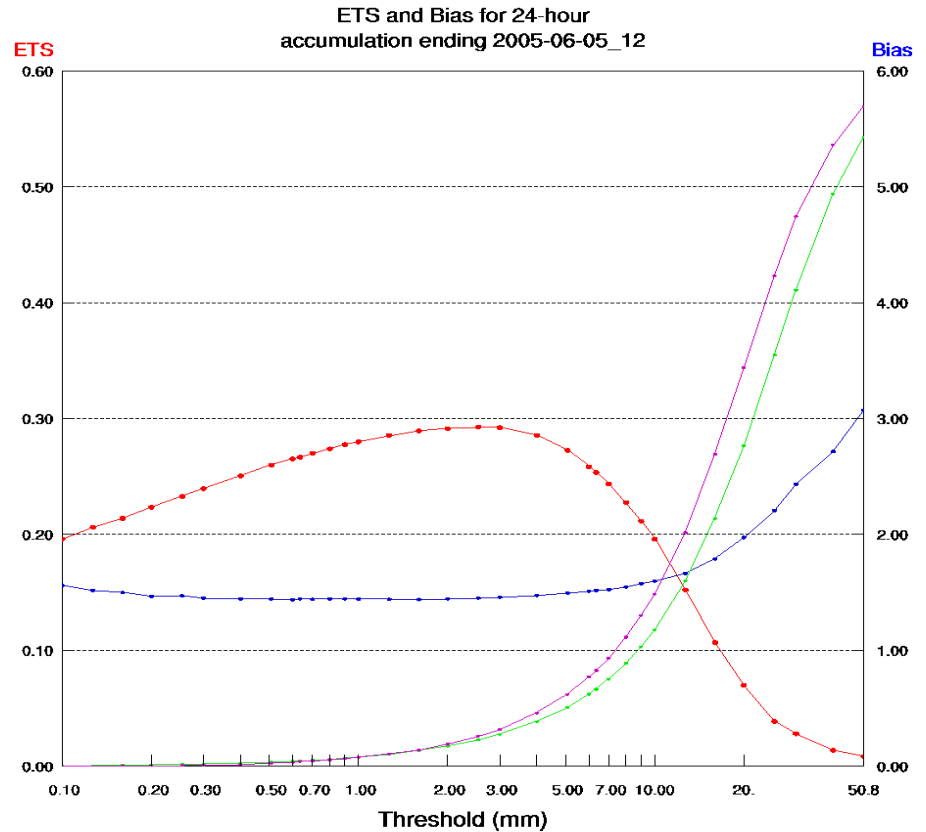


Dynamics: 5. Advection (transport) and conservation – examples

Initialized 00 UTC 04 June 2005

Standard advection

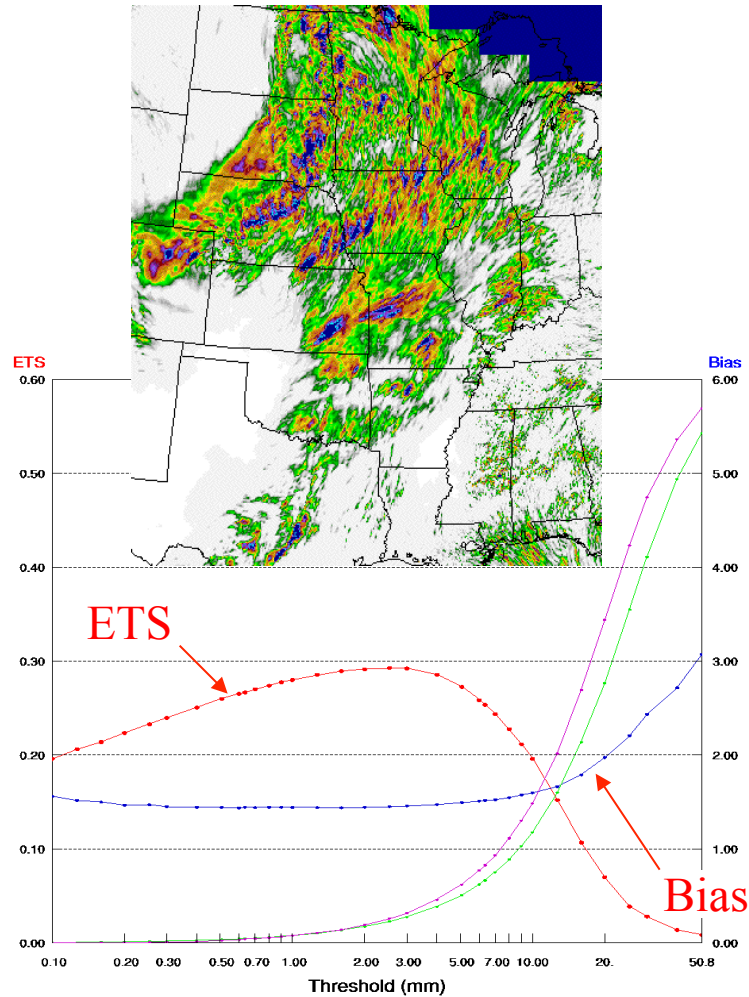

Positive-definite advection

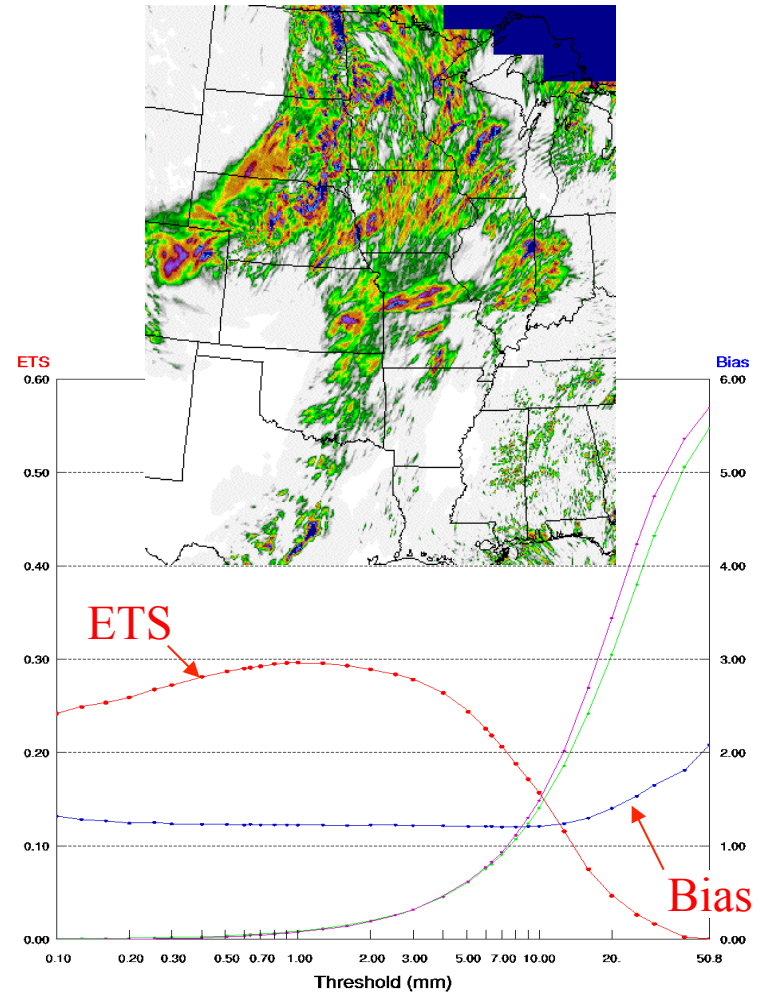

Dynamics: 5. Advection (transport) and conservation – WENO scheme

Weighted Essentially Non-Oscillatory scheme

The diagram illustrates the WENO scheme. On the left, the update equation is shown: $\psi_i^{t+\Delta t} - \psi_i^t = -\frac{\Delta t}{\Delta x} (flux_{i+1/2} - flux_{i-1/2})$. Red brackets connect the flux terms to the stencil. The stencil is a horizontal row of six boxes labeled ψ_{i-3} , ψ_{i-2} , ψ_{i-1} , ψ_i , ψ_{i+1} , and ψ_{i+2} . Red arrows indicate the flux calculation: one arrow points from the ψ_{i-1} box to the $flux_{i-1/2}$ term, and another points from the ψ_i box to the $flux_{i+1/2}$ term. A long red arrow also points from the ψ_i box to the $\psi_i^{t+\Delta t}$ term in the equation.

for $U_{i-1/2} \geq 0$

$$flux_{i-1/2} = U_{i-1/2} \left(\frac{w_0}{\bar{w}} f_0 + \frac{w_1}{\bar{w}} f_1 + \frac{w_2}{\bar{w}} f_2 \right)$$

where $\bar{w} = w_0 + w_1 + w_2$

$$f_0 = \frac{1}{3}\psi_{i-3} - \frac{7}{6}\psi_{i-2} + \frac{11}{6}\psi_{i-1}$$

$$f_1 = -\frac{1}{6}\psi_{i-2} + \frac{5}{6}\psi_{i-1} + \frac{1}{3}\psi_i$$

$$f_2 = \frac{1}{3}\psi_{i-1} + \frac{5}{6}\psi_i - \frac{1}{6}\psi_{i+1}$$

$$w_0 = \frac{0.1}{(\varepsilon + \beta_0)^2}$$

$$w_1 = \frac{0.6}{(\varepsilon + \beta_1)^2}$$

$$w_2 = \frac{0.3}{(\varepsilon + \beta_2)^2}$$

$$\beta_0 = \frac{13}{12}(\psi_{i-3} - 2\psi_{i-2} + \psi_{i-1})^2 + \frac{1}{4}(\psi_{i-3} - 4\psi_{i-2} + 3\psi_{i-1})^2$$

$$\beta_1 = \frac{13}{12}(\psi_{i-2} - 2\psi_{i-1} + \psi_i)^2 + \frac{1}{4}(\psi_{i-2} - 4\psi_{i-1} + 3\psi_i)^2$$

$$\beta_2 = \frac{13}{12}(\psi_{i-1} - 2\psi_i + \psi_{i+1})^2 + \frac{1}{4}(\psi_{i-1} - 4\psi_i + 3\psi_{i+1})^2$$

Dynamics: 5. Advection (transport) and conservation – WENO scheme

Weighted Essentially Non-Oscillatory scheme

The diagram illustrates the WENO scheme. On the left, the update equation is shown: $\psi_i^{t+\Delta t} - \psi_i^t = -\frac{\Delta t}{\Delta x} (\text{flux}_{i+1/2} - \text{flux}_{i-1/2})$. Red brackets connect the flux terms to the stencil on the right. The stencil consists of six boxes labeled ψ_{i-3} , ψ_{i-2} , ψ_{i-1} , ψ_i , ψ_{i+1} , and ψ_{i+2} . Red arrows indicate the flux calculation: one arrow points from ψ_{i-1} to ψ_i (representing $\text{flux}_{i-1/2}$), and another points from ψ_i to ψ_{i+1} (representing $\text{flux}_{i+1/2}$). A long red arrow also points from the top of the equation to the ψ_i box.

$$\psi_i^{t+\Delta t} - \psi_i^t = -\frac{\Delta t}{\Delta x} (\text{flux}_{i+1/2} - \text{flux}_{i-1/2})$$

for $U_{i-1/2} \geq 0$

$$\text{flux}_{i-1/2} = U_{i-1/2} \left(\frac{w_0}{\bar{w}} f_0 + \frac{w_1}{\bar{w}} f_1 + \frac{w_2}{\bar{w}} f_2 \right)$$

Positive-definite option uses same flux-renormalization as the standard ARW transport schemes.

Can be used on momentum in addition to scalars.

Dynamics: 5. Advection (transport) and conservation – WENO scheme

WRF Quarter SS, NSSL 2-MOM, 5th/3rd-PD

Valid: 0001-01-01_02:00:00


WRF Quarter SS, NSSL 2-MOM, Mono

Valid: 0001-01-01_02:00:00


WRF Quarter SS, NSSL 2-MOM, WENO-PD

Valid: 0001-01-01_02:00:00


Radar reflectivity (lamda = 10 cm) (dBZ) at Eta Level 11

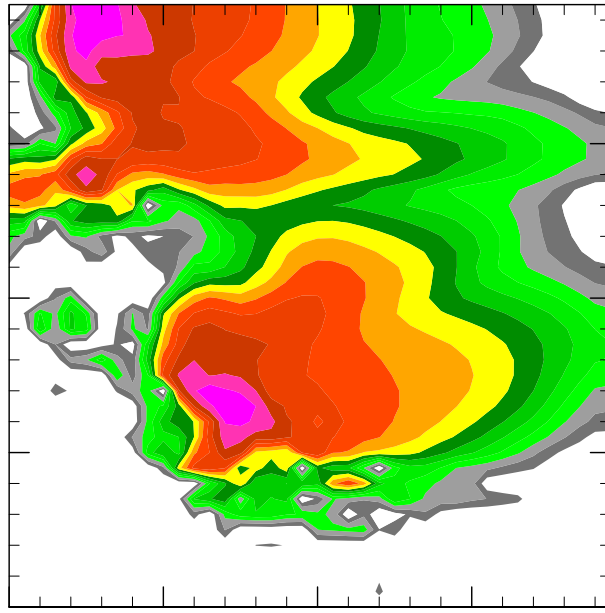

Radar reflectivity (lamda = 10 cm) (dBZ) at Eta Level 11

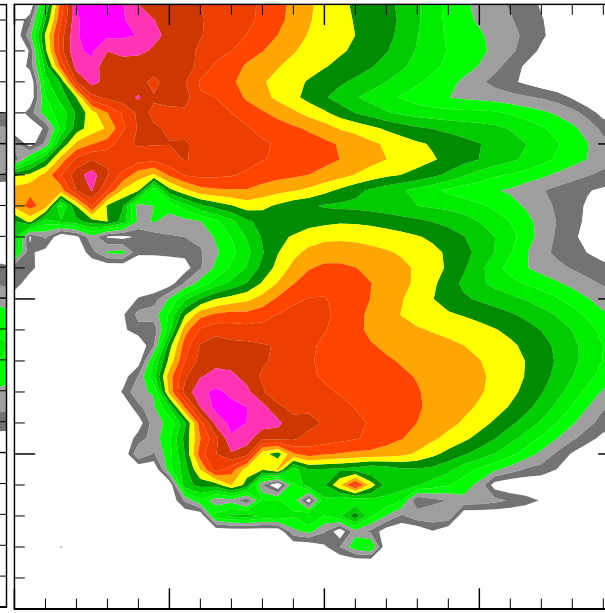

Radar reflectivity (lamda = 10 cm) (dBZ) at Eta Level 11

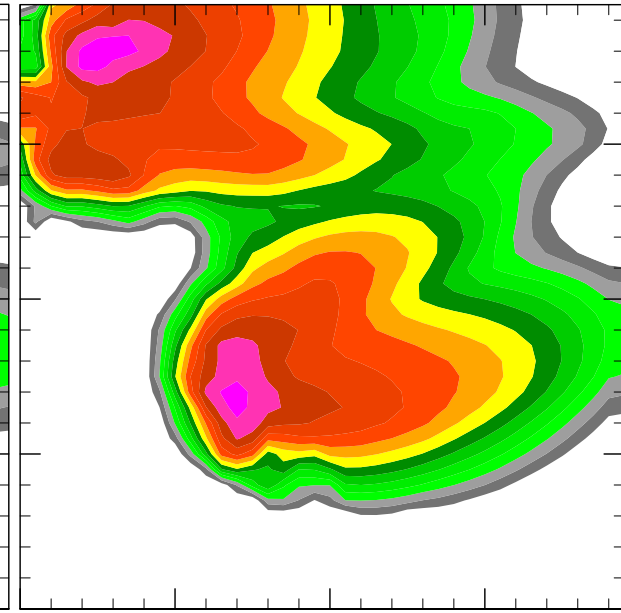

One should consider WENO for some double-moment microphysics scheme applications where noise is a problem.

Application to momentum may not provide much benefit.

Results courtesy of Ted Mansell (NOAA/NSSL)

Dynamics: 5. Advection (transport) and conservation

Where are the transport-scheme parameters?

The namelist.input file:

&dynamics

h_mom_adv_order

v_mom_adv_order

h_sca_adv_order

v_sca_adv_order



scheme order (2, 3, 4, or 5)

defaults:

horizontal (*h_**) = 5

vertical (*v_**) = 3

momentum_adv_opt



= 1 standard scheme

= 3 5th order WENO

default: 1

moist_adv_opt

scalar_adv_opt

chem_adv_opt

tracer_adv_opt

tke_adv_opt



options:

= 1, 2, 3 : no limiter,
positive definite (PD),
montonic

= 4 : 5th order WENO

= 5 : 5th order PD WENO

Dynamics: 6. Time step parameters

3rd order Runge-Kutta time step Δt_{RK}

Courant number limited, 1D: $C_r = \frac{U\Delta t}{\Delta x} < 1.43$

Generally stable using a timestep approximately twice as large as used in a leapfrog model.

Where?

The namelist.input file:

&domains

time_step (integer seconds)

time_step_fract_num

time_step_fract_den

Dynamics: 6. Time step parameters

3rd order Runge-Kutta time step Δt_{RK} (&domains *time_step*)

Acoustic time step

2D horizontal Courant number limited: $C_r = \frac{C_s \Delta \tau}{\Delta h} < \frac{1}{\sqrt{2}}$

$\Delta \tau_{sound} = \Delta t_{RK} / (\text{number of acoustic steps})$

Where?

The namelist.input file:

&dynamics

time_step_sound (integer)



Dynamics: 6. Time step parameters

3rd order Runge-Kutta time step Δt_{RK} (&domains *time_step*)

Acoustic time step [*&dynamics time_step_sound* (integer)]

Guidelines for time step

Δt_{RK} in seconds should be about $6 * \Delta x$ (grid size in kilometers). Larger Δt can be used in smaller-scale dry situations, but *time_step_sound* (default = 4) should increase proportionately if larger Δt is used.

If ARW blows up (aborts) quickly, try:

Decreasing Δt_{RK} (that also decreases Δt_{sound}),

Or increasing *time_step_sound* (that decreases Δt_{sound} but does not change Δt_{RK})

Dynamics: 7. Filters – divergence damping

Purpose: filter acoustic modes (3-D divergence, $D = \nabla \cdot \rho \mathbf{V}$)

$$\left\{ \frac{\partial \rho \mathbf{V}}{\partial t} + \nabla p + \dots = \gamma'_d \nabla D \right\}$$

$$\nabla \cdot \left\{ \right\} \rightarrow \frac{\partial D}{\partial t} + \nabla^2 p + \dots = \gamma'_d \nabla^2 D$$

From the pressure equation: $p_t \simeq c^2 D$

$$\frac{\partial \rho \mathbf{V}}{\partial t} + \nabla [p_\tau + \gamma_d (p^\tau - p^{\tau - \Delta\tau})] + \dots = 0$$

$\gamma_d = 0.1$ recommended (default) (&dynamics *smdiv*)

(Illustrated in height coordinates for simplicity)

Dynamics: 7. Filters – time off-centering the vertical acoustic modes

Purpose: damp vertically-propagating acoustic modes

$$\frac{\partial W}{\partial t} + g \overline{\left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right)}^\tau = \dots$$

$$\frac{\partial \phi}{\partial t} - \frac{g}{\mu_d^t} \overline{W}^\tau = \dots$$

$$\overline{(\quad)}^\tau = \frac{1 + \beta}{2} \overline{(\quad)}^{\tau + \Delta\tau} + \frac{1 - \beta}{2} \overline{(\quad)}^\tau$$

Slightly forward centering the vertical pressure gradient damps
3-D divergence as demonstrated for the divergence damper

$\beta = 0.1$ recommended (default) [`&dynamics` `epssm`]

Dynamics: 7. Filters – external mode filter

Purpose: filter the external mode

Vertically integrated horizontal divergence, $D_h = \int_1^0 (\nabla_\eta \cdot \mu \mathbf{V}_h) d\eta$

$$\left\{ \frac{\partial \mu \mathbf{V}_h}{\partial t} + \dots = -\gamma_e \nabla_\eta D_h \right\}$$

$$\int_1^0 \nabla_\eta \cdot \left\{ \right\} d\eta \rightarrow \frac{\partial D_h}{\partial t} + \dots = \gamma_e \nabla^2 D_h$$

Continuity equation: $\frac{\partial \mu}{\partial t} = -\nabla_\eta \cdot \mu \mathbf{V}_h - \frac{\partial \mu \dot{\eta}}{\partial \eta} = D_h$

$$\frac{\partial \mu \mathbf{V}_h}{\partial \tau} + \dots = -\gamma_e \frac{\Delta x^2}{\Delta \tau^2} \nabla_\eta (\mu^\tau - \mu^{\tau - \Delta \tau})$$

$\gamma_e = 0.01$ recommended (default) [`&dynamics emdiv`]

(Primarily for real-data applications)

Purpose: damp anomalously-large vertical velocities
(usually associated with anomalous physics tendencies)

Additional term:

$$\partial_t W = \dots - \mu_d \operatorname{sign}(W) \gamma_w (Cr - Cr_\beta)$$

$$Cr = \left| \frac{\Omega dt}{\mu d\eta} \right|$$

$Cr_\beta = 1.0$ typical value (default)

[share/module_model_constants.F w_beta]

$\gamma_w = 0.3 \text{ m/s}^2$ recommended (default)

[share/module_model_constants.F w_alpha]

[&dynamics w_damping 0 (off; default) 1 (on)]

2nd-Order Horizontal Mixing, Horizontal-Deformation-Based K_h

Purpose: mixing on horizontal coordinate surfaces
(real-data applications) [`&dynamics diff_opt=1, km_opt=4`]

$$K_h = C_s^2 l^2 \left[0.25(D_{11} - D_{22})^2 + \overline{D_{12}^2}^{xy} \right]^{\frac{1}{2}}$$

where $l = (\Delta x \Delta y)^{1/2}$

$$D_{11} = 2 m^2 [\partial_x(m^{-1}u) - z_x \partial_z(m^{-1}u)]$$

$$D_{22} = 2 m^2 [\partial_y(m^{-1}v) - z_y \partial_z(m^{-1}v)]$$

$$D_{12} = m^2 [\partial_y(m^{-1}u) - z_y \partial_z(m^{-1}u) \\ + \partial_x(m^{-1}v) - z_x \partial_z(m^{-1}v)]$$

$C_s = 0.25$ (Smagorinsky coefficient, default value)
[`&dynamics c_s`]

Implicit Rayleigh w Damping Layer for Split-Explicit Nonhydrostatic NWP Models (gravity-wave absorbing layer)

Modification to small time step:

- Step horizontal momentum, continuity, and potential temperature equations to new time level:

$$\begin{array}{ll} U^{\tau+\Delta\tau} & \mu^{\tau+\Delta\tau} \\ \Omega^{\tau+\Delta\tau} & \Theta^{\tau+\Delta\tau} \end{array}$$

- Step vertical momentum and geopotential equations (implicit in the vertical):

$$W^{*\tau+\Delta\tau} \quad \phi^{*\tau+\Delta\tau}$$

- **Apply implicit Rayleigh damping on W as an adjustment step:**

$$W^{\tau+\Delta\tau} = W^{*\tau+\Delta\tau} - \Delta\tau R_w(\eta) W^{\tau+\Delta\tau}$$

- Update final value of geopotential at new time level:

$$\phi^{\tau+\Delta\tau}$$

Implicit Rayleigh w Damping Layer for Split-Explicit Nonhydrostatic NWP Models (gravity-wave absorbing layer)

$$W^{\tau+\Delta\tau} = W^{*\tau+\Delta\tau} - \Delta\tau R_w(\eta) W^{\tau+\Delta\tau}$$

$$R_w(\eta) = \begin{cases} \gamma_r \sin^2 \left[\frac{\pi}{2} \left(1 - \frac{z_{top}-z}{z_d} \right) \right] & \text{for } z \geq (z_{top} - z_d); \\ 0 & \text{otherwise,} \end{cases}$$

$R_w(\eta)$ - damping rate (t^{-1})
 z_d - depth of the damping layer
 γ_r - damping coefficient


[&dynamics *damp_opt* = 3 (default = 0)]

[&dynamics *damp_coef* = 0.2 (recommended, = 0. default)]

[&dynamics *zdamp* = 5000. (z_d (meters); default); height below
model top where damping begins]

Dynamics: 7. Filters – gravity-wave absorbing layer example

Model Initialized 04 Dec 2007 00 UTC

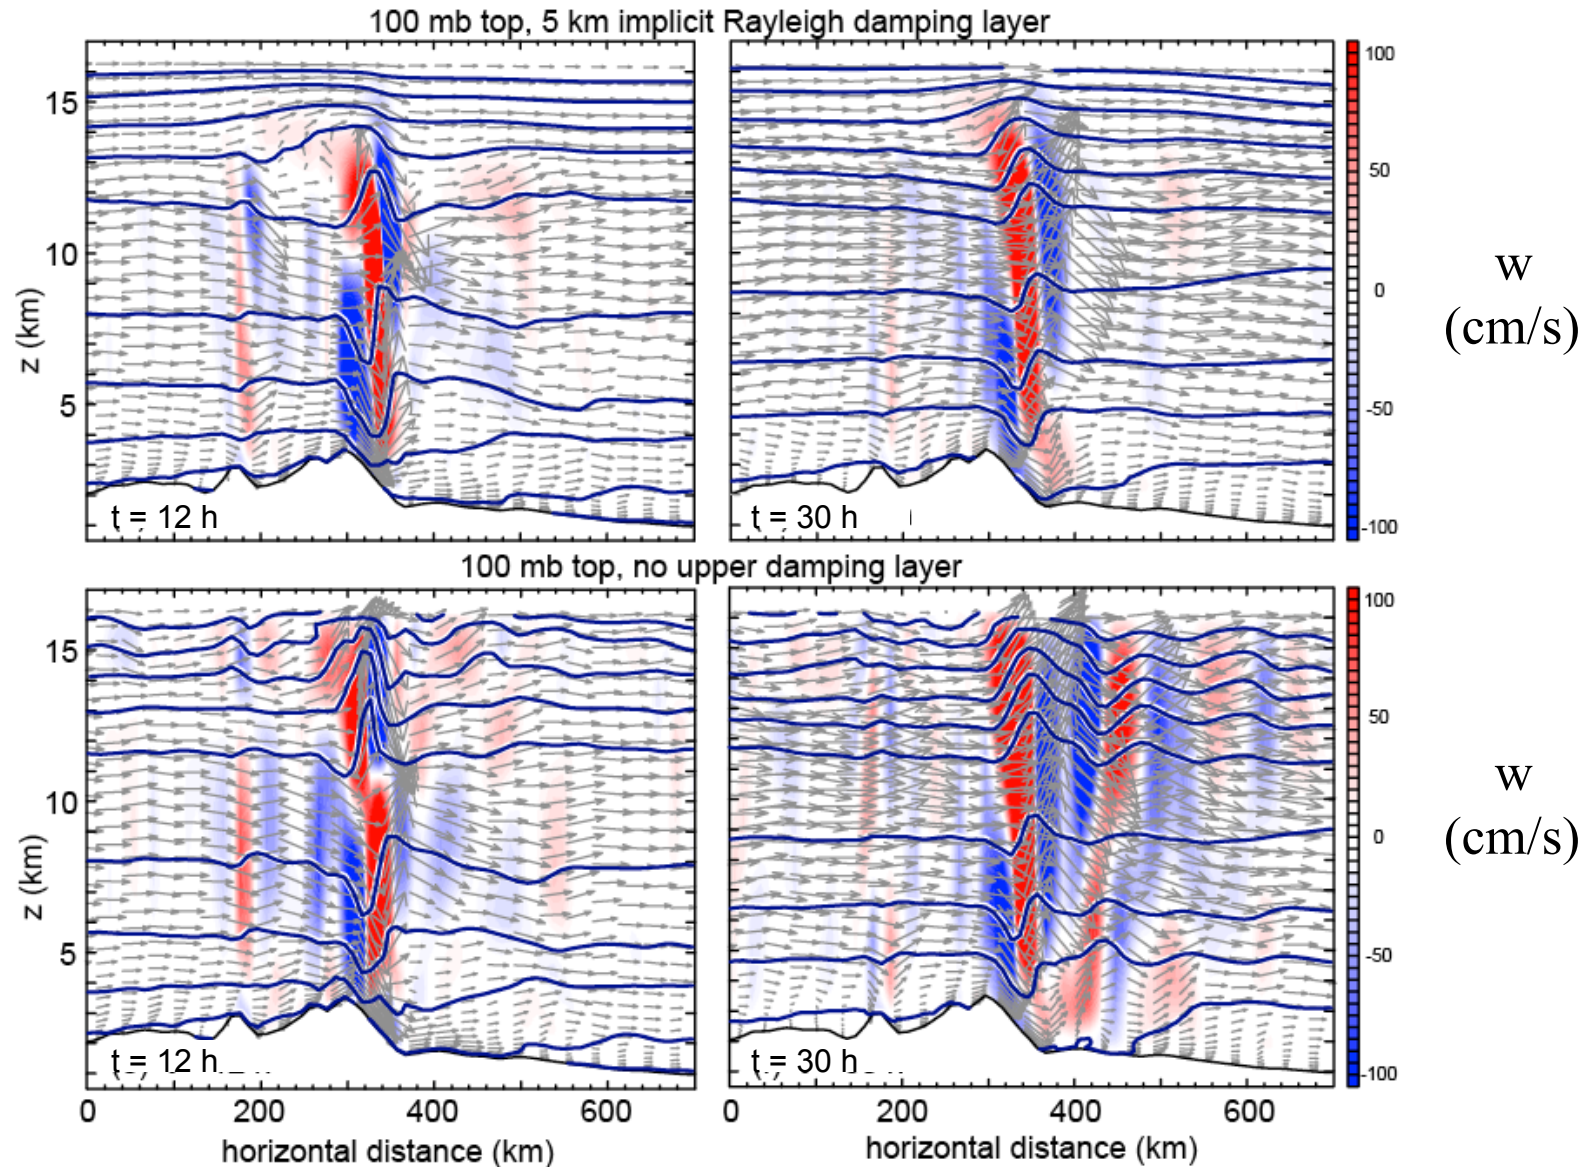

ARW Model: projection options

1. Cartesian geometry:
idealized cases
2. Lambert Conformal:
mid-latitude applications
3. Polar Stereographic:
high-latitude applications
4. Mercator:
low-latitude applications
5. Latitude-Longitude global, regional

Projections 1-4 are isotropic ($m_x = m_y$)


Latitude-longitude projection is anisotropic ($m_x \neq m_y$)

Global ARW – Polar filters


Converging gridlines severely limit timestep.
The polar filter removes this limitation.

Filter procedure - Along a grid latitude circle:

1. Fourier transform variable.
2. Filter Fourier coefficients.
3. Transform back to physical space.

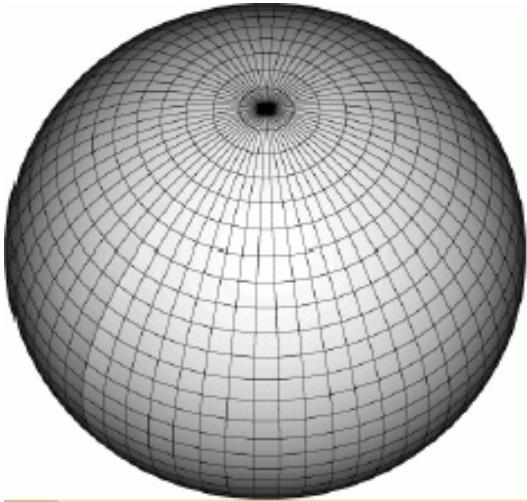

Filter Coefficient $a(k)$, $\psi_o = 45^\circ$

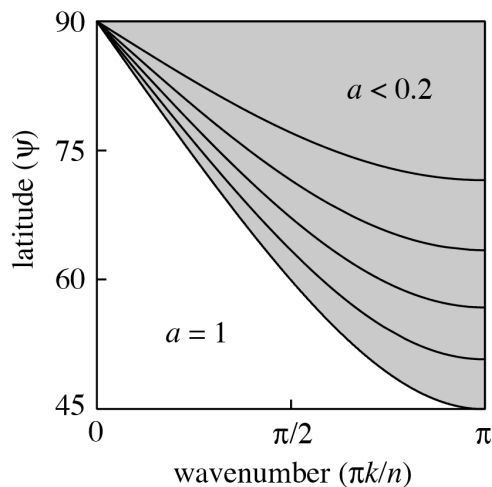

$$\hat{\phi}(k)_{\text{filtered}} = a(k) \hat{\phi}(k), \quad \text{for all } k$$

$$a(k) = \min \left[1., \max \left(0., \left(\frac{\cos \psi}{\cos \psi_o} \right)^2 \frac{1}{\sin^2(\pi k/n)} \right) \right]$$

k = dimensionless wavenumber


$\hat{\phi}(k)$ = Fourier coefficients from forward transform

$a(k)$ = filter coefficients

ψ = latitude ψ_o = polar filter latitude, filter when $|\psi| > \psi_o$

ARW integration with polar filtering

Begin time step

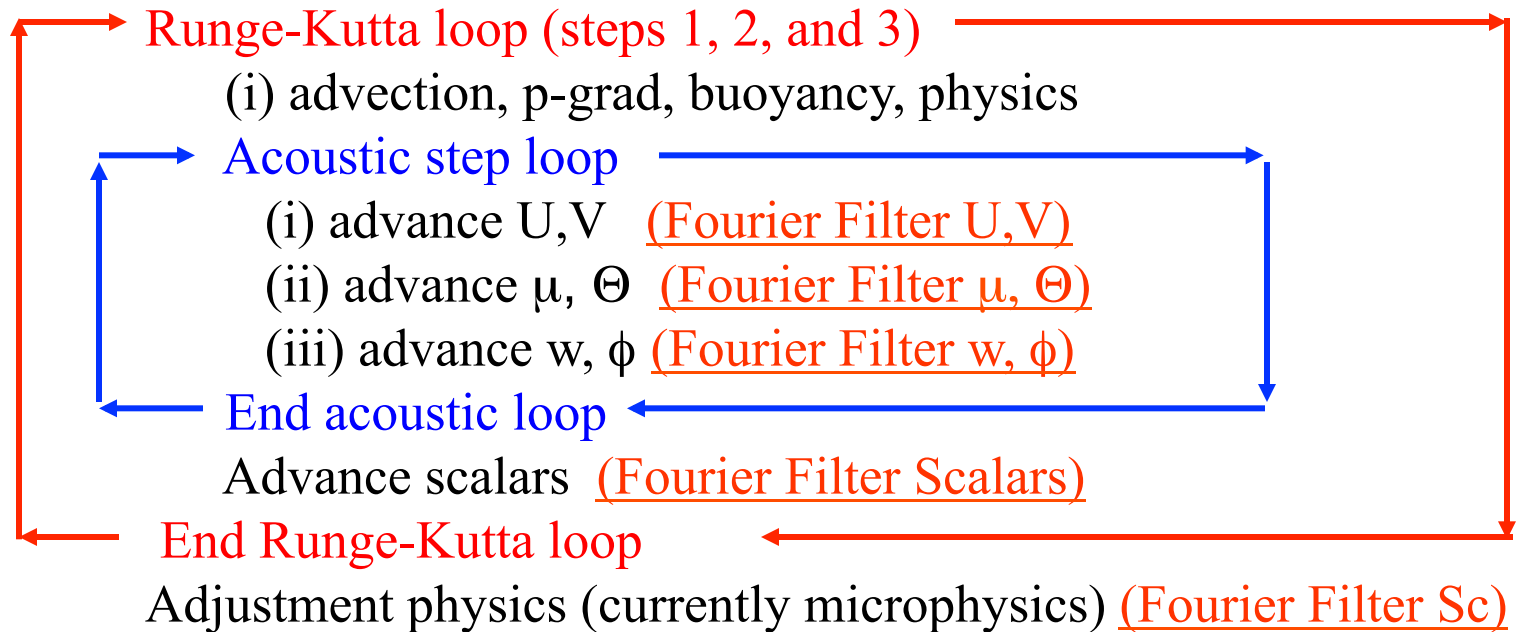


End time step

Timestep limited by minimum Δx outside of polar-filter region.
Monotonic and PD transport is not available for global model.

Dynamics: 8. Map projections and global configuration

An alternative to
global ARW...

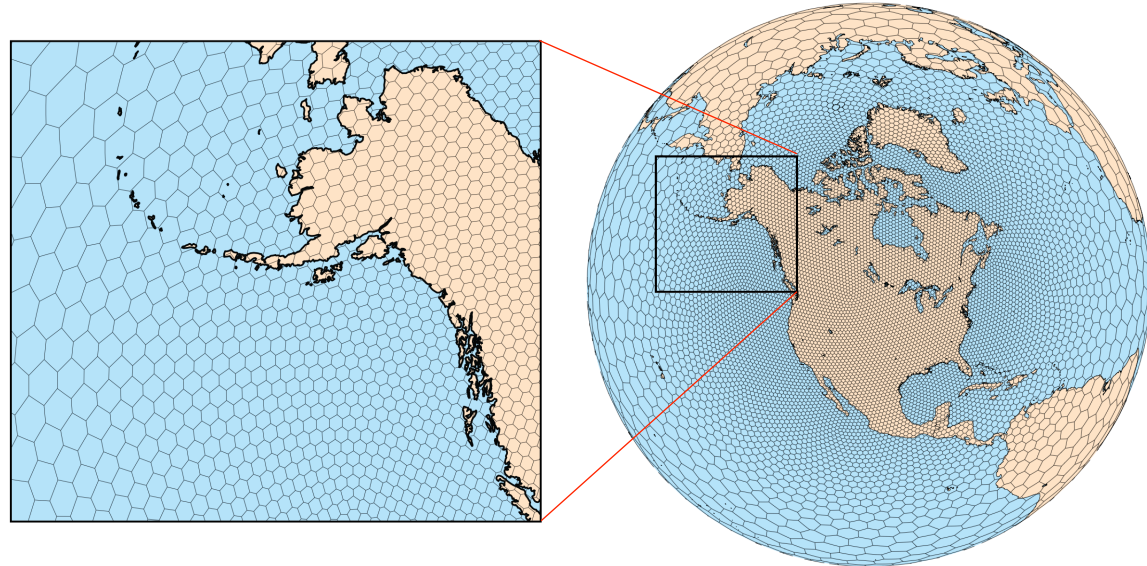

- Global, nonhydrostatic, C-grid Voronoi mesh
- Numerics similar to WRF; WRF-NRCM physics
- No pole problems
- Variable-resolution mesh – no nested BC problems

Available at: <http://mpas-dev.github.io/>



U.S. DEPARTMENT OF
ENERGY

Office of
Science



ARW Model: Boundary Condition Options

Lateral boundary conditions

1. Specified (Coarse grid, real-data applications).
2. Open lateral boundaries (gravity-wave radiative).
3. Symmetric lateral boundary condition (free-slip wall).
4. Periodic lateral boundary conditions.
5. Nested boundary conditions (specified).


Top boundary conditions

1. Constant pressure.

Bottom boundary conditions

1. Free slip.
2. Various B.L. implementations of surface drag, fluxes.

Dynamics: Where are things?

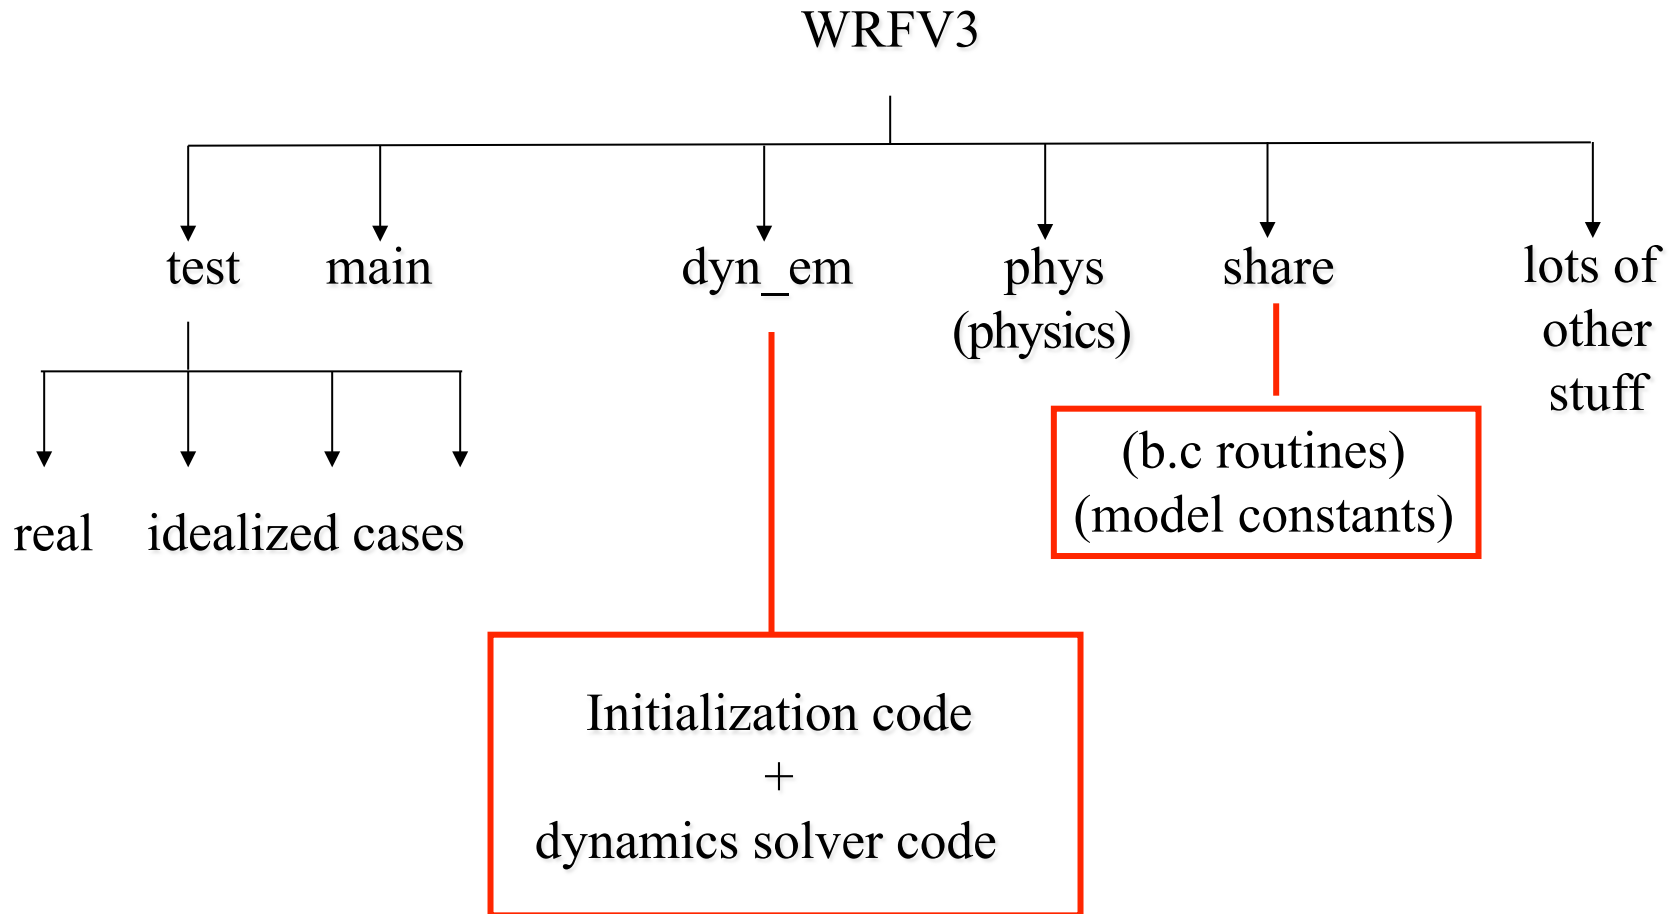

WRF ARW Tech Note

A Description of the Advanced Research WRF Version 3 (June 2008, 2012 update)

<http://www.mmm.ucar.edu/wrf/users/pub-doc.html>