



The WRF Preprocessing System: Description of General Functions

Michael Duda



The WRF Users' Basic Tutorial
25 - 29 July 2016, Boulder, CO

*NCAR is sponsored by the
National Science Foundation

Purpose of this Lecture

In this lecture, our goals are to:

- 1) Understand the purpose of the WPS
- 2) Learn what each component of the WPS does
- 3) Understand why the components work as they do

– The details of *actually running* the WPS are covered this afternoon


– *Advanced features* of the WPS are described on Thursday



The WRF Users' Basic Tutorial
25 - 29 July 2016, Boulder, CO

2

WRF Modeling System Flowchart

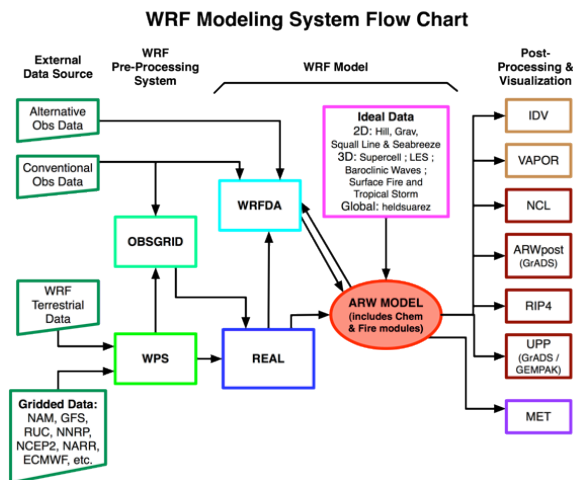

The WRF Users' Basic Tutorial
25 - 29 July 2016, Boulder, CO

3

Purpose of the WPS

The purpose of the WPS is to prepare input to WRF for real-data simulations:


1. Defines simulation coarse domain and ARW nested domains
2. Computes latitude, longitude, map scale factors, and Coriolis parameters at every grid point
3. Interpolates time-invariant terrestrial data to simulation grids (e.g., terrain height and soil type)
4. Interpolates time-varying meteorological fields from another model onto simulation domains




The WRF Users' Basic Tutorial
25 - 29 July 2016, Boulder, CO

4

WPS Program Flowchart

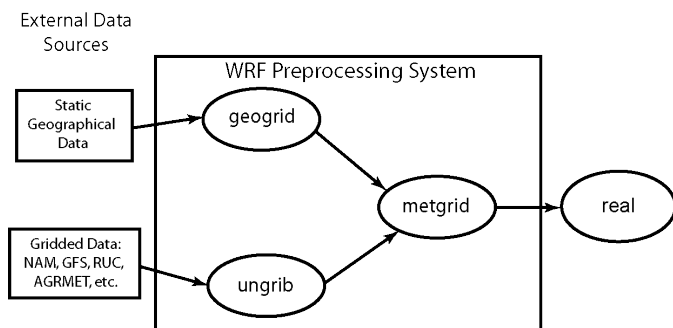

The *geogrid* program

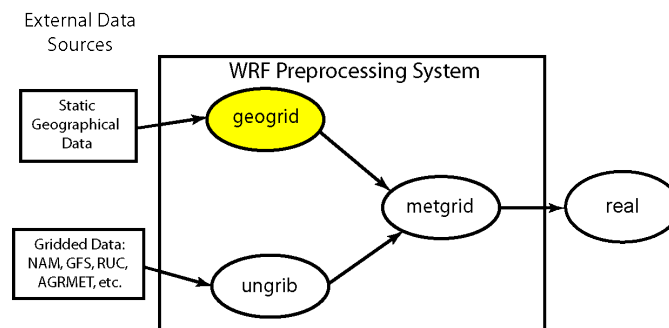

geogrid: think geographical



The *geogrid* program

- For WRF model domains, geogrid defines:
 - Map projection (all domains must use the same projection)
 - Geographic location of domains
 - Dimensions of domains
- Geogrid provides values for static (time-invariant) fields at each model grid point
 - Compute latitude, longitude, map scale factor, and Coriolis parameters at each grid point
 - Horizontally interpolate static terrestrial data (e.g., topography height, land use category, soil type, vegetation fraction, monthly surface albedo)





Geogrid: Defining model domains

- First, we choose a map projection to use for the domains; why?
 - The real earth is (roughly) an ellipsoid
 - But WRF computational domains are defined by rectangles in the plane
- ARW can use any of the following projections:
 - Lambert conformal
 - Mercator
 - Polar stereographic
 - Latitude–longitude (for global domain, you *must* choose this projection!)





ARW Projections: Lambert Conformal

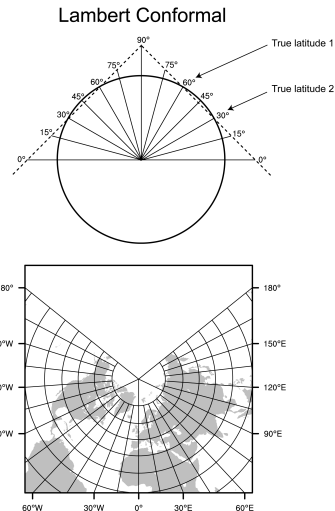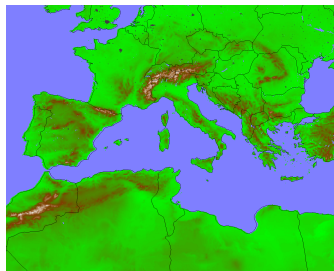

- Well-suited for mid-latitudes
- Domain cannot contain either pole
- Domain cannot be periodic in west-east direction
- Either one or two *true latitudes* may be specified
 - If two are given, the order doesn't matter





ARW Projections: Mercator

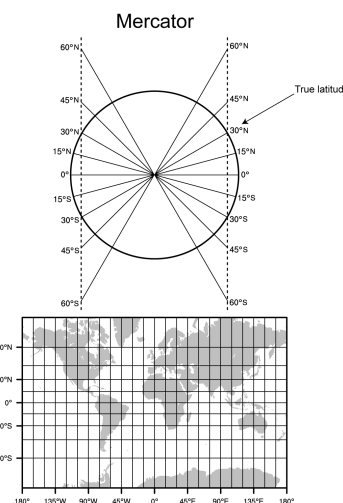

- Well-suited for low-latitudes
- May be used for "channel" domain (periodic domain in west-east direction)
- A single true latitude is specified
 - Cylinder intersects the earth's surface at +/- truelat





ARW Projections: Polar Stereographic

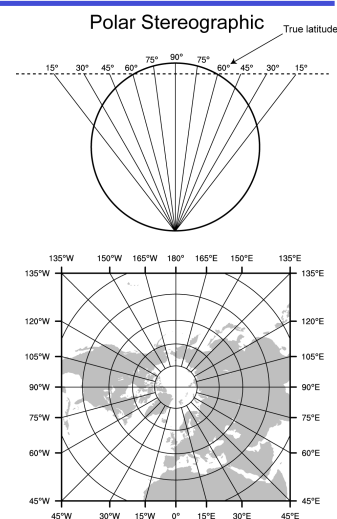

- Good for high-latitude domains, especially if domain must contain a pole
- A single true latitude is specified



ARW Projections: Cylindrical Equidistant

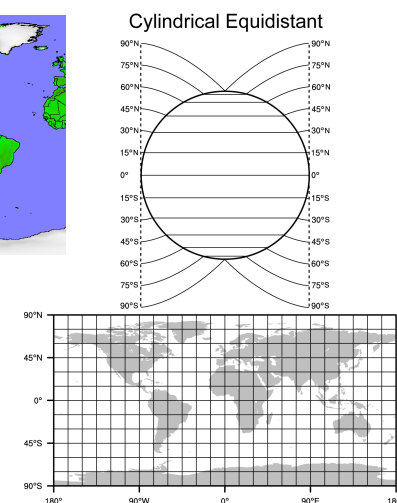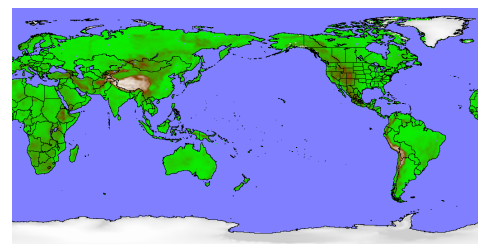

- Required for global domains
- May be used for regional domains
- Can be used in its normal or rotated aspect



Why do map projections matter?

Each choice of map projection and associated parameters distorts distances at a given point on the globe differently

Geographic grid distance in WRF at a point is given by

$$\Delta x_{\text{geographical}} = \Delta x_{\text{nominal}} / m$$

where m is a map scale factor.

Maximum stable timestep in WRF is determined by geographic grid distance, not nominal (i.e., *namelist*) grid distance!

Map scale factor is a 2-d field available in the geogrid output files

- Can easily check min/max map scale factor using, e.g., ncview!




Why do map projections matter?

Example:

- Nominally 27 km grid
- Lambert conformal projection
- True latitude 1 = 23.14
- True latitude 2 = 23.14

Choosing both true latitudes in the center of the WRF domain leads to maximum map scale factors of 1.0975, corresponding to a minimum physical grid distance of $27/1.0975 = 24.6$ km.

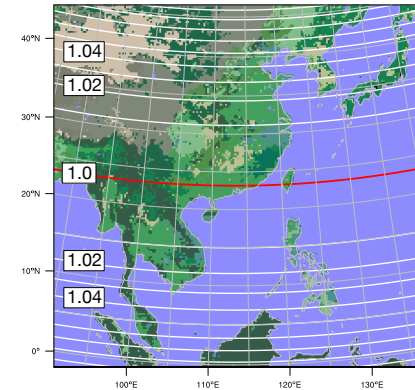


Above: Contours of map scale factor (white; interval 0.01) with true latitudes (red).




Why do map projections matter?

We can reduce the maximum map scale factor at the expense of grid resolution...

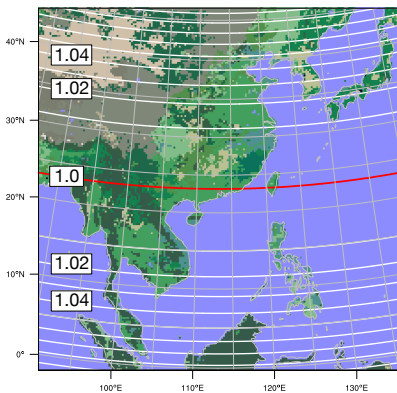

Above: Reference projection as on previous slide; maximum grid distance is 27 km (at true latitude).

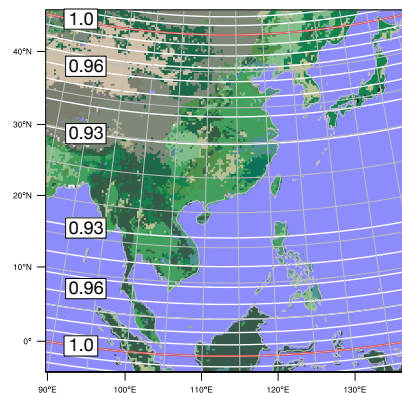


Above: The maximum map scale factor is 1.03, but the minimum is 0.924, corresponding to a physical distance of 29.2 km.




Why do map projections matter?

... but if we insist that the maximum grid distance is at most 27 km, we must reduce the *nominal* grid distance to accommodate the map scale factors!

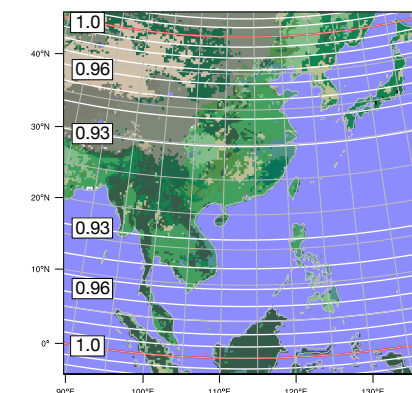

Above: With a nominal grid distance of 27 km, the map scale factors of 0.924 in the center of the map correspond to a physical distance of 29.2 km.

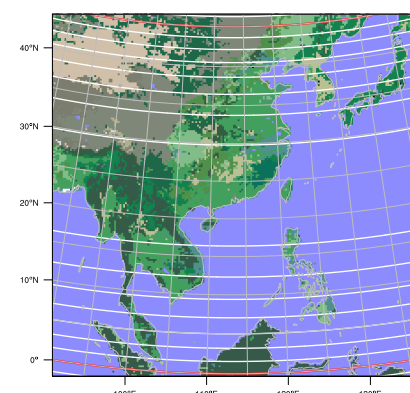

Above: Reducing the nominal grid distance to 25 km, the map scale factors of 0.924 in the center of the map correspond to a physical distance of 27.06 km.




Geogrid: Defining Model Domains

- Define projection of domains using a subset of the following parameters
 - MAP_PROJ**: 'lambert', 'mercator', 'polar', or 'lat-lon'
 - TRUELAT1**: First true latitude
 - TRUELAT2**: Second true latitude (*only for Lambert conformal*)
 - POLE_LAT**, **POLE_LON**: Location of North Pole in WRF computational grid (*only for 'lat-lon'*)
 - STAND_LON**: The meridian parallel to y-axis
- All parameters reside in the file *namelist.wps*



See p. 3-9 and 3-43

Geogrid: Defining ARW Domains

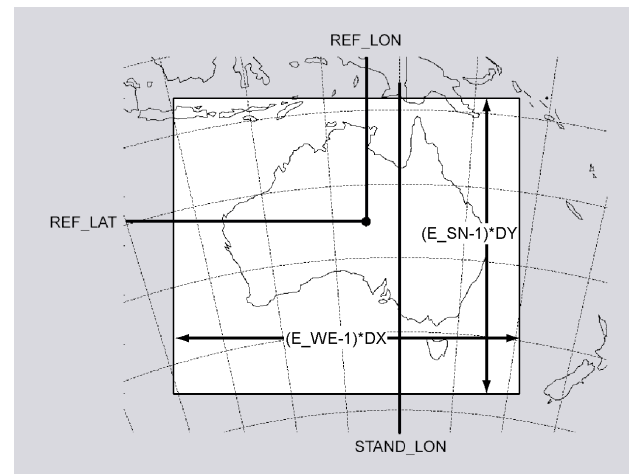


Geogrid: Defining Model Domains

- Define the area covered (dimensions and location) by coarse domain using the following:
 - REF_LAT**, **REF_LON**: The (lat,lon) location of a known location in the domain (*by default, the center point of the domain*)
 - DX**, **DY**: Grid distance where map factor = 1
 - For Lambert, Mercator, and polar stereographic: **meters**
 - For (rotated) latitude-longitude: **degrees**
 - E_WE**: Number of velocity points in west-east direction
 - E_SN**: Number of velocity points in south-north direction



See p. 3-13 and 3-42

Geogrid: Defining ARW Domains

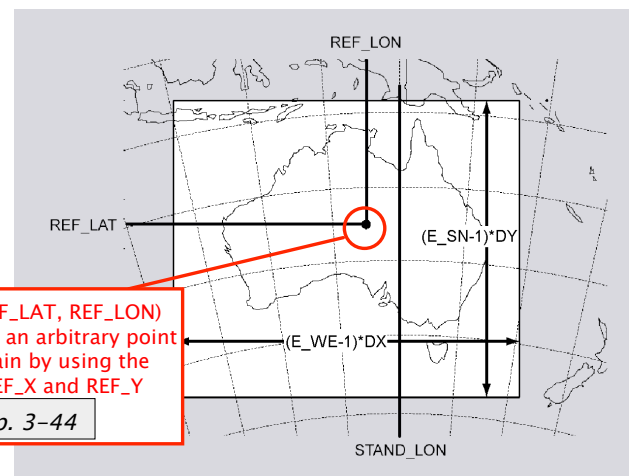


Geogrid: Nesting Basics

- A *nested domain* is a domain that is wholly contained within its *parent domain* and that receives information from its parent, and that may also feed information back to its parent
 - A nested domain has exactly one *parent*
 - A domain may have one or more *children*
- 2-way nests on the same *nesting level* must not overlap in coverage!




Geogrid: Nesting Example

Example configuration - 4 domains

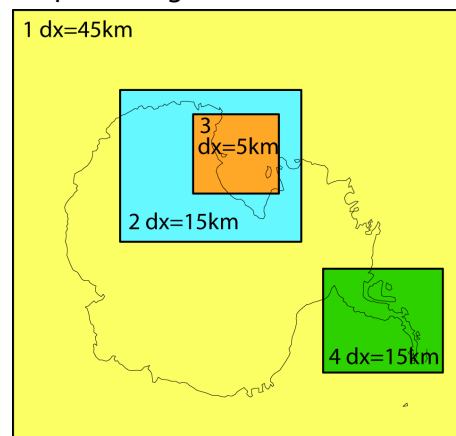

Each domain is assigned a *domain ID #*

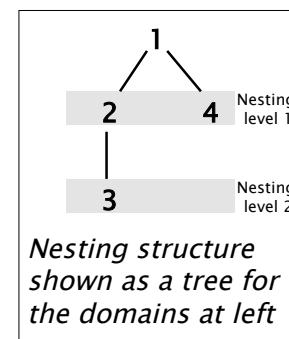


Geogrid: Defining Nested Domains

- Define the dimensions and location of nested domains using:
 - **PARENT_ID**: Which domain is the parent?
 - **PARENT_GRID_RATIO**: What is the ratio of grid spacing in parent to grid spacing in this nest?
 - **I_PARENT_START**: *i*-coordinate in parent of this nest's lower-left corner
 - **J_PARENT_START**: *j*-coordinate in parent of this nest's lower-left corner
 - **E_WE**: Number of velocity points in west-east direction
 - **E_SN**: Number of velocity points in south-north direction

See p. 3-20 and 3-42



Geogrid: Defining Nested Domains

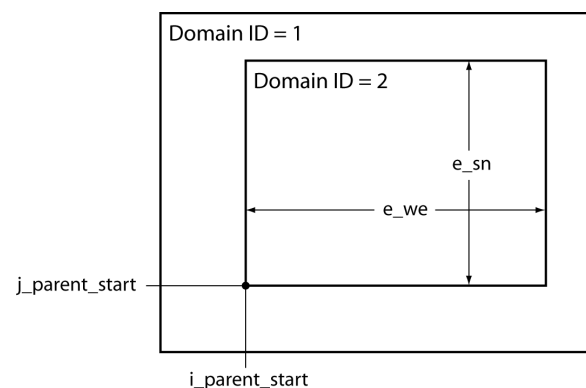


The grid spacing (dx) of domain 2 is determined by grid spacing of domain 1 and the *parent_grid_ratio*



Geogrid: Defining Nested Domains

A nested domain must cover an integer number of parent-domain grid cells, and e_{we} and e_{sn} represent the number of velocity-staggered points.

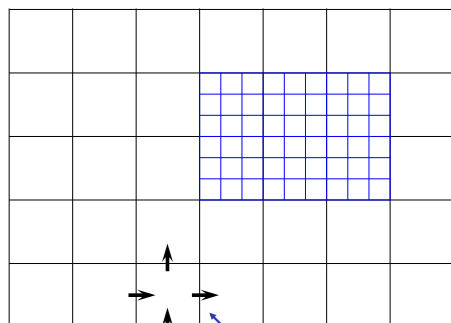

Velocity-staggered points,
located on cell faces.

Therefore, in ARW, nest dimensions must satisfy

$$\frac{e_{we} - 1}{parent_grid_ratio} = n_i$$


$$\frac{e_{sn} - 1}{parent_grid_ratio} = n_j$$

where n_i and n_j are any integers.



Geogrid: Nesting example

Assuming $parent_grid_ratio = 3$

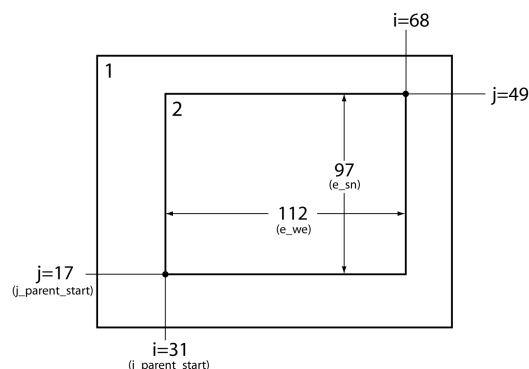

In ARW, nest dimensions must satisfy

$$\frac{e_{we} - 1}{parent_grid_ratio} = n_i$$

$$\frac{e_{sn} - 1}{parent_grid_ratio} = n_j$$

where n_i and n_j are any integers.



Geogrid: Interpolating Static Fields

- Given definitions of all computational grids, geogrid interpolates terrestrial, time-invariant fields
 - Topography height
 - Land use categories
 - Soil type (top layer & bottom layer)
 - Annual mean soil temperature
 - Monthly vegetation fraction
 - Monthly surface albedo




Geogrid: Program Output


- The parameters defining each domain, plus interpolated static fields, are written using the WRF I/O API
 - One file per domain for ARW
- Filenames: [geo_em.d0n.nc](#)
(where n is the domain ID number)
- Example:
 - [geo_em.d01.nc](#)
 - [geo_em.d02.nc](#) (nest)
 - [geo_em.d03.nc](#) (nest)



Geogrid: Example Output Fields

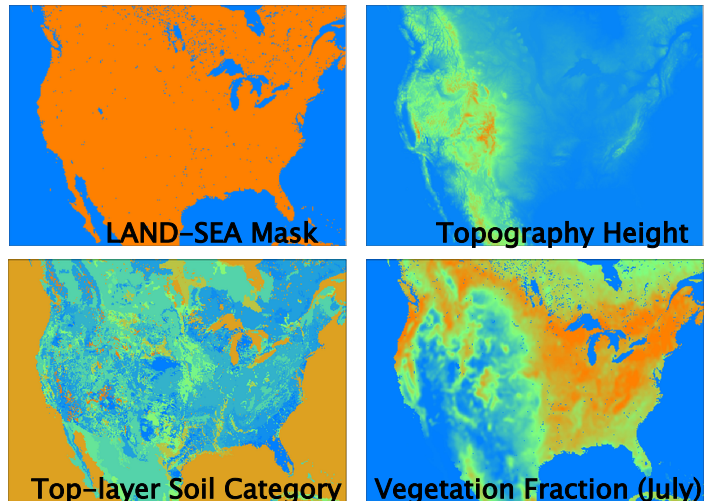

The *ungrid* program

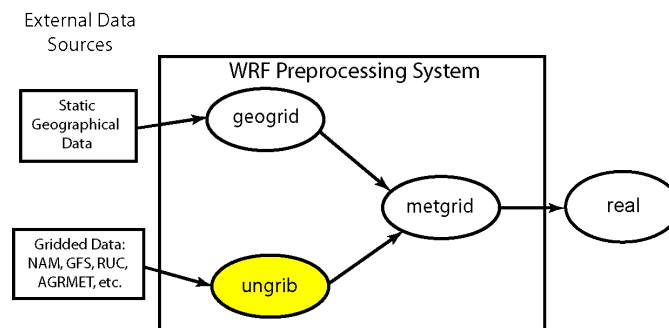

ungrid: think un+grid



What is a GRIB file, anyway?

- GRIB is a WMO standard file format for storing regularly-distributed (e.g., gridded) fields
 - “General Regularly-distributed Information in Binary”
- Fields within a GRIB file are compressed with a lossy compression
 - Think of truncating numbers to a fixed number of digits
- A record-based format
- Fields in a file are identified only by code numbers
 - These numbers must be referenced against an external table to determine the corresponding field



The *ungrid* program

- Read GRIB Edition 1 and GRIB Edition 2 files
- Extract meteorological fields
- If necessary, derive required fields from related ones
 - E.g., Compute RH from T, P, and Q
- Write requested fields to an intermediate file format



Ungrib: Vtables

How does ungrib know which fields to extract?

Using Vtables (think: Variable tables)

- Vtables are files that give the GRIB codes for fields to be extracted from GRIB input files
- One Vtable for each source of data
- Vtables are provided for: NAM 104, NAM 212, GFS, AGRMET, and others



Ungrib: Example Vtable

GRIB1 Param	Level Type	From Level1	To Level2	UNGRIB Name	UNGRIB Units	UNGRIB Description
11	100	*		T	K	Temperature
33	100	*		U	m s-1	U
34	100	*		V	m s-1	V
52	100	*		RH	%	Relative Humidity
7	100	*		HGT	m	Height
11	105	2		T	K	Temperature at 2 m
52	105	2		RH	%	Relative Humidity at 2 m
33	105	10		U	m s-1	U at 10 m
34	105	10		V	m s-1	V at 10 m
1	1	0		PSFC	Pa	Surface Pressure
130	102	0		PMSL	Pa	Sea-level Pressure
144	112	0	10	SM000010	kg m-3	Soil Moist 0-10 cm below grn layer (Up)
144	112	10	40	SM010040	kg m-3	Soil Moist 10-40 cm below grn layer
144	112	40	100	SM040100	kg m-3	Soil Moist 40-100 cm below grn layer
144	112	100	200	SM100200	kg m-3	Soil Moist 100-200 cm below gr layer
85	112	0	10	ST000010	K	T 0-10 cm below ground layer (Upper)
85	112	10	40	ST010040	K	T 10-40 cm below ground layer (Upper)
85	112	40	100	ST040100	K	T 40-100 cm below ground layer (Upper)
85	112	100	200	ST100200	K	T 100-200 cm below ground layer (Bottom)
91	1	0		SEAICE	proprtn	Ice flag
81	1	0		LANDSEA	proprtn	Land/Sea flag (1=land,2=sea in GRIB2)
7	1	0		HGT	m	Terrain field of source analysis
11	1	0		SKINTEMP	K	Skin temperature (can use for SST also)
65	1	0		SNOW	kg m-2	Water equivalent snow depth
223	1	0		CANWAT	kg m-2	Plant Canopy Surface Water
224	1	0		SOILCAT	Tab4.213	Dominant soil type category
225	1	0		VEGCAT	Tab4.212	Dominant land use category



Ungrib: GRIB2 Vtable Entries

metgrid Description	GRIB2 Discp	GRIB2 Catgy	GRIB2 Param	GRIB2 Level
Temperature	0	0	0	100
U	0	2	2	100
V	0	2	3	100
Relative Humidity	0	1	1	100
Height	0	3	5	100
Temperature at 2 m	0	0	0	103
Relative Humidity at 2 m	0	1	1	103
U at 10 m	0	2	2	103
V at 10 m	0	2	3	103
Surface Pressure	0	3	0	1
Sea-level Pressure	0	3	1	101
Soil Moist 0-10 cm below grn layer (Up)	2	0	192	106
Soil Moist 10-40 cm below grn layer	2	0	192	106
Soil Moist 40-100 cm below grn layer	2	0	192	106
Soil Moist 100-200 cm below gr layer	2	0	192	106
Soil Moist 10-200 cm below gr layer	2	0	192	106
T 0-10 cm below ground layer (Upper)	0	0	0	106
T 10-40 cm below ground layer (Upper)	0	0	0	106
T 40-100 cm below ground layer (Upper)	0	0	0	106
T 100-200 cm below ground layer (Bottom)	0	0	0	106
T 10-200 cm below ground layer (Bottom)	0	0	0	106
Ice flag	0	2	0	1
Land/Sea flag (1=land, 0 or 2=sea)	2	0	0	1
Terrain field of source analysis	2	0	7	1
Skin temperature (can use for SST also)	0	0	0	1
Water equivalent snow depth	0	1	13	1
Dominant soil type cat.(not in GFS file)	2	3	0	1
Dominant land use cat. (not in GFS file)	2	0	198	1



Ungrib: Vtables

What if a data source has no existing Vtable?

Create a Vtable

- Get a listing of GRIB codes for fields in the source
 - Check documentation from originating center or use utility such as *wgrib*, *g1print*, *g2print*
- Use existing Vtable as a template
- Check documentation in Chapter 3 of the Users' Guide for more information about Vtables

See p. 3-35



Ungrib: Intermediate File Format

- After extracting fields listed in Vtable, ungrib writes those fields to intermediate format
- For meteorological data sets not in GRIB format, the user may write to intermediate format directly

See p. 3-33

- Allows WPS to ingest new data sources; basic programming required of user
- Simple intermediate file format is easily read/written using routines from WPS (`read_met_module.F` and `write_met_module.F`)



Ungrib: Program Output

- Output files named *FILE:YYYY-MM-DD_HH*
 - YYYY is year of data in the file; MM is month; DD is day; HH is hour
 - All times are UTC

- Example:

FILE:2007-07-24_00


FILE:2007-07-24_06

FILE:2007-07-24_12

ungrib can also write intermediate files in the MM5 or WRF SI format! (To allow for use of GRIB2 data with MM5, for example)



The *metgrid* program

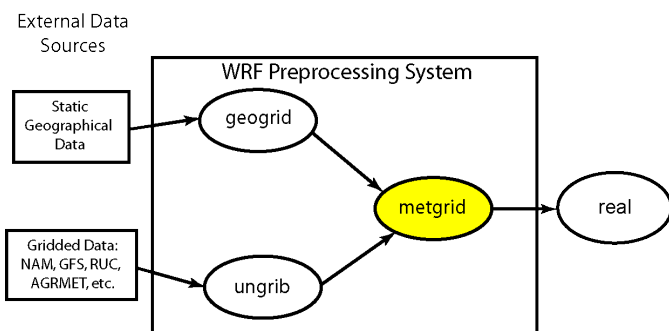

metgrid: think meteorological




The *metgrid* program

- Horizontally interpolate meteorological data (*extracted by ungrib*) to simulation domains (*defined by geogrid*)
 - Masked interpolation for masked fields
 - *Can process both isobaric and native vertical coordinate data sets*
- Rotate winds to WRF grid
 - i.e., rotate so that U-component is parallel to x-axis, V-component is parallel to y-axis



Metgrid: ARW Grid Staggering

- For ARW, wind U-component interpolated to “u” staggering
- Wind V-component interpolated to “v” staggering
- Other meteorological fields interpolated to “θ” staggering by default (*can change this!*)

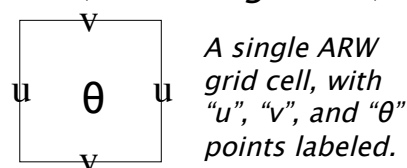


Metgrid: Masked Interpolation

- Masked fields* may only have valid data at a subset of grid points
 - E.g., SST field only valid on water points
- When metgrid interpolates masked fields, it must know which points are invalid (masked)
 - Can use separate mask field (e.g., LANDSEA)
 - Can rely on special values (e.g., 1×10^{30}) in field itself to identify masked grid points



Metgrid: Masked Interpolation



- = valid source data
- = masked/invalid data

Suppose we need to interpolate to point X


- Using **red** points as valid data can give a bad interpolated value!
- Masked interpolation only uses valid **blue** points to interpolate to X

Not every interpolation option can handle masked points; we'll address this issue in the advanced WPS lecture




Metgrid: Masked Interpolation

Common fields that require masked interpolation include SST, soil moisture, and soil temperature.

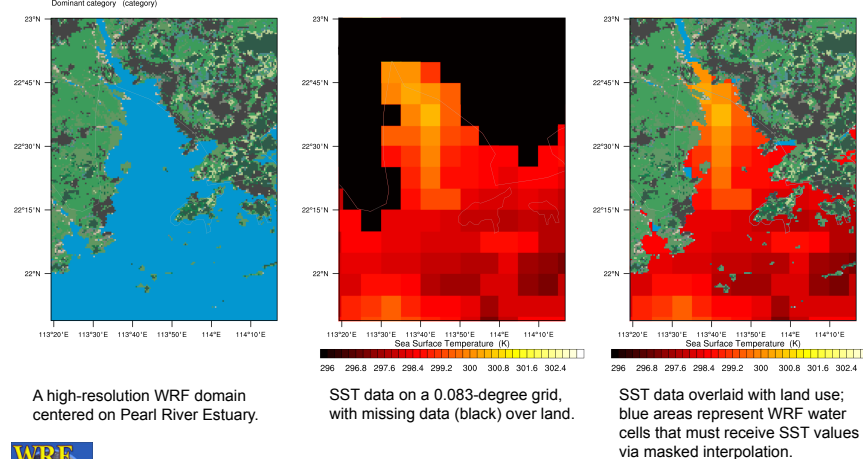


Metgrid: Masked Interpolation

Masked interpolation can also be used for any field, e.g., to improve the resolution of coastlines in the field.

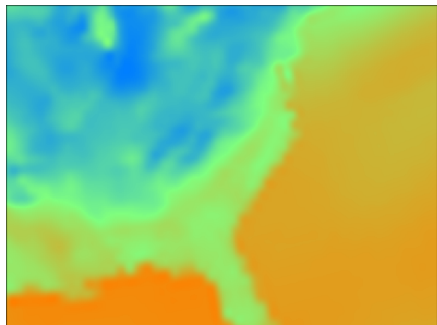

Skin temperature field interpolated from GFS 0.5-deg field with no mask using a sixteen-point interpolator.

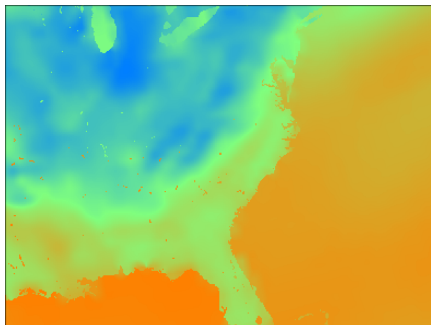

Skin temperature field interpolated using masks: GFS water points interpolated to model water points, GFS land points interpolated to model land points.




Metgrid: Wind Rotation


- Input wind fields (U-component + V-component) are either:
 - Earth-relative:** U-component = westerly component; V-component = southerly component
 - Relative to source grid:** U-component (V-component) parallel to source model x-axis (y-axis)
- WRF expects wind components to be relative to the simulation grid



Metgrid: Wind Rotation Example



A wind vector, shown in terms of its U and V components with respect to the source grid.



The same vector, in terms of its U and V components with respect to the WRF simulation grid.

This process may require *two* rotations: one from source grid to earth grid and a second from earth grid to WRF grid



Metgrid: Constant Fields

- For short simulations, some fields may be constant
 - E.g., SST or sea-ice fraction
- Use namelist option `CONSTANTS_NAME` option to specify such fields:
 - `CONSTANTS_NAME = 'SST_FILE:2007-07-24_00'`




Metgrid: Program Output


- For coarse domain, one file per time period
 - In ARW, we also get the first time period for all nested grids
- Files contain static fields from geogrid plus interpolated meteorological fields
- Filenames:
 ARW: `met_em.d0n.YYYY-MM-DD_HH:mm:ss.nc`
 (where *n* is the domain ID number)



Metgrid: Example Output

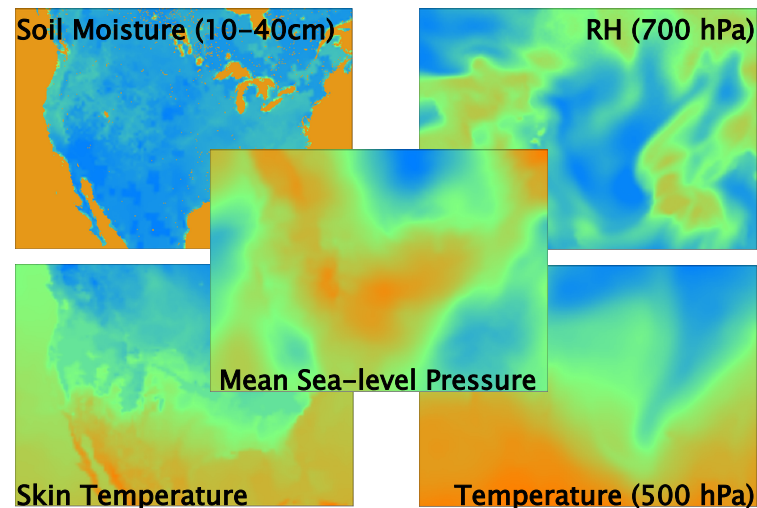


WPS Summary

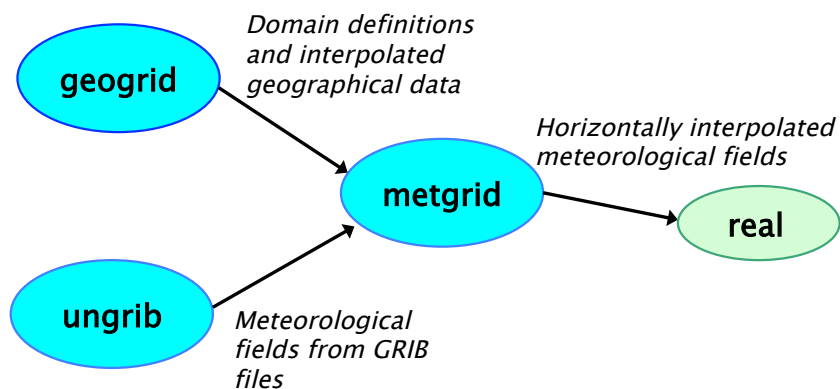

And finally...

Vertical interpolation to WRF eta levels is performed in the *real* program

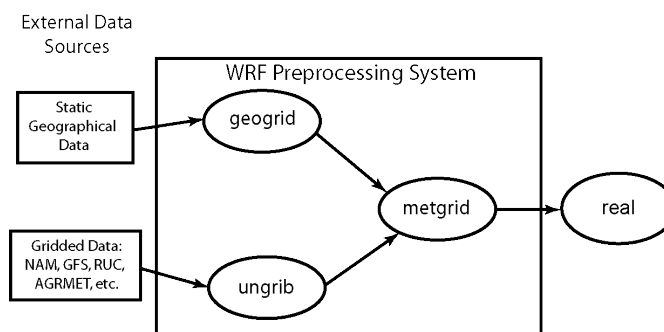

Questions?

