

Regional MPAS

Prepare mesh, Create initial and boundary conditions

Michael Duda Ming Chen

Weather Modeling and Research Section
Mesoscale & Microscale Meteorology Laboratory
National Center for Atmospheric Research




Regional MPAS

prepare mesh, create initial and boundary conditions

- A limited-area domain must be defined, and a mesh must be created
- The mesh must be partitioned for parallel execution
- Initial and boundary conditions must be generated for the domain

(see Sections 4.3 and 8.2 in the User's Guide)

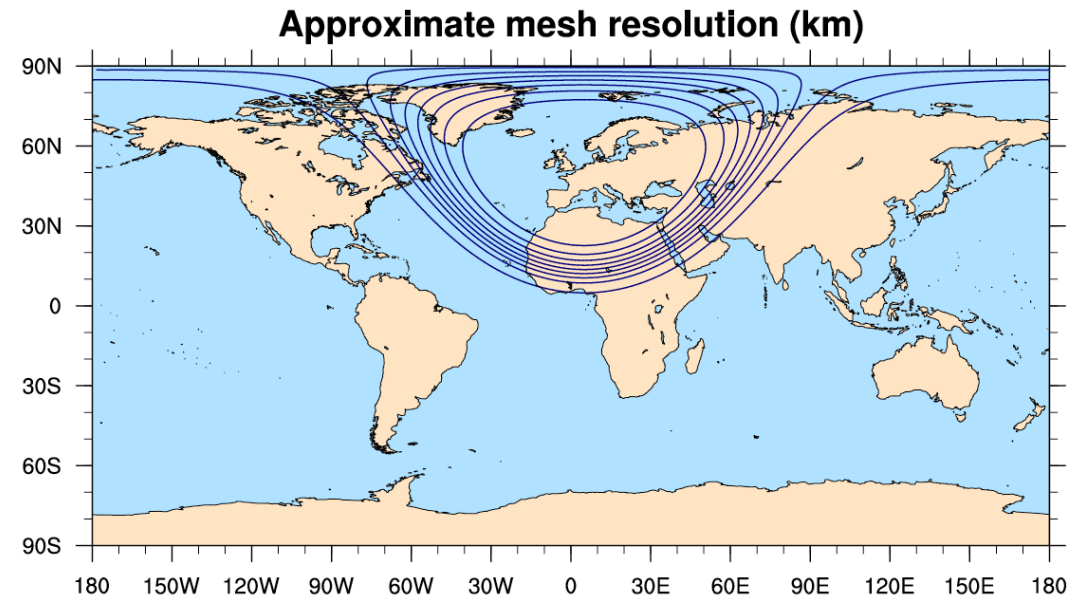

Regional-MPAS: preparing mesh using MPAS_limited_area tool

MPAS Limited-Area: a python tool to produces a regional area grid

- **Download and Installing**

- git clone <https://github.com/MPAS-Dev/MPAS-Limited-Area.git>

- setenv PATH \${PATH}:/path/to/MPAS-Limited-Area

- **Run the create_region to create regional mesh**

- create_region **points.txt** **global_mpas.nc**


Domain definition file


Global MPAS grid/static datafile

(Sample points.txt files can be found in docs/points-examples)

 [Product](#) [Solutions](#) [Resources](#) [Open Source](#) [Enterprise](#) [Pricing](#) [Sign in](#) [Sign up](#)

MPAS-Dev / MPAS-Limited-Area Public

[Notifications](#) [Fork 12](#) [Star 24](#)

[Code](#) [Issues 5](#) [Pull requests 1](#) [Actions](#) [Wiki](#) [Security](#) [Insights](#)

master 12 Branches 7 Tags

 mgduda Merge branch 'region_plotting' (PR #48)

docs/points-examples

Converted points-e

 limited_area

Merge branch 'regi

 .gitignore

Update README.m

 README.md

Update version and

 create_region

Add -p/--plot optio

 requirements.txt

Added requirments.txt file

6 years ago

Go to file

<> Code

Clone

HTTPS

GitHub CLI

https://github.com/MPAS-Dev/MPAS-Limited-Area

Clone using the web URL.

Open with GitHub Desktop

Download ZIP

About

Python tool to create a regional subset of a global MPAS Mesh

[mpas-dev.github.io/](#)

[Readme](#) [Activity](#) [Custom properties](#)

24 stars

5 watching

12 forks

[Report repository](#)

Releases

7 tags

Packages

No packages published

Contributors 3

 MiCurry Miles Curry

 mgduda Michael Duda

README

MPAS Limited-Area - v2.2





MPAS Limited-Area is a python tool that takes an MPAS global grid and produces a regional area grid given a region specifications. Regions can be specified in a number of different ways, making limited-area extensible and flexible.

Download and Installing

Regional-MPAS: how to create mesh over a regional domain

- mpas limited-area tool supports various types of region: circle, ellipse, channel, and polygon
- Required inputs: a parent mesh and a region definition file
- It is easy to create various regional domains using python

(<https://github.com/MPAS-Dev/MPAS-Limited-Area.git>)

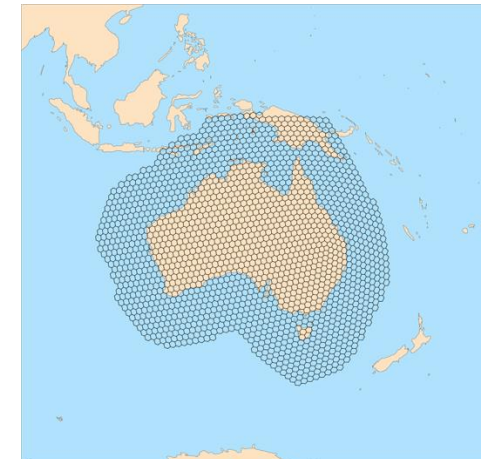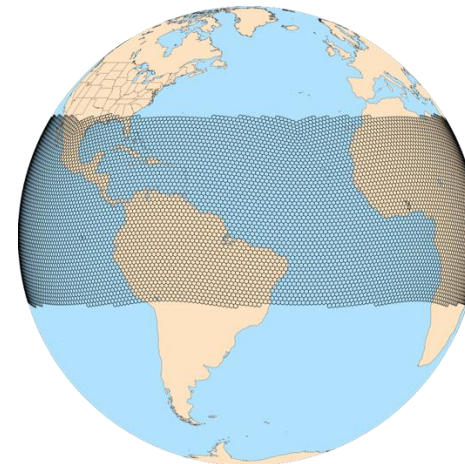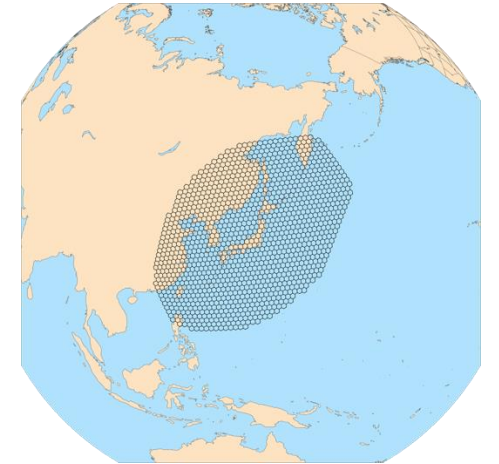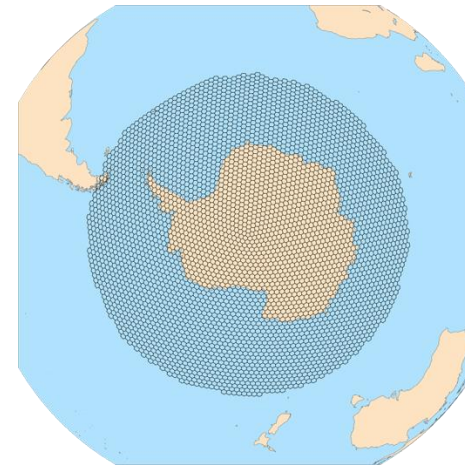

Regional-MPAS: how to create mesh over a regional domain

Points.txt

Name: Europe

Type: circle

Point: 50.0, 17.0

radius: 3300 (unit: km)


Command usage line:

Create_region points.txt x1.10242.static.nc

Output:

Europe.static.nc and Europe.graph.info

Terrain Height

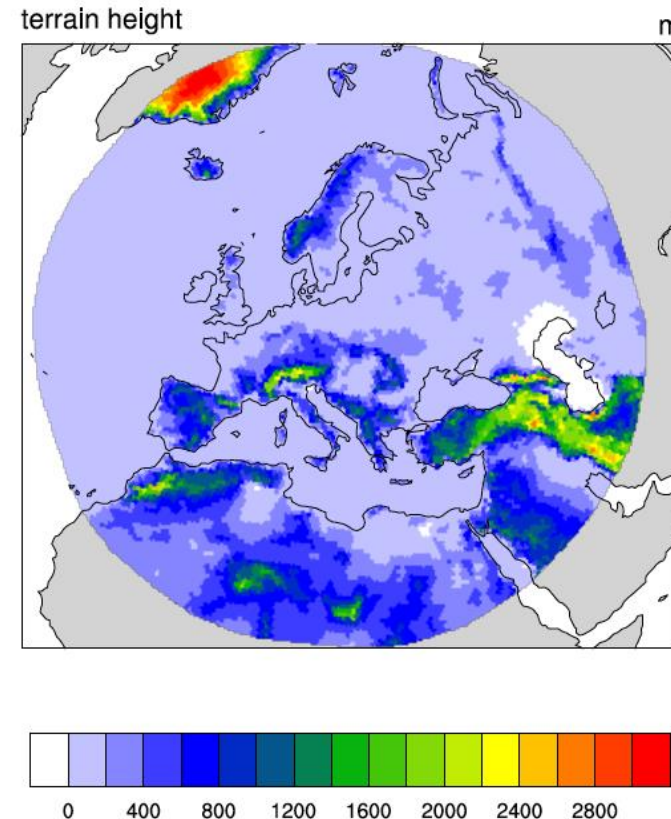

Regional-MPAS: how to create mesh over a regional domain

The ellipse method

Points.txt

Name: Europe

Type: ellipse


Point: 50.0, 17.0

Semi-major-axis: 3000000.(meter)

Semi-minor-axis: 1500000.(meter)

Orientation-angle: 90.0 (degree)

Terrain Height

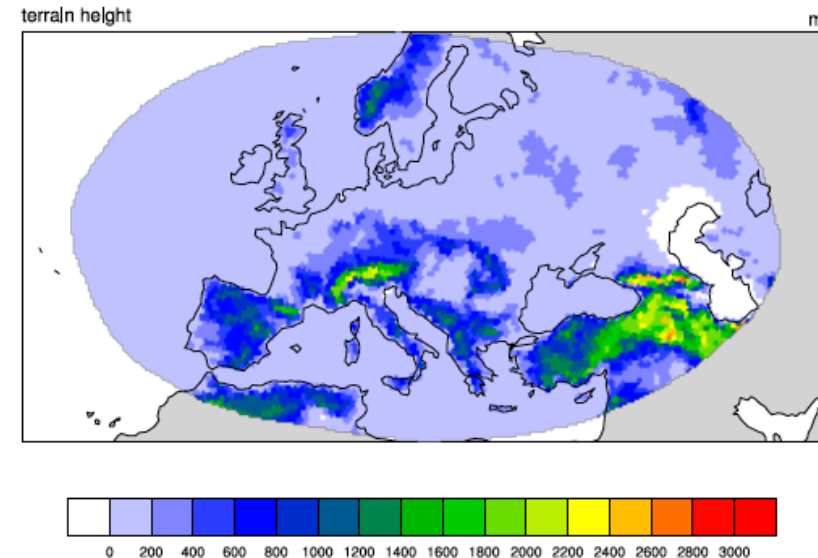

Regional-MPAS: how to create mesh over a regional domain

Points.txt

Name: Japan


Type: ellipse

Point: 38.0, 138.0

Semi-major-axis: 2000000

Semi-minor-axis: 1000000

Orientation-angle: 45

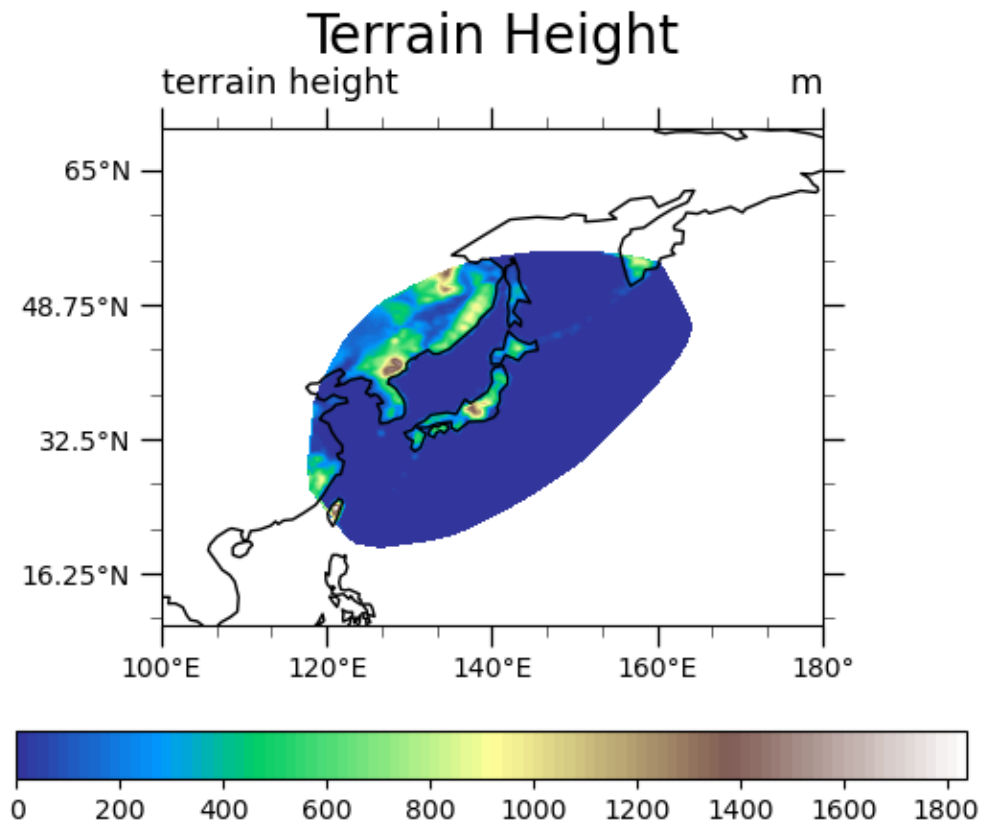

Regional-MPAS: how to create mesh over a regional domain


Points.txt

Name: Tropics

Type: channel

ulat: 20.4

llat: -20.4

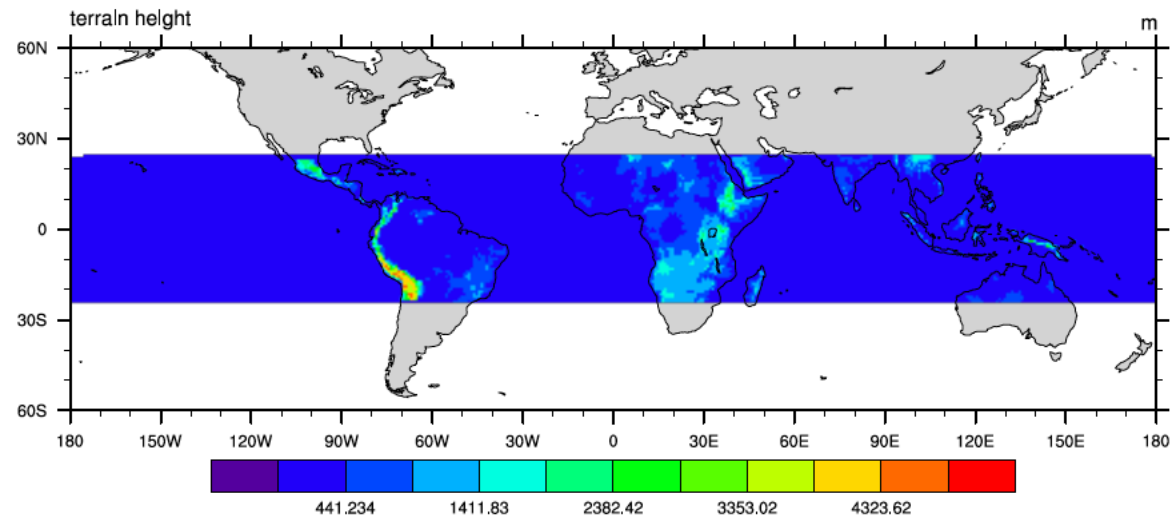


The equatorial channel


Regional-MPAS: how to create mesh over a regional domain

Creating limited-area meshes from variable-resolution “parent” meshes works equally well


Available MPAS global meshes(https://www2.mmm.ucar.edu/projects/mpas/site/access_code/meshes.html).

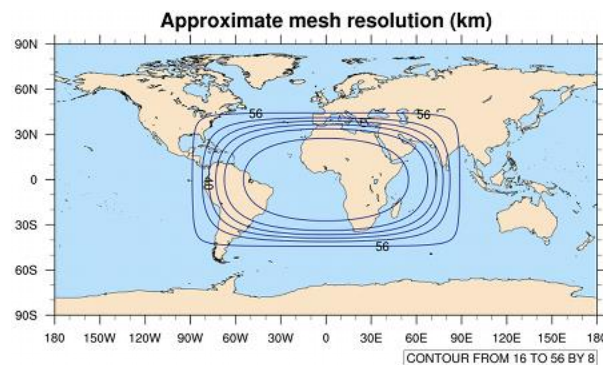


60-15km mesh

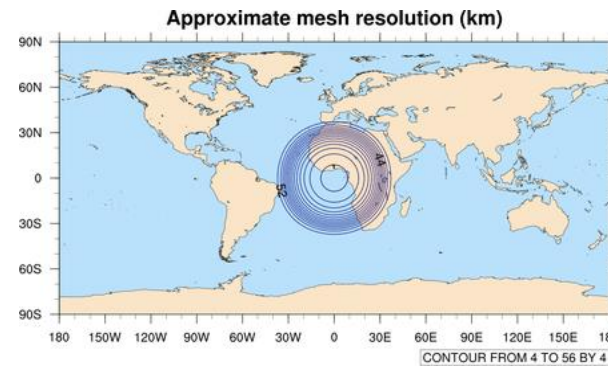

60-3km mesh

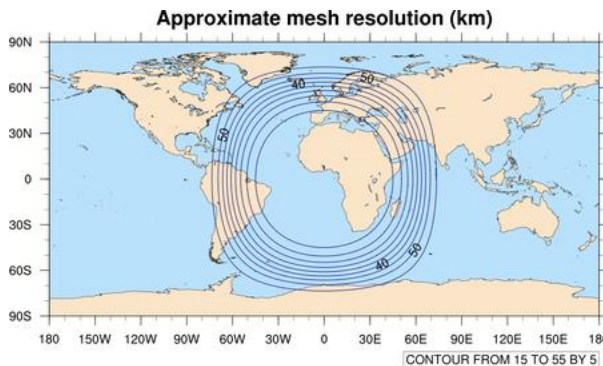

60-10km mesh

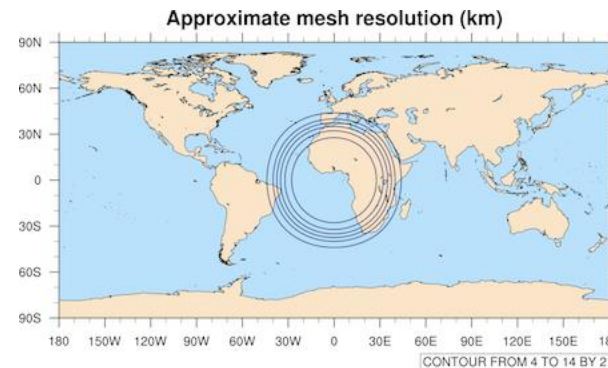

46-12km mesh


grid-rotate utility




mpas-limited area tool

Regional-MPAS: how to create mesh over a regional domain

Step I: run grid-rotate to relocate the refinement to the area of interests

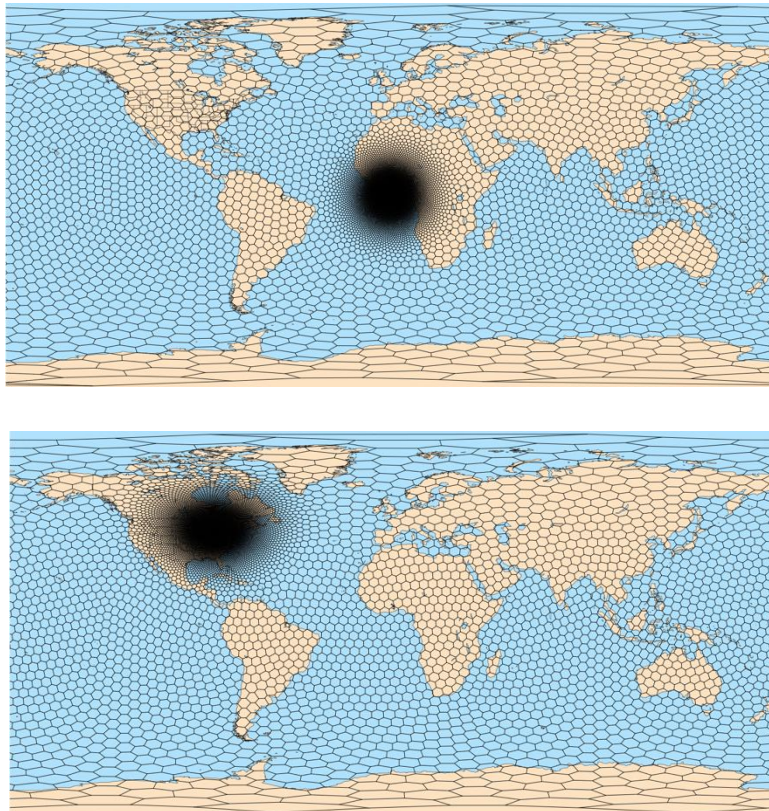

Step II: run mpas_limited_area tool to produce limited-area mesh

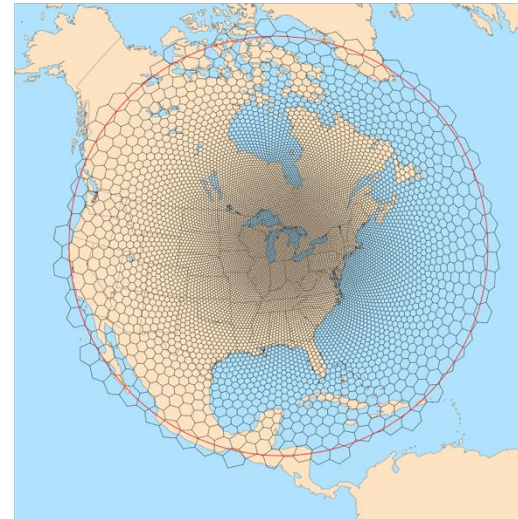

New Mesh Tool I : Generating Regional Mesh



Creating a rectangular MPAS horizontal mesh composed of perfect hexagons using Lambert conformal projection (<https://github.com/MPAS-Dev/MPAS-Tools>)

- Compile the codes:
 - 'make' to produce an executable named "project_hexes"

- Edit namelist.projections:

```
&mesh
  cell_spacing_km = 15.
  mesh_length_x_km = 5403.
  mesh_length_y_km = 3183.
  earth_radius_km = 6378.14
/
&projection
  projection_type = "lambert_conformal"
/
&lambert_conformal
  reference_longitude_degrees = 17.5
  standard_longitude_degrees = 17.5,
  reference_latitude_degrees = 40.
  standard_parallel_1_degrees = 40.
  standard_parallel_2_degrees = 40.
/
```

- Run project_hexes

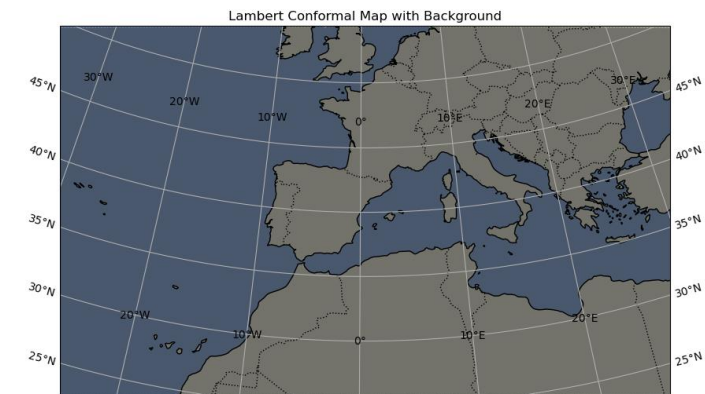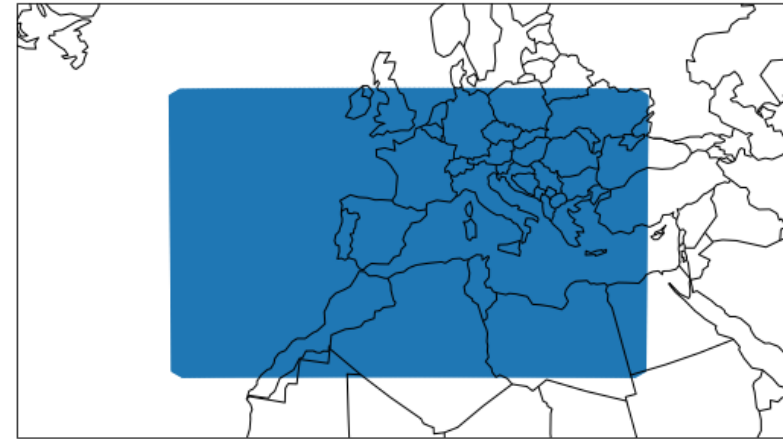

New Mesh Tool II: Scaling Regional Meshes

Scaling Regional Meshes

(https://github.com/mgduda/scale_region)

- `scale_region.py`: scale the size of elements in a regional MPAS mesh.
- Python 3.11+, `netCDF4` and `Numpy` modules are needed.
- `scale_region.py` requires five command-line arguments (summarized in the message from “`scale_region.py -h / --help`”)
- Example command line usage:
`scale_region.py mesh-in mesh-out factor lat lon`

tangent point of stereographic projection
(should be close to the mesh center)




Original 240-km regional mesh



Scaled 48-km regional mesh

Regional-MPAS: Lateral Boundary

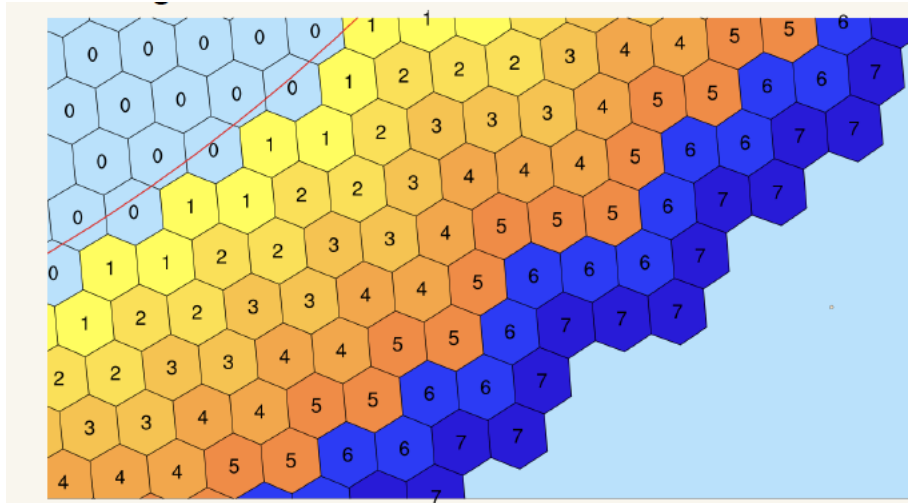

In MPAS, the lateral boundary includes


- Five layers of relaxation-zone cells (bdyMaskCell = 1, 2, 3, 4, 5)
- Two layers of specified-zone cells (bdyMaskCell = 6, 7)

The integer variable, `bdyMaskCell`, identifies boundary cell types in the regional mesh file


Regional-MPAS: mesh partitioning for parallel run

For newly created limited-area meshes, one must partition the mesh for parallel execution

MPAS-Limited-Area writes not only the netCDF mesh file, but also a *graph.info* file

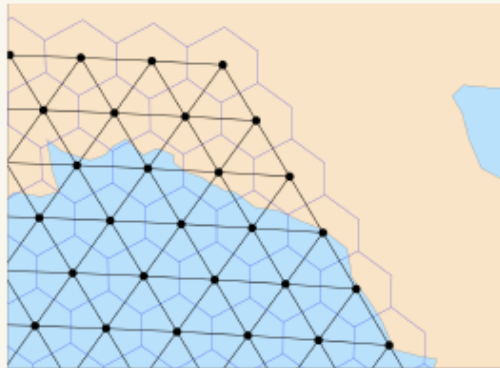

Above: An illustration of the mesh connectivity information contained in a graph.info file

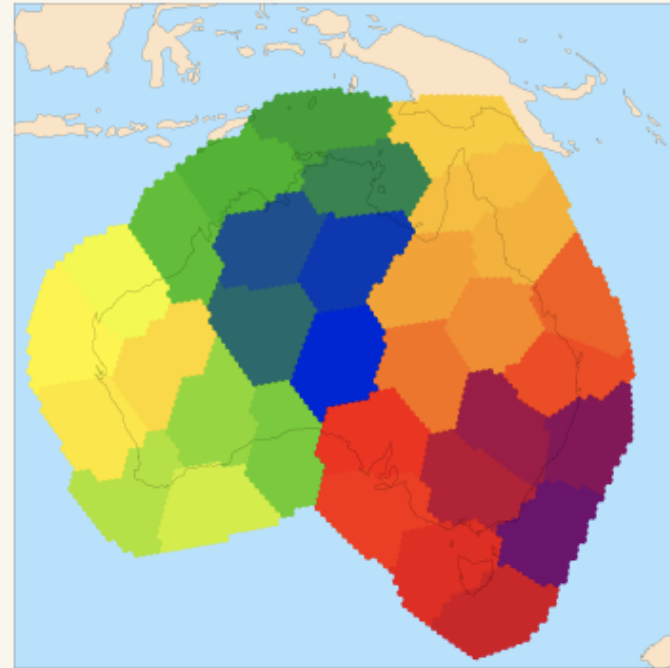

Above: Cells in a regional mesh colored according to their partition



METIS software supports partition of a graph.info (<http://glaros.dtc.umn.edu/gkhome/views/metis>)

- `gpmets -minconn -contig -niter=200 graph.info N` (N is the required number of partitions)
- output: `graph.info.part.N`, used for regional MPAS run with N MPI tasks

(See Section 4.1 in the MPAS User's Guide)

Regional MPAS: generating static fields and initial condition

- **Static fields**
 - If we rotate the refinement to the region of our interests, we need to generate static data for that region (see Section 7.2.1 in User's Guide).
 - Otherwise, we can subset static fields from global static datafile.
- **Initial condition: Generating initial condition for regional MPAS simulation is basically the same as that for global MPAS run.**
 - (a) Edit `namelist.init_atmosphere`
 - (b) Edit `streams.init_atmosphere`
 - (c) Run `init_atmosphere`
 - (d) Check tail of `log.init_atmosphere.0000.out`

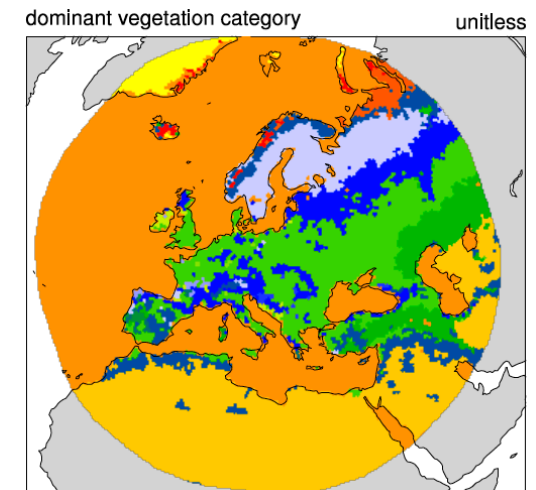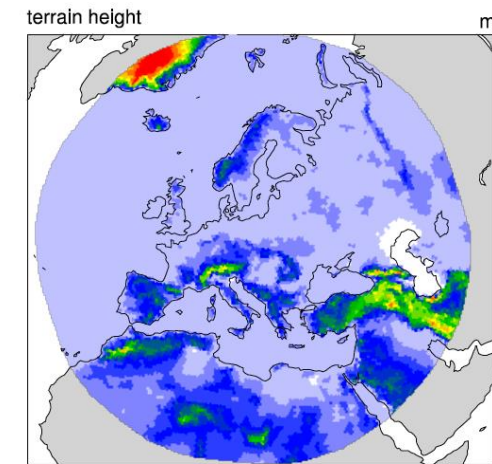

MPAS: regional domain static fields

Regional MPAS: generating initial condition

Edit namelist.init_atmosphere

```
&vertical_grid  
  config_init_case = 7  
  config_ztop = 30000.0  
  config_nsmterrain = 1  
  config_smooth_surfaces = true  
  config_dzmin = 0.3  
  config_nsm = 30  
  config_tc_vertical_grid = true  
  config_blend_bdy_terrain = true
```

Note: Important to set the above option!

With above option, terrain height in boundary cells are blended with terrain height from the first-guess dataset

Edit streams.init_atmosphere

```
<streams>  
<immutable_stream name="input"  
  type="input"  
  filename_template="Europe.static.nc"  
  input_interval="initial_only" />  
  
<immutable_stream name="output"  
  type="output"  
  filename_template="Europe.init.nc"  
  packages="initial_conds"  
  output_interval="initial_only" />
```

We are providing as input: **Europe.static.nc**


We are creating as output: **Europe.init.nc**

Regional MPAS: generating static fields and initial condition



Regional ICs: blending boundary terrain

The `config_blend_bdy_terrain` option only affects terrain in the boundary cells (where `bdyMaskCell > 0`)

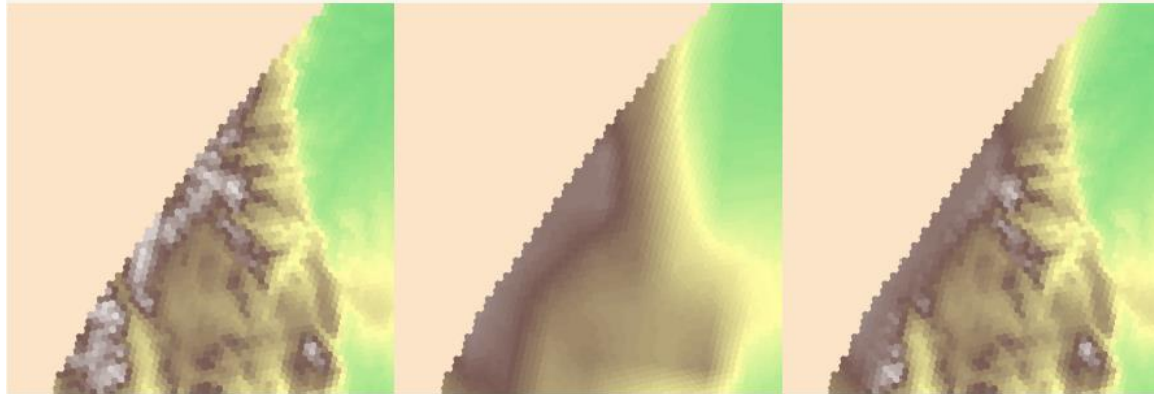

Terrain field from 3-km static file, interpolated directly from GMTED2010

0.25-deg GFS terrain field interpolated to 3-km mesh

Blended terrain field used in the generation of vertical coordinate surfaces

MPAS topography


GFS topography

Blended topography



Regional ICs: blending boundary terrain

The `config_blend_bdy_terrain` option only affects terrain in the boundary cells (where `bdyMaskCell > 0`)

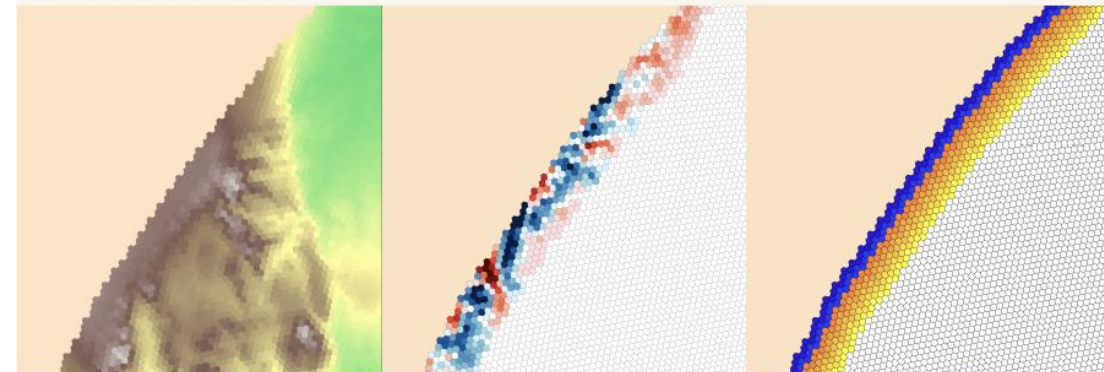

Blended terrain field

Difference between blended terrain field and original terrain

bdyMaskCell (>0 for yellow-orange and blue-purple cells)

Regional MPAS: generating lateral boundary condition

Edit namelist.init_atmosphere

&nhyd_model

config_init_case = 9  "9" indicates this is a lateral boundary processing case

config_start_time = '2017-02-01_00:00:00'
config_stop_time = '2017-02-04_00:00:00'  time to begin and end processing LBC data

&data_sources

config_met_prefix = 'GFS'  The prefix of the intermediate data files to be used for LBC

config_sfc_prefix = 'SST'

config_fg_interval = 10800  Interval between intermediate files (in seconds)

config_use_spechumd = false

&vertical_grid

config_tc_vertical_grid = true

config_blend_bdy_terrain = false

Regional MPAS: generating lateral boundary condition

Edit `streams.init_atmosphere`

```
<streams>
```

```
<immutable_stream name="input"
```

```
  type="input"
```

```
  filename_template="Europe.init.nc"
```

```
  input_interval="initial_only" />
```

→ Provide vertical grid information

```
<immutable_stream name="lbc"
```

```
  type="output"
```

```
  filename_template="lbc.$Y-$M-$D_$h.nc"
```

```
  filename_interval="output_interval"
```

```
  packages="lbcs"
```

```
  output_interval="3:00:00" />
```

The output_interval must be the same as config_fg_interval (=10800) in namelist.init_atmosphere

We are providing as input: **Europe.init.nc**

We are creating as output: **lbc.yyyy-mm-dd_hh.nc**

Regional MPAS: variables in initial & lateral boundary conditions

Important variables in initial condition

Horizontal and vertical coordinate information

Mesh structure

Static fields (terrain height, landuse type, landmask, vegetation fraction, etc.)

Soil moisture and temperature, snow cover, snow depth, etc

Atmospheric moisture fields (water vapor, rain water, cloud water, etc.)

Potential temperature, dry air density, relative humidity, horizontal wind, vertical velocity

Lateral boundary condition includes:

Potential temperature

Dry density

Normal components of horizontal winds on edges

Vertical velocity on vertical cell interfaces

Scalars (water vapor, cloud water, rainwater, etc.)

Valid time of fields

Regional MPAS: How to Run the Model

Edit “namelist.atmosphere” and “streams.atmosphere”

The most important option for running regional MPAS model (namelist.atmosphere)

&limited_area

config_apply_lbcs = true

/

This is the only namelist option that activates regional MPAS simulation

If `config_apply_lbcs` is not set to true for a regional simulation, the model will stop with the following error:

```
ERROR: Boundary cells found in the bdyMaskCell field, but config_apply_lbcs = false.  
ERROR: Please ensure that config_apply_lbcs = true for limited-area simulations.  
ERROR: Please correct issues with the model input fields and/or namelist.
```

Regional MPAS: How to Run the Model

Need to include stream 'lbc_in' in the file "streams.atmosphere"

```
<immutable_stream name="lbc_in"  
    type="input"  
    filename_template="lbc.$Y-$M-$D_$h.nc"  
    filename_interval="input_interval"  
    input_interval="3:00:00" />
```

➡ same as **config_fg_interval = 10800**

If the interval specified here is different to that between the LBC files, the model will crash with errors like:

```
ERROR: Could not read from 'lbc_in' stream after the current date to update lateral  
boundary tendencies  
ERROR: Failed to process LBC data at next time after 2019-08-31_00:00:00
```

Regional MPAS: Summary

Running regional MPAS simulation is slightly more difficult than running a global simulation. The basic steps are as follows:

1. Create a subset of an existing global MPAS mesh using the `MPAS_limited_area` tool
2. Generate initial condition
`config_init_case = 7`
`config_blend_bdy_terrain = true`
3. Generate LBC conditions
`config_init_case = 9`
4. Run the model with the option
`config_apply_lbcs = true`

Regional MPAS: How to Run



**We are ready for regional
MPAS run !**

Any questions?