

Nesting in WRF


Kelly Werner,
NCAR/MMM



This material is based upon work supported by the National Center for Atmospheric Research, which is a major facility sponsored by the National Science Foundation under Cooperative Agreement No. 1852977.

What is a Nest?

- A finer-resolution domain embedded in a coarser-resolution domain, and run together with the coarse domain
- Driven along its lateral boundaries by the parent domain

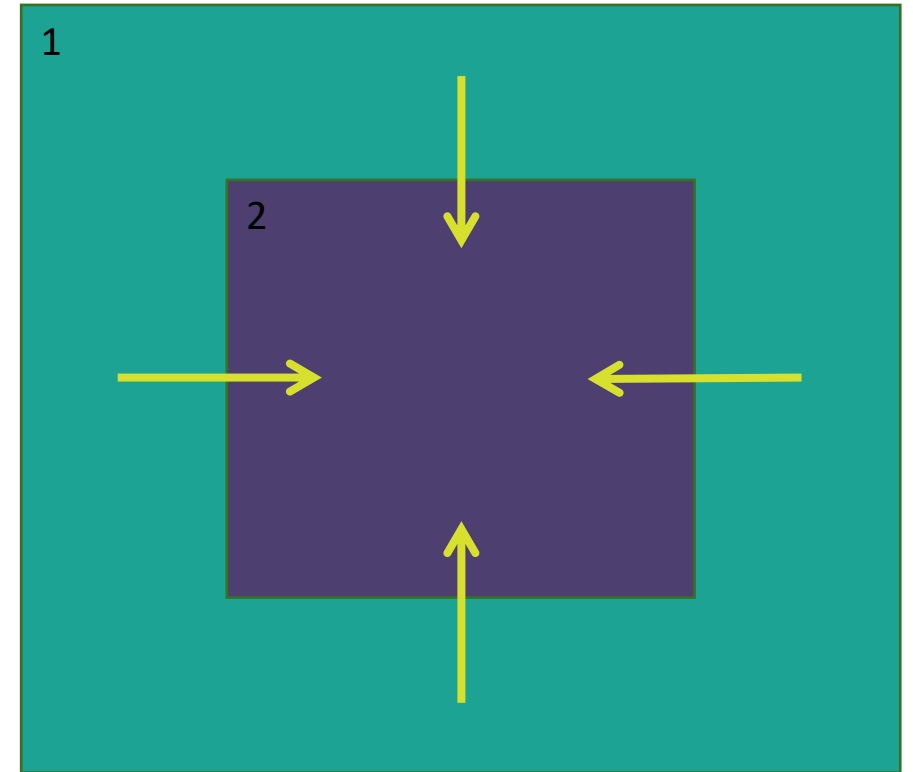

When should I use a nest?

Do you need to simulate localized phenomena (e.g., convection)?

- What size area do you need to fully include the phenomena?

What resolution is necessary to resolve what you are interested in?



What is the resolution of the input data?

- Input data resolution is too coarse by more than a factor of $\sim 5\times$ the domain resolution

What computing resources are available?

- Computing resources not available for uniform coverage

Coarse vs. Fine Landuse Resolution over Large Domain

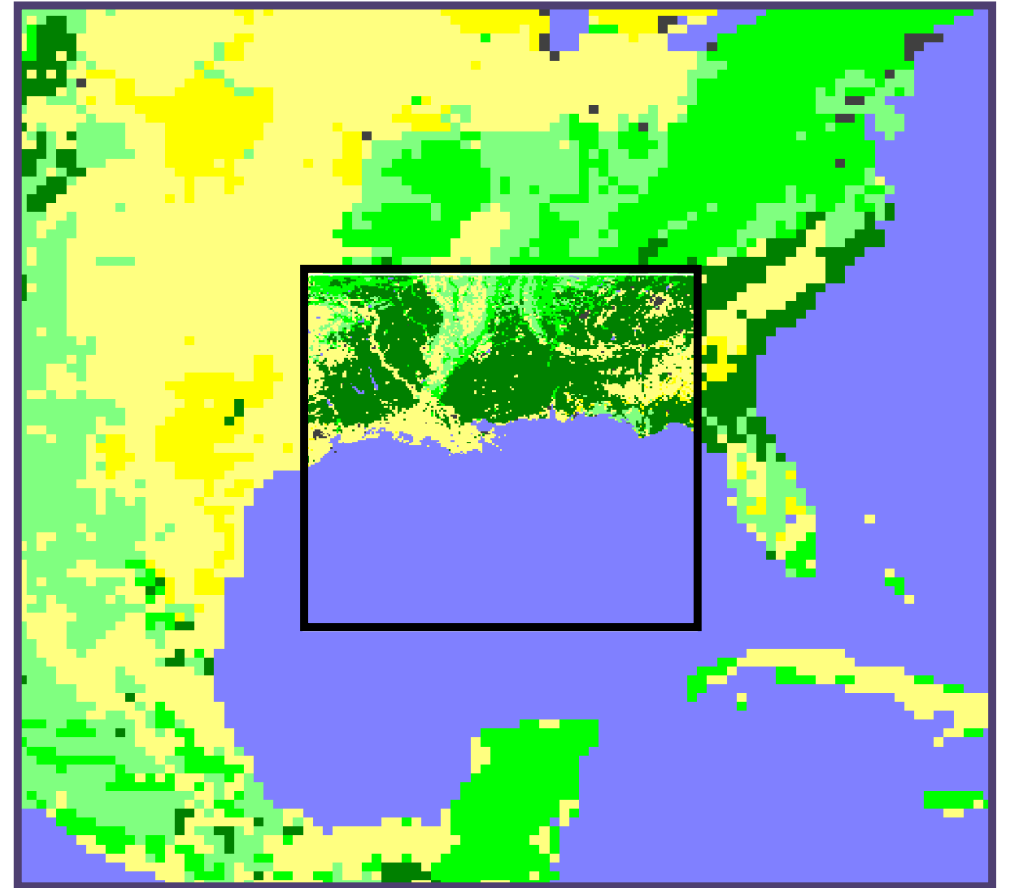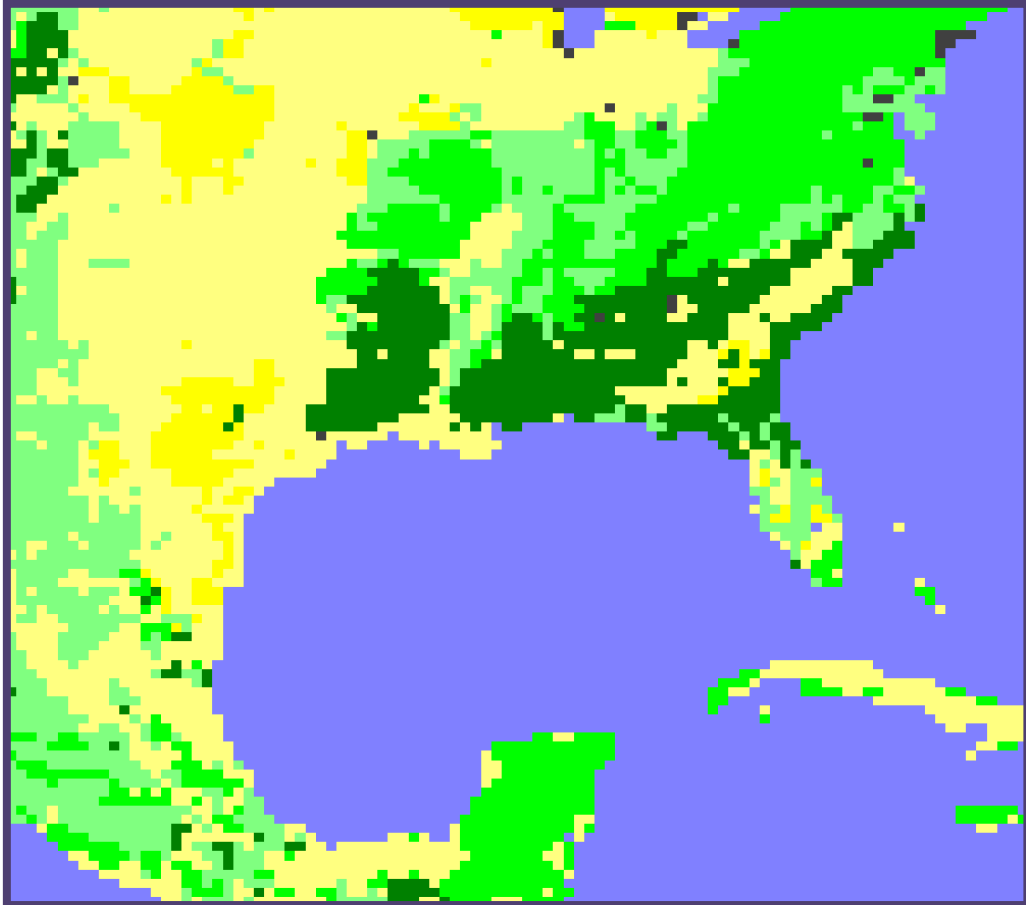

Types of Nesting

Standard Nesting

Running all nests simultaneously

- Build WRF with “1-Basic”

Specialized Nesting

Specified move

- Build WRF with “2=preset moves”
- Must specify every move

Automatic move

- Build WRF with “3=vortex following”
- Only for tropical cyclone tracking
- Expensive for single large nest


ndown.exe

- Use coarser WRF model output to drive finer resolution domains (i.e. ‘downscaling’)
- If you have run a long coarse domain simulation (years) and later decide you want to have a nest with higher resolution.
- If using several nests and domain size for the fine-resolution domain is much different than resolution for coarse domain


Two-way Nesting

Determined by the namelist parameter “feedback”
feedback = 1 (turned on/two-way)

(1) Lateral boundary conditions
are fed to the nest, from the parent.

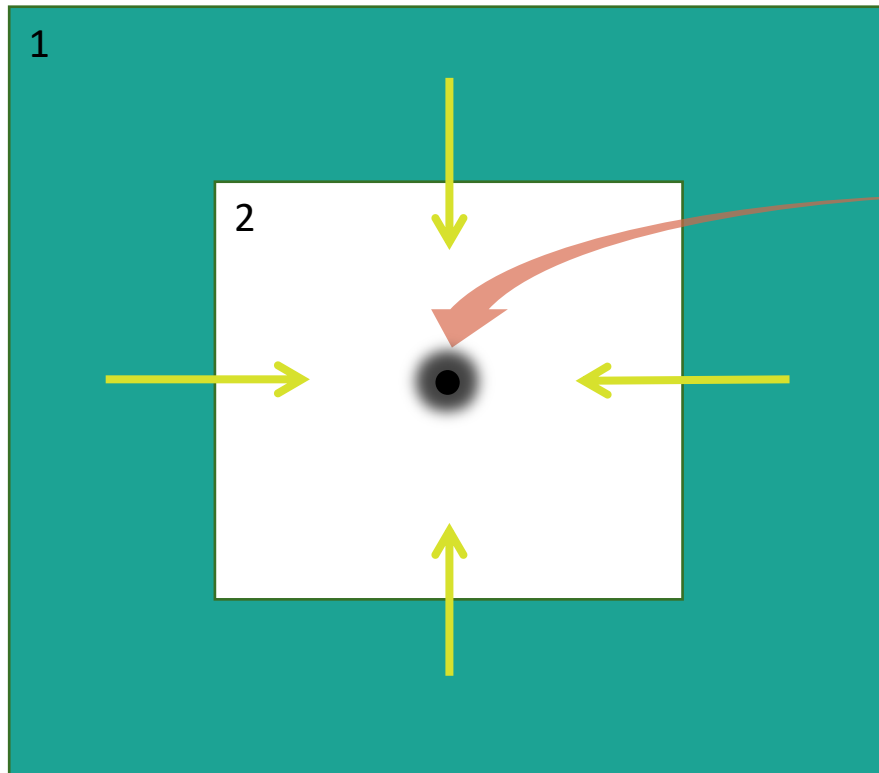


(2) Child values are averaged, and then
sent back to parent to overwrite value
at corresponding grid point

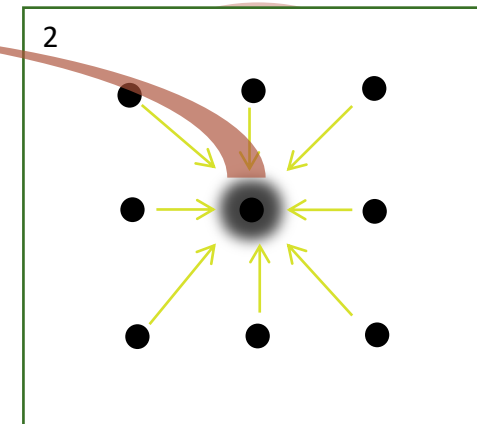


One-way Nesting

feedback = 0 (turned off/one-way)

Lateral boundary conditions
are fed to the nest, from
the parent.


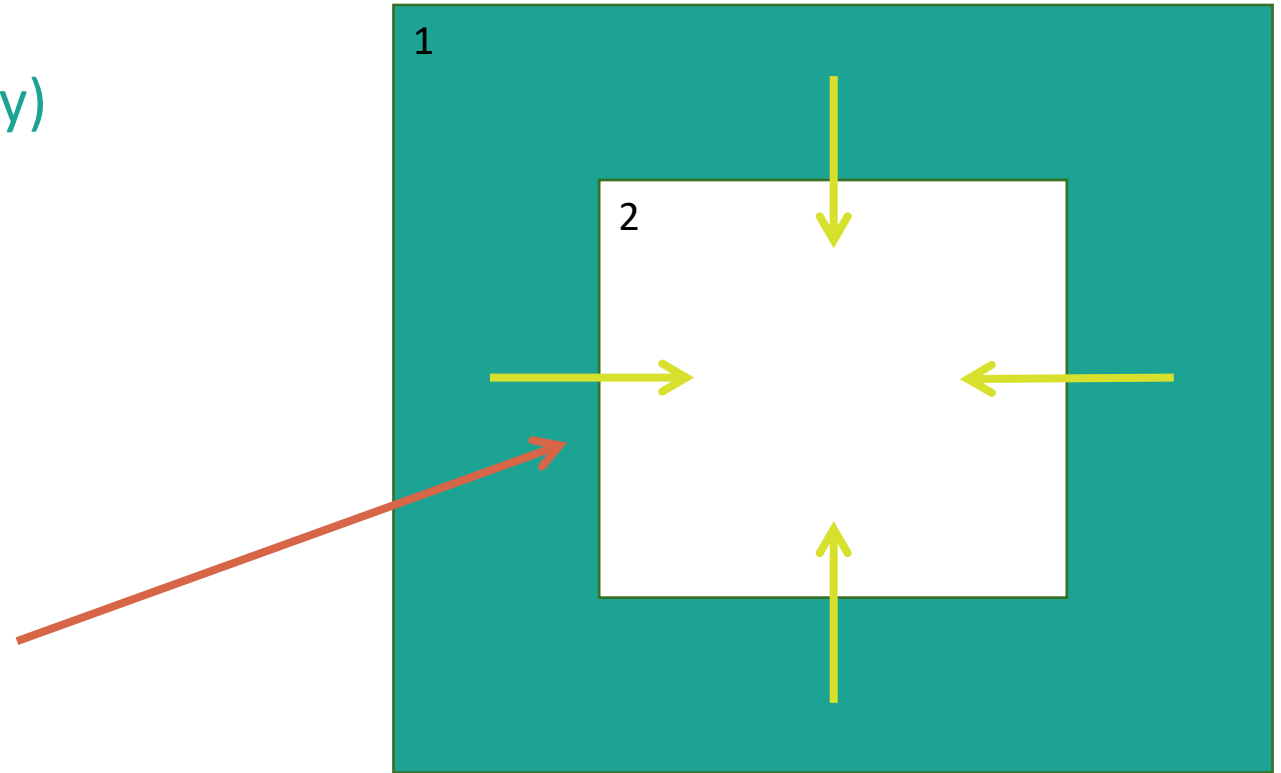


Masked Feedback

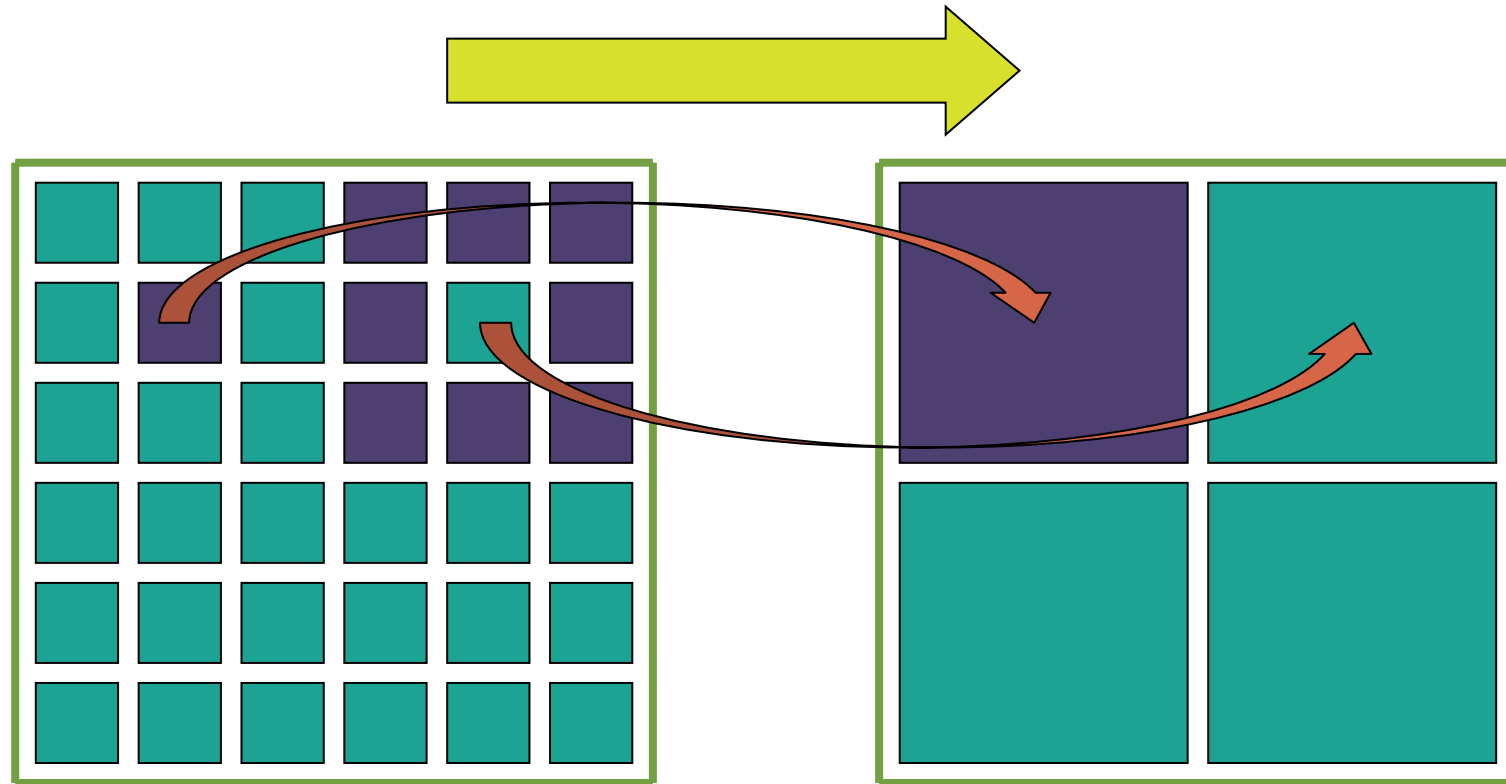


Single grid value feedback for
categorical and masked data

Compliant Nest Set-ups

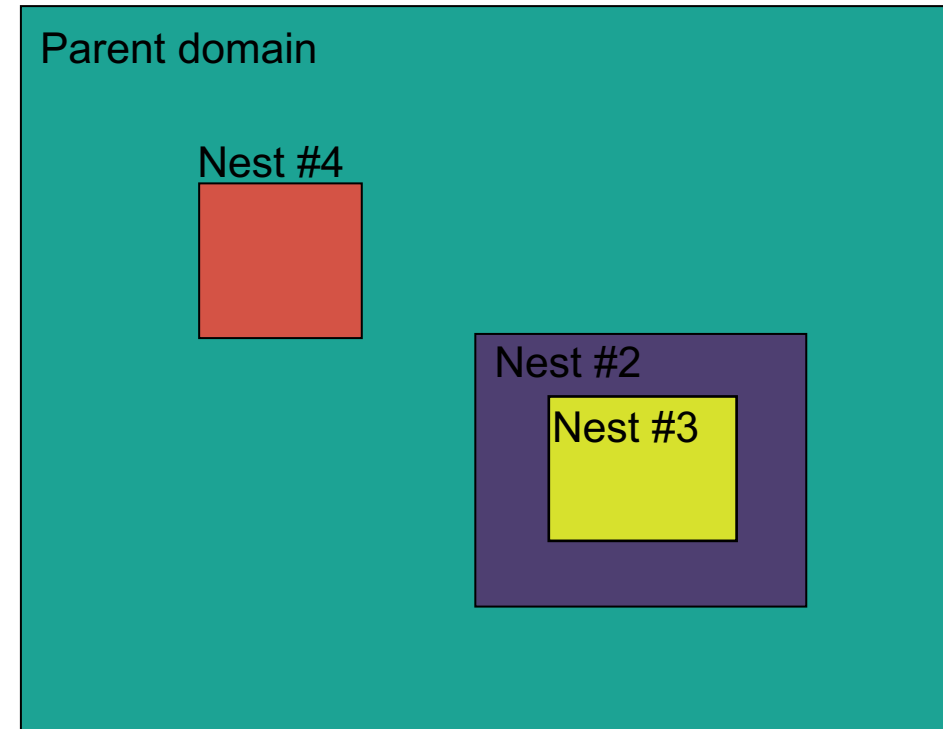
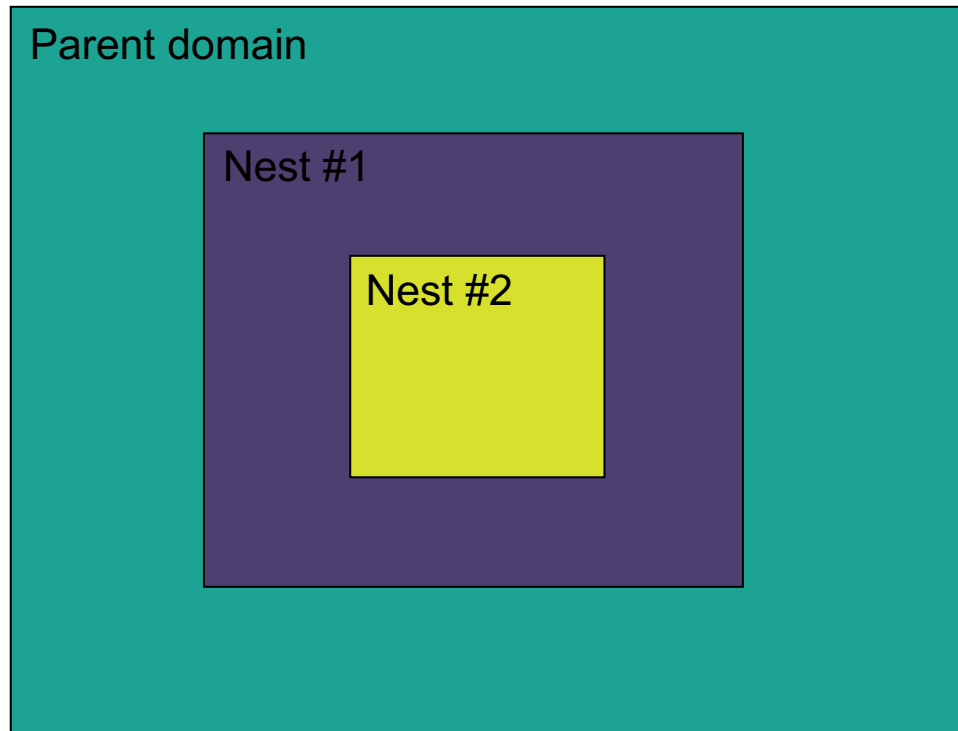


Non-compliant Nest Setups

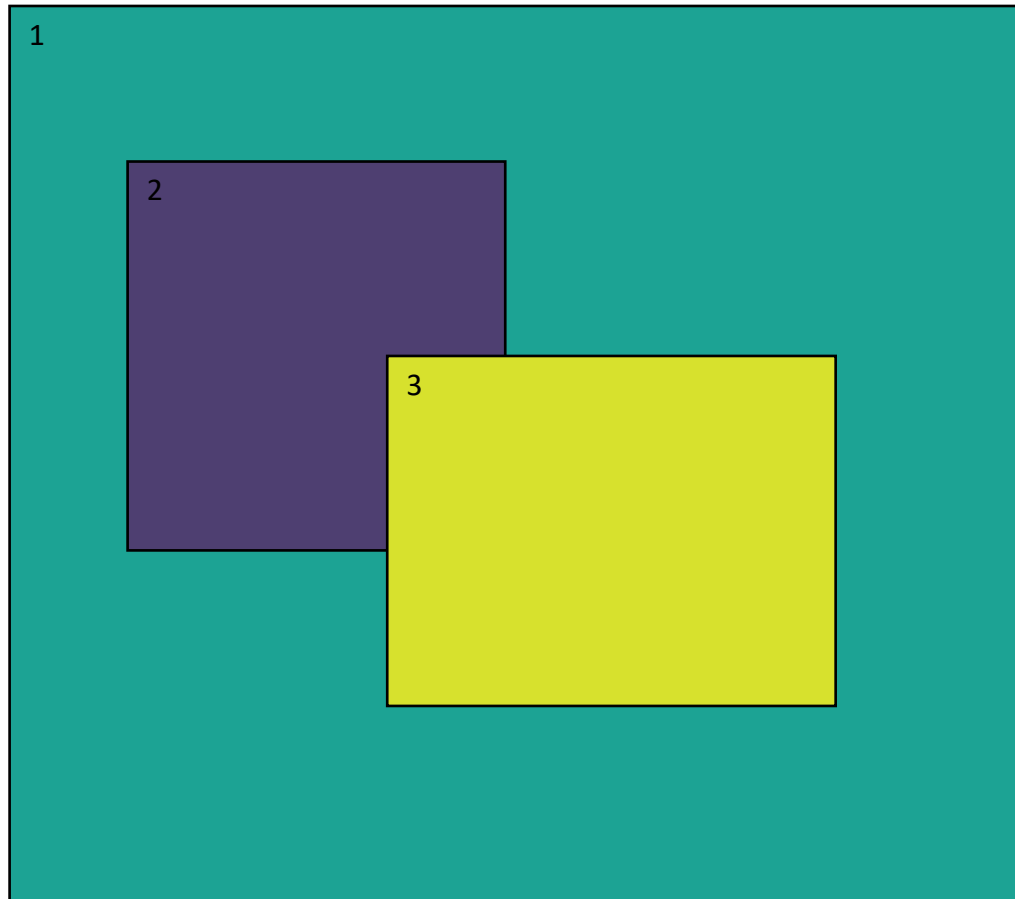

Child domains *may not* have overlapping points in the parent domain (possible if Feedback is off).

Solution to Nest Overlapping Problem (1)

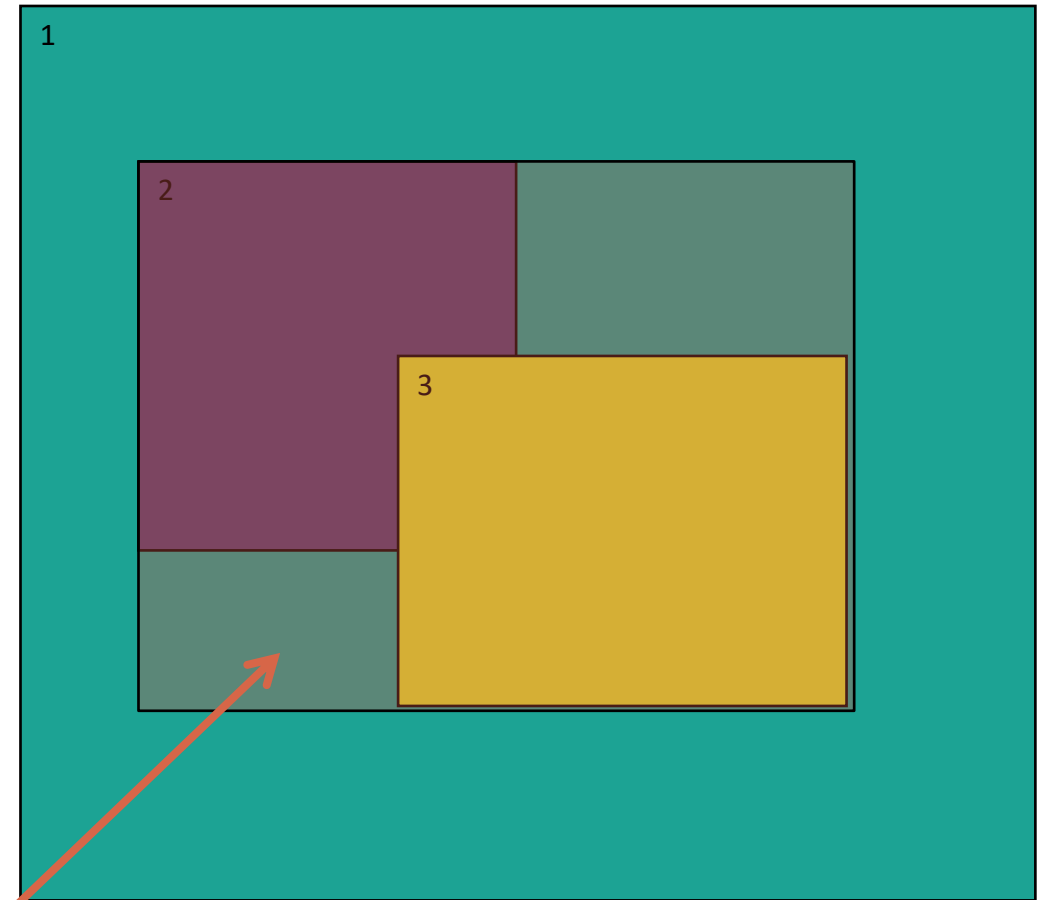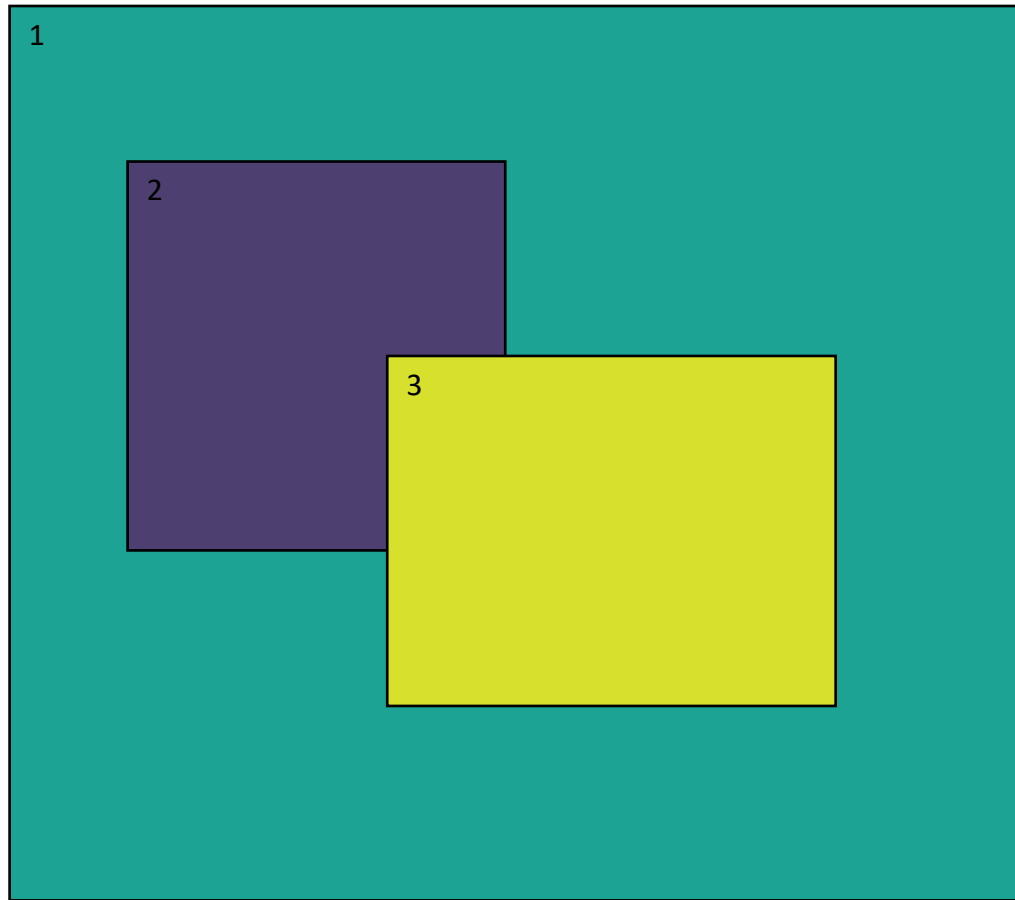

It's best to combine domains to create a single large fine-resolution nested domain

Nesting Set-up and Run

Compiling WRF for Nesting

```
-----  
Please select from among the following Darwin ARCH options:
```

1. (serial)	2. (smpar)	3. (dmpar)	4. (dm+sm)	PGI (pgf90/pgcc)
5. (serial)	6. (smpar)	7. (dmpar)	8. (dm+sm)	INTEL (ifort/icc)
9. (serial)	10. (smpar)	11. (dmpar)	12. (dm+sm)	INTEL (ifort/clang)
13. (serial)		14. (dmpar)		GNU (g95/gcc)
15. (serial)	16. (smpar)	17. (dmpar)	18. (dm+sm)	GNU (gfortran/gcc)
19. (serial)	20. (smpar)	21. (dmpar)	22. (dm+sm)	GNU (gfortran/clang)
23. (serial)		24. (dmpar)		IBM (xlf90_r/cc)
25. (serial)	26. (smpar)	27. (dmpar)	28. (dm+sm)	PGI (pgf90/pgcc): -f90=pgf90

```
Enter selection [1-28] : 9
```

```
-----  
Compile for nesting? (0=no nesting, 1=basic, 2=preset moves, 3=vortex following) [default 0]:
```

Compile with nesting option (1=basic)

*Note: Unless compiling for a moving nest, or 2D idealized case, there's no reason to not always choose "basic." It takes no longer to build.

Nesting Set-up for namelist.wps

	d01	d02
&share		
wrf_core =	'ARW',	
max_dom =	1,	
start_date =	'2012-01-27_00:00:00',	'2012-01-27_00:00:00',
end_date =	'2012-01-28_00:00:00',	'2012-01-27_00:00:00',
interval_seconds =	21600	
io_form_geogrid =	2,	
/		
&geogrid		
parent_id =	1,	1,
parent_grid_ratio =	1,	3,
i_parent_start =	1,	70,
j_parent_start =	1,	67,
e_we =	175,	181,
e_sn =	145,	181,
geog_data_res =	'default',	'default',
dx =	30000,	
dy =	30000,	
map_proj =	'lambert',	
ref_lat =	37,	
ref_lon =	-97.00,	
truelat1 =	45.0,	
truelat2 =	30.0,	
stand_lon =	-97.0,	
geog_data_path =	'/data/static/geog'	
/		
&ungrib		
out_format =	'WPS',	
prefix =	'FILE',	
/		
&metgrid		
fg_name =	'FILE'	
io_form_metgrid =	2,	
/		

namelist.wps &share for Nesting

&share

```
wrf_core = 'ARW',  
max_dom = 2,  
start_date = '2012-01-27_00:00:00', 2012-01-27_00:00:00'  
end_date = '2012-01-28_00:00:00', 2012-01-27_00:00:00'  
interval_seconds = 21600  
io_form_geogrid = 2,  
/  

```

real.exe only requires
initial
time for fine domain
(unless doing nudging or
SST-update in the nest)

Make sure to edit start/end dates for all domains!

namelist.wps &geogrid for Nesting (1)

&geogrid


```
parent_id      = 1,      1,  
parent_grid_ratio = 1,      3,  
i_parent_start  = 1,      70,  
j_parent_start  = 1,      67,  
  
e_we           = 175,    181,  
e_sn           = 145,    181,  
geog_data_res  = 'default', 'default',
```

```
dx             = 30000,  
dy             = 30000,  
map_proj       = 'lambert',  
ref_lat        = 37.0,  
ref_lon        = -97.0,  
truelat1       = 45.0,  
truelat2       = 30.0,  
stand_lon      = -97.0,  
geog_data_path = '/data/static/geog/'
```

/

parent_id:

The domain # of the nest's parent

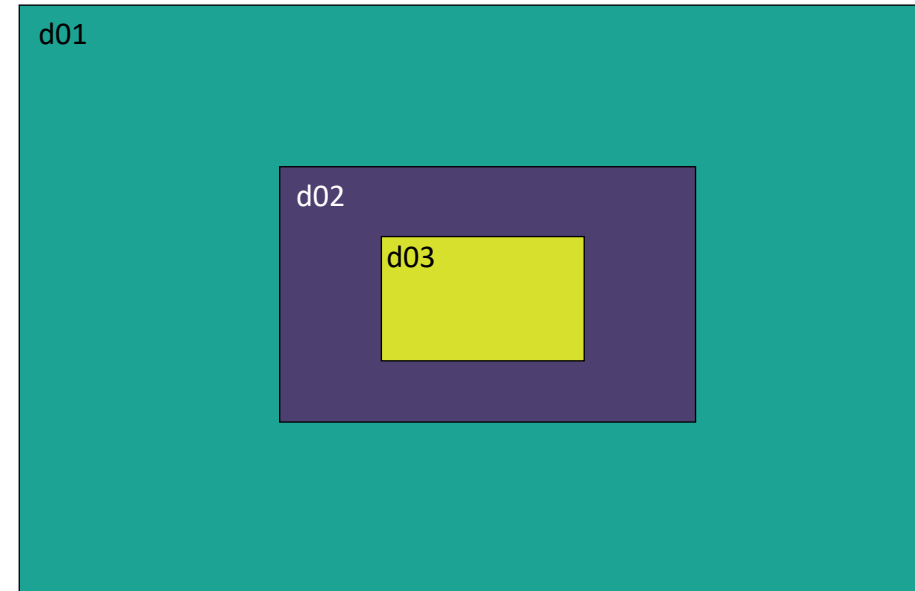

parent_id = 1, 1, 2

namelist.wps &geogrid for Nesting (2)

&geogrid


```
parent_id      = 1,      1,  
parent_grid_ratio = 1,      3,  
i_parent_start  = 1,      70,  
j_parent_start  = 1,      67,  
  
e_we           = 175,    181,  
e_sn           = 145,    181,  
geog_data_res   = 'default', 'default',
```

```
dx              = 30000,  
dy              = 30000,  
map_proj        = 'lambert',  
ref_lat         = 37.0,  
ref_lon         = -97.0,  
truelat1        = 45.0,  
truelat2        = 30.0,  
stand_lon       = -97.0,  
geog_data_path  = '/data/static/geog/'
```

/

parent_id:

The domain # of the nest's parent

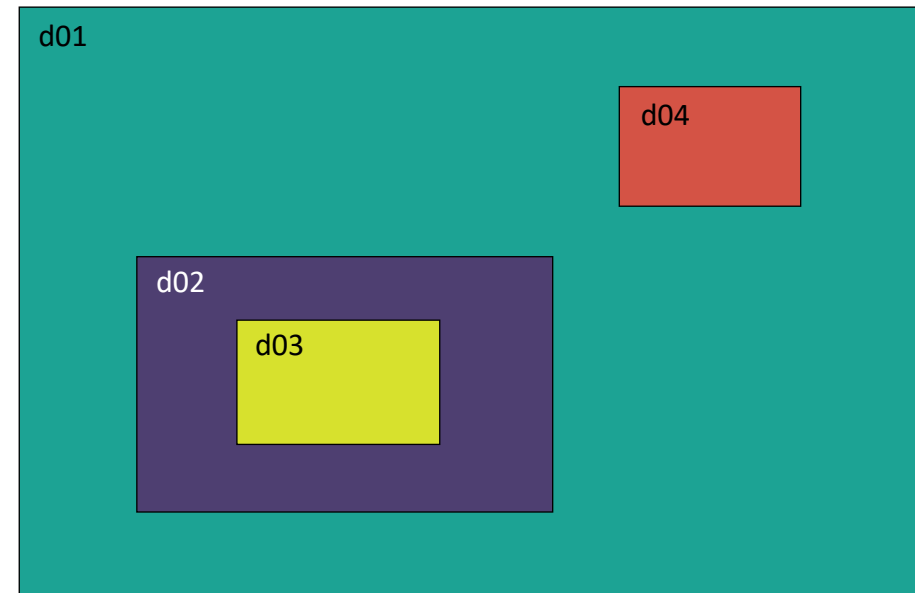

parent_id = 1, 1, 2, 1

namelist.wps &geogrid for Nesting (3)

&geogrid

```
parent_id      = 1,      1,  
parent_grid_ratio = 1,      3,  
i_parent_start  = 1,      70,  
j_parent_start  = 1,      67,  
  
e_we           = 175,    181,  
e_sn           = 145,    181,  
geog_data_res   = 'default', 'default',
```


```
dx             = 30000,  
dy             = 30000,  
map_proj       = 'lambert',  
ref_lat        = 37.0,  
ref_lon        = -97.0,  
truelat1       = 45.0,  
truelat2       = 30.0,  
stand_lon      = -97.0,  
geog_data_path = '/data/static/geog/'
```

/

parent_grid_ratio: The grid resolution ratio of the child to its parent (must be an integer).

**recommended ratios are 3:1 or 5:1*

i/j_parent_start:

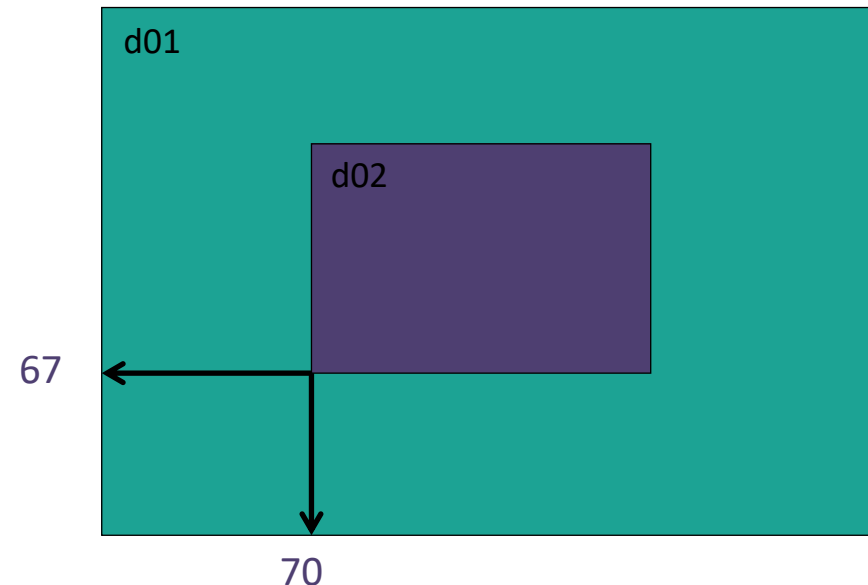


Odd Ratios for Feedback Option

When using feedback, conditions are fed back to the parent domain from the child along the rows and columns, and at the mass points (center)

U: east-west velocities
V: south-north velocities
 Θ : all other meteorological data

*Averaging is performed

3:1 grid ratio

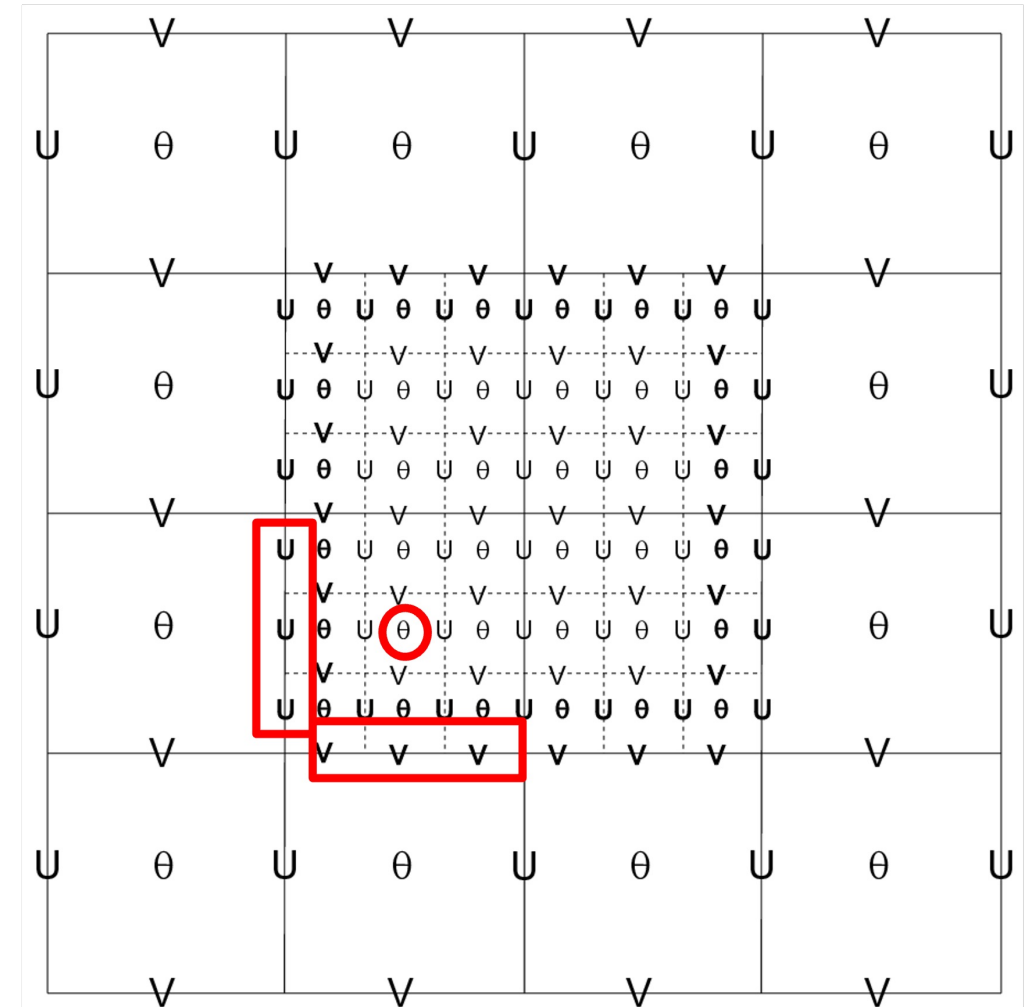

namelist.wps & *geogrid* for Nesting (4)


&geogrid

```
parent_id      = 1,      1,  
parent_grid_ratio = 1,      3,  
i_parent_start  = 1,      70,  
j_parent_start  = 1,      67,  
  
e_we           = 175,    181,  
e_sn           = 145,    181,  
geog_data_res   = 'default', 'default',
```

```
dx             = 30000,  
dy             = 30000,  
map_proj       = 'lambert',  
ref_lat        = 37.0,  
ref_lon        = -97.0,  
truelat1       = 45.0,  
truelat2       = 30.0,  
stand_lon      = -97.0,  
geog_data_path = '/data/static/geog/'
```

e_we and e_sn:

Each domain's full west-east and south-north dimensions

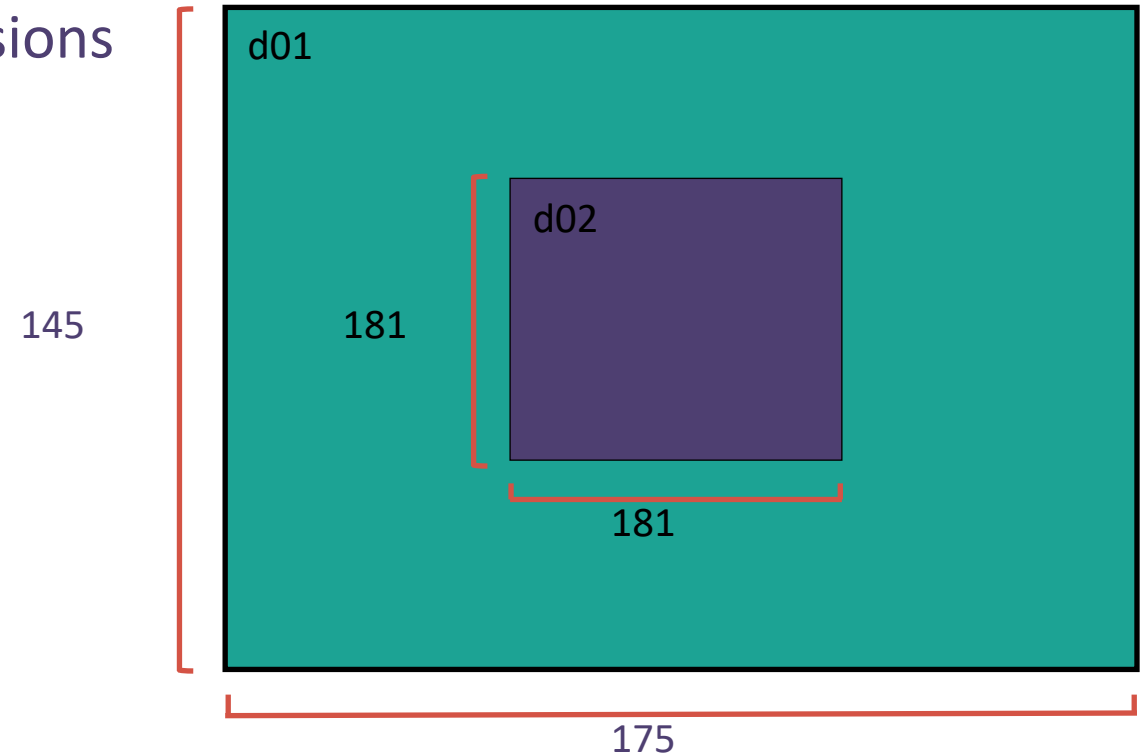

Notes:

- Domains should be > 100x100
- Keep nest away from coarse domain

namelist.wps & *geogrid* for Nesting (5)


&geogrid

```
parent_id      = 1,      1,  
parent_grid_ratio = 1,      3,  
i_parent_start  = 1,      70,  
j_parent_start  = 1,      67,
```

```
e_we           = 175,    181,  
e_sn           = 145,    181,  
geog_data_res   = 'default', 'default',
```

```
dx              = 30000,  
dy              = 30000,  
map_proj        = 'lambert',  
ref_lat         = 37.0,  
ref_lon         = -97.0,  
truelat1        = 45.0,  
truelat2        = 30.0,  
stand_lon       = -97.0,  
geog_data_path  = '/data/static/geog/'
```

/

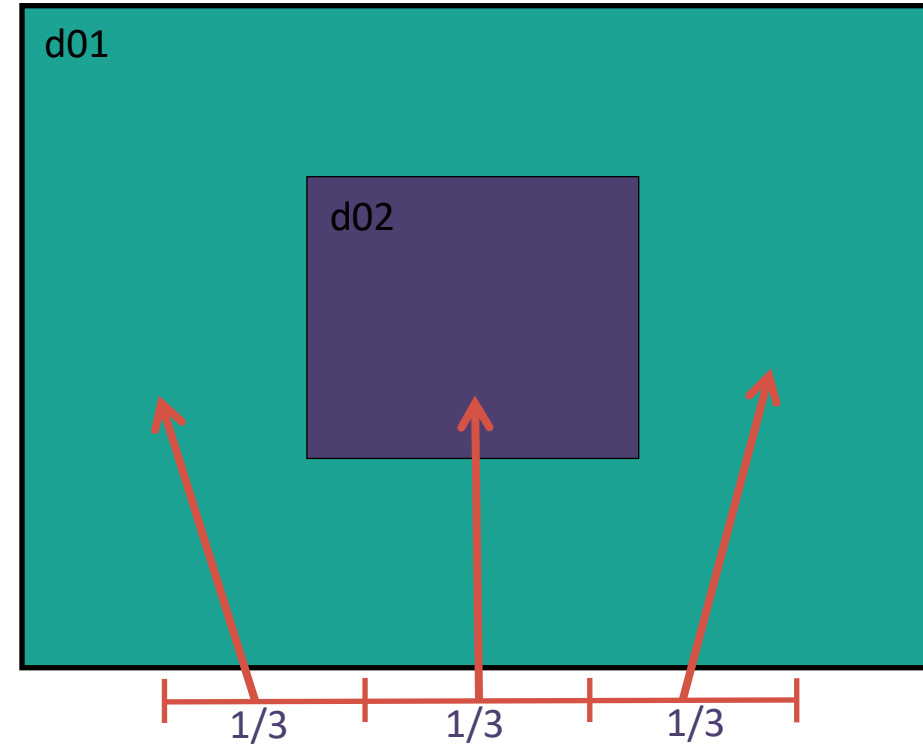

Notes:

- Domains should be > 100x100
- Keep nest away from coarse domain

namelist.wps & *geogrid* for Nesting (6)

&geogrid

```
parent_id      = 1,      1,  
parent_grid_ratio = 1,      3,  
i_parent_start = 1,      70,  
j_parent_start = 1,      67,  
  
e_we          = 175,    181,  
e_sn          = 145,    181,  
geog_data_res = 'default', 'default',  
  
dx            = 30000,  
dy            = 30000,  
map_proj      = 'lambert',  
ref_lat       = 37.0,  
ref_lon       = -97.0,  
truelat1      = 45.0,  
truelat2      = 30.0,  
stand_lon     = -97.0,  
geog_data_path = '/data/static/geog/'
```

dx and dy:

Only need the coarse domain resolution.
The geogrid program calculates the nest
resolution(s) using the “parent_grid_ratio”

namelist.wps Final Notes

```
&ungrib  
  out_format =      'WPS',  
  prefix =         'FILE',  
/  
  
&metgrid  
  fg_name =         'FILE'  
  io_form_metgrid = 2,  
/
```

Notes:

- No changes need to be made to the &ungrib and &metgrid namelists records for nesting purposes
- Do not add values for additional columns if default namelist does not have values in more than d01 column.

Nesting Set-up for namelist.input

namelist.input &time_control for Nesting

&time_control

```
run_days      = 0,  
run_hours     = 24,  
run_minutes   = 0,  
run_seconds   = 0,  
start_year    = 2012, 2012, 2012,  
start_month   = 01, 01, 01,  
start_day     = 27, 27, 27,  
start_hour    = 00, 00, 00,  
end_year      = 2012, 2012, 2012,  
end_month     = 01, 01, 01,  
end_day       = 28, 28, 28,  
end_hour      = 00, 00, 00,  
interval_seconds = 10800  
input_from_file = .true., .true., .true.  
history_interval = 360, 60, 60  
frames_per_outfile = 1000, 1, 1  
restart       = .false.  
restart_interval = 180  
io_form_history = 2  
io_form_restart = 2
```

start/end date/times:

These values *typically* will be the same for all domains

history_interval:

How often history is written out.

*May choose to have more frequent output time for nests

frames_per_outfile:

The number of history intervals in a single file.

/

Time & Frequency Clarification

&time_control

interval_seconds = 10800

history_interval = 60, 60, 60

frames_per_outfile = 1, 1, 1

/

&domains

time_step = 180

/

frames_per_outfile:

The number of history intervals in a single file.

In the example above, if it's set to 1, you should get a wrfout file for each simulation hour.

interval_seconds:

The number of seconds between each met_em* file
10800 = 3-hourly input data

time_step:

How often the model integrates forward (in seconds). *180 = every 3 mins of simulation time*

history_interval:

Frequency (in simulation mins) that data is written/recorded.

= 60: history is recorded every 1 hour.

Since time_step=180, each history recording includes 20 time steps of integration.

namelist.input &domains for Nesting (1)

&domains

```
time_step           = 180,  
time_step_fract_num = 0,  
time_step_fract_den = 1,  
max_dom             = 2,
```

```
e_we                = 175, 181, 94,  
e_sn                = 145, 181, 91,  
e_vert              = 40, 40, 40,
```

```
p_top_requested     = 5000,  
num_metgrid_levels  = 32,  
num_metgrid_soil_levels = 4,
```

```
dx                  = 30000,  
dy                  = 30000,
```

```
grid_id             = 1, 2, 3,  
parent_id           = 1, 1, 2,  
i_parent_start      = 1, 70, 30,  
j_parent_start      = 1, 67, 30,  
parent_grid_ratio    = 1, 3, 3,  
parent_time_step_ratio = 1, 3, 3,  
feedback            = 1,
```

```
/
```

max_dom:

Activate nests - # of domains to run

e_we and e_sn:

should match namelist.wps values

e_vert:

of vertical levels.

All columns usually have the same value

dx/dy:

for non-integer grid resolutions, use at least two decimal places

**** Before V4.2 – needed value for each domain**

namelist.input &domains for Nesting (1)

&domains

.....

grid_id = 1, 2, 3,

parent_id = 1, 1, 2,

i_parent_start = 1, 70, 30,

j_parent_start = 1, 67, 30,

parent_grid_ratio = 1, 3, 3,

parent_time_step_ratio = 1, 3, 3,

feedback = 1,

/

All must be set to the same values
used in namelist.wps

feedback:

Whether a nest will overwrite parent results

- 2-way nesting: feedback = 1
- 1-way nesting: feedback = 0



parent_time_step_ratio:

See next slide!

Nested 3:1 Parent Time Step Ratio


Example: 3-domain nested run

- `time_step = 180`
- `parent_time_step_ratio = 1, 3, 3,`
 - D01: a single 3-min dt
 - D02: a single 1-min dt
 - D03: 20-second intervals, up to 1 min

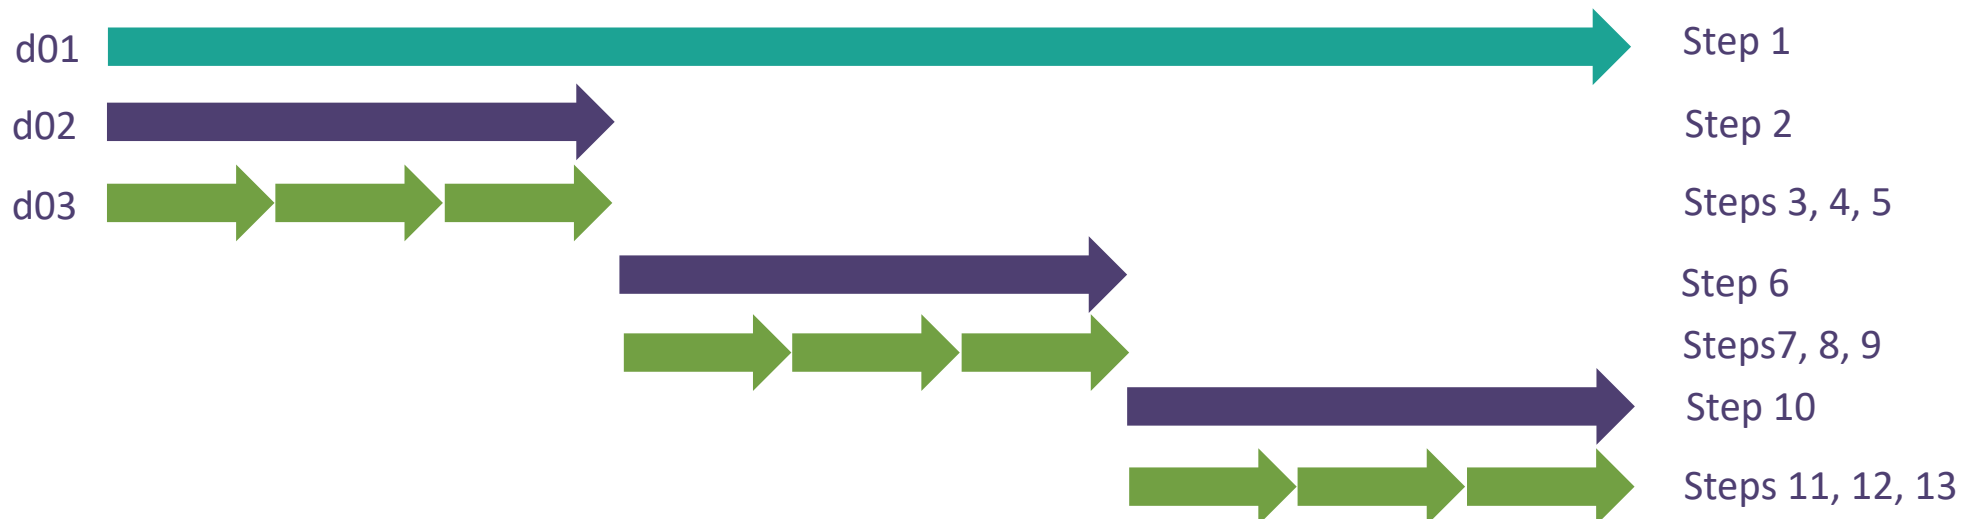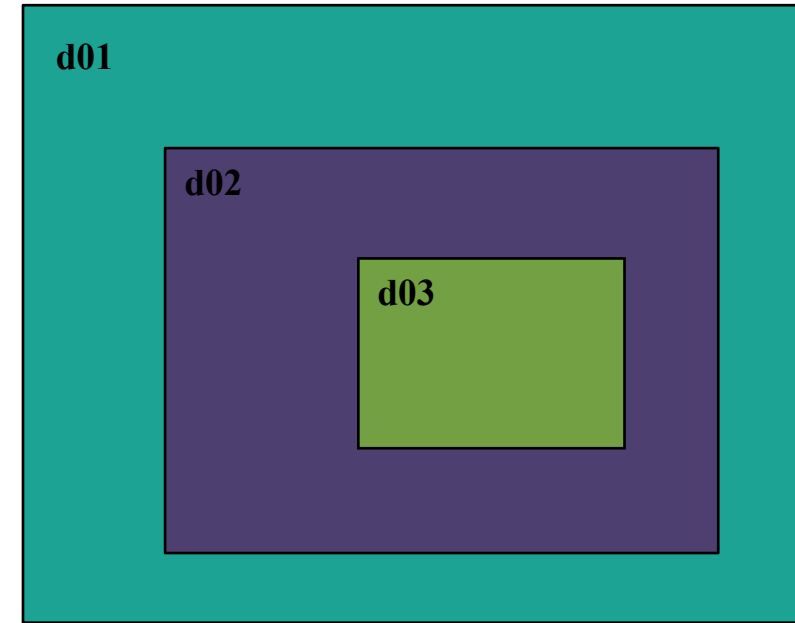

Namelist.input & *physics* for Nesting

- You should use the same physics options for all domains for all schemes
 - **Exceptions:**
 - cumulus_scheme (cu_physics): may need to be turned off for a nest that has a grid distance of only a few kilometers
 - may turn off PBL scheme for resolutions close to 100 m
- Use same values for physics calling frequency parameters (for each domain)
 - radt: radiation time step
 - bldt: boundary layer time step
 - cudt: cumulus scheme time step



Computationally inexpensive –
no reason to not always set to
zero (run every time step)

Where should you start?

Namelist templates and descriptions provided in test/em_real

- **README.namelist**
- **examples.namelist**

Helpful documentation:

- **Users' Guide, Chapter 5**
 - http://www2.mmm.ucar.edu/wrf/users/docs/user_guide_v4/V4.1/users_guide_chap5.htm
- **Namelist Best Practice web pages:**
 - WPS: http://www2.mmm.ucar.edu/wrf/users/namelist_best_prac_wps.html
 - WRF: http://www2.mmm.ucar.edu/wrf/users/namelist_best_prac_wrf.html

Not all namelist options are domain-dependent. If in doubt:

- Check **Registry files** (found in WRF/Registry/)
 - * *grep for parameter names – look for “max_dom” (max_dom means expected value for each domain)*

Rule of thumb: If default namelist only has 1 column, don't add values for other columns!

Running WPS for Nested Domain

- Modify namelist.wps for multiple domains (additional columns)
- Use same executables for running with a single domain
 - geogrid.exe output: `geo_em.d01.nc`, `geo_em.d02.nc`, etc.
 - ungrib.exe output: same as single domain – not domain dependent
 - metgrid.exe output: `met_em.d01*`, `met_em.d02*`, etc.

Running Real & WRF for Nested Domain

Modify namelist.input for multiple domains (additional columns)

Link-in the met_em* files and then run real.exe and wrf.exe

real.exe output

wrfbdy_d01: Lateral boundary data for all times (domain 01 only)

wrfinput_d01, wrfinput_d02, etc.

- Single time-level data at the model's start time (for each domain)
- 1 file per domain

wrf.exe output

wrfout_d01*, wrfout_d02*, etc.

- One for each domain, for each history time (depending on 'frames_per_outfile')

wrfrst_d01*, wrfrst_d02*, etc.

- If "restart_interval" is less than or equal to the integration time

Summary

- Decide the best strategy to run your simulation
 - Based on resolution needed to resolve phenomenon, vs. resolution of input data
 - Based on computational allowance
- If nesting is required, design your nest configuration
 - Design the coarse domain first
 - Determine the beginning and ending indices of the nest on the coarse domain
- Choose the appropriate nesting strategy:
 - one-way, two-way, or one-way via *ndown*

Thank you!

