
## Set Up and Run WRF

(ARW-Ideal, ARW-real, and NMM)

#### Wei Wang NCAR/ESSL/MMM



## WRF System Flowchart

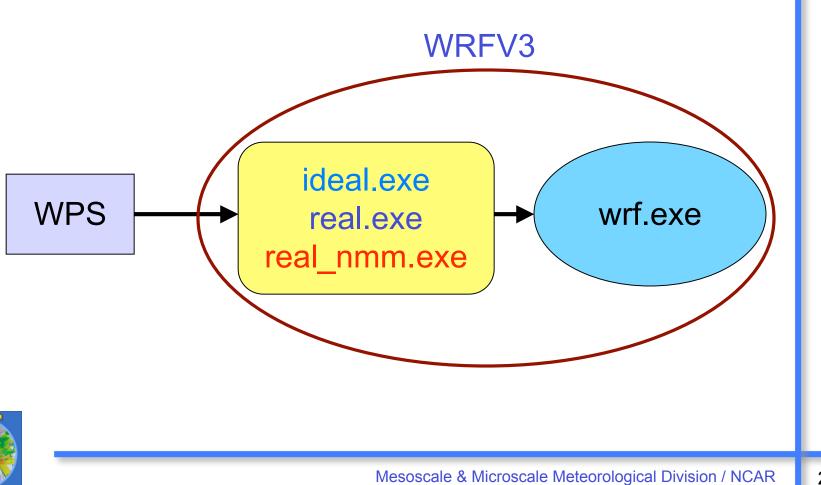

#### **Outline**

- Running WRF code
  - Before you run..
  - Running idealized case
  - Running ARW real-data case
  - Running NMM real-data case
- Basic runtime options for a single domain run (namelist)
- Check output
- Simple trouble shooting

This talk is complementary to 'Nesting' talk later.



#### Before You Run ..

 Check and make sure appropriate executables are created in WRFV3/main/ directory:

#### For ARW:

- ideal.exe
- real.exe
- wrf.exe
- ndown.exe

#### For NMM:

- real\_nmm.exe
- wrf.exe
- If you are running a real-data case, be sure that files from WPS are correctly generated:
  - met\_em.d01.\*, for ARW or
     met nmm.d01.\* for NMM
- Prepare namelist.input for runtime options.



#### WRF test case directories

You have these choices in WRFV3/test/

```
(made at compile time):
                                          NMM
 nmm real
                       3d real-data
 em real
 em quarter ss
 em b wave
                         3d ideal
 em les
 em heldsuarez
                                          ARW
 em hill2d x
 em squall2d x
                         2d ideal
 em squall2d y
 em grav2d x
 em seabreeze2d x
```

#### Steps to Run

- cd to run/ or one of the test case directories
- 2. Link or copy WPS output files to the directory for real-data cases
- 3. Edit *namelist.input* file for the appropriate grid and times of the case
- 4. Run initialization program (*ideal.exe*, *real.exe*, or *real\_nmm.exe*)
- 5. Run model executable, wrf.exe



#### WRFV3/run directory

#### README.namelist

LANDUSE TBL ETAMPNEW DATA GENPARM. TBL RRTM DATA SOILPARM. TBL VEGPARM, TBL urban param.tbl tr49t67 tr49t85 tr67t85 gribmap.txt grib2map.tbl .... (a few more)

these files are model physics data files: they are used to either initialize physics variables, or make physics computation more efficient



### WRFV3/run directory after compile

```
LANDUSE TBL
ETAMPNEW DATA
GENPARM. TBL
RRTM DATA
SOILPARM. TBL
                         An example after
VEGPARM. TBL
                         ARW real case
urban param.tbl
                         compile
tr49t67
tr49t85
tr67t85
gribmap.txt
grib2map.tbl
namelist.input -> ../test/em real/namelist.input
real.exe -> ../main/real.exe
wrf.exe -> ../main/wrf.exe
ndown.exe -> ../main/ndown.exe
.... (a few more)
```

# Running an Idealized Case ARW only



If you have compiled an ideal case, you should have:
 ideal.exe - ideal case initialization program

 wrf.exe - model executable

These executables are linked to:

```
WRFV3/run
and
WRFV3/test/em_test-case
```

→ One can go to either directory to run.



Go to the desired *ideal* test case directory: e.g. cd test/em\_quarter\_ss

If there is 'run\_me\_first.csh' in the directory, run it first - this links physics data files to the currect directory:

./run\_me\_first.csh



Then run the ideal initialization program:

```
./ideal.exe
```

The input to this program is typically a sounding file (file named <u>input\_sounding</u>), or a pre-defined 3D input (e.g. <u>input\_jet</u> in em\_b\_wave case).

Running ideal.exe creates WRF initial condition file: wrfinput d01

Note that wrfbdy file is not needed for idealized cases

To run the model interactively, type

```
./wrf.exe >& wrf.out &
```

for single processor (serial) or SMP run. Or

```
mpirun -np N ./wrf.exe &
```

for a MPI run (where N is the number of processors requested)

Successful running of the model executable will create a model history file called wrfout\_d01\_<date>
 e.g. wrfout d01 0001-01-01 00:00:00



- Edit namelist.input file to change options.
- For your own case, you may provide a different sounding.
- You may also edit dyn\_em/module\_initialize\_<case>.F to change other aspects of the initialization.

#### Note:

- For 2D cases and baroclinic wave case, ideal.exe must be run serially
- For all 2D cases, wrf.exe must be run serially or with SMP

# Running ARW Real-Data Case



### Running ARW Real-Data Case

 If you have compiled the em\_real case, you should have:

```
real.exe - real data initialization program
wrf.exe - model executable
ndown.exe - program for doing one-way nesting
```

These executables are linked to:

```
WRFV3/run
and
WRFV3/test/em_real
```

One can go to either directory to run.



#### WRFV3/test/em\_*real* directory

```
LANDUSE.TBL -> ../../run/LANDUSE.TBL
ETAMPNEW DATA -> ../../run/ETAMPNEW DATA
GENPARM.TBL -> ../../run/GENPARM.TBL
RRTM DATA -> ../../run/RRTM DATA
SOILPARM.TBL -> ../../run/SOILPARM.TBL
VEGPARM.TBL -> ../../run/VEGPARM.TBL
urban param.tbl -> ../../run/urban param.tbl
tr49t67 -> ../../run/tr49t67
tr49t85 -> ../../run/tr49t85
tr67t85 -> ../../run/tr67t85
gribmap.txt -> ../../run/gribmap.txt
grib2map.tbl -> ../../run/grib2map.tbl
namelist.input - require editing
real.exe -> ../../main/real.exe
wrf.exe -> ../../main/wrf.exe
ndown.exe -> ../../main/ndown.exe
```

.... (a few more)

- One must successfully run WPS, and create
   met\_em.\* file for more than one time period
- Link or copy WPS output files to the run directory:

```
cd test/em_real
ln -s ../../WPS/met_em.d01.*
```




- Edit namelist.input file for runtime options (at mininum, one must edit &time\_control for start, end and integration times, and &domains for grid dimensions)
- Run the real-data initialization program:

```
./real.exe, if compiled serially / SMP, or mpirun -np N ./real.exe, for a MPI job where N is the number of processors requested
```



 Successfully running this program will create model initial and boundary files:

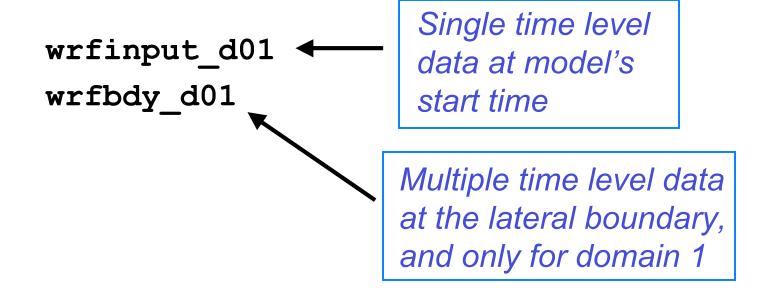



Run the model executable by typing:

```
./wrf.exe >& wrf.out &
or
mpirun -np N ./wrf.exe &
```

 Successfully running the model will a create model history file:

```
wrfout_d01_2005-08-28_00:00:00
```

```
And restart file if restart_interval is set to 720: wrfrst_d01_2008-08-28_12:00:00
```



# Running NMM Real-Data Case



### Running NMM Real-Data Case

If you have compiled the nmm\_real, you should have:
 real\_nmm.exe - NMM real date initialization
 program

wrf.exe - NMM model executable

These executables are linked to:

```
WRFV3/run
and
WRFV3/test/nmm_real
```

→ One can go to either directory to run.



#### WRFV3/test/*nmm\_real* directory

```
LANDUSE.TBL -> ../../run/LANDUSE.TBL
ETAMPNEW DATA -> ../../run/ETAMPNEW DATA
GENPARM.TBL -> ../../run/GENPARM.TBL
RRTM DATA -> ../../run/RRTM DATA
SOILPARM.TBL -> ../../run/SOILPARM.TBL
VEGPARM.TBL -> ../../run/VEGPARM.TBL
urban_param.tbl -> ../../run/urban param.tbl
tr49t67 -> ../../run/tr49t67
tr49t85 -> ../../run/tr49t85
tr67t85 -> ../../run/tr67t85
gribmap.txt -> ../../run/gribmap.txt
grib2map.tbl -> ../../run/grib2map.tbl
namelist.input - require editing
real nmm.exe -> ../../main/real nmm.exe
wrf.exe -> ../../main/wrf.exe
```



- One must successfully run WPS, and create
   met\_nmm. \* file for more than one time period
- Link or copy WPS output files to the run directory:

```
cd test/nmm_real
ln -s ../../WPS/met_nmm.d01.*
```



- Edit namelist.input file for runtime options (at minimum, one must edit &time\_control for start, end and integration time, and &domains for grid dimensions)
- Run the real-data initialization program (MPI only):
   mpirun -np N ./real\_nmm.exe
- Successfully running this program will create model initial and boundary files:

```
wrfinput_d01
wrfbdy_d01
```



Run the model executable by typing (MPI only):

```
mpirun -np N ./wrf.exe
```

 Successfully running the model will create a model history file:

```
wrfout_d01_2005-08-28_00:00:00
```

And *restart* file if **restart\_interval** is set to 720: wrfrst\_d01\_2008-08-28\_12:00:00



# **Basic namelist Options**



#### What is a namelist?

- A Fortran namelist contains a list of *runtime* options for the code to read in during its execution. Use of a namelist allows one to change runtime configuration without the need to recompile the source code.
- Fortran 90 namelist has very specific format, so edit with care:

```
&namelist-record - start
/ - end
```


As a general rule:

Multiple columns: domain dependent

Single column: value valid for all domains



#### &time\_control

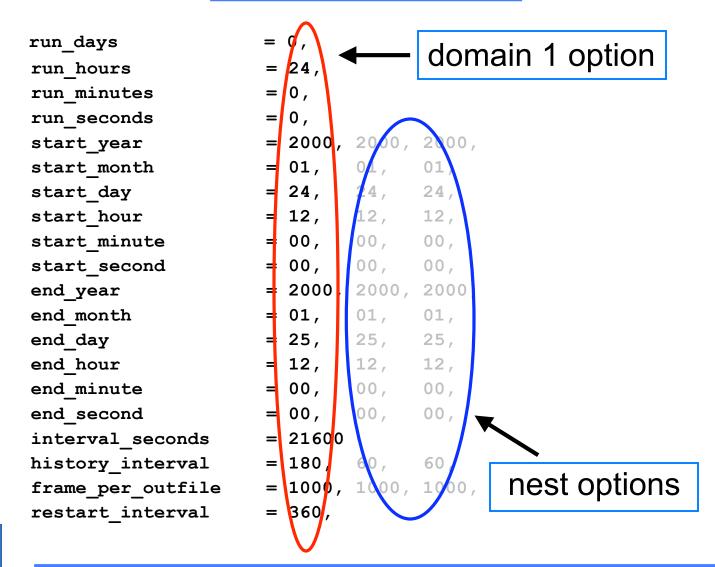



- run \* time variables:
  - Model simulation length: wrf.exe and domain 1 only
- start\_\* and end\_\* time variables:
  - Program real will use WPS output between these times to produce lateral (and lower) boundary file
  - They can also be used to specify the start and end of simulation times for the coarse grid.



- Interval seconds:
  - Time interval between WPS output times, and LBC update frequency
- history\_interval
  - Time interval in minutes when a history output is written
  - The time stamp in a history file name is the time when the history file is first written, and multiple time periods may be written in one file. e.g. a history file for domain 1 that is first written for 1200 UTC Jan 24 2000 is

wrfout d01 2000-01-24 12:00:00



- frame per outfile.
  - Number of history times written to one file.
- restart\_interval:
  - Time interval in minutes when a restart file is written.
  - By default, restart file is not written at hour 0.
  - A restart file contains only one time level data, and its valid time is in its file name, e.g. a restart file for domain 1 that is valid for 0000 UTC Jan 25 2000 is

wrfrst d01 2000-01-25 00:00:00



#### &time\_control

```
io_form_history = 2,
io_form_restart = 2,
io_form_input = 2,
io_form_boundary = 2,
debug_level = 0,
```

#### IO format options:

- = 1, binary
- = 2, netcdf (most common)
- = 4, PHDF5
- = 5, Grib 1
- =10, Grib 2

io\_form\_restart = 102 :
write in patch sizes: fast
for large grids

Debug print control: Increasing values give more prints.



- frame per outfile.
  - Number of history times written to one file.
- restart\_interval:
  - Time interval in minutes when a restart file is written.
  - By default, restart file is not written at hour 0.
  - A restart file contains only one time level data, and its valid time is in its file name, e.g. a restart file for domain 1 that is valid for 0000 UTC Jan 25 2000 is

wrfrst d01 2000-01-25 00:00:00



#### &domains

```
time step
                          = 180
time_step_fract_num
                          = 0,
time_step_fract_den
                          = 1,
max_dom
                          = 1,
                          = 1,
s we
                          = 74,
e we
                          = 1,
s sn
                          = 61,
                                       , nest<sup>91</sup>
e sn
s vert
                                      options
                          = 28,
e vert
num_metgrid_levels
                          = 21
                          = 30000, 10000, 33
dx
                          = 30000, 10000,
dy
                          = 1.0, 0.996, 0.99, 0.98, ... 0.0
eta_levels
p_top_requested
                          = 5000,
```



### Notes on &domains

- time\_step, time\_step\_fract\_num, time\_step\_frac\_den:
  - Time step for model integration in seconds.
  - Fractional time step specified in separate integers of numerator and denominator.
  - ARW: 6xDX; NMM: 2.25xDX (DX is grid distance in km)
- s\_we, s\_sn, s\_vert
  - Starting indices in X, Y, and Z direction; 1 for domain 1.
- e\_we, e\_sn, e\_vert:
  - Model grid dimensions (staggered) in X, Y and Z directions.
- num\_metgrid\_levels:
  - Number of metgrid (input) data levels.
- *dx*, *dy*:
  - grid distances in meters for ARW; in degrees for NMM.



### Notes on &domains

- p\_top\_requested
  - Pressure value at the model top.
  - Constrained by the available data from WPS.
  - Default is 5000 hPa
- eta levels:
  - Specify your own model levels from 1.0 to 0.0.
  - If not specified, program real will calculate a set of levels for you (ARW)



### Where do I start?

- Always start with a namelist template provided in a test case directory, whether it is a ideal case, ARW or NMM.
  - A number of namelist templates are provided in test/testcase/ directories
- Use document to guide the modification of the namelist values:
  - run/README.namelist
  - User's Guide, Chapter 5
  - Full list of namelists can be found in Registry files: Registry.EM (ARW), Registry.NMM and registry.io\_boilerplate (IO options)



# To run a job in a different directory..

- Directories run/ and test\_<case>/ are convenient places to run, but it does not have to be.
- Copy or link the content of these directories to another directory, including physics data files, wrf input and boundary files and wrf namelist and executables, and you should be able to run a job anywhere on your system.



# **Check Output**



## Output After a Model Run

Standard out/error files:

```
wrf.out, or rsl.* files
```

Model history file(s):

```
wrfout d01 <date>
```

Model restart file(s), optional



# Output from a multi-processor run

The standard out and error will go to the following files for a MPI run:

```
mpirun -np 4 .wrf.exe →
```

```
rsl.out.0000 rsl.error.0000
rsl.out.0001 rsl.error.0001
rsl.out.0002 rsl.error.0002
rsl.out.0003
```

There is one pair of files for each processor requested

### What to Look for in a standard out File?

Check run log file by typing

```
tail wrf.out, or tail rsl.out.0000
```

You should see the following if the job is successfully completed:

wrf: SUCCESS COMPLETE WRF



# How to Check Model History File?

• Use ncdump:

```
ncdump -v Times wrfout_d01_<date>
to check output times. Or
  ncdump -v U wrfout_d01_<date>
to check a particular variable (U)
```

- Use ncview or ncBrowse (great tools!)
- Use post-processing tools (see talks later)



### What is in a wrf.out or rs/ file?

- A print of namelist options
- Time taken to compute one model step:

```
Timing for main: time 2000-01-24_12:03:00 on domain 1: 3.25000 elapsed seconds. Timing for main: time 2000-01-24_12:06:00 on domain 1: 1.50000 elapsed seconds. Timing for main: time 2000-01-24_12:09:00 on domain 1: 1.50000 elapsed seconds. Timing for main: time 2000-01-24_12:12:00 on domain 1: 1.55000 elapsed seconds.
```

Time taken to write history and restart file:

```
Timing for Writing wrfout d01 2000-01-24 18:00:00 for domain 1: 0.14000 elapsed seconds.
```

Any model error prints: (example from ARW run)

```
5 points exceeded cfl=2 in domain 1 at time 4.200000 MAX AT i,j,k: 123 48 3 cfl,w,d(eta)= 4.165821
```

-> An indication the model has become numerically unstable



# Simple Trouble Shooting



### Often-seen runtime problems

- module\_configure: initial\_config: error reading
  namelist: &dynamics
  - > Typos or erroneous namelist variables exist in namelist record &dynamics in namelist.input file
- input\_wrf.F: SIZE MISMATCH: namelist
  ide,jde,num\_metgrid\_levels= 70 61 27; input
  data ide,jde,num\_metgrid\_levels= 74 61 27
  - > Grid dimensions in error



## Often-seen runtime problems

- Segmentation fault (core dumped)
  - > Often typing 'unlimit' or equivalent can help when this happens quickly in a run.
- 121 points exceeded cfl=2 in domain 1 at time 4.200000 MAX AT i,j,k: 123 48 3 cfl,w,d(eta)= 4.165821
  - > Model becomes unstable due to various reasons. If it happens soon after the start time, check input data, and/or reduce time step.



### References

- Information on compiling and running WRF, and a more extensive list of namelist options and their definition / explanations can be found in the ARW and NMM User's Guide, Chapter 5
- Also see 'Nesting Setup and Run' talk.

