NESTING IN WRF

Kelly Werner

July 2019

This material is based upon work supported by the National Center for Atmospheric Research, which is a major facility sponsored by the National Science Foundation under Cooperative Agreement No. 1852977.

What is a nest?

- A *finer-resolution* domain embedded in a coarser resolution domain, and run together with the coarser resolution domain
- Most input data are on the order of about 1 degree or ½ a degree – You don't want to interpolate down to, say a 3 km domain from 1 degree.
- Enables running at a higher-resolution without:
  - Uniformly high-resolution over a large domain – VERY expensive
  - High resolution for a very small domain, with mismatched time and spatial lateral boundary conditions

What is a nest?

- Covers a portion of the parent domain, and is fully contained by the parent domain
- Driven along its lateral boundaries by the parent domain
- May feedback the computed values back to the parent domain



When Should I Use Nests?

- Need to simulate localized phenomena: convection, topography, landuse-forced, etc.
  - What resolution is necessary to resolve what you are interested in?
  - Input data resolution is too coarse by more than a factor of 5-10x
  - Would like to provide better boundary conditions for the area of interest
    - BC's for external sources are typically 3-6 hours and do not have tendencies for all predicted fields
  - Computing resources not available for uniform coverage

When Should I Use Nests?

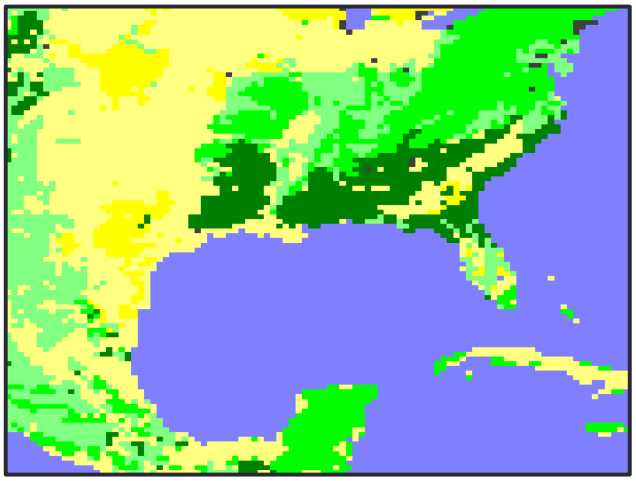

When Should I Use Nests?

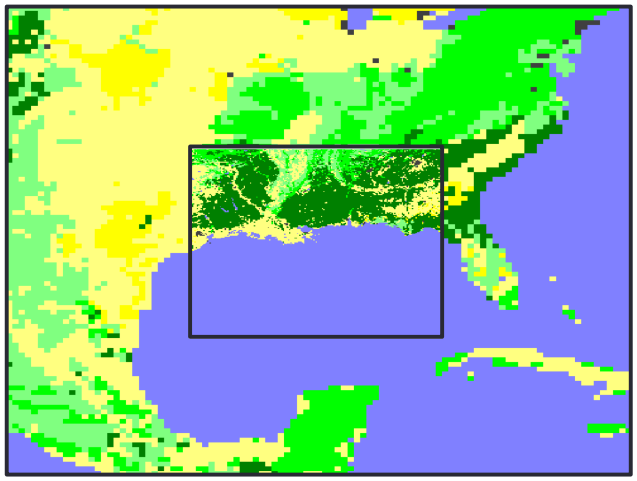

Types of Nesting

- Using a single input domain (met_em.d01*)
  - No met_em.d02* files are used
  - All fields are interpolated from the model coarse grid
  - Only recommended if nest is over the ocean
- Using multiple input domains
  - Each domain contains full input data files (including topography, landuse, etc.)
- Specified move
  - Build WRF with "2=preset moves"
  - Must specify every move
  - Can use, but tedious to set-up
- Automatic move
  - Build WRF with "3=vortex following"
  - Only for tropical cyclone tracking
  - Expensive for single large nest
- ndown.exe
  - Use coarser WRF model output to drive finer resolution domains (i.e. 'downscaling')
  - If you have run a long coarse domain simulation (years) and later decide you want to have a nest with higher resolution.

Types of Nesting

One-way/two-way nesting

- Determined by the namelist parameter "feedback"
  - **feedback = 0 (turned off/one-way)**

Lateral boundary conditions are fed to the nest, from the parent.



Types of Nesting

One-way/**two-way nesting**

- Determined by the namelist parameter "feedback"
  - **feedback = 1 (turned on/two-way)**

(1) Lateral boundary conditions are fed to the nest, from the parent.

(2) Child values are averaged, and then sent back to parent to overwrite value at corresponding grid point

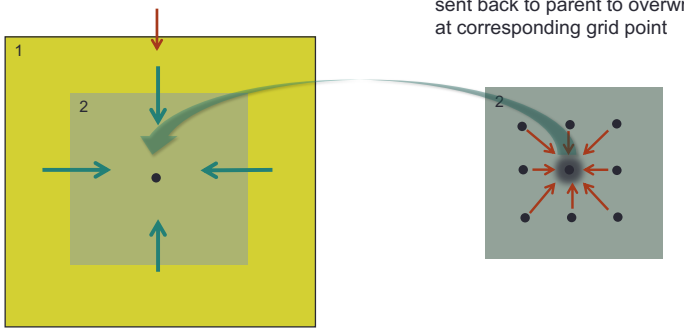

Masked Feedback

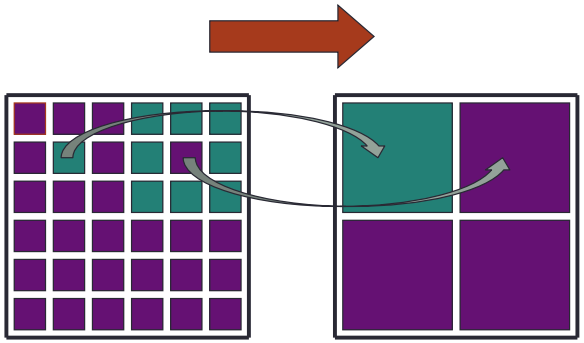

Single grid value feedback for categorical and masked data

Nests that are OK

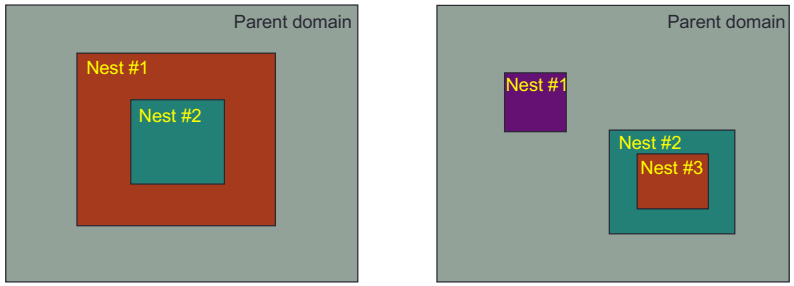

Nests that are NOT OK

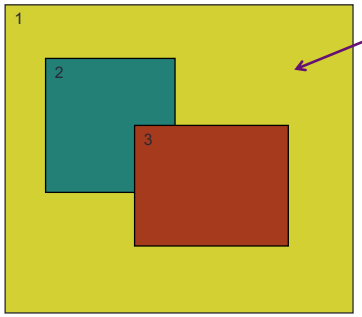

Child domains *may not* have overlapping points in the parent domain (possible if Feedback is off).

Nests that are NOT OK

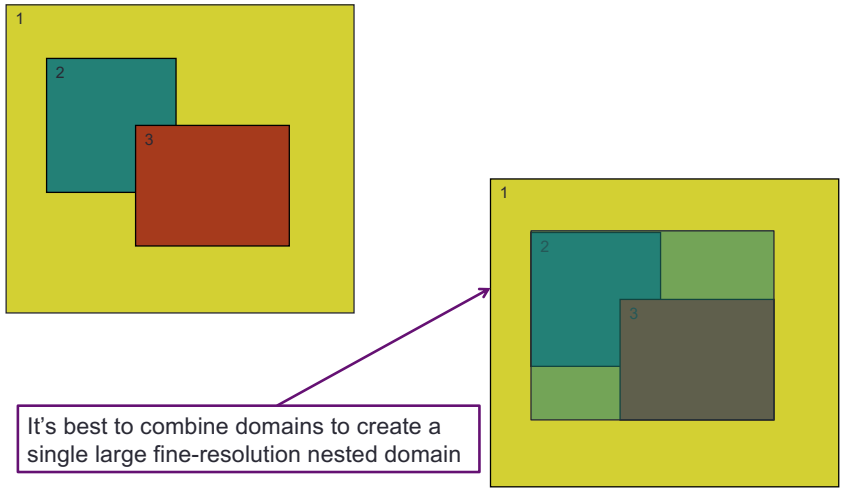

Nests that are NOT OK

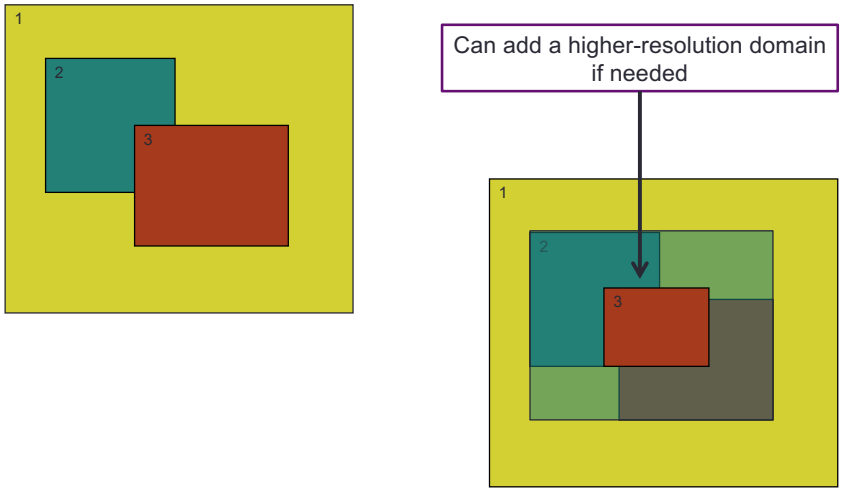

Nesting Set-up and Run

Compiling for Nesting (WRF)

```
------------------------------------------------------------------------
Please select from among the following Darwin ARCH options:

  1. (serial)   2. (smpar)   3. (dmpar)   4. (dm+sm)   PGI (pgf90/pgcc)
  5. (serial)   6. (smpar)   7. (dmpar)   8. (dm+sm)   INTEL (ifort/icc)
  9. (serial)  10. (smpar)  11. (dmpar)  12. (dm+sm)   INTEL (ifort/clang)
 13. (serial)               14. (dmpar)                GNU (g95/gcc)
 15. (serial)  16. (smpar)  17. (dmpar)  18. (dm+sm)   GNU (gfortran/gcc)
 19. (serial)  20. (smpar)  21. (dmpar)  22. (dm+sm)   GNU (gfortran/clang)
 23. (serial)               24. (dmpar)                IBM (xlf90_r/cc)
 25. (serial)  26. (smpar)  27. (dmpar)  28. (dm+sm)   PGI (pgf90/pgcc): -f90=pgf90

Enter selection [1-28] : 9
------------------------------------------------------------------------
Compile for nesting? (0=no nesting, 1=basic, 2=preset moves, 3=vortex following) [default 0]:
```

Compile with nesting option (1=basic)

*Note: Unless compiling for a moving nest, or 2D idealized case, there's no reason to not always choose "basic." It takes no longer to build.

namelist.wps - WPS

namelist.wps set-up: &share

To edit the namelist.wps file, make sure you are in the WPS/ directory

```
&share
 wrf_core = 'ARW',
 max_dom = 2,
 start_date = '2012-01-27_00:00:00', 2012-01-27_00:00:00'
 end_date = '2012-01-28_00:00:00', 2012-01-27_00:00:00'
 interval_seconds = 21600
 io_form_geogrid = 2,
/
```

real.exe program only requires initial time for fine domain (unless doing nudging or SST-update in the nest)

Make sure to edit start/end dates for all domains!

namelist.wps set-up: &geogrid

```
&geogrid

 parent_id         =  1,      1,
 parent_grid_ratio =  1,      3,
 i_parent_start    =  1,     70,
 j_parent_start    =  1,     67,

 e_we              = 175,   181,
 e_sn              = 145,   181,
 geog_data_res     = 'default', 'default',


 dx                = 30000,
 dy                = 30000,
 map_proj     = 'lambert',
 ref_lat      = 37.0,
 ref_lon      = -97.0,
 truelat1     = 45.0,
 truelat2     = 30.0,
 stand_lon    = -97.0,
 geog_data_path = '/data/static/geog/'
/
```

Used for nesting purposes
- parent_grid_ratio what is the grid ratio for each nest? (must be integer)
- Where is it located inside its parent?

Domain sizes: How many grid points does each domain have?

namelist.wps set-up: &geogrid

```
&geogrid

 parent_id         =  1,      1,
 parent_grid_ratio =  1,      3,
 i_parent_start    =  1,     70,
 j_parent_start    =  1,     67,

 e_we              = 175,   181,
 e_sn              = 145,   181,
 geog_data_res     = 'default', 'default',


 dx                = 30000,
 dy                = 30000,
 map_proj     = 'lambert',
 ref_lat      = 37.0,
 ref_lon      = -97.0,
 truelat1     = 45.0,
 truelat2     = 30.0,
 stand_lon    = -97.0,
 geog_data_path = '/data/static/geog/'
/
```

parent_id:
The domain # of the nest's parent



parent_id = 1, 1, 2

namelist.wps set-up: &geogrid

```
&geogrid

 parent_id         =  1,      1,
 parent_grid_ratio =  1,      3,
 i_parent_start    =  1,     70,
 j_parent_start    =  1,     67,

 e_we              =  175,   181,
 e_sn              =  145,   181,
 geog_data_res     =  'default', 'default',


 dx                = 30000,
 dy                = 30000,
 map_proj          = 'lambert',
 ref_lat           = 37.0,
 ref_lon           = -97.0,
 truelat1          = 45.0,
 truelat2          = 30.0,
 stand_lon         = -97.0,
 geog_data_path    = '/data/static/geog/'
/
```

parent_id:
The domain # of the nest's parent



parent_id = 1, 1, 2, 1

namelist.wps set-up: &geogrid

```
&geogrid

 parent_id         =  1,      1,
 parent_grid_ratio =  1,      3,
 i_parent_start    =  1,     70,
 j_parent_start    =  1,     67,

 e_we              =  175,   181,
 e_sn              =  145,   181,
 geog_data_res     =  'default', 'default',


 dx                = 30000,
 dy                = 30000,
 map_proj          = 'lambert',
 ref_lat           = 37.0,
 ref_lon           = -97.0,
 truelat1          = 45.0,
 truelat2          = 30.0,
 stand_lon         = -97.0,
 geog_data_path    = '/data/static/geog/'
/
```

parent_grid_ratio:
recommended ratios are 3:1 or 5:1
(odd ratios, less than 7)

i/j_parent_start:



Feedback 3:1 Ratio

When using feedback, conditions are fed back to the parent domain from the child along the rows and columns, and at the mass points (center)

U: east-west velocities
V: south-north velocities
Θ: all other meteorological data

➡ Averaging is performed

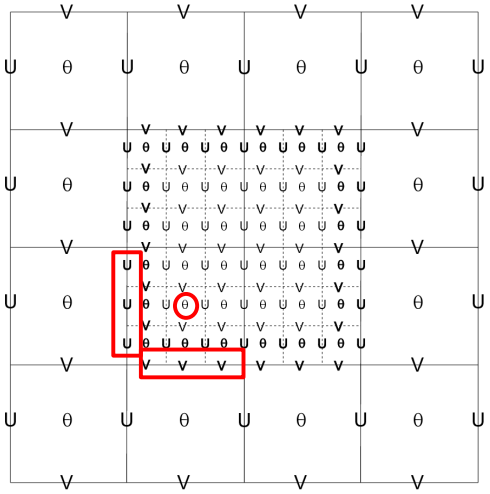

namelist.wps set-up: &geogrid

```
&geogrid

 parent_id         =  1,      1,
 parent_grid_ratio =  1,      3,
 i_parent_start    =  1,     70,
 j_parent_start    =  1,     67,

 e_we              =  175,   181,
 e_sn              =  145,   181,
 geog_data_res     =  'default', 'default',


 dx                = 30000,
 dy                = 30000,
 map_proj          = 'lambert',
 ref_lat           = 37.0,
 ref_lon           = -97.0,
 truelat1          = 45.0,
 truelat2          = 30.0,
 stand_lon         = -97.0,
 geog_data_path    = '/data/static/geog/'
/
```

e_we and e_sn:
Each domain's full west-east and south-north dimensions

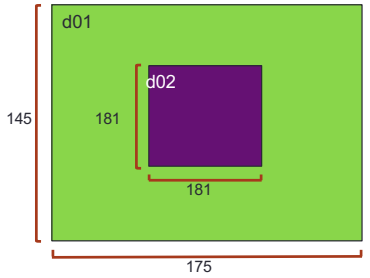

Notes:
- Domains should be no smaller than about 100x100
- Avoid placing any boundaries over complex terrain
- Keep nest away from coarse domain

namelist.wps set-up: &geogrid

```
&geogrid

 parent_id           =  1,      1,
 parent_grid_ratio   =  1,      3,
 i_parent_start      =  1,     70,
 j_parent_start      =  1,     67,

 e_we                = 175,   181,
 e_sn                = 145,   181,
 geog_data_res       =  'default', 'default',


 dx                  = 30000,
 dy                  = 30000,
 map_proj     = 'lambert',
 ref_lat      = 37.0,
 ref_lon      = -97.0,
 truelat1     = 45.0,
 truelat2     = 30.0,
 stand_lon    = -97.0,
 geog_data_path = '/data/static/geog/'
/
```

Minimum distance between nest boundary and parent boundary:
- 4 grid cells
- need MUCH larger buffer zone



- Good practice to have ~1/3 of coarse-grid surrounding each side of nest
- Nest can be placed a bit downstream of the inflow boundary

WRF Parent-nest Domain Overlap

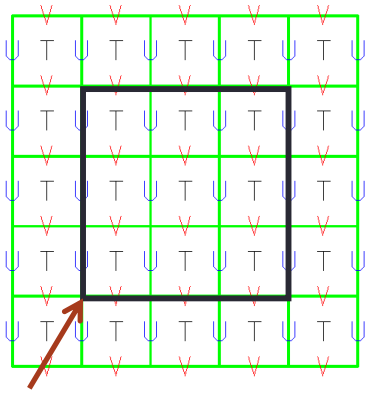

- The nested domain can be placed *anywhere* within the parent domain and the nested grid cells will exactly overlap the parent cells at the coincident cell boundaries
- Coincident parent/nest grid points:
  - eliminate the need for complex, generalized remapping calculations
  - enhances model performance and portability.

namelist.wps set-up: &geogrid

```
&geogrid

 parent_id           =  1,      1,
 parent_grid_ratio   =  1,      3,
 i_parent_start      =  1,     70,
 j_parent_start      =  1,     67,

 e_we                = 175,   181,
 e_sn                = 145,   181,
 geog_data_res       =  'default', 'default',
/
```

How to determine the nest grid numbers?
- Determine the beginning and ending locations for the nest on the parent domain
- Use the following to get these numbers:

(ending index – beginning index)*ratio+1
e.g. (127-67)*3+1 = 181

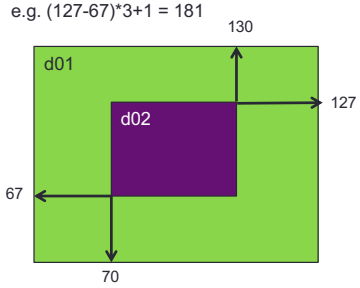

namelist.wps set-up: &geogrid

```
&geogrid

 parent_id           =  1,      1,
 parent_grid_ratio   =  1,      3,
 i_parent_start      =  1,     70,
 j_parent_start      =  1,     67,

 e_we                = 175,   181,
 e_sn                = 145,   181,
 geog_data_res       =  'default', 'default',


 dx                  = 30000,
 dy                  = 30000,
 map_proj     = 'lambert',
 ref_lat      = 37.0,
 ref_lon      = -97.0,
 truelat1     = 45.0,
 truelat2     = 30.0,
 stand_lon    = -97.0,
 geog_data_path = '/data/static/geog/'
/
```

dx and dy:
Only need the coarse domain resolution. The geogrid program calculates the nest resolution(s) using the "parent_grid_ratio"

***Note:**
No changes need to be made to the &ungrib and &metgrid namelists records for nesting purposes

namelist.input (WRF)

namelist.input set-up: &time_control

```
&time_control
 run_days                 = 0,
 run_hours                = 24,
 run_minutes              = 0,
 run_seconds              = 0,
 start_year               = 2012,  2012,  2012,
 start_month              = 01,    01,    01,
 start_day                = 27,    27,    27,
 start_hour               = 00,    00,    00,
 end_year                 = 2012,  2012,  2012,
 end_month                = 01,    01,    01,
 end_day                  = 28,    28,    28,
 end_hour                 = 00,    00,    00,
 interval_seconds         = 10800
 input_from_file          = .true.,.true.,.true.,
 history_interval         = 360,   60,    60
 frames_per_outfile       = 1000,  1,     1
 restart                  = .false.
 restart_interval         = 180
 io_form_history          = 2
 io_form_restart          = 2
/
```

** To edit the namelist.input file, make sure you are in the *WRF/test/em_real/* (or *WRF/run/*) directory

start/end date/times:
These values *typically* will be the same for all domains

history_interval:
May choose to have more frequent output time for nests

frames_per_outfile:
May choose to have all history outputs in a single file, or in multiple files
- to display geographic boundaries in newer versions of ncview, it's necessary to have 1 file per time period.

namelist.input set-up: &domains

```
&domains
 time_step                = 180,
 time_step_fract_num      = 0,
 time_step_fract_den      = 1,
 max_dom                  = 2,
 e_we                     = 175,   181,   94,
 e_sn                     = 145,   181,   91,
 e_vert                   = 40,    40,    40,
 p_top_requested          = 5000,
 num_metgrid_levels       = 32,
 num_metgrid_soil_levels  = 4,
 dx                       = 30000, 10000, 3333.33,
 dy                       = 30000, 10000, 3333.33,
 grid_id                  = 1,     2,     3,
 parent_id                = 1,     1,     2,
 i_parent_start           = 1,     70,    30,
 j_parent_start           = 1,     67,    30,
 parent_grid_ratio        = 1,     3,     3,
 parent_time_step_ratio   = 1,     3,     3,
 feedback                 = 1,
/
```

max_dom:
Activate nests - # of domains to run

e_we and e_sn:
should match namelist.wps values

e_vert:
All columns usually have the same value

dx/dy:
must set values for each domain.
make sure values correspond with "parent_grid_ratio"
- for non-integer grid resolutions, use at least two decimal places

namelist.input set-up: &domains

```
&domains
 ..........
 grid_id                  = 1,     2,     3,
 parent_id                = 1,     1,     2,
 i_parent_start           = 1,     70,    30,
 j_parent_start           = 1,     67,    30,
 parent_grid_ratio        = 1,     3,     3,
 parent_time_step_ratio   = 1,     3,     3,
 feedback                 = 1
/
```

All must be set to the same values used in namelist.wps

feedback:
Whether a nest will overwrite parent results
- 2-way nesting: feedback = 1
- 1-way nesting: feedback = 0

parent_time_step_ratio:
See next slide!

Nested 3:1 Parent Time Step Ratio

- Example: 3-domain nested run
- time_step = 180
  parent_time_step_ratio = 1, 3, 3,
  - D01: a single 3 min dt
  - D02: a single 1 min dt
  - D03: 20 second intervals, up to 1 min

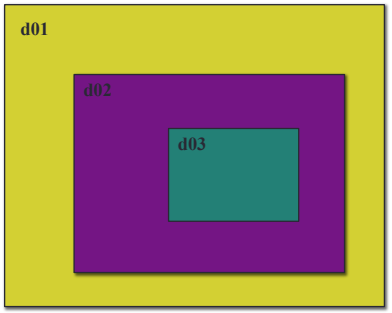

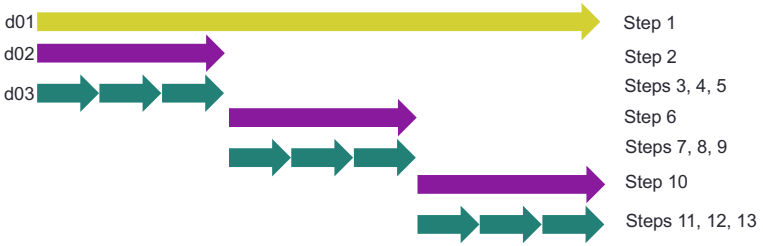

namelist.input set-up: &physics

- You should use the same physics options for all domains for all schemes
  - **Exceptions**:
    - cumulus_scheme (cu_physics): may need to be turned off for a nest that has a grid distance of only a few kilometers
    - may turn off PBL scheme for resolutions close to 100 m
- Use same values for physics calling frequency parameters (for each domain)
  - radt: radiation time step
  - bldt: boundary layer time step
  - cudt: cumulus scheme time step

Computationally inexpensive – no reason to not always set to zero (run every time step)

Where do I start?

- Start with a namelist template provided in test/em_real (or WRF/run/)
- Use documentation to guide your namelist modifications
  - **README.namelist** (found in WRF/run/ or WRF/test/em_real/)
  - **examples.namelist** (found in WRF/test/em_real/)
  - **Users' Guide, Chapter 5**
    - http://www2.mmm.ucar.edu/wrf/users/docs/user_guide_v4/V4.1/users_guide_chap5.htm
  - **Namelist Best Practice web pages:**
    - WPS: http://www2.mmm.ucar.edu/wrf/users/namelist_best_prac_wps.html
    - WRF: http://www2.mmm.ucar.edu/wrf/users/namelist_best_prac_wrf.html
- Not all namelist options are domain dependent. If in doubt:
  - **Registry.EM_COMMON** or **registry.io_boilerplate** (found in WRF/Registry/) **README.namelist**
    - grep for parameter names – look for "max_dom"
  - Rule of thumb: If default namelist only has 1 column, don't add values for other columns!

Successful Nested Run: WPS

- Modify namelist.wps for multiple domains (additional columns)
- Use same executables for running with a single domain
  - geogrid.exe output: `geo_em.d01.nc`, `geo_em.d02.nc`, etc.
  - ungrib.exe output: same as single domain – not domain dependent
  - metgrid.exe output: `met_em.d01*`, `met_em.d02*`, etc.

Successful Nested Run: WRF

- Modify namelist.input for multiple domains (additional columns)

- Link in the met_em* files and issue same executables for running with a single domain

real.exe output:

wrfbdy_d01
- Lateral boundary data for all times (domain 01 only)

wrfinput_d01, wrfinput_d02, etc.
- Single time-level data at the model's start time (for each domain)
- 1 file per domain

wrf.exe output:

wrfout_d01*, wrfout_d02*, etc.
- One for each domain, for each history time (depending on 'frames_per_outfile')

wrfrst_d01*, wrfrst_d02*, etc.
- If "restart_interval" is less than or equal to the integration time

Summary

- Decide the best strategy to run your simulation
  - Based on resolution needed to resolve phenomenon, vs. resolution of input data

- If nesting is required, design your nest configuration
  - Design the coarse domain first
  - Determine the beginning and ending indices of the nest on the coarse domain

- Choose the appropriate nesting strategy:
  - one-way, two-way, or one-way via *ndown*

Questions?