


ARW

Version 3 Modeling System User's Guide
January 2015

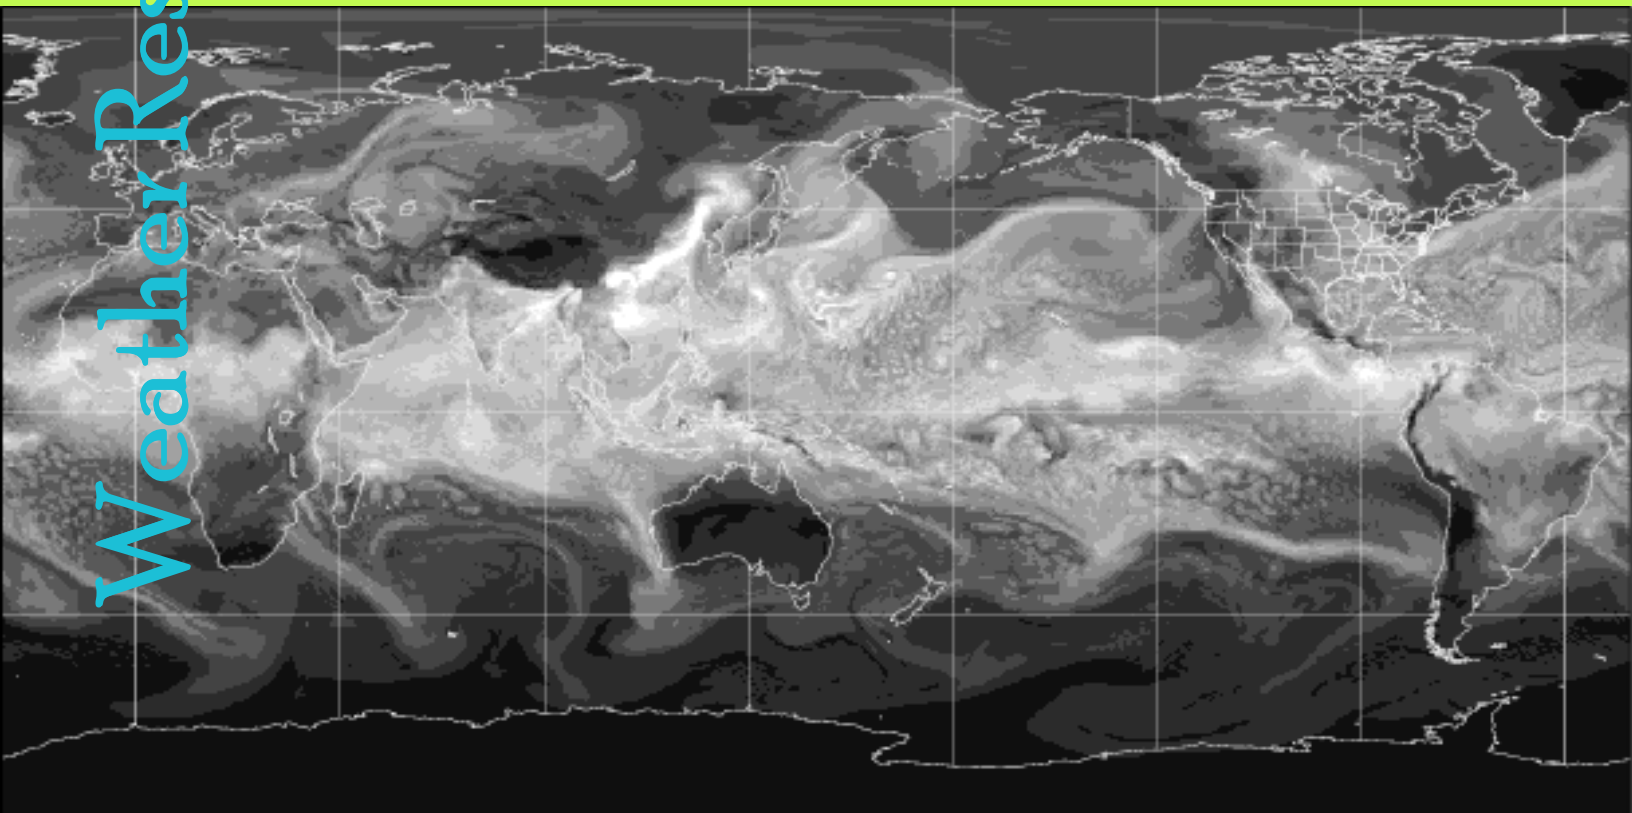

Foreword

This User's Guide describes the Advanced Research WRF (ARW) Version 3.6 modeling system, released in April 2014. As the ARW is developed further, this document will be continuously enhanced and updated. Please send feedback to wrfhelp@ucar.edu.

This document is complementary to the ARW Tech Note (http://www.mmm.ucar.edu/wrf/users/docs/arw_v3.pdf), which describes the equations, numerics, boundary conditions, and nesting etc. in greater detail.

Highlights of updates to WRFV3.6 include:

- WRF model:
 - New physics:*
 - Sub-tiling capability for Noah LSM (contributed by Dan Li of Princeton)
 - Lake model (contributed by Hongping Gu of IAP China and Jiming Jin of Utah State University)
 - Full and 'fast' versions of HUIJ spectral bin microphysics (contributed by Alex Khain and Barry Lynn of Hebrew University of Jerusalem, Israel)
 - Improved aerosol input capability for use in RRTMG and new Goddard radiation options (contributed by Jose Ruiz-Arias of University of Jaen, Spain)
 - Sub-grid cloud fraction from Kain-Fritsch scheme (contributed by Alapaty and Herwehe of EPA)
 - Vertical structure function in SKEBS (contributed by J. Berner of NCAR)
 - Others:*
 - Improved wind farm parameterization (contributed by Pedro Jimenez of Spain, and Henning Heiberg-Andersen of Uni Rersearch, Norway)
 - Improvement to NoahMP
 - WRF-Hydro 2.0 (contributed by NCAR/RAL)
 - Diagnostic option (contributed by AFWA)
 - Faster netCDF write (contributed by Jim Abeles of IBM and J. Michalakes of NCEP)
 - 12-monthly, 30-sec Leaf-Area Index dataset derived from MODIS (contributed by M. Barlage of NCAR/RAL)
 - 15-seconds MODIS landuse dataset (contributed by Patrick Broxton and Xubin Zeng of Univ of Arizona)
- WRF-DA updates:
 - New instruments which can be assimilated: Meteosat SEVIRI (IR radiance), AIREP humidity and Metop-B instruments (IASI, AMSU-A and MHS)
 - Observation thinning for conventional obs in ASCII format
 - Dual-resolution hybrid assimilation
 - Radiative transfer code updated: CRTM is up to 2.1.3, and RTTOV 11.1
- WRF-Chemistry
 - Improvement on existing code and packages.

For the latest version of this document, please visit the ARW Users' Web site at <http://www.mmm.ucar.edu/wrf/users/>.

Contributors to this guide:

Wei Wang, Cindy Bruyère, Michael Duda, Jimmy Dudhia, Dave Gill, Michael Kavulich, Kelly Keene, Hui-Chuan Lin, John Michalakes, Syed Rizvi, Xin Zhang, Judith Berner and Kate Smith

Contributors to WRF-Fire chapter:

Jonathan D. Beezley, Janice L. Coen, and Jan Mandel

Contributors to UPP section:

Hui-Ya Chuang, Nicole McKee, Tricia Slovacek, Jamie Wolff, and Kate Smith

Special Acknowledgment:

We gratefully acknowledge the late Dr. Thomas T. Warner for his years of research, development, instruction, leadership, and motivation in the field of NWP modeling.

1. Overview

- Introduction 1-1
- The WRF Modeling System Program Components 1-2

2. Software Installation

- Introduction 2-1
- Required Compilers and Scripting Languages..... 2-2
- Required/Optional Libraries to Download 2-3
- Post-Processing Utilities..... 2-4
- UNIX Environment Settings 2-4
- Building the WRF Code..... 2-5
- Building the WPS Code..... 2-6
- Building the WRFDA Code (for 3DVAR) 2-7
- Building the WRFDA Code (for 4DVAR) 2-9

3. The WRF Preprocessing System (WPS)

- Introduction 3-1
- Function of Each WPS Program 3-2
- Installing the WPS..... 3-4
- Running the WPS..... 3-7
- Creating Nested Domains with the WPS 3-20
- Selecting Between USGS and MODIS-based
Land Use Data 3-22
- Selecting Static Data for the Gravity Wave Drag Scheme 3-23
- Using Multiple Meteorological Data Sources 3-23
- Alternative Initialization of Lake SSTs..... 3-26
- Parallelism in the WPS..... 3-28
- Checking WPS Output 3-29
- WPS Utility Programs..... 3-30
- Writing Meteorological Data to the Intermediate Format..... 3-33
- Creating and Editing Vtables..... 3-35
- Writing Static Data to the Geogrid Binary Format 3-37
- Creating an Urban Fraction Field from NLCD Data 3-40
- Description of Namelist Variables 3-42
- Description of GEOGRID.TBL Options 3-47
- Description of index Options 3-50
- Description of METGRID.TBL Options..... 3-53
- Available Interpolation Options in Geogrid and Metgrid 3-56
- Land Use and Soil Categories in the Static Data 3-59
- WPS Output Fields..... 3-61

4. WRF Initialization

- Introduction 4-1
- Initialization for Ideal Cases 4-3

- Initialization for Real Data Cases	4-6
--	-----

5. WRF Model

- Introduction	5-1
- Installing WRF	5-2
- Running WRF	5-8
- Examples of namelists for various applications	5-32
- Check Output	5-35
- Trouble Shooting.....	5-36
- Physics and Dynamics Options.....	5-36
- Summary of PBL Physics Options.....	5-49
- Summary of Microphysics Options.....	5-50
- Summary of Cumulus Parameterization Options.....	5-52
- Summary of Radiation Physics Options.....	5-53
- Description of Namelist Variables	5-56
- WRF Output Fields.....	5-105

6. WRF Data Assimilation

- Introduction	6-1
- Installing WRFDA for 3D-Var Run.....	6-3
- Installing WRFPLUS and WRFDA for 4D-Var Run	6-8
- Running Observation Preprocessor (OBSPROC)	6-9
- Running WRFDA.....	6-13
- Radiance Data Assimilations in WRFDA	6-21
- Precipitation Data Assimilation in WRFDA 4D-Var.....	6-31
- Updating WRF boundary conditions	6-34
- Running gen_be.....	6-36
- Additional WRFDA Exercises.....	6-39
- WRFDA with Multivariate Background Error (MBE) Statistics...6-42	
- WRFDA Diagnostics	6-43
- Hybrid Data Assimilation	6-47
- ETKF Data Assimilation.....	6-51
- Description of Namelist Variables	6-56

7. Objective Analysis (OBSGRID)

- Introduction	7-1
- Program Flow.....	7-2
- Source of Observations.....	7-3
- Objective Analysis techniques in OBSGRID	7-4
- Quality Control for Observations	7-6
- Additional Observations	7-7
- Surface FDDA option	7-7
- Objective Analysis on Model Nests.....	7-8

– How to run OBSGRID	7-8
– Output Files	7-10
– Plot Utilities	7-13
– Observations Format	7-15
– OBSGRID Namelist	7-18

8. WRF Software

– WRF Build Mechanism	8-1
– Registry	8-5
– I/O Applications Program Interface (I/O API)	8-14
– Timekeeping	8-14
– Software Documentation	8-15
– Performance	8-15

9. Post-Processing Programs

– Introduction	9-1
– NCL	9-2
– RIP4	9-20
– ARWpost	9-29
– UPP	9-36
– VAPOR	9-59

10. Utilities and Tools

– Introduction	10-1
– read_wrf_nc	10-1
– iowrf.	10-5
– p_interp	10-6
– TC Bogus Scheme	10-9
– v_interp	10-11
– proc_oml.f	10-13
– Tools	10-14

Appendix A: WRF-Fire

– Introduction	A-1
– WRF_Fire in idealized cases	A-3
– Fire variables in namelist.input	A-4
– namelist.fire	A-5
– Running WRF_Fire on real data	A-6
– Fire state variables	A-12
– WRF-Fire software	A-12

Chapter 1: Overview

Table of Contents

- [Introduction](#)
- [The WRF ARW Modeling System Program Components](#)

Introduction

The Advanced Research WRF (ARW) modeling system has been in development for the past few years. The current release is Version 3, available since April 2008. The ARW is designed to be a flexible, state-of-the-art atmospheric simulation system that is portable and efficient on available parallel computing platforms. The ARW is suitable for use in a broad range of applications across scales ranging from meters to thousands of kilometers, including:

- Idealized simulations (e.g. LES, convection, baroclinic waves)
- Parameterization research
- Data assimilation research
- Forecast research
- Real-time NWP
- Hurricane research
- Regional climate research
- Coupled-model applications
- Teaching

The Mesoscale and Microscale Meteorology Division of NCAR is currently maintaining and supporting a subset of the overall WRF code (Version 3) that includes:


- WRF Software Framework (WSF)
- Advanced Research WRF (ARW) dynamic solver, including one-way, two-way nesting and moving nest.
- The WRF Preprocessing System (WPS)
- WRF Data Assimilation (WRF-DA) system which currently supports 3DVAR 4DVAR, and hybrid data assimilation capabilities
- Numerous physics packages contributed by WRF partners and the research community
- Several graphics programs and conversion programs for other graphics tools

And these are the subjects of this document.

The WRF modeling system software is in the public domain and is freely available for community use.

The WRF Modeling System Program Components

The following figure shows the flowchart for the WRF Modeling System Version 3.

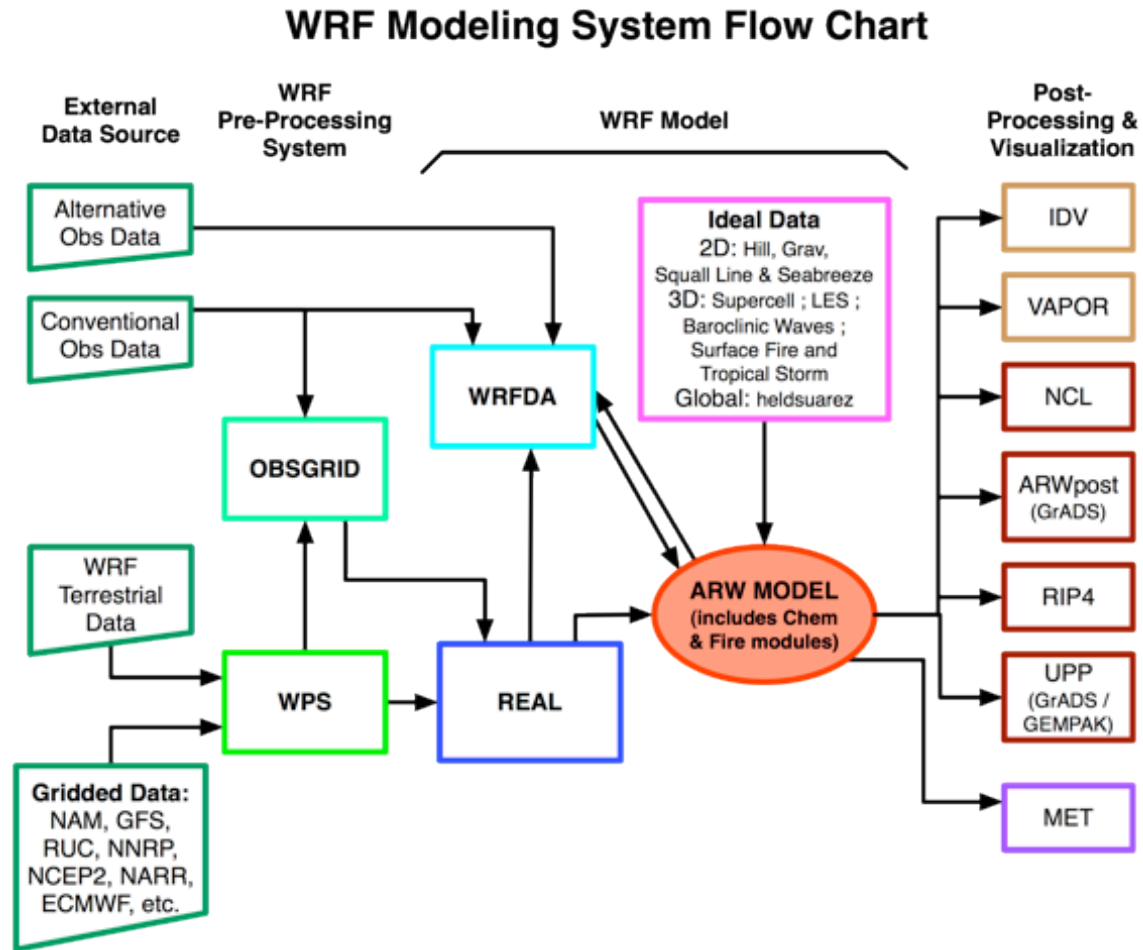

As shown in the diagram, the WRF Modeling System consists of these major programs:

- The WRF Preprocessing System (WPS)
- WRF-DA
- ARW solver
- Post-processing & Visualization tools

WPS

This program is used primarily for real-data simulations. Its functions include 1) defining simulation domains; 2) interpolating terrestrial data (such as terrain, landuse, and soil

types) to the simulation domain; and 3) degribbing and interpolating meteorological data from another model to this simulation domain. Its main features include:

- GRIB 1/2 meteorological data from various centers around the world
- USGS 24 category and MODIS 20 category land datasets; USGS GTOPO30 elevation dataset; Global 5-minutes United Nation FAO, and North-America STATSGO 30 sec soil category dataset; 10-min greenness fraction data based on AVHRR and 30-sec greenness fraction data based on 10 years MODIS; MODIS-based leaf-area index; 0.15 degree monthly albedo and snow albedo data; and 1-degree deep soil temperature data; plus a few specialized datasets
- Map projections for 1) polar stereographic, 2) Lambert-Conformal, 3) Mercator and 4) latitude-longitude
- Nesting
- User-interfaces to input other static data as well as met data

WRF-DA

This program is optional, but can be used to ingest observations into the interpolated analyses created by WPS. It can also be used to update WRF model's initial conditions when the WRF model is run in cycling mode. Its main features are as follows:

- It is based on an incremental variational data assimilation technique, and has both 3D-Var and 4D-Var capabilities
- It also includes the capability of hybrid data assimilation (Variational + Ensemble)
- The conjugate gradient method is utilized to minimize the cost function in the analysis control variable space
- Analysis is performed on an un-staggered Arakawa A-grid
- Analysis increments are interpolated to staggered Arakawa C-grid and it gets added to the background (first guess) to get the final analysis of the WRF-model grid
- Conventional observation data input may be supplied either in ASCII format via the “obsproc” utility or “PREPBUFR” format.
- Multiple satellite observation data input may be supplied in BUFR format
- Multiple radar data (reflectivity & radial velocity) input is supplied through ASCII format
- Multiple outer loop to address the nonlinearity
- Capability to compute adjoint sensitivity
- Horizontal component of the background (first guess) error is represented via a recursive filter (for regional) or power spectrum (for global). The vertical component is applied through projections on climatologically generated averaged eigenvectors and its corresponding Eigen values
- Horizontal and vertical background errors are non-separable. Each eigenvector has its own horizontal climatologically-determined length scale
- Preconditioning of the background part of the cost function is done via the control variable transform U defined as $B = UU^T$

- It includes the “gen_be” utility to generate the climatological background error covariance estimate via the NMC-method or ensemble perturbations
- A utility program to update WRF boundary condition file after WRF-DA

ARW Solver

This is the key component of the modeling system, which is composed of several initialization programs for idealized, and real-data simulations, and the numerical integration program. The key features of the WRF model include:

- Fully compressible nonhydrostatic equations with hydrostatic option
- Regional and global applications
- Complete Coriolis and curvature terms
- Two-way nesting with multiple nests and nest levels
- Concurrent one-way nesting with multiple nests and nest levels
- Offline one-way nesting with vertical nesting
- Moving nests (prescribed moves and vortex tracking)
- Mass-based terrain-following coordinate
- Vertical grid-spacing can vary with height
- Map-scale factors for these projections:
 - polar stereographic (conformal)
 - Lambert-conformal
 - Mercator (conformal)
 - Latitude and longitude, which can be rotated
- Arakawa C-grid staggering
- Runge-Kutta 2nd and 3rd order time integration options
- Scalar-conserving flux form for prognostic variables
- 2nd to 6th order advection options (horizontal and vertical)
- Monotonic transport and positive-definite advection option for moisture, scalar, tracer, and TKE
- Weighted Essentially Non-Oscillatory (WENO) advection option
- Time-split small step for acoustic and gravity-wave modes:
 - small step horizontally explicit, vertically implicit
 - divergence damping option and vertical time off-centering
 - external-mode filtering option
- Upper boundary absorption and Rayleigh damping
- Lateral boundary conditions
 - idealized cases: periodic, symmetric, and open radiative
 - real cases: specified with relaxation zone
- Full physics options for land-surface, planetary boundary layer, atmospheric and surface radiation, microphysics and cumulus convection
- Ocean models
- Grid analysis nudging using separate upper-air and surface data, and observation nudging
- Spectral nudging
- Digital filter initialization

- Adaptive time stepping
- Orographic gravity wave drag
- Stochastic kinetic-energy backscatter scheme
- A number of idealized examples

Graphics and Verification Tools

Several programs are supported, including RIP4 (based on NCAR Graphics), NCAR Graphics Command Language (NCL), and conversion programs for other readily available graphics packages like GrADS.

Program VAPOR, **V**isualization and **A**nalysis **P**latform for **O**cean, **A**tmosphere, and **S**olar **R**esearchers (<http://www.vapor.ucar.edu/>), is a 3-dimensional data visualization tool, and it is developed and supported by the VAPOR team at NCAR (vapor@ucar.edu).

Program MET, **M**odel **E**valuation **T**ools (<http://www.dtcenter.org/met/users/>), is developed and supported by the Developmental Testbed Center at NCAR (met_help@ucar.edu).

The details of these programs (with the exception of the MET program) are described more in the later chapters of this user's guide. See the above link for information about MET.

Chapter 2: Software Installation

Table of Contents

- [Introduction](#)
- [Required Compilers and Scripting Languages](#)
- [Required/Optional Libraries to Download](#)
- [Post-Processing Utilities](#)
- [UNIX Environment Settings](#)
- [Building the WRF Code](#)
- [Building the WPS Code](#)
- [Building the WRFDA Code \(for 3DVAR\)](#)
- [Building the WRFDA Code \(for 4DVAR\)](#)

Introduction

The [WRF](#) modeling system [software](#) installation is fairly straightforward on the ported platforms listed below. The model-component portion of the package is mostly self-contained. The WRF model does contain the source code to a Fortran interface to ESMF and the source to FFTPACK. Contained within the WRF system is the WRFDA component, which has several external libraries that the user must install (for various observation types and linear algebra solvers). Similarly, the WPS package, separate from the WRF source code, has additional external libraries that must be built (in support of Grib2 processing). The one external package that all of the systems require is the netCDF library, which is one of the supported I/O API packages. The netCDF libraries and source code are available from the [Unidata](http://www.unidata.ucar.edu) homepage at <http://www.unidata.ucar.edu> (select DOWNLOADS, registration required).

There are three tar files for the WRF code. The first is the WRF model (including the real and ideal pre-processors). The second is the WRFDA code. The third tar file is for WRF chemistry. In order to run the WRF chemistry code, both the WRF model and the chemistry tar file must be combined.

The WRF model has been successfully ported to a number of Unix-based machines. We do not have access to all of them and must rely on outside users and vendors to supply the required configuration information for the compiler and loader options. Below is a list of the supported combinations of hardware and software for WRF.

Vendor	Hardware	OS	Compiler
Cray	XC30 Intel	Linux	Intel
Cray	XE AMD	Linux	Intel
IBM	Power Series	AIX	vendor
IBM	Intel	Linux	Intel / PGI / gfortran
SGI	IA64 / Opteron	Linux	Intel
COTS*	IA32	Linux	Intel / PGI / gfortran / g95 / PathScale
COTS	IA64 / Opteron	Linux	Intel / PGI / gfortran / PathScale
Mac	Power Series	Darwin	xlf / g95 / PGI / Intel
Mac	Intel	Darwin	gfortran / PGI / Intel
NEC	NEC	Linux	vendor
Fujitsu	FX10 Intel	Linux	vendor

* Commercial Off-The-Shelf systems

The WRF model may be built to run on a single-processor machine, a shared-memory machine (that uses the OpenMP API), a distributed memory machine (with the appropriate MPI libraries), or on a distributed cluster (utilizing both OpenMP and MPI). The WRFDA and WPS packages run on the above-listed systems.

Required Compilers and Scripting Languages

The majority of the WRF model, WPS, and WRFDA codes are written in Fortran (what many refer to as Fortran 90). The software layer, [RSL](#), which sits between WRF and WRFDA, and the MPI interface is written in C. WPS makes direct calls to the MPI libraries for distributed memory message passing. There are also ancillary programs that are written in C to perform file parsing and file construction, which are required for default building of the WRF modeling code. Additionally, the WRF build mechanism uses several scripting languages: including [perl](#), Cshell and Bourne shell. The traditional UNIX text/file processing utilities are used: make, m4, sed, and awk. See Chapter 8: WRF Software (Required Software) for a more detailed listing of the necessary pieces for the WRF build.

Required/Optional Libraries to Download

The only library that is *always* required is the netCDF package from [Unidata](#) (login > Downloads > NetCDF). Most of the WRF post-processing packages assume that the data from the WRF model, the WPS package, or the WRFDA program are using the netCDF libraries. One may also need to add '/path-to-netcdf/netcdf/bin' to their path so that they may execute netCDF utility commands, such as **ncdump**. Use a netCDF version that is 3.6.1 or later. [To utilize the compression capabilities, use netCDF 4.0 or later. Note that compression will require the use of HDF5.](#)

Note 1: If one wants to compile WRF system components on a Linux or Darwin system that has access to multiple compilers, link the correct external libraries. For example, do not link the libraries built with PathScale when compiling the WRF components with gfortran. Even more, the same options when building the netCDF libraries must be used when building the WRF code (32 vs 64 bit, assumptions about underscores in the symbol names, etc.).

Note 2: If netCDF-4 is used, be sure that it is installed without activating parallel I/O based on HDF5. The WRF modeling system is able to use either the classic data model from netCDF-3 or the compression options supported in netCDF-4.

If you are going to be running distributed memory WRF jobs, you need a version of MPI. You can pick up a version of [mpich](#), but you might want your system group to install the code. A working installation of MPI is required prior to a build of WRF using distributed memory. Either MPI-1 or MPI-2 are acceptable. Do you already have an MPI lying around? Try

```
which mpif90
which mpicc
which mpirun
```

If these are all defined executables in your path, you are probably OK. Make sure your paths are set up to point to the MPI **lib**, **include**, and **bin** directories. As with the netCDF libraries, you must build MPI consistently with the WRF source code.

Note that to output WRF model data in Grib1 format, Todd Hutchinson ([WSI](#)) has provided a complete source library that is included with the software release. However, when trying to link the WPS, the WRF model, and the WRFDA data streams together, always use the netCDF format.

[Note 3:](#) The entire step-by-step recipe for building the WRF and WPS packages is available at: http://www2.mmm.ucar.edu/wrf/OnLineTutorial/compilation_tutorial.php This page includes complete turn-key directions, from tests of your machines's utilities all the way up through where to download real-time data.

Post-Processing Utilities

The more widely used (*and therefore supported*) WRF post-processing utilities are:

- NCL ([homepage](#) and [WRF download](#))
 - NCAR Command Language written by NCAR's Computer Information Systems Laboratory (formerly the Scientific Computing Division)
 - NCL scripts written and maintained by WRF support
 - many template scripts are provided that are tailored for specific real-data and ideal-data cases
(http://www2.mmm.ucar.edu/wrf/OnLineTutorial/Graphics/NCL/NCL_examples.htm)
 - raw WRF output can be input with the NCL scripts
 - interactive or command-file driven
- GrADS ([homepage](#) and [WRF download](#))
 - download GrADS executable, build format converter
 - programs (*ARWpost*) are available to convert the WRF output into an input format suitable for GrADS
 - simple to generate publication quality
 - interactive or command-file driven
- RIP4 ([homepage](#) and [WRF download](#))
 - RIP4 written and maintained by Mark Stoelinga, UW
 - interpolation to various surfaces, trajectories, hundreds of diagnostic calculations
 - Fortran source provided
 - based on the NCAR Graphics package
 - pre-processor converts WRF, WPS, and WRFDA data to RIP input format
 - table driven

UNIX Environment Settings

There are only a few environmental settings that are WRF system related. Most of these are not required, but when things start acting badly, test some out. In Cshell syntax:

- **setenv WRF_EM_CORE 1**
 - explicitly defines which model core to build
- **setenv WRF_NMM_CORE 0**
 - explicitly defines which model core NOT to build
- **setenv WRF_DA_CORE 0**
 - explicitly defines no data assimilation
- **setenv NETCDF /usr/local/netcdf** (or wherever you have it stored)
 - all of the WRF components want both the lib and the include directories
- **setenv OMP_NUM_THREADS *n*** (where *n* is the number of procs to use)

- if you have OpenMP on your system, this is how to specify the number of threads
- **setenv MP_STACK_SIZE 64000000**
 - OpenMP blows through the stack size, set it large
 - However, if the model still crashes, it may be a problem of over-specifying stack size. Set stack size sufficiently large, but not unlimited.
 - On some systems, the equivalent parameter could be KMP_STACKSIZE, or OMP_STACKSIZE
- **unlimit**
 - especially if you are on a small system

Building the WRF Code

The WRF code has a fairly complicated build mechanism. It tries to determine the architecture that you are on, and then presents you with options to allow you to select the preferred build method. For example, if you are on a Linux machine, it determines whether this is a 32 or 64 bit machine, and then prompts you for the desired usage of processors (such as serial, shared memory, or distributed memory). You select from among the available compiling options in the build mechanism. For example, do not choose a PGI build if you do not have PGI compilers installed on your system.

An instructional web site describes the sequence of steps required to build the WRF and WPS codes (though the instructions are specifically given for tcsh and GNU compilers).

http://www2.mmm.ucar.edu/wrf/OnLineTutorial/compilation_tutorial.php

- Get the WRF zipped tar file for WRFV3 from
 - http://www2.mmm.ucar.edu/wrf/users/download/get_source.html
 - Always get the latest version if you are not trying to continue a long project, or duplicate previous work
- **unzip and untar the file**
 - **gzip -cd WRFV3.TAR.gz | tar -xf -**
 - Alternatively **tar -xzf WRFV3.TAR.gz** on some systems
- **cd WRFV3**
- **./configure**
 - **serial** means single processor
 - **smpar** means Symmetric Multi-Processing/Shared Memory Parallel (OpenMP) – this does not reliably work on most non-IBM machines
 - **dmpar** means Distributed Memory Parallel (MPI)
 - **dm+sm** means Distributed Memory with Shared Memory (for example, MPI across nodes with OpenMP within a node) – usually better performance is through **dmpar** only
 - The second option is for nesting: 0 = no nesting, 1 = standard static nesting, 2 = nesting with a prescribed set of moves, 3 = nesting that allows

- o a domain to follow a vortex (typhoon tracking)
- o A typical option that may be included on the `./configure` command is the flag “`-d`” (for debug). This option removes optimization, which is useful when running a debugger (such as `gdb` or `dbx`)
- o For bounds checking and some additional exception handling, the debugging flag “`-D`” may be selected. Only PGI, Intel, and `gfortran` have been set up to use this option.
- `./compile em_real` (or any of the directory names in `./WRFV3/test` directory)
- `ls -ls main/*.exe`
 - o If you built a real-data case, you should see `ndown.exe`, `real.exe`, and `wrf.exe`
 - o If you built an ideal-data case, you should see `ideal.exe` and `wrf.exe`

The WRF code supports a parallel *build* option, an option that compiles separate source code files in the WRF directories at the same time on separate processors (though those processors need to share memory) via a parallel make. The purpose of the parallel build option is to be able to speed-up the time required to construct executables. In practice, users typically see approximately a 2x speed-up, a limit imposed by the various dependencies in the code due to modules and USE association. To enable the parallel build option, the user sets an environment variable, `J`. In `csh`, to utilize two processors, before the `./compile` command, issue the following:

```
setenv J "-j 2"
```

Users may wish to only use a single processor for the build. In which case:

```
setenv J "-j 1"
```

Users wishing to run the WRF chemistry code must first download the WRF model tar file, and untar it. Then the chemistry code is untar’ed in the WRFV3 directory (this is the **chem** directory structure). Once the source code from the tar files is combined, then users may proceed with the WRF chemistry build.

Building the WPS Code

Building WPS requires that WRFV3 be already built.

If you plan to use Grib2 data, additional libraries for zlib, png, and jasper are required. Please see details in Chapter 3.

- Get the WPS zipped tar file `WPSV3.TAR.gz` from
 - o http://www2.mmm.ucar.edu/wrf/users/download/get_source.html
- Also download the geographical datasets from the same page. There are new data sets for land cover for North America (NLCD), and high-resolution urban data sets for select North American cities.
- Unzip and untar the source code file
 - o `gzip -cd WPSV3.TAR.gz | tar -xf -`

-
- **cd WPS**
 - **./configure**
 - Choose one of the options
 - Usually, serial builds are the best for an initial test. Most large domains work with a single processor for WPS
 - WPS requires that you build for the appropriate Grib decoding. Select an option that is suitable for the data you will use with the ungrib program (the Grib2 option will work for either Grib1 or Grib2 data)
 - If you select a Grib2 option, you must have those libraries prepared and built in advance (see the chapter on WPS for the location of these compression libraries). Add the paths to these libraries and include files using variables `COMPRESSION_LIBS` and `COMPRESSION_INC` in **configure.wps**. Also inside the **configure.wps** file is the location of the built WRFV3 directory, which needs to be modified. This is how the WPS picks up all of the required IO pieces to build the **geogrid.exe** and **metgrid.exe** files.
 - **./compile**
 - **ls -ls *.exe**
 - You should see **geogrid.exe**, **ungrib.exe**, and **metgrid.exe** (if you are missing both **geogrid.exe** and **metgrid.exe**, you probably need to fix where the path to WRF is pointing in the **configure.wps** file; if you are missing **ungrib.exe**, try a Grib1-only build to further isolate the problem)
 - **ls -ls util/*.exe**
 - You should see a number of utility executables: **avg_tsfc.exe**, **calc_ecmwf_p.exe**, **glprint.exe**, **g2print.exe**, **height_ukmo.exe**, **mod_levs.exe**, **plotfmt.exe**, **plotgrids.exe**, and **rd_intermediate.exe** (files requiring NCAR Graphics are **plotfmt.exe** and **plotgrids.exe**)
 - If **geogrid.exe** and **metgrid.exe** executables are missing, the path to the built WRFV3 directory structure is probably incorrect (found inside the **configure.wps** file)
 - If the **ungrib.exe** is missing, the Grib2 libraries are probably not linked or built correctly
 - If the **plotfmt.exe** or the **plotgrids.exe** programs is missing, the NCAR Graphics path is probably set incorrectly

Building the WRFDA Code (for 3DVAR)

WRFDA uses the same build mechanism as WRF; thus, this mechanism must be instructed to configure and build the code for WRFDA rather than WRF. Additionally, the paths to libraries needed by WRFDA code must be set, as described in the steps below.

- Get the WRFDA zipped tar file, WRFDA_V3.6.1.TAR.gz, from http://www2.mmm.ucar.edu/wrf/users/download/get_source.html
- Unzip and untar the WRFDA code
 - **tar -xf WRFDA_V3.6.1.TAR.gz**
 - This will create a directory, **WRFDA**
- **cd WRFDA**
 - In addition to netCDF, set up environmental variables pointing to additional libraries required by WRFDA, such as RTTOV
 - Please note: only the netCDF library is mandatory to compile the basic WRFDA system; all other libraries are optional
 - If you intend to use satellite radiance data, an RTM (Radiative Transfer Model) is required. The current RTM versions that WRFDA uses are **CRTM v2.1.3** and **RTTOV v11**. WRFDA can compile with CRTM only, or RTTOV only, or both CRTM and RTTOV together

To compile WRFDA with CRTM: **setenv CRTM 1**

(Note: the latest available CRTM, version 2.1.3, is included in this release version and it will be compiled automatically when the appropriate environmental variable is set. Users do not need to download and install the CRTM).

To compile WRFDA with RTTOV: RTTOV still must be downloaded (http://research.metoffice.gov.uk/research/interproj/nwpsaf/rtm/rtm_rtov11.html) and installed using the same compiler that will be used to build WRFDA, since the library produced by one compiler may not be compatible with code compiled with another. Then, the necessary environment variable should be set with

setenv RTTOV \${path_for_RTTOV}

- **./configure wrfda**
 - **serial** means single processor
 - **dmpar** means Distributed Memory Parallel (MPI)
 - **smpar** and **dm+sm** are not recommended for use with WRFDA
- WRFDA also supports [parallel build](#).
- **./compile all_wrfvar**
- **ls -ls var/build/*.exe**
 - If the compilation was successful, **da_wrfvar.exe**, **da_update_bc.exe**, and other executables should be found in the var/build directory. Their links are in the var/da directory; **obsproc.exe** should be found in the var/obsproc/src directory

Building the WRFDA Code (for 4DVAR)

Building WRFDA 4DVAR requires that WRFPLUSV3.6.1 be already built.

- Get the WRFPLUSV3.6.1 zipped tar file WRFPLUS_V3.6.1_r7511.tar.gz from
 - <http://www2.mmm.ucar.edu/wrf/users/download/wrfplus.html>
- unzip and untar the source code file
 - **tar -xf WRFPLUS_V3.6.1_r7511.tar.gz**
- **cd WRFPLUSV3**
- **./configure wrfplus**
 - **serial** means single processor
 - **dmpar** means Distributed Memory Parallel (MPI)
 - (Note: WRFPLUS does not support Shared Memory Parallel and WRFPLUS is compiled as realsize=8)
- WRFPLUS also supports [parallel build](#).
- **./compile em_real**
- **ls -ls main/*.exe**
 - you should see **ndown.exe**, **real.exe**, and **wrf.exe**
- Set up the environmental variable pointing to WRFPLUS_DIR.
 - **setenv WRFPLUS_DIR \${path_of_wrfplusv3.4}** (csh)
 - **export WRFPLUS_DIR=\${path_of_wrfplusv3.4}** (bash)
- Please refer to above section “[Building WRFDA code \(for 3DVAR\)](#)” to download code and set up necessary environmental variables.
- **./configure 4dvar**
 - **serial** means single processor
 - **dmpar** means Distributed Memory Parallel (MPI)
- **./compile all_wrfvar**
- **ls -ls var/build/*.exe**
 - If the compilation was successful, **da_wrfvar.exe**, **da_update_bc.exe**, and other executables should be found in the var/build directory. Their links are in the var/da directory; **obsproc.exe** should be found in the var/obsproc/src directory


Chapter 3: WRF Preprocessing System (WPS)

Table of Contents

- [Introduction](#)
- [Function of Each WPS Program](#)
- [Installing the WPS](#)
- [Running the WPS](#)
- [Creating Nested Domains with the WPS](#)
- [Selecting Between USGS and MODIS-based Land Use Data](#)
- [Selecting Static Data for the Gravity Wave Drag Scheme](#)
- [Using Multiple Meteorological Data Sources](#)
- [Alternative Initialization of Lake SSTs](#)
- [Parallelism in the WPS](#)
- [Checking WPS Output](#)
- [WPS Utility Programs](#)
- [Writing Meteorological Data to the Intermediate Format](#)
- [Creating and Editing Vtables](#)
- [Writing Static Data to the Geogrid Binary Format](#)
- [Creating an Urban Fraction Field from NLCD Data](#)
- [Description of Namelist Variables](#)
- [Description of GEOGRID.TBL Options](#)
- [Description of index Options](#)
- [Description of METGRID.TBL Options](#)
- [Available Interpolation Options in Geogrid and Metgrid](#)
- [Land Use and Soil Categories in the Static Data](#)
- [WPS Output Fields](#)

Introduction

The WRF Preprocessing System (WPS) is a set of three programs whose collective role is to prepare input to the *real* program for real-data simulations. Each of the programs performs one stage of the preparation: *geogrid* defines model domains and interpolates static geographical data to the grids; *ungrib* extracts meteorological fields from GRIB-formatted files; and *metgrid* horizontally interpolates the meteorological fields extracted by *ungrib* to the model grids defined by *geogrid*. The work of vertically interpolating meteorological fields to WRF eta levels is performed within the *real* program.

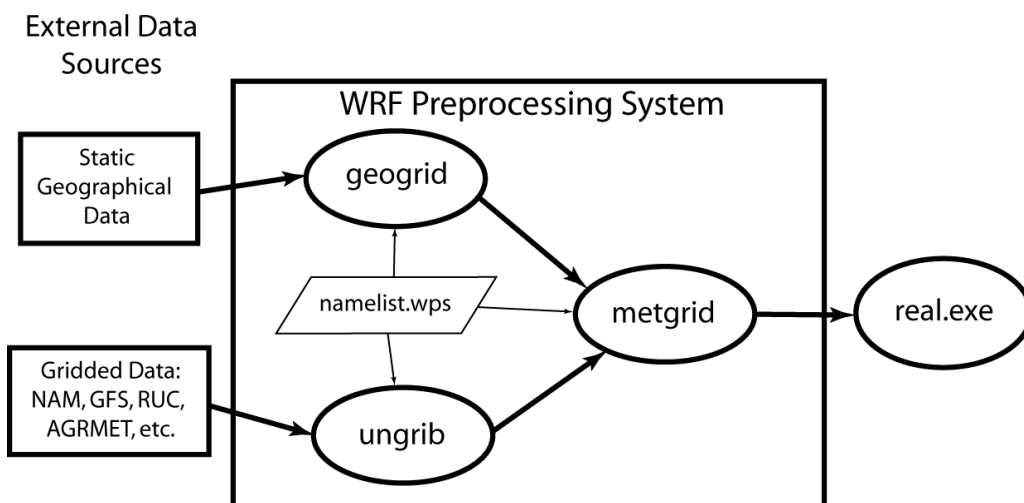

The data flow between the programs of the WPS is shown in the figure above. Each of the WPS programs reads parameters from a common namelist file, as shown in the figure. This namelist file has separate namelist records for each of the programs and a shared namelist record, which defines parameters that are used by more than one WPS program. Not shown in the figure are additional table files that are used by individual programs. These tables provide additional control over the programs' operations, though they generally do not need to be changed by the user. The [GEOGRID.TBL](#), [METGRID.TBL](#), and [Vtable](#) files are explained later in this document, though for now, the user need not be concerned with them.

The build mechanism for the WPS, which is very similar to the build mechanism used by the WRF model, provides options for compiling the WPS on a variety of platforms. When MPI libraries and suitable compilers are available, the *metgrid* and *geogrid* programs may be compiled for distributed memory execution, which allows large model domains to be processed in less time. The work performed by the *ungrib* program is not amenable to parallelization, so *ungrib* may only be run on a single processor.

Function of Each WPS Program

The WPS consists of three independent programs: *geogrid*, *ungrib*, and *metgrid*. Also included in the WPS are several utility programs, which are described in the section on [utility programs](#). A brief description of each of the three main programs is given below, with further details presented in subsequent sections.

Program *geogrid*

The purpose of *geogrid* is to define the simulation domains, and interpolate various terrestrial data sets to the model grids. The simulation domains are defined using

information specified by the user in the “geogrid” namelist record of the WPS namelist file, namelist.wps. In addition to computing the latitude, longitude, and map scale factors at every grid point, geogrid will interpolate soil categories, land use category, terrain height, annual mean deep soil temperature, monthly vegetation fraction, monthly albedo, maximum snow albedo, and slope category to the model grids by default. Global data sets for each of these fields are provided through the WRF download page, and, because these data are time-invariant, they only need to be downloaded once. Several of the data sets are available in only one resolution, but others are made available in resolutions of 30", 2', 5', and 10'; here, " denotes arc seconds and ' denotes arc minutes. The user need not download all available resolutions for a data set, although the interpolated fields will generally be more representative if a resolution of data near to that of the simulation domain is used. However, users who expect to work with domains having grid spacings that cover a large range may wish to eventually download all available resolutions of the static terrestrial data.

Besides interpolating the default terrestrial fields, the geogrid program is general enough to be able to interpolate most continuous and categorical fields to the simulation domains. New or additional data sets may be interpolated to the simulation domain through the use of the table file, GEOGRID.TBL. The GEOGRID.TBL file defines each of the fields that will be produced by geogrid; it describes the interpolation methods to be used for a field, as well as the location on the file system where the data set for that field is located.

Output from geogrid is written in the WRF I/O API format, and thus, by selecting the NetCDF I/O format, geogrid can be made to write its output in NetCDF for easy visualization using external software packages, including ncview, NCL, and RIP4.

Program ungrib

The ungrib program reads GRIB files, "degrib" the data, and writes the data in a simple format called the intermediate format (see the section on [writing data to the intermediate format](#) for details on the format). The GRIB files contain time-varying meteorological fields and are typically from another regional or global model, such as NCEP's NAM or GFS models. The ungrib program can read GRIB Edition 1 and, if compiled with a "GRIB2" option, GRIB Edition 2 files.

GRIB files typically contain more fields than are needed to initialize WRF. Both versions of the GRIB format use various codes to identify the variables and levels in the GRIB file. Ungrib uses tables of these codes – called Vtables, for "variable tables" – to define which fields to extract from the GRIB file and write to the intermediate format. Details about the codes can be found in the WMO GRIB documentation and in documentation from the originating center. Vtables for common GRIB model output files are provided with the ungrib software.

Vtables are provided for NAM 104 and 212 grids, the NAM AWIP format, GFS, the NCEP/NCAR Reanalysis archived at NCAR, RUC (pressure level data and hybrid coordinate data), AFWA's AGRMET land surface model output, ECMWF, and other data

sets. Users can create their own Vtable for other model output using any of the Vtables as a template; further details on the meaning of fields in a Vtable are provided in the section on [creating and editing Vtables](#).

Ungrib can write intermediate data files in any one of three user-selectable formats: WPS – a new format containing additional information useful for the downstream programs; SI – the previous intermediate format of the WRF system; and MM5 format, which is included here so that ungrib can be used to provide GRIB2 input to the MM5 modeling system. Any of these formats may be used by WPS to initialize WRF, although the WPS format is recommended.

Program metgrid

The metgrid program horizontally interpolates the intermediate-format meteorological data that are extracted by the ungrib program onto the simulation domains defined by the geogrid program. The interpolated metgrid output can then be ingested by the WRF real program. The range of dates that will be interpolated by metgrid are defined in the “share” namelist record of the WPS namelist file, and date ranges must be specified individually in the namelist for each simulation domain. Since the work of the metgrid program, like that of the ungrib program, is time-dependent, metgrid is run every time a new simulation is initialized.

Control over how each meteorological field is interpolated is provided by the METGRID.TBL file. The METGRID.TBL file provides one section for each field, and within a section, it is possible to specify options such as the interpolation methods to be used for the field, the field that acts as the mask for masked interpolations, and the grid staggering (e.g., U, V in ARW; H, V in NMM) to which a field is interpolated.

Output from metgrid is written in the WRF I/O API format, and thus, by selecting the NetCDF I/O format, metgrid can be made to write its output in NetCDF for easy visualization using external software packages, including the new version of RIP4.

Installing the WPS

The WRF Preprocessing System uses a build mechanism similar to that used by the WRF model. External libraries for geogrid and metgrid are limited to those required by the WRF model, since the WPS uses the WRF model's implementations of the WRF I/O API; consequently, *WRF must be compiled prior to installation of the WPS* so that the I/O API libraries in the WRF external directory will be available to WPS programs. Additionally, the ungrib program requires three compression libraries for GRIB Edition 2 support; however, if support for GRIB2 data is not needed, ungrib can be compiled without these compression libraries.

Required Libraries

The only library that is required to build the WRF model is NetCDF. The user can find the source code, precompiled binaries, and documentation at the UNIDATA home page (<http://www.unidata.ucar.edu/software/netcdf/>). Most users will select the NetCDF I/O option for WPS due to the easy access to utility programs that support the NetCDF data format, and before configuring the WPS, users should ensure that the environment variable NETCDF is set to the path of the NetCDF installation.

Where WRF adds a software layer between the model and the communications package, the WPS programs geogrid and metgrid make MPI calls directly. Most multi-processor machines come preconfigured with a version of MPI, so it is unlikely that users will need to install this package by themselves.

Three libraries are required by the ungrib program for GRIB Edition 2 compression support. Users are encouraged to engage their system administrators for the installation of these packages so that traditional library paths and include paths are maintained. Paths to user-installed compression libraries are handled in the `configure.wps` file by the `COMPRESSION_LIBS` and `COMPRESSION_INC` variables. As an alternative to manually editing the `COMPRESSION_LIBS` and `COMPRESSION_INC` variables in the `configure.wps` file, users may set the environment variables `JASPERLIB` and `JASPERINC` to the directories holding the JasPer library and include files *before configuring the WPS*; for example, if the JasPer libraries were installed in `/usr/local/jasper-1.900.1`, one might use the following commands (in `csh` or `tsh`):

```
> setenv JASPERLIB /usr/local/jasper-1.900.1/lib
> setenv JASPERINC /usr/local/jasper-1.900.1/include
```

If the `zlib` and `PNG` libraries are not in a standard path that will be checked automatically by the compiler, the paths to these libraries can be added on to the JasPer environment variables; for example, if the `PNG` libraries were installed in `/usr/local/libpng-1.2.29` and the `zlib` libraries were installed in `/usr/local/zlib-1.2.3`, one might use

```
> setenv JASPERLIB "${JASPERLIB} -L/usr/local/libpng-1.2.29/lib -
L/usr/local/zlib-1.2.3/lib"
> setenv JASPERINC "${JASPERINC} -I/usr/local/libpng-
1.2.29/include -I/usr/local/zlib-1.2.3/include"
```

after having previously set `JASPERLIB` and `JASPERINC`.

1) JasPer (an implementation of the JPEG2000 standard for "lossy" compression)

<http://www.ece.uvic.ca/~mdadams/jasper/>

Go down to "JasPer software", one of the "click here" parts is the source.

```
> ./configure
> make
> make install
```

Note: The GRIB2 libraries expect to find include files in "jasper/jasper.h", so it may be necessary to manually create a "jasper" subdirectory in the "include" directory created by the Jasper installation, and manually link header files there.

2) PNG (compression library for "lossless" compression)

<http://www.libpng.org/pub/png/libpng.html>

Scroll down to "Source code" and choose a mirror site.

```
> ./configure
> make check
> make install
```

3) zlib (a compression library used by the PNG library)

<http://www.zlib.net/>

Go to "The current release is publicly available here" section and download.

```
> ./configure
> make
> make install
```

To get around portability issues, the NCEP GRIB libraries, w3 and g2, have been included in the WPS distribution. The original versions of these libraries are available for download from NCEP at <http://www.nco.ncep.noaa.gov/pmb/codes/GRIB2/>. The specific tar files to download are g2lib and w3lib. Because the ungrib program requires modules from these files, they are not suitable for usage with a traditional library option during the link stage of the build.

Required Compilers and Scripting Languages

The WPS requires the same Fortran and C compilers as were used to build the WRF model, since the WPS executables link to WRF's I/O API libraries. After executing the `./configure` command in the WPS directory, a list of supported compilers on the current system architecture are presented.

WPS Installation Steps

- Download the `WPSV3.TAR.gz` file and unpack it at the same directory level as `WRFV3`, as shown below.

```
> ls
-rw-r--r--  1  563863 WPS.TAR.gz
drwxr-xr-x 18    4096 WRFV3

> gzip -d WPSV3.TAR.gz

> tar xf WPSV3.TAR

> ls
drwxr-xr-x  7    4096 WPS
-rw-r--r--  1 3491840 WPSV3.TAR
```

```
drwxr-xr-x 18      4096 WRFV3
```

- At this point, a listing of the current working directory should at least include the directories WRFV3 and WPS. First, compile WRF (see the instructions for installing WRF in Chapter 2). Then, after the WRF executables are generated, change to the WPS directory and issue the configure command followed by the compile command as below.

```
> cd WPS
```

```
> ./configure
```

- Choose one of the configure options

```
> ./compile >& compile.output
```

- After issuing the compile command, a listing of the current working directory should reveal symbolic links to executables for each of the three WPS programs: geogrid.exe, ungrib.exe, and metgrid.exe. If any of these links do not exist, check the compilation output in compile.output to see what went wrong.

```
> ls
```

```
drwxr-xr-x 2      4096 arch
-rwxr-xr-x 1      1672 clean
-rwxr-xr-x 1      3510 compile
-rw-r--r-- 1    85973 compile.output
-rwxr-xr-x 1      4257 configure
-rw-r--r-- 1      2486 configure.wps
drwxr-xr-x 4      4096 geogrid
lrwxrwxrwx 1         23 geogrid.exe -> geogrid/src/geogrid.exe
-rwxr-xr-x 1      1328 link_grib.csh
drwxr-xr-x 3      4096 metgrid
lrwxrwxrwx 1         23 metgrid.exe -> metgrid/src/metgrid.exe
-rw-r--r-- 1      1101 namelist.wps
-rw-r--r-- 1      1987 namelist.wps.all_options
-rw-r--r-- 1      1075 namelist.wps.global
-rw-r--r-- 1         652 namelist.wps.nmm
-rw-r--r-- 1      4786 README
drwxr-xr-x 4      4096 ungrib
lrwxrwxrwx 1         21 ungrib.exe -> ungrib/src/ungrib.exe
drwxr-xr-x 3      4096 util
```

Running the WPS

There are essentially three main steps to running the WRF Preprocessing System:

1. Define a model coarse domain and any nested domains with *geogrid*.

2. Extract meteorological fields from GRIB data sets for the simulation period with *ungrib*.
3. Horizontally interpolate meteorological fields to the model domains with *metgrid*.

When multiple simulations are to be run for the same model domains, it is only necessary to perform the first step once; thereafter, only time-varying data need to be processed for each simulation using steps two and three. Similarly, if several model domains are being run for the same time period using the same meteorological data source, it is not necessary to run *ungrib* separately for each simulation. Below, the details of each of the three steps are explained.

Step 1: Define model domains with *geogrid*

In the root of the WPS directory structure, symbolic links to the programs *geogrid.exe*, *ungrib.exe*, and *metgrid.exe* should exist if the WPS software was successfully installed. In addition to these three links, a *namelist.wps* file should exist. Thus, a listing in the WPS root directory should look something like:

```
> ls
drwxr-xr-x 2 4096 arch
-rwxr-xr-x 1 1672 clean
-rwxr-xr-x 1 3510 compile
-rw-r--r-- 1 85973 compile.output
-rwxr-xr-x 1 4257 configure
-rw-r--r-- 1 2486 configure.wps
drwxr-xr-x 4 4096 geogrid
lrwxrwxrwx 1 23 geogrid.exe -> geogrid/src/geogrid.exe
-rwxr-xr-x 1 1328 link_grib.csh
drwxr-xr-x 3 4096 metgrid
lrwxrwxrwx 1 23 metgrid.exe -> metgrid/src/metgrid.exe
-rw-r--r-- 1 1101 namelist.wps
-rw-r--r-- 1 1987 namelist.wps.all_options
-rw-r--r-- 1 1075 namelist.wps.global
-rw-r--r-- 1 652 namelist.wps.nmm
-rw-r--r-- 1 4786 README
drwxr-xr-x 4 4096 ungrib
lrwxrwxrwx 1 21 ungrib.exe -> ungrib/src/ungrib.exe
drwxr-xr-x 3 4096 util
```

The model coarse domain and any nested domains are defined in the “*geogrid*” *namelist* record of the *namelist.wps* file, and, additionally, parameters in the “*share*” *namelist* record need to be set. An example of these two *namelist* records is given below, and the user is referred to the [description of namelist variables](#) for more information on the purpose and possible values of each variable.

```
&share
wrf_core = 'ARW',
max_dom = 2,
start_date = '2008-03-24_12:00:00', '2008-03-24_12:00:00',
end_date   = '2008-03-24_18:00:00', '2008-03-24_12:00:00',
interval_seconds = 21600,
```

```

io_form_geogrid = 2
/

&geogrid
parent_id      = 1, 1,
parent_grid_ratio = 1, 3,
i_parent_start = 1, 31,
j_parent_start = 1, 17,
s_we           = 1, 1,
e_we           = 74, 112,
s_sn           = 1, 1,
e_sn           = 61, 97,
geog_data_res  = '10m', '2m',
dx = 30000,
dy = 30000,
map_proj = 'lambert',
ref_lat  = 34.83,
ref_lon  = -81.03,
truelat1 = 30.0,
truelat2 = 60.0,
stand_lon = -98.,
geog_data_path = '/mmm/users/wrfhelp/WPS_GEOG/'
/

```

To summarize a set of typical changes to the “share” namelist record relevant to geogrid, the WRF dynamical core must first be selected with `wrf_core`. If WPS is being run for an ARW simulation, `wrf_core` should be set to 'ARW', and if running for an NMM simulation, it should be set to 'NMM'. After selecting the dynamical core, the total number of domains (in the case of ARW) or nesting levels (in the case of NMM) must be chosen with `max_dom`. Since geogrid produces only time-independent data, the `start_date`, `end_date`, and `interval_seconds` variables are ignored by geogrid. Optionally, a location (if not the default, which is the current working directory) where domain files should be written to may be indicated with the `opt_output_from_geogrid_path` variable, and the format of these domain files may be changed with `io_form_geogrid`.


In the “geogrid” namelist record, the projection of the simulation domain is defined, as are the size and location of all model grids. The map projection to be used for the model domains is specified with the `map_proj` variable. Each of the four possible map projections in the ARW are shown graphically in the full-page figure below, and the namelist variables used to set the parameters of the projection are summarized in the following table.

Map projection / value of <code>map_proj</code>	Projection parameters
Lambert Conformal / 'lambert'	<code>truelat1</code> <code>truelat2</code> (optional) <code>stand_lon</code>
Mercator / 'mercator'	<code>truelat1</code>
Polar stereographic / 'polar'	<code>truelat1</code> <code>stand_lon</code>


Regular latitude-longitude, or cylindrical equidistant / 'lat-lon'	pole_lat pole_lon stand_lon
---	-----------------------------------

In the illustrations of the Lambert conformal, polar stereographic, and Mercator projections, it may be seen that the so-called true latitude (or true latitudes, in the case of the Lambert conformal), is the latitude at which the surface of projection intersects or is tangent to the surface of the earth. At this latitude, there is no distortion in the distances in the map projection, while at other latitudes, the distance on the surface of the earth is related to the distance on the surface of projection by a *map scale factor*. Ideally, the map projection and its accompanying parameters should be chosen to minimize the maximum distortion within the area covered by the model grids, since a high amount of distortion, evidenced by map scale factors significantly different from unity, can restrict the model time step more than necessary. As a general guideline, the polar stereographic projection is best suited for high-latitude WRF domains, the Lambert conformal projection is well-suited for mid-latitude domains, and the Mercator projection is good for low-latitude domains or domains with predominantly west-east extent. The cylindrical equidistant projection is required for global ARW simulations, although in its rotated aspect (i.e., when pole_lat, pole_lon, and stand_lon are changed from their default values) it can also be well-suited for regional domains anywhere on the earth's surface.


Polar Stereographic

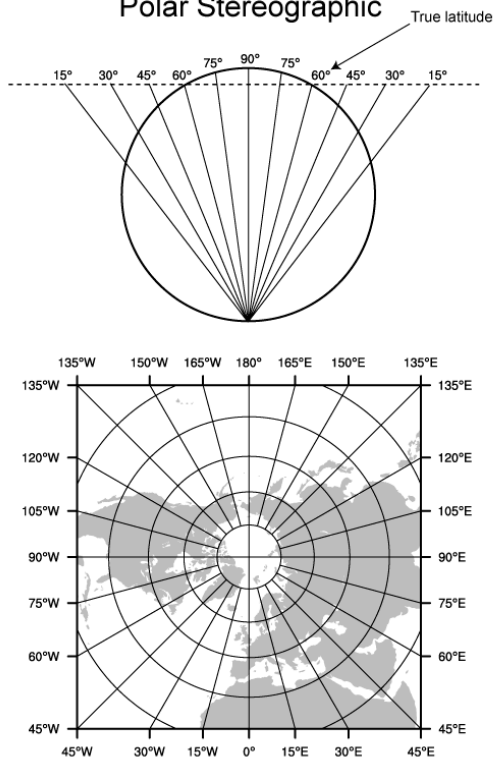


Lambert Conformal

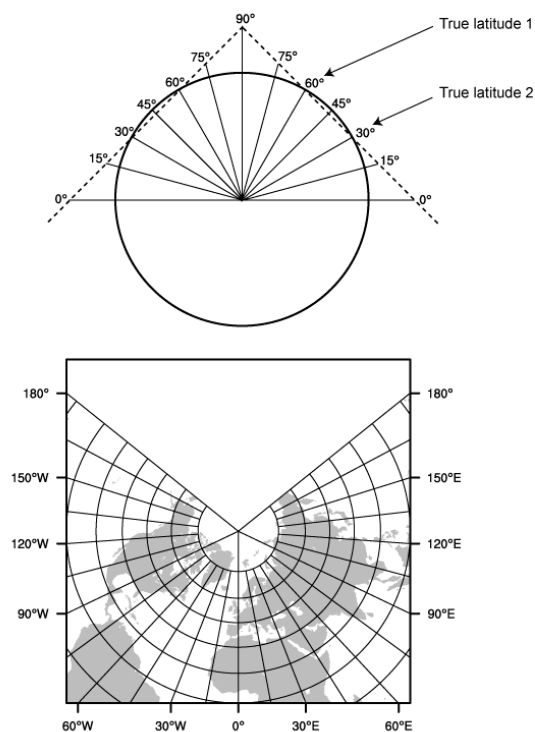

Mercator

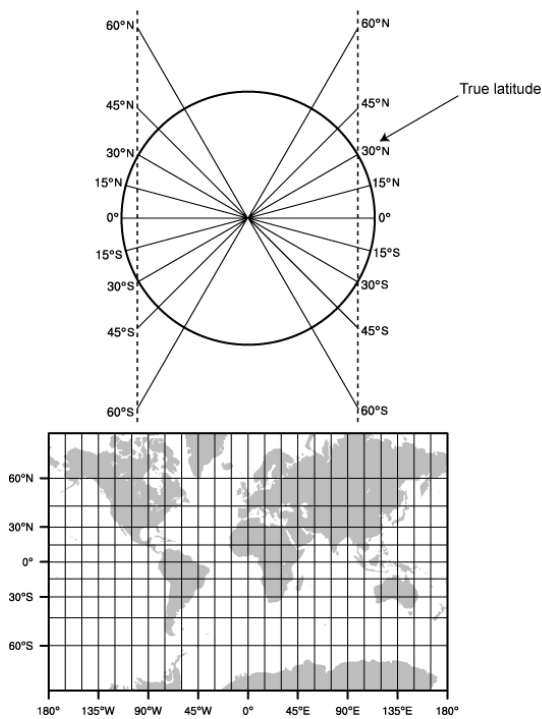


Cylindrical Equidistant

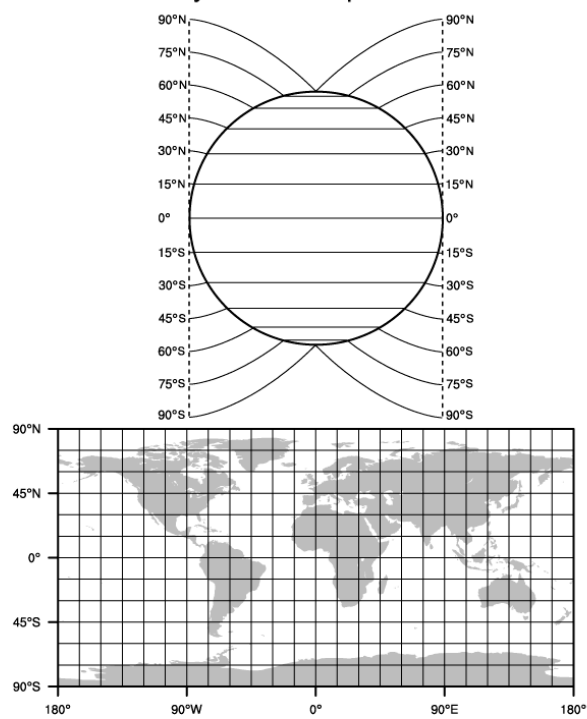

When configuring a rotated latitude-longitude grid, the namelist parameters `pole_lat`, `pole_lon`, and `stand_lon` are changed from their default values. The parameters `pole_lat` and `pole_lon` specify the latitude and longitude of the geographic north pole within the model's *computational grid*, and `stand_lon` gives the rotation about the earth's axis. In the context of the ARW, the computational grid refers to the regular latitude-longitude grid on which model computation is done, and on whose latitude circles Fourier filters are applied at high latitudes; users interested in the details of this filtering are referred to the WRF Version 3 Technical Note, and here, it suffices to note that the computational latitude-longitude grid is always represented with computational latitude lines running parallel to the x-axis of the model grid and computational longitude lines running parallel to the y-axis of the grid.

If the earth's geographic latitude-longitude grid coincides with the computational grid, a global ARW domain shows the earth's surface as it is normally visualized on a regular latitude-longitude grid. If instead the geographic grid does not coincide with the model computational grid, geographical meridians and parallels appear as complex curves. The difference is most easily illustrated by way of example. In top half of the figure below, the earth is shown with the geographical latitude-longitude grid coinciding with the computational latitude-longitude grid. In the bottom half, the geographic grid (not shown) has been rotated so that the geographic poles of the earth are no longer located at the poles of the computational grid.

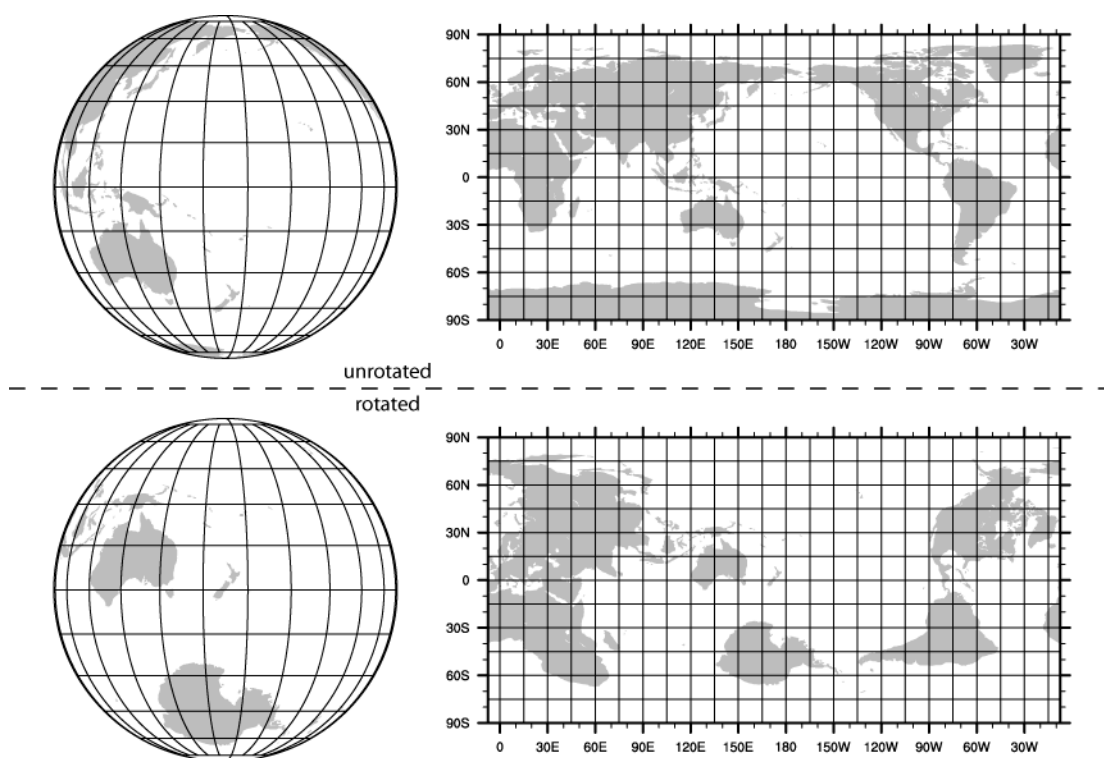

When WRF is to be run for a regional domain configuration, the location of the coarse domain is determined using the `ref_lat` and `ref_lon` variables, which specify the latitude and longitude, respectively, of the center of the coarse domain. If nested domains are to be processed, their locations with respect to the parent domain are specified with the `i_parent_start` and `j_parent_start` variables; further details of setting up nested domains are provided in the section on [nested domains](#). Next, the dimensions of the coarse domain are determined by the variables `dx` and `dy`, which specify the nominal grid distance in the x-direction and y-direction, and `e_we` and `e_sn`, which give the number of velocity points (i.e., *u*-staggered or *v*-staggered points) in the x- and y-directions; for the 'lambert', 'mercator', and 'polar' projections, `dx` and `dy` are given in meters, and for the 'lat-lon' projection, `dx` and `dy` are given in degrees. For nested domains, only the variables `e_we` and `e_sn` are used to determine the dimensions of the grid, and `dx` and `dy` should not be specified for nests, since their values are determined recursively based on the values of the `parent_grid_ratio` and `parent_id` variables, which specify the ratio of a nest's parent grid distance to the nest's grid distance and the grid number of the nest's parent, respectively.

If the regular latitude-longitude projection will be used for a regional domain, care must be taken to ensure that the map scale factors in the region covered by the domain do not deviate significantly from unity. This can be accomplished by rotating the projection such that the area covered by the domain is located near the equator of the projection, since, for the regular latitude-longitude projection, the map scale factors in the x-direction are given by the cosine of the computational latitude. For example, in the figure above showing the unrotated and rotated earth, it can be seen that, in the rotated aspect, New Zealand is located along the computational equator, and thus, the rotation used there would be suitable for a domain covering New Zealand. As a general guideline for rotating the latitude-longitude projection for regional domains, the namelist parameters `pole_lat`, `pole_lon`, and `stand_lon` may be chosen according to the formulas in the following table.

	(<code>ref_lat</code> , <code>ref_lon</code>) in N.H.	(<code>ref_lat</code> , <code>ref_lon</code>) in S.H.
<code>pole_lat</code>	<code>90.0 - ref_lat</code>	<code>90.0 + ref_lat</code>
<code>pole_lon</code>	<code>180.0</code>	<code>0.0</code>
<code>stand_lon</code>	<code>-ref_lon</code>	<code>180.0 - ref_lon</code>

For global WRF simulations, the coverage of the coarse domain is, of course, global, so `ref_lat` and `ref_lon` do not apply, and `dx` and `dy` *should not be specified*, since the nominal grid distance is computed automatically based on the number of grid points. Also, it should be noted that the latitude-longitude, or cylindrical equidistant, projection (`map_proj` = 'lat-lon') is the only projection in WRF that can support a global domain. *Nested domains within a global domain must not cover any area north of computational latitude +45 or south of computational latitude -45, since polar filters are applied poleward of these latitudes (although the cutoff latitude can be changed in the WRF namelist).*

Besides setting variables related to the projection, location, and coverage of model domains, the path to the static geographical data sets must be correctly specified with the `geog_data_path` variable. Also, the user may select which resolution of static data geogrid will interpolate from using the `geog_data_res` variable, whose value should match one of the resolutions of data in the GEOGRID.TBL. If the full set of static data are downloaded from the [WRF download page](#), possible resolutions include '30s', '2m', '5m', and '10m', corresponding to 30-arc-second data, 2-, 5-, and 10-arc-minute data.

Depending on the value of the `wrf_core` namelist variable, the appropriate GEOGRID.TBL file must be used with geogrid, since the grid staggers that WPS interpolates to differ between dynamical cores. For the ARW, the GEOGRID.TBL.ARW file should be used, and for the NMM, the GEOGRID.TBL.NMM file should be used. Selection of the appropriate GEOGRID.TBL is accomplished by linking the correct file to GEOGRID.TBL in the geogrid directory (or in the directory specified by `opt_geogrid_tbl_path`, if this variable is set in the namelist).

```
> ls geogrid/GEOGRID.TBL
```

```
lrwxrwxrwx 1          15 GEOGRID.TBL -> GEOGRID.TBL.ARW
```

For more details on the meaning and possible values for each variable, the user is referred to a [description of the namelist variables](#).

Having suitably defined the simulation coarse domain and [nested domains](#) in the `namelist.wps` file, the `geogrid.exe` executable may be run to produce domain files. In the case of ARW domains, the domain files are named `geo_em.d0N.nc`, where `N` is the number of the nest defined in each file. When run for NMM domains, `geogrid` produces the file `geo_nmm.d01.nc` for the coarse domain, and `geo_nmm_nest.10N.nc` files for each nesting level `N`. Also, note that the file suffix will vary depending on the `io_form_geogrid` that is selected. To run `geogrid`, issue the following command:

```
> ./geogrid.exe
```

When `geogrid.exe` has finished running, the message

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
! Successful completion of geogrid.                             !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

should be printed, and a listing of the WPS root directory (or the directory specified by `opt_output_from_geogrid_path`, if this variable was set) should show the domain files. If not, the `geogrid.log` file may be consulted in an attempt to determine the possible cause of failure. For more information on checking the output of `geogrid`, the user is referred to the section on [checking WPS output](#).

```
> ls
drwxr-xr-x 2      4096 arch
-rwxr-xr-x 1      1672 clean
-rwxr-xr-x 1      3510 compile
```

```

-rw-r--r-- 1      85973 compile.output
-rwxr-xr-x 1      4257 configure
-rw-r--r-- 1      2486 configure.wps
-rw-r--r-- 1 1957004 geo_em.d01.nc
-rw-r--r-- 1 4745324 geo_em.d02.nc
drwxr-xr-x 4      4096 geogrid
lrwxrwxrwx 1       23 geogrid.exe -> geogrid/src/geogrid.exe
-rw-r--r-- 1 11169 geogrid.log
-rwxr-xr-x 1      1328 link_grib.csh
drwxr-xr-x 3      4096 metgrid
lrwxrwxrwx 1       23 metgrid.exe -> metgrid/src/metgrid.exe
-rw-r--r-- 1      1094 namelist.wps
-rw-r--r-- 1      1987 namelist.wps.all_options
-rw-r--r-- 1      1075 namelist.wps.global
-rw-r--r-- 1       652 namelist.wps.nmm
-rw-r--r-- 1      4786 README
drwxr-xr-x 4      4096 ungrib
lrwxrwxrwx 1       21 ungrib.exe -> ungrib/src/ungrib.exe
drwxr-xr-x 3      4096 util

```

Step 2: Extracting meteorological fields from GRIB files with ungrib

Having already downloaded meteorological data in GRIB format, the first step in extracting fields to the intermediate format involves editing the “share” and “ungrib” namelist records of the namelist.wps file – the same file that was edited to define the simulation domains. An example of the two namelist records is given below.

```

&share
  wrf_core = 'ARW',
  max_dom = 2,
  start_date = '2008-03-24_12:00:00', '2008-03-24_12:00:00',
  end_date   = '2008-03-24_18:00:00', '2008-03-24_12:00:00',
  interval_seconds = 21600,
  io_form_geogrid = 2
/

&ungrib
  out_format = 'WPS',
  prefix     = 'FILE'
/

```

In the “share” namelist record, the variables that are of relevance to ungrib are the starting and ending times of the coarse domain (`start_date` and `end_date`; alternatively, `start_year`, `start_month`, `start_day`, `start_hour`, `end_year`, `end_month`, `end_day`, and `end_hour`) and the interval between meteorological data files (`interval_seconds`). In the “ungrib” namelist record, the variable `out_format` is used to select the format of the intermediate data to be written by ungrib; the metgrid program can read any of the formats supported by ungrib, and thus, any of 'WPS', 'SI', and 'MM5' may be specified for `out_format`, although 'WPS' is recommended. Also in the "ungrib" namelist, the user may specify a path and prefix for the intermediate files with the `prefix` variable. For example, if `prefix` were set to 'ARGRMET', then the intermediate files created by ungrib

would be named according to AGRMET:YYYY-MM-DD_HH, where YYYY-MM-DD_HH is the valid time of the data in the file.

After suitably modifying the namelist.wps file, a Vtable must be supplied, and the GRIB files must be linked (or copied) to the filenames that are expected by ungrib. The WPS is supplied with Vtable files for many sources of meteorological data, and the appropriate Vtable may simply be symbolically linked to the file Vtable, which is the Vtable name expected by ungrib. For example, if the GRIB data are from the GFS model, this could be accomplished with

```
> ln -s ungrib/Variable_Tables/Vtable.GFS Vtable
```

The ungrib program will try to read GRIB files named GRIBFILE.AAA, GRIBFILE.AAB, ..., GRIBFILE.ZZZ. In order to simplify the work of linking the GRIB files to these filenames, a shell script, link_grib.csh, is provided. The link_grib.csh script takes as a command-line argument a list of the GRIB files to be linked. For example, if the GRIB data were downloaded to the directory /data/gfs, the files could be linked with link_grib.csh as follows:

```
> ls /data/gfs
-rw-r--r-- 1 42728372 gfs_080324_12_00
-rw-r--r-- 1 48218303 gfs_080324_12_06

> ./link_grib.csh /data/gfs/gfs*
```

After linking the GRIB files and Vtable, a listing of the WPS directory should look something like the following:

```
> ls
drwxr-xr-x 2      4096 arch
-rwxr-xr-x 1      1672 clean
-rwxr-xr-x 1      3510 compile
-rw-r--r-- 1     85973 compile.output
-rwxr-xr-x 1      4257 configure
-rw-r--r-- 1      2486 configure.wps
-rw-r--r-- 1    1957004 geo_em.d01.nc
-rw-r--r-- 1    4745324 geo_em.d02.nc
drwxr-xr-x 4      4096 geogrid
lrwxrwxrwx 1        23 geogrid.exe -> geogrid/src/geogrid.exe
-rw-r--r-- 1     11169 geogrid.log
lrwxrwxrwx 1        38 GRIBFILE.AAA -> /data/gfs/gfs_080324_12_00
lrwxrwxrwx 1        38 GRIBFILE.AAB -> /data/gfs/gfs_080324_12_06
-rwxr-xr-x 1     1328 link_grib.csh
drwxr-xr-x 3      4096 metgrid
lrwxrwxrwx 1        23 metgrid.exe -> metgrid/src/metgrid.exe
-rw-r--r-- 1     1094 namelist.wps
-rw-r--r-- 1     1987 namelist.wps.all_options
-rw-r--r-- 1     1075 namelist.wps.global
-rw-r--r-- 1      652 namelist.wps.nmm
-rw-r--r-- 1     4786 README
drwxr-xr-x 4      4096 ungrib
lrwxrwxrwx 1        21 ungrib.exe -> ungrib/src/ungrib.exe
drwxr-xr-x 3      4096 util
```

```
lrwxrwxrwx 1      33 Vtable -> ungrib/Variable_Tables/Vtable.GFS
```

After editing the namelist.wps file and linking the appropriate Vtable and GRIB files, the ungrib.exe executable may be run to produce files of meteorological data in the intermediate format. Ungrib may be run by simply typing the following:

```
> ./ungrib.exe >& ungrib.output
```

Since the ungrib program may produce a significant volume of output, it is recommended that ungrib output be redirected to a file, as in the command above. If ungrib.exe runs successfully, the message

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!  Successful completion of ungrib.                          !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

will be written to the end of the ungrib.output file, and the intermediate files should appear in the current working directory. The intermediate files written by ungrib will have names of the form FILE:YYYY-MM-DD_HH (unless, of course, the prefix variable was set to a prefix other than 'FILE').

```
> ls
drwxr-xr-x 2      4096 arch
-rwxr-xr-x 1      1672 clean
-rwxr-xr-x 1      3510 compile
-rw-r--r-- 1     85973 compile.output
-rwxr-xr-x 1      4257 configure
-rw-r--r-- 1      2486 configure.wps
-rw-r--r-- 1 154946888 FILE:2008-03-24_12
-rw-r--r-- 1 154946888 FILE:2008-03-24_18
-rw-r--r-- 1     1957004 geo_em.d01.nc
-rw-r--r-- 1     4745324 geo_em.d02.nc
drwxr-xr-x 4      4096 geogrid
lrwxrwxrwx 1        23 geogrid.exe -> geogrid/src/geogrid.exe
-rw-r--r-- 1     11169 geogrid.log
lrwxrwxrwx 1        38 GRIBFILE.AAA ->
/data/gfs/gfs_080324_12_00
lrwxrwxrwx 1        38 GRIBFILE.AAB ->
/data/gfs/gfs_080324_12_06
-rwxr-xr-x 1     1328 link_grib.csh
drwxr-xr-x 3      4096 metgrid
lrwxrwxrwx 1        23 metgrid.exe -> metgrid/src/metgrid.exe
-rw-r--r-- 1     1094 namelist.wps
-rw-r--r-- 1     1987 namelist.wps.all_options
-rw-r--r-- 1     1075 namelist.wps.global
-rw-r--r-- 1      652 namelist.wps.nmm
-rw-r--r-- 1     4786 README
drwxr-xr-x 4      4096 ungrib
lrwxrwxrwx 1        21 ungrib.exe -> ungrib/src/ungrib.exe
-rw-r--r-- 1     1418 ungrib.log
-rw-r--r-- 1     27787 ungrib.output
drwxr-xr-x 3      4096 util
```

```
lrwxrwxrwx 1          33 Vtable ->
ungrib/Variable_Tables/Vtable.GFS
```

Step 3: Horizontally interpolating meteorological data with metgrid

In the final step of running the WPS, meteorological data extracted by ungrib are horizontally interpolated to the simulation grids defined by geogrid. In order to run metgrid, the namelist.wps file must be edited. In particular, the “share” and “metgrid” namelist records are of relevance to the metgrid program. Examples of these records are shown below.

```
&share
  wrf_core = 'ARW',
  max_dom = 2,
  start_date = '2008-03-24_12:00:00', '2008-03-24_12:00:00',
  end_date   = '2008-03-24_18:00:00', '2008-03-24_12:00:00',
  interval_seconds = 21600,
  io_form_geogrid = 2
/

&metgrid
  fg_name           = 'FILE',
  io_form_metgrid   = 2,
/
```

By this point, there is generally no need to change any of the variables in the “share” namelist record, since those variables should have been suitably set in previous steps. If the “share” namelist was not edited while running geogrid and ungrib, however, the WRF dynamical core, number of domains, starting and ending times, interval between meteorological data, and path to the static domain files must be set in the “share” namelist record, as described in the steps to run geogrid and ungrib.

In the “metgrid” namelist record, the path and prefix of the intermediate meteorological data files must be given with `fg_name`, the full path and file names of any intermediate files containing constant fields may be specified with the `constants_name` variable, and the output format for the horizontally interpolated files may be specified with the `io_form_metgrid` variable. Other variables in the “metgrid” namelist record, namely, `opt_output_from_metgrid_path` and `opt_metgrid_tbl_path`, allow the user to specify where interpolated data files should be written by metgrid and where the METGRID.TBL file may be found.

As with geogrid and the GEOGRID.TBL file, a METGRID.TBL file appropriate for the WRF core must be linked in the metgrid directory (or in the directory specified by `opt_metgrid_tbl_path`, if this variable is set).

```
> ls metgrid/METGRID.TBL
```

```
lrwxrwxrwx 1          15 METGRID.TBL -> METGRID.TBL.ARW
```


After suitably editing the namelist.wps file and verifying that the correct METGRID.TBL will be used, metgrid may be run by issuing the command

```
> ./metgrid.exe
```

If metgrid successfully ran, the message

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!  Successful completion of metgrid.                          !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

will be printed. After successfully running, metgrid output files should appear in the WPS root directory (or in the directory specified by `opt_output_from_metgrid_path`, if this variable was set). These files will be named `met_em.d0N.YYYY-MM-DD_HH:mm:ss.nc` in the case of ARW domains, where `N` is the number of the nest whose data reside in the file, or `met_nmm.d01.YYYY-MM-DD_HH:mm:ss.nc` in the case of NMM domains. Here, `YYYY-MM-DD_HH:mm:ss` refers to the date of the interpolated data in each file. If these files do not exist for each of the times in the range given in the “share” namelist record, the `metgrid.log` file may be consulted to help in determining the problem in running metgrid.

```
> ls
drwxr-xr-x 2      4096 arch
-rwxr-xr-x 1      1672 clean
-rwxr-xr-x 1      3510 compile
-rw-r--r-- 1     85973 compile.output
-rwxr-xr-x 1      4257 configure
-rw-r--r-- 1      2486 configure.wps
-rw-r--r-- 1 154946888 FILE:2008-03-24_12
-rw-r--r-- 1 154946888 FILE:2008-03-24_18
-rw-r--r-- 1      1957004 geo_em.d01.nc
-rw-r--r-- 1      4745324 geo_em.d02.nc
drwxr-xr-x 4      4096 geogrid
lrwxrwxrwx 1         23 geogrid.exe -> geogrid/src/geogrid.exe
-rw-r--r-- 1      11169 geogrid.log
lrwxrwxrwx 1         38 GRIBFILE.AAA ->
/data/gfs/gfs_080324_12_00
lrwxrwxrwx 1         38 GRIBFILE.AAB ->
/data/gfs/gfs_080324_12_06
-rwxr-xr-x 1      1328 link_grib.csh
-rw-r--r-- 1     5217648 met_em.d01.2008-03-24_12:00:00.nc
-rw-r--r-- 1     5217648 met_em.d01.2008-03-24_18:00:00.nc
-rw-r--r-- 1     12658200 met_em.d02.2008-03-24_12:00:00.nc
drwxr-xr-x 3      4096 metgrid
lrwxrwxrwx 1         23 metgrid.exe -> metgrid/src/metgrid.exe
-rw-r--r-- 1     65970 metgrid.log
-rw-r--r-- 1      1094 namelist.wps
-rw-r--r-- 1     1987 namelist.wps.all_options
-rw-r--r-- 1     1075 namelist.wps.global
-rw-r--r-- 1      652 namelist.wps.nmm
-rw-r--r-- 1     4786 README
drwxr-xr-x 4      4096 ungrib
lrwxrwxrwx 1         21 ungrib.exe -> ungrib/src/ungrib.exe
-rw-r--r-- 1     1418 ungrib.log
```

```
-rw-r--r-- 1      27787 ungrib.output
drwxr-xr-x 3      4096 util
lrwxrwxrwx 1        33 Vtable ->
ungrib/Variable_Tables/Vtable.GFS
```

Creating Nested Domains with the WPS

To run the WPS for nested-domain simulations is essentially no more difficult than running for a single-domain case; the difference with nested-domain simulations is that the geogrid and metgrid programs process more than one grid when they are run, rather than a single grid for the simulation. In order to specify the size and location of nests, a number of variables in the namelist.wps file must be given lists of values, one value per nest.

```
&share
wrf_core = 'ARW',
max_dom = 2,
start_date = '2008-03-24_12:00:00', '2008-03-24_12:00:00',
end_date   = '2008-03-24_18:00:00', '2008-03-24_12:00:00',
interval_seconds = 21600,
io_form_geogrid = 2
/
```


```
&geogrid
parent_id      = 1, 1,
parent_grid_ratio = 1, 3,
i_parent_start = 1, 31,
j_parent_start = 1, 17,
s_we           = 1, 1,
e_we           = 74, 112,
s_sn           = 1, 1,
e_sn           = 61, 97,
geog_data_res  = '10m', '2m',
dx = 30000,
dy = 30000,
map_proj = 'lambert',
ref_lat  = 34.83,
ref_lon  = -81.03,
truelat1 = 30.0,
truelat2 = 60.0,
stand_lon = -98.
geog_data_path = '/mmm/users/wrfhelp/WPS_GEOG/'
/
```

The namelist variables that are affected by nests are shown in the (partial) namelist records above. The example shows namelist variables for a two-domain run (the coarse domain plus a single nest), and the effect on the namelist variables generalize to multiple nests in the obvious way: rather than specifying lists of two values, lists of N values must be specified, where N is the total number of model grids.

In the above example, the first change to the “share” namelist record is to the `max_dom` variable, which must be set to the total number of nests in the simulation, including the

coarse domain. Having determined the number of nests, all of the other affected namelist variables must be given a list of N values, one for each grid. The only other change to the “share” namelist record is to the starting and ending times. Here, a starting and ending time must be given for each nest, with the restriction that a nest cannot begin before its parent domain or end after its parent domain; also, it is suggested that nests be given starting and ending times that are identical to the desired starting times of the nest *when running WPS*. This is because the nests get their lateral boundary conditions from their parent domain, and thus, only the initial time for a nest needs to be processed by WPS, except when grid nudging, also called analysis nudging, is used in WRF. It is important to note that, *when running WRF*, the actual starting and ending times for all nests must be given in the WRF namelist.input file.

The remaining changes are to the “geogrid” namelist record. In this record, the parent of each nest must be specified with the `parent_id` variable. Every nest must be a child of exactly one other nest, with the coarse domain being its own parent. Related to the identity of a nest's parent is the nest refinement ratio with respect to its parent, which is given by the `parent_grid_ratio` variable; this ratio determines the nominal grid spacing for a nest in relation to the grid spacing of the its parent.

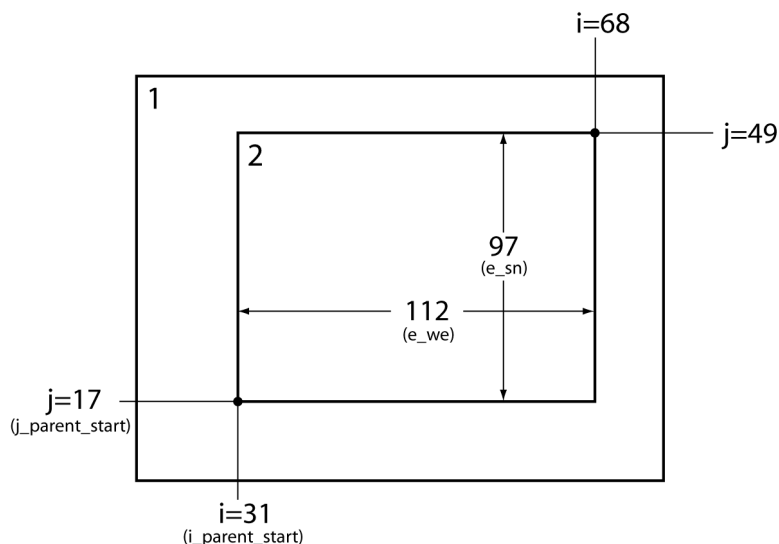

Next, the lower-left corner of a nest is specified as an (i, j) location in the nest's parent domain; this is done through the `i_parent_start` and `j_parent_start` variables, and the specified location is given with respect to the unstaggered grid. Finally, the dimensions of each nest, in grid points, are given for each nest using the `s_we`, `e_we`, `s_sn`, and `e_sn` variables. The nesting setup in our example namelist is illustrated in the figure above, where it may be seen how each of the above-mentioned variables is determined. Currently, the starting grid point values in the south-north (`s_sn`) and west-east (`s_we`) directions must be specified as 1, and the ending grid point values (`e_sn` and `e_we`) determine, essentially, the full dimensions of the nest; to ensure that the upper-right corner of the nest's grid is coincident with an unstaggered grid point in the parent domain, both `e_we` and `e_sn` must be one greater than some integer multiple of the nesting ratio. Also, for each nest, the resolution (or list of resolutions; see the [description](#)

[of namelist variables](#)) of source data to interpolate from is specified with the `geog_data_res` variable. For a complete description of these namelist variables, the user is referred to the [description of namelist variables](#).

Selecting Between USGS and MODIS-based Land Use Classifications

By default, the `geogrid` program will interpolate land use categories from USGS 24-category data. However, the user may select an alternative set of land use categories based on the MODIS land-cover classification of the International Geosphere-Biosphere Programme and modified for the Noah land surface model. Although the MODIS-based data contain 20 categories of land use, these categories are not a subset of the 24 USGS categories; users interested in the specific categories in either data set can find a listing of the land use classes in the section on [land use and soil categories](#). *It must be emphasized that the MODIS-based categories should only be used with the Noah land surface model in WRF.*

The 20-category MODIS-based land use data may be selected instead of the USGS data at run-time through the `geog_data_res` variable in the “`geogrid`” namelist record. This is accomplished by prefixing each resolution of static data with the string “`modis_30s+`”. For example, in a three-domain configuration, where the `geog_data_res` variable would ordinarily be specified as

```
geog_data_res = '10m', '2m', '30s'
```

the user should instead specify

```
geog_data_res = 'modis_30s+10m', 'modis_30s+2m', 'modis_30s+30s'
```

The effect of this change is to instruct the `geogrid` program to look, in each entry of the `GEOGRID.TBL` file, for a resolution of static data with a resolution denoted by ‘`modis_30s`’, and if such a resolution is not available, to instead look for a resolution denoted by the string following the ‘+’. Thus, for the `GEOGRID.TBL` entry for the `LANDUSEF` field, the MODIS-based land use data, which is identified with the string ‘`modis_30s`’, would be used instead of the ‘`10m`’, ‘`2m`’, and ‘`30s`’ resolutions of USGS data in the example above; for all other fields, the ‘`10m`’, ‘`2m`’, and ‘`30s`’ resolutions would be used for the first, second, and third domains, respectively. As an aside, when none of the resolutions specified for a domain in `geog_data_res` are found in a `GEOGRID.TBL` entry, the resolution denoted by ‘`default`’ will be used.

Selecting Static Data for the Gravity Wave Drag Scheme

The gravity wave drag by orography (GWDO) scheme in the ARW requires ten static fields from the WPS. In fact, these fields will be interpolated by the geogrid program regardless of whether the GWDO scheme will be used in the model. When the GWDO scheme will not be used, the fields will simply be ignored in WRF, and the user need not be concerned with the resolution of data from which the fields are interpolated. However, it is recommended that these fields be interpolated from a resolution of source data that is slightly *lower* (i.e., coarser) in resolution than the model grid; consequently, if the GWDO scheme will be used, care should be taken to select an appropriate resolution of GWDO static data. Currently, five resolutions of GWDO static data are available: 2-degree, 1-degree, 30-minute, 20-minute, and 10-minute, denoted by the strings ‘2deg’, ‘1deg’, ‘30m’, ‘20m’, and ‘10m’, respectively. To select the resolution to interpolate from, the user should prefix the resolution specified for the `geog_data_res` variable in the “geogrid” namelist record by the string “XXX+”, where XXX is one of the five available resolutions of GWDO static data. For example, in a model configuration with a 48-km grid spacing, the `geog_data_res` variable might typically be specified as

```
geog_data_res = '10m',
```

However, if the GWDO scheme were employed, the finest resolution of GWDO static data that is still lower in resolution than the model grid would be the 30-minute data, in which case the user should specify

```
geog_data_res = '30m+10m',
```

If none of ‘2deg’, ‘1deg’, ‘30m’, or ‘20m’ are specified in combination with other resolutions of static data in the `geog_data_res` variable, the ‘10m’ GWDO static data will be used, since it is also designated as the ‘default’ resolution in the GEOGRID.TBL file. It is worth noting that, if 10-minute resolution GWDO data are to be used, but a different resolution is desired for other static fields (e.g., topography height), the user should simply omit ‘10m’ from the value given to the `geog_data_res` variable, since specifying

```
geog_data_res = '10m+30s',
```

for example, would cause geogrid to use the 10-minute data in preference to the 30-second data for the non-GWDO fields, such as topography height and land use category, as well as for the GWDO fields.

Using Multiple Meteorological Data Sources

The metgrid program is capable of interpolating time-invariant fields, and it can also interpolate from multiple sources of meteorological data. The first of these capabilities uses the `constants_name` variable in the `&metgrid` namelist record. This variable may

be set to a list of filenames – including path information where necessary – of intermediate-formatted files which contains time-invariant fields, and which should be used in the output for every time period processed by metgrid. For example, short simulations may use a constant SST field; this field need only be available at a single time, and may be used by setting the `constants_name` variable to the path and filename of the SST intermediate file. Typical uses of `constants_name` might look like

```
&metgrid
  constants_name = '/data/ungribbed/constants/SST_FILE:2006-08-16_12'
/
```

or

```
&metgrid
  constants_name = 'LANDSEA', 'SOILHGT'
/
```

The second metgrid capability – that of interpolating data from multiple sources – may be useful in situations where two or more complementary data sets need to be combined to produce the full input data needed by real.exe. To interpolate from multiple sources of time-varying, meteorological data, the `fg_name` variable in the `&metgrid` namelist record should be set to a list of prefixes of intermediate files, including path information when necessary. When multiple path-prefixes are given, and the same meteorological field is available from more than one of the sources, data from the last-specified source will take priority over all preceding sources. Thus, data sources may be prioritized by the order in which the sources are given.

As an example of this capability, if surface fields are given in one data source and upper-air data are given in another, the values assigned to the `fg_name` variable may look something like:

```
&metgrid
  fg_name = '/data/ungribbed/SFC', '/data/ungribbed/UPPER_AIR'
/
```

To simplify the process of extracting fields from GRIB files, the `prefix` namelist variable in the `&ungrib` record may be employed. This variable allows the user to control the names of (and paths to) the intermediate files that are created by ungrib. The utility of this namelist variable is most easily illustrated by way of an example. Suppose we wish to work with the North American Regional Reanalysis (NARR) data set, which is split into separate GRIB files for 3-dimensional atmospheric data, surface data, and fixed-field data. We may begin by linking all of the "3D" GRIB files using the `link_grib.csh` script, and by linking the NARR Vtable to the filename `vtable`. Then, we may suitably edit the `&ungrib` namelist record before running `ungrib.exe` so that the resulting intermediate files have an appropriate prefix:

```
&ungrib
```

```

    out_format = 'WPS',
    prefix = 'NARR_3D',
/

```

After running `ungrib.exe`, the following files should exist (with a suitable substitution for the appropriate dates):

```

NARR_3D:2008-08-16_12
NARR_3D:2008-08-16_15
NARR_3D:2008-08-16_18
...

```

Given intermediate files for the 3-dimensional fields, we may process the surface fields by linking the surface GRIB files and changing the `prefix` variable in the namelist:

```

&ungrib
    out_format = 'WPS',
    prefix = 'NARR_SFC',
/

```

Again running `ungrib.exe`, the following should exist in addition to the `NARR_3D` files:

```

NARR_SFC:2008-08-16_12
NARR_SFC:2008-08-16_15
NARR_SFC:2008-08-16_18
...

```

Finally, the fixed file is linked with the `link_grib.csh` script, and the `prefix` variable in the namelist is again set:

```

&ungrib
    out_format = 'WPS',
    prefix = 'NARR_FIXED',
/

```

Having run `ungrib.exe` for the third time, the fixed fields should be available in addition to the surface and "3D" fields:

```

NARR_FIXED:1979-11-08_00

```

For the sake of clarity, the fixed file may be renamed to remove any date information, for example, by renaming it to simply `NARR_FIXED`, since the fields in the file are static. In this example, we note that the NARR fixed data are only available at a specific time, 1979 November 08 at 0000 UTC, and thus, the user would need to set the correct starting and ending time for the data in the `&share` namelist record before running `ungrib` on the NARR fixed file; of course, the times should be re-set before `metgrid` is run.

Given intermediate files for all three parts of the NARR data set, `metgrid.exe` may be run after the `constants_name` and `fg_name` variables in the `&metgrid` namelist record are set:


```
&metgrid
  constants_name = 'NARR_FIXED',
  fg_name = 'NARR_3D', 'NARR_SFC'
/
```

Although less common, another situation where multiple data sources would be required is when a source of meteorological data from a regional model is insufficient to cover the entire simulation domain, and data from a larger regional model, or a global model, must be used when interpolating to the remaining points of the simulation grid.

For example, to use NAM data wherever possible, and GFS data elsewhere, the following values might be assigned in the namelist:

```
&metgrid
  fg_name = '/data/ungribbed/GFS', '/data/ungribbed/NAM'
/
```

Then the resulting model domain would use data as shown in the figure below.

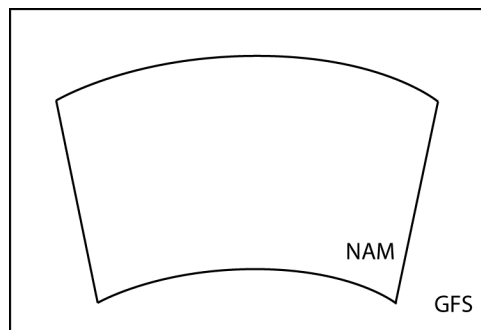

If no field is found in more than one source, then no prioritization need be applied by metgrid, and each field will simply be interpolated as usual; of course, each source should cover the entire simulation domain to avoid areas of missing data.

Alternative Initialization of Lake SSTs

The default treatment of sea-surface temperatures – both for oceans and lakes – in the metgrid program involves simply interpolating the SST field from the intermediate files to all water points in the WRF domain. However, if the lakes that are resolved in the WRF domain are not resolved in the GRIB data, and especially if those lakes are geographically distant from resolved water bodies, the SST field over lakes will most likely be extrapolated from the nearest resolved water bodies in the GRIB data; this situation can lead to lake SST values that are either unrealistically warm or unrealistically cold.

Without a higher-resolution SST field for metgrid to use, one alternative to extrapolating SST values for lakes is to manufacture a “best guess” at the SST for lakes. In the metgrid and real programs, this can be done using a combination of a special land use data set that distinguishes between lakes and oceans, and a field to be used as a proxy for SST over lakes. A special land use data set is necessary, since WRF’s real pre-processing program needs to know where the manufactured SST field should be used instead of the interpolated SST field from the GRIB data.

The alternative procedure for initializing lake SSTs is summarized in the following steps:

1. If they have not already been downloaded (either as a separate tar file or as part of the ‘full’ geographical data tar file), obtain the special land use data sets that distinguish between lakes and oceans. Two such data sets – based on USGS and MODIS land use categories – may be downloaded through the WRF download page. For simplicity, it is recommended to place the two directories in the same directory as the other static geographical data sets (e.g., topo_30s, soiltype_top_30s, etc.) used by geogrid, since doing so will eliminate the need to modify the GEOGRID.TBL file. If the landuse_30s_with_lakes and modis_landuse_21class_30s directories are placed in a location different from the other static data sets, it will be necessary to change the paths to these directories from relative paths to absolute paths in the GEOGRID.TBL file.
2. Before running geogrid, change the specification of `geog_data_res` in the `&geogrid` namelist record to specify either the USGS-based or the MODIS-based land use data with inland water bodies. For example, in a two-domain configuration, setting

```
geog_data_res = 'usgs_lakes+10m', 'usgs_lakes+2m',
```

would tell geogrid to use the USGS-based land use data for both domains, and to use the 10-minute resolution data for other static fields in domain 1 and the 2-minute resolution data for other static fields in domain 2; for MODIS-based data, `usgs_lakes` should be replaced by `modis_lakes`.

Running geogrid should result in output files that use a separate category for inland water bodies instead of the general water category used for oceans and seas. The lake category is identified by the global attribute ISLAKE in the geogrid output files; this attribute should be set to either 28 (in the case of USGS-based data) or 21 (in the case of the MODIS-based data). See, e.g., the list of [WPS output fields](#), where a value of -1 for ISLAKE indicates that there is no separate lake category.

3. After running the `ungrib` program, use the `avg_tsfc.exe` utility program to create an intermediate file containing a daily-average surface air temperature field, which will be substituted for the SST field only over lakes by the real program; for more information on the `avg_tsfc.exe` utility, see the section on [WPS utility programs](#).

4. Before running the metgrid program, add the TAVGSFC file created in the previous step to the specification of `constants_name` in the `&metgrid` record of the `namelist.wps` file.
5. Run WRF's `real.exe` program as usual after setting the number of land categories (`num_land_cat`) in the `&physics` record of the `namelist.input` file so that it matches the value of the global attribute `NUM_LAND_CAT` in the metgrid files. If the global attribute `ISLAKE` in the metgrid files indicates that there is a special land use category for lakes, the real program will substitute the TAVGSFC field for the SST field only over those grid points whose category matches the lake category; additionally, the real program will change the land use category of lakes back to the general water category (the category used for oceans), since neither the `LANDUSE.TBL` nor the `VEGPARM.TBL` files contain an entry for a lake category.

Parallelism in the WPS

If the dimensions of the domains to be processed by the WPS become too large to fit in the memory of a single CPU, it is possible to run the geogrid and metgrid programs in a distributed memory configuration. In order to compile geogrid and metgrid for distributed memory execution, the user must have MPI libraries installed on the target machine, and must have compiled WPS using one of the "DM parallel" configuration options. Upon successful compilation, the geogrid and metgrid programs may be run with the *mpirun* or *mpiexec* commands, or through a batch queuing system, depending on the machine.

As mentioned earlier, the work of the ungrib program is not amenable to parallelization, and, further, the memory requirements for ungrib's processing are independent of the memory requirements of geogrid and metgrid; thus, ungrib is always compiled for a single processor and run on a single CPU, regardless of whether a "DM parallel" configuration option was selected during configuration.

Each of the standard WRF I/O API formats (NetCDF, GRIB1, binary) has a corresponding parallel format, whose number is given by adding 100 to the `io_form` value (i.e., the value of `io_form_geogrid` and `io_form_metgrid`) for the standard format. It is not necessary to use a parallel `io_form`, but when one is used, each CPU will read/write its input/output to a separate file, whose name is simply the name that would be used during serial execution, but with a four-digit processor ID appended to the name. For example, running geogrid on four processors with `io_form_geogrid=102` would create output files named `geo_em.d01.nc.0000`, `geo_em.d01.nc.0001`, `geo_em.d01.nc.0002`, and `geo_em.d01.nc.0003` for the coarse domain.

During distributed-memory execution, model domains are decomposed into rectangular patches, with each processor working on a single patch. When reading/writing from/to the WRF I/O API format, each processor reads/writes only its patch. Consequently, if a parallel `io_form` is chosen for the output of geogrid, metgrid must be run using the same

number of processors as were used to run geogrid. Similarly, if a parallel `io_form` is chosen for the metgrid output files, the real program must be run using the same number of processors. Of course, it is still possible to use a standard `io_form` when running on multiple processors, in which case all data for the model domain will be distributed/collected upon input/output. As a final note, when geogrid or metgrid are run on multiple processors, each processor will write its own log file, with the log file names being appended with the same four-digit processor ID numbers that are used for the I/O API files.

Checking WPS Output

When running the WPS, it may be helpful to examine the output produced by the programs. For example, when determining the location of nests, it may be helpful to see the interpolated static geographical data and latitude/longitude fields. As another example, when importing a new source of data into WPS – either static data or meteorological data – it can often be helpful to check the resulting interpolated fields in order to make adjustments the interpolation methods used by geogrid or metgrid.

By using the NetCDF format for the geogrid and metgrid I/O forms, a variety of visualization tools that read NetCDF data may be used to check the domain files processed by geogrid or the horizontally interpolated meteorological fields produced by metgrid. In order to set the file format for geogrid and metgrid to NetCDF, the user should specify 2 as the `io_form_geogrid` and `io_form_metgrid` in the WPS namelist file (Note: 2 is the default setting for these options):

```
&share
  io_form_geogrid = 2,
/

&metgrid
  io_form_metgrid = 2,
/
```

Among the available tools, the `ncdump`, `ncview`, and new RIP4 programs may be of interest. The `ncdump` program is a compact utility distributed with the NetCDF libraries that lists the variables and attributes in a NetCDF file. This can be useful, in particular, for checking the domain parameters (e.g., west-east dimension, south-north dimension, or domain center point) in geogrid domain files, or for listing the fields in a file. The `ncview` program provides an interactive way to view fields in NetCDF files. Also, for users wishing to produce plots of fields suitable for use in publications, the new release of the RIP4 program may be of interest. The new RIP4 is capable of plotting horizontal contours, map backgrounds, and overlaying multiple fields within the same plot.

Output from the `ungrib` program is always written in a simple binary format (either ‘WPS’, ‘SI’, or ‘MM5’), so software for viewing NetCDF files will almost certainly be of no use. However, an NCAR Graphics-based utility, *plotfmt*, is supplied with the WPS

source code. This utility produces contour plots of the fields found in an intermediate-format file. If the NCAR Graphics libraries are properly installed, the plotfmt program is automatically compiled, along with other utility programs, when WPS is built.

WPS Utility Programs

Besides the three main WPS programs – geogrid, ungrib, and metgrid – there are a number of utility programs that come with the WPS, and which are compiled in the util directory. These utilities may be used to examine data files, visualize the location of nested domains, compute pressure fields, and compute average surface temperature fields.

A. avg_tsfc.exe

The avg_tsfc.exe program computes a daily mean surface temperature given input files in the intermediate format. Based on the range of dates specified in the "share" namelist section of the namelist.wps file, and also considering the interval between intermediate files, avg_tsfc.exe will use as many complete days' worth of data as possible in computing the average, beginning at the starting date specified in the namelist. If a complete day's worth of data is not available, no output file will be written, and the program will halt as soon as this can be determined. Similarly, any intermediate files for dates that cannot be used as part of a complete 24-hour period are ignored; for example, if there are five intermediate files available at a six-hour interval, the last file would be ignored. The computed average field is written to a new file named TAVGSFC using the same intermediate format version as the input files. This daily mean surface temperature field can then be ingested by metgrid by specifying 'TAVGSFC' for the constants_name variable in the "metgrid" namelist section.

B. mod_levs.exe

The mod_levs.exe program is used to remove levels of data from intermediate format files. The levels which are to be kept are specified in a new namelist record in the namelist.wps file:

```
&mod_levs
  press_pa = 201300 , 200100 , 100000 ,
              95000 , 90000 ,
              85000 , 80000 ,
              75000 , 70000 ,
              65000 , 60000 ,
              55000 , 50000 ,
              45000 , 40000 ,
              35000 , 30000 ,
              25000 , 20000 ,
              15000 , 10000 ,
              5000 , 1000
/
```

Within the `&mod_levs` namelist record, the variable `press_pa` is used to specify a list of levels to keep; the specified levels should match values of `xlv1` in the intermediate format files (see the discussion of the [WPS intermediate format](#) for more information on the fields of the intermediate files). The `mod_levs` program takes two command-line arguments as its input. The first argument is the name of the intermediate file to operate on, and the second argument is the name of the output file to be written.

Removing all but a specified subset of levels from meteorological data sets is particularly useful, for example, when one data set is to be used for the model initial conditions and a second data set is to be used for the lateral boundary conditions. This can be done by providing the initial conditions data set at the first time period to be interpolated by `metgrid`, and the boundary conditions data set for all other times. If the both data sets have the same number of vertical levels, then no work needs to be done; however, when these two data sets have a different number of levels, it will be necessary, at a minimum, to remove $(m - n)$ levels, where $m > n$ and m and n are the number of levels in each of the two data sets, from the data set with m levels. The necessity of having the same number of vertical levels in all files is due to a limitation in `real.exe`, which requires a constant number of vertical levels to interpolate from.

The `mod_levs` utility is something of a temporary solution to the problem of accommodating two or more data sets with differing numbers of vertical levels. Should a user choose to use `mod_levs`, it should be noted that, although the vertical locations of the levels need not match between data sets, all data sets should have a surface level of data, and, when running `real.exe` and `wrf.exe`, the value of `p_top` must be chosen to be below the lowest top among the data sets.

C. `calc_ecmwf_p.exe`

In the course of vertically interpolating meteorological fields, the `real` program requires 3-d pressure and geopotential height fields on the same levels as the other atmospheric fields. The `calc_ecmwf_p.exe` utility may be used to create such these fields for use with ECMWF sigma-level data sets. Given a surface pressure field (or log of surface pressure field) and a list of coefficients A and B , `calc_ecmwf_p.exe` computes the pressure at an ECMWF sigma level k at grid point (i,j) as $P_{ijk} = A_k + B_k * Psfc_{ij}$. The list of coefficients used in the pressure computation can be copied from a table appropriate to the number of sigma levels in the data set from http://old.ecmwf.int/products/data/technical/model_levels/index.html. This table should be written in plain text to a file, `ecmwf_coeffs`, in the current working directory; for example, with 16 sigma levels, the file `ecmwf_coeffs` would contain something like:

0	0.000000	0.000000000
1	5000.000000	0.000000000
2	9890.519531	0.001720764
3	14166.304688	0.013197623
4	17346.066406	0.042217135
5	19121.152344	0.093761623
6	19371.250000	0.169571340

7	18164.472656	0.268015683
8	15742.183594	0.384274483
9	12488.050781	0.510830879
10	8881.824219	0.638268471
11	5437.539063	0.756384850
12	2626.257813	0.855612755
13	783.296631	0.928746223
14	0.000000	0.972985268
15	0.000000	0.992281914
16	0.000000	1.000000000

Additionally, if soil height (or soil geopotential), 3-d temperature, and 3-d specific humidity fields are available, `calc_ecmwf_p.exe` computes a 3-d geopotential height field, which is required to obtain an accurate vertical interpolation in the real program.

Given a set of intermediate files produced by `ungrib` and the file `ecmwf_coeffs`, `calc_ecmwf_p` loops over all time periods in `namelist.wps`, and produces an additional intermediate file, `PRES:YYYY-MM-DD_HH`, for each time, which contains pressure and geopotential height data for each full sigma level, as well as a 3-d relative humidity field. This intermediate file should be specified to `metgrid`, along with the intermediate data produced by `ungrib`, by adding 'PRES' to the list of prefixes in the `fg_name` `namelist` variable.

D. height_ukmo.exe

The real program requires 3-d pressure and geopotential height fields to vertically interpolate the output of the `metgrid` program; however, data sets from the UKMO Unified Model contain a 3-d pressure field, but do not contain a geopotential height field. Accordingly, the `height_ukmo.exe` program may be used to compute a geopotential height field for data sets from the UKMO Unified Model. The `height_ukmo.exe` program requires no command-line arguments, but reads the `&metgrid` `namelist` record to get the prefix of the intermediate files created by `ungrib.exe`; the intermediate files indicated by the first prefix in the `fg_name` variable of the `&metgrid` `namelist` record are expected to contain a `SOILHGT` field, from which the `height_ukmo.exe` program computes, with the aid of an auxiliary table, the 3-d geopotential height field. The computed height field is written to a new intermediate file with the prefix `HGT`, and the prefix 'HGT' should then be added to the `fg_name` `namelist` variable in the `&metgrid` `namelist` record before running `metgrid.exe`. The name of the file containing the auxiliary table is currently hard-wired in the source code of the `height_ukmo.exe` program, and it is the responsibility of the user to change this file name in `WPS/util/src/height_ukmo.F` to the name of the table with the same number of levels as the GRIB data processed by `ungrib.exe`; tables for data with 38, 50, and 70 levels are provided in the `WPS/util` directory with file names `vertical_grid_38_20m_G3.txt`, `vertical_grid_50_20m_63km.txt`, and `vertical_grid_70_20m_80km.txt`, respectively.

E. plotgrids.ncl

The `plotgrids.ncl` program is an NCAR Graphics-based utility whose purpose is to plot the locations of all nests defined in the `namelist.wps` file. The program operates on the

namelist.wps file, and thus, may be run without having run any of the three main WPS programs. Upon successful completion, plotgrids produces an Graphics file in the chosen format (see inside the plotgrids.ncl script for making changes to the output format). The coarse domain is drawn to fill the plot frame, a map outline with political boundaries is drawn over the coarse domain, and any nested domains are drawn as rectangles outlining the extent of each nest. This utility may be useful particularly during initial placement of domains, at which time the user can iteratively adjust the locations of nests by editing the namelist.wps file, running plotgrids.ncl, and determining a set of adjustments to the nest locations. To run this program, simply type 'ncl util/plotgrids.ncl' in the command line from inside the WPS/ directory. *Currently, this utility does not work for ARW domains that use the latitude-longitude projection (i.e., when map_proj = 'lat-lon').*

F. g1print.exe

The g1print.exe program takes as its only command-line argument the name of a GRIB Edition 1 file. The program prints a listing of the fields, levels, and dates of the data in the file.

G. g2print.exe

Similar to g1print.exe, the g2print.exe program takes as its only command-line argument the name of a GRIB Edition 2 file. The program prints a listing of the fields, levels, and dates of the data in the file.

H. rd_intermediate.exe

Given the name of a single intermediate format file on the command line, the rd_intermediate.exe program prints information about the fields contained in the file.

Writing Meteorological Data to the Intermediate Format

The role of the ungrib program is to decode GRIB data sets into a simple intermediate format that is understood by metgrid. If meteorological data are not available in GRIB Edition 1 or GRIB Edition 2 formats, the user is responsible for writing such data into the intermediate file format. Fortunately, the intermediate format is relatively simple, consisting of a sequence of unformatted Fortran writes. It is important to note that these *unformatted writes use big-endian byte order*, which can typically be specified with compiler flags. Below, we describe the WPS intermediate format; users interested in the SI or MM5 intermediate formats can first gain familiarity with the WPS format, which is very similar, and later examine the Fortran subroutines that read and write all three intermediate formats (metgrid/src/read_met_module.F90 and metgrid/src/write_met_module.F90, respectively).

When writing data to the WPS intermediate format, 2-dimensional fields are written as a rectangular array of real values. 3-dimensional arrays must be split across the vertical dimension into 2-dimensional arrays, which are written independently. It should also be noted that, for global data sets, either a Gaussian or cylindrical equidistant projection must be used, and for regional data sets, either a Mercator, Lambert conformal, polar stereographic, or cylindrical equidistant may be used. The sequence of writes used to write a single 2-dimensional array in the WPS intermediate format is as follows (note that not all of the variables declared below are used for a given projection of the data).

```
integer :: version           ! Format version (must =5 for WPS format)
integer :: nx, ny           ! x- and y-dimensions of 2-d array
integer :: iproj            ! Code for projection of data in array:
                           !     0 = cylindrical equidistant
                           !     1 = Mercator
                           !     3 = Lambert conformal conic
                           !     4 = Gaussian (global only!)
                           !     5 = Polar stereographic
real :: nlats              ! Number of latitudes north of equator
                           !     (for Gaussian grids)
real :: xfcst              ! Forecast hour of data
real :: xlvl              ! Vertical level of data in 2-d array
real :: startlat, startlon ! Lat/lon of point in array indicated by
                           !     startloc string
real :: deltalat, deltalon ! Grid spacing, degrees
real :: dx, dy            ! Grid spacing, km
real :: xlonc             ! Standard longitude of projection
real :: truelat1, truelat2 ! True latitudes of projection
real :: earth_radius      ! Earth radius, km
real, dimension(nx,ny) :: slab ! The 2-d array holding the data
logical :: is_wind_grid_rel ! Flag indicating whether winds are
                           !     relative to source grid (TRUE) or
                           !     relative to earth (FALSE)
character (len=8) :: startloc ! Which point in array is given by
                           !     startlat/startlon; set either
                           !     to 'SWCORNER' or 'CENTER '
character (len=9) :: field   ! Name of the field
character (len=24) :: hdate  ! Valid date for data YYYY:MM:DD_HH:00:00
character (len=25) :: units  ! Units of data
character (len=32) :: map_source ! Source model / originating center
character (len=46) :: desc   ! Short description of data

! 1) WRITE FORMAT VERSION
write(unit=ounit) version

! 2) WRITE METADATA
! Cylindrical equidistant
if (iproj == 0) then
    write(unit=ounit) hdate, xfcst, map_source, field, &
        units, desc, xlvl, nx, ny, iproj
    write(unit=ounit) startloc, startlat, startlon, &
        deltalat, deltalon, earth_radius

! Mercator
else if (iproj == 1) then
    write(unit=ounit) hdate, xfcst, map_source, field, &
```

```

                                units, desc, xlv1, nx, ny, iproj
write(unit=ounit) startloc, startlat, startlon, dx, dy, &
                                truelat1, earth_radius

! Lambert conformal
else if (iproj == 3) then
    write(unit=ounit) hdate, xfcst, map_source, field, &
                                units, desc, xlv1, nx, ny, iproj
    write(unit=ounit) startloc, startlat, startlon, dx, dy, &
                                xlonc, truelat1, truelat2, earth_radius

! Gaussian
else if (iproj == 4) then
    write(unit=ounit) hdate, xfcst, map_source, field, &
                                units, desc, xlv1, nx, ny, iproj
    write(unit=ounit) startloc, startlat, startlon, &
                                nlats, deltalon, earth_radius

! Polar stereographic
else if (iproj == 5) then
    write(unit=ounit) hdate, xfcst, map_source, field, &
                                units, desc, xlv1, nx, ny, iproj
    write(unit=ounit) startloc, startlat, startlon, dx, dy, &
                                xlonc, truelat1, earth_radius

end if

! 3) WRITE WIND ROTATION FLAG
write(unit=ounit) is_wind_grid_rel

! 4) WRITE 2-D ARRAY OF DATA
write(unit=ounit) slab

```

Creating and Editing Vtables

Although Vtables are provided for many common data sets, it would be impossible for ungrib to anticipate every possible source of meteorological data in GRIB format. When a new source of data is to be processed by ungrib.exe, the user may create a new Vtable either from scratch, or by using an existing Vtable as an example. In either case, a basic knowledge of the meaning and use of the various fields of the Vtable will be helpful.

Each Vtable contains either seven or eleven fields, depending on whether the Vtable is for a GRIB Edition 1 data source or a GRIB Edition 2 data source, respectively. The fields of a Vtable fall into one of three categories: fields that describe how the data are identified within the GRIB file, fields that describe how the data are identified by the ungrib and metgrid programs, and fields specific to GRIB Edition 2. Each variable to be extracted by ungrib.exe will have one or more lines in the Vtable, with multiple lines for data that are split among different level types – for example, a surface level and upper-air levels. The fields that must be specified for a line, or entry, in the Vtable depends on the specifics of the field and level.

The first group of fields – those that describe how the data are identified within the GRIB file – are given under the column headings of the Vtable shown below.

```

GRIB1 | Level | From | To |
Param | Type | Level1 | Level2 |
-----+-----+-----+-----+

```

The "GRIB1 Param" field specifies the GRIB code for the meteorological field, which is a number unique to that field within the data set. However, different data sets may use different GRIB codes for the same field – for example, temperature at upper-air levels has GRIB code 11 in GFS data, but GRIB code 130 in ECMWF data. To find the GRIB code for a field, the g1print.exe and g2print.exe utility program may be used.

Given a GRIB code, the "Level Type", "From Level1", and "From Level2" fields are used to specify which levels a field may be found at. As with the "GRIB1 Param" field, the g1print.exe and g2print.exe programs may be used to find values for the level fields. The meanings of the level fields are dependent on the "Level Type" field, and are summarized in the following table.

Level	Level Type	From Level1	To Level2
Upper-air	100	*	(blank)
Surface	1	0	(blank)
Sea-level	102	0	(blank)
Levels at a specified height AGL	105	Height, in meters, of the level above ground	(blank)
Fields given as layers	112	Starting level for the layer	Ending level for the layer

When layer fields (Level Type 112) are specified, the starting and ending points for the layer have units that are dependent on the field itself; appropriate values may be found with the g1print.exe and g2print.exe utility programs.

The second group of fields in a Vtable, those that describe how the data are identified within the metgrid and real programs, fall under the column headings shown below.

```

| metgrid | metgrid | metgrid |
| Name    | Units   | Description |
+-----+-----+-----+

```

The most important of these three fields is the "metgrid Name" field, which determines the variable name that will be assigned to a meteorological field when it is written to the intermediate files by ungrib. This name should also match an entry in the METGRID.TBL file, so that the metgrid program can determine how the field is to be

horizontally interpolated. The "metgrid Units" and "metgrid Description" fields specify the units and a short description for the field, respectively; here, it is important to note that if no description is given for a field, then *ungrib will not write that field out to the intermediate files*.

The final group of fields, which provide GRIB2-specific information, are found under the column headings below.

GRIB2	GRIB2	GRIB2	GRIB2
Discp	Catgy	Param	Level
+-----+			

The GRIB2 fields are only needed in a Vtable that is to be used for GRIB Edition 2 data sets, although having these fields in a Vtable does not prevent that Vtable from also being used for GRIB Edition 1 data. For example, the Vtable.GFS file contains GRIB2 Vtable fields, but is used for both 1-degree (GRIB1) GFS and 0.5-degree (GRIB2) GFS data sets. Since Vtables are provided for most known GRIB Edition 2 data sets, the corresponding Vtable fields are not described here at present.

Writing Static Data to the Geogrid Binary Format

The static geographical data sets that are interpolated by the geogrid program are stored as regular 2-d and 3-d arrays written in a simple binary raster format. Users with a new source for a given static field can ingest their data with WPS by writing the data set into this binary format. The geogrid format is capable of supporting single-level and multi-level continuous fields, categorical fields represented as dominant categories, and categorical fields given as fractional fields for each category. The most simple of these field types in terms of representation in the binary format is a categorical field given as a dominant category at each source grid point, an example of which is the 30-second USGS land use data set.

x_{n1}	x_{n2}		x_{nm}
x_{21}	x_{22}		x_{2m}
x_{11}	x_{12}		x_{1m}

For a categorical field given as dominant categories, the data must first be stored in a regular 2-d array of integers, with each integer giving the dominant category at the corresponding source grid point. Given this array, the data are written to a file, row-by-row, beginning at the bottom, or southern-most, row. For example, in the figure above, the elements of the $n \times m$ array would be written in the order $x_{11}, x_{12}, \dots, x_{1m}, x_{21}, \dots, x_{2m}, \dots, x_{n1}, \dots, x_{nm}$. When written to the file, every element is stored as a 1-, 2-, 3-, or 4-byte integer in big-endian byte order (i.e., for the 4-byte integer $ABCD$, byte A is stored at the lowest address and byte D at the highest), although little-endian files may be used by setting `endian=little` in the "index" file for the data set. Every element in a file must use the same number of bytes for its storage, and, of course, it is advantageous to use the fewest number of bytes needed to represent the complete range of values in the array.

When writing the binary data to a file, no header, record marker, or additional bytes should be written. For example, a 2-byte 1000×1000 array should result in a file whose size is exactly 2,000,000 bytes. Since Fortran unformatted writes add record markers, *it is not possible to write a geogrid binary-formatted file directly from Fortran*; instead, it is recommended that the C routines in `read_geogrid.c` and `write_geogrid.c` (in the `geogrid/src` directory) be called when writing data, either from C or Fortran code.

Similar in format to a field of dominant categories is the case of a field of continuous, or real, values. Like dominant-category fields, single-level continuous fields are first organized as a regular 2-d array, then written, row-by-row, to a binary file. However, because a continuous field may contain non-integral or negative values, the storage representation of each element within the file is slightly more complex. All elements in the array must first be converted to integral values. This is done by first scaling all elements by a constant, chosen to maintain the required precision, and then removing any remaining fractional part through rounding. For example, if three decimal places of precision are required, the value -2.71828 would need to be divided by 0.001 and rounded to -2718. Following conversion of all array elements to integral values, if any negative values are found in the array, a second conversion must be applied: if elements are stored using 1 byte each, then 2^8 is added to each negative element; for storage using 2 bytes, 2^{16} is added to each negative element; for storage using 3 bytes, 2^{24} is added to each negative element; and for storage using 4 bytes, a value of 2^{32} is added to each negative element. It is important to note that no conversion is applied to positive elements. Finally, the resulting positive, integral array is written as in the case of a dominant-category field.

Multi-level continuous fields are handled much the same as single-level continuous fields. For an $n \times m \times r$ array, conversion to a positive, integral field is first performed as described above. Then, each $n \times m$ sub-array is written contiguously to the binary file as before, beginning with the smallest r -index. Categorical fields that are given as fractional fields for each possible category can be thought of as multi-level continuous fields, where each level k , $1 \leq k \leq r$, is the fractional field for category k .

When writing a field to a file in the geogrid binary format, the user should adhere to the naming convention used by the geogrid program, which expects data files to have names

of the form *xstart-xend.ystart-yend*, where *xstart*, *xend*, *ystart*, and *yend* are five-digit positive integers specifying, respectively, the starting *x*-index of the array contained in the file, the ending *x*-index of the array, the starting *y*-index of the array, and the ending *y*-index of the array; here, indexing begins at 1, rather than 0. So, for example, an 800 × 1200 array (i.e., 800 rows and 1200 columns) might be named 00001-01200.00001-00800.

When a data set is given in several pieces, each of the pieces may be formed as a regular rectangular array, and each array may be written to a separate file. In this case, the relative locations of the arrays are determined by the range of *x*- and *y*-indices in the file names for each of the arrays. It is important to note, however, that *every tile in a data set must have the same x- and y-dimensions*, and that tiles of data within a data set must not overlap; furthermore, all tiles must start and end on multiples of the index ranges. For example, the global 30-second USGS topography data set is divided into arrays of dimension 1200 × 1200, with each array containing a 10-degree × 10-degree piece of the data set; the file whose south-west corner is located at (90S, 180W) is named 00001-01200.00001-01200, and the file whose north-east corner is located at (90N, 180E) is named 42001-43200.20401-21600.

If a data set is to be split into multiple tiles, and the number of grid points in, say, the *x*-direction is not evenly divided by the number of tiles in the *x*-direction, then the last column of tiles must be padded with a flag value (specified in the [index file](#) using the `missing_value` keyword) so that all tiles have the same dimensions. For example, if a data set has 2456 points in the *x*-direction, and three tiles in the *x*-direction will be used, the range of *x*-coordinates of the tiles might be 1 – 820, 821 – 1640, and 1641 – 2460, with columns 2457 through 2460 being filled with a flag value.

Clearly, since the starting and ending indices must have five digits, a field cannot have more than 99999 data points in either of the *x*- or *y*-directions. In case a field has more than 99999 data points in either dimension, the user can simply split the data set into several smaller data sets which will be identified separately to geogrid. For example, a very large global data set may be split into data sets for the Eastern and Western hemispheres.

Besides the binary data files, geogrid requires one extra metadata file per data set. This metadata file is always named 'index', and thus, two data sets cannot reside in the same directory. Essentially, this metadata file is the first file that geogrid looks for when processing a data set, and the contents of the file provide geogrid with all of the information necessary for constructing names of possible data files. The contents of an example index file are given below.

```
type = continuous
signed = yes
projection = regular_ll
dx = 0.00833333
dy = 0.00833333
known_x = 1.0
known_y = 1.0
```

```
known_lat = -89.99583
known_lon = -179.99583
wordsize = 2
tile_x = 1200
tile_y = 1200
tile_z = 1
tile_bdr=3
units="meters MSL"
description="Topography height"
```

For a complete listing of keywords that may appear in an index file, along with the meaning of each keyword, the user is referred to the section on [index file options](#).

Creating an Urban Fraction Field from NLCD Data

In order to create a more inhomogeneous and detailed urban fraction field for use with NUDAPT, users may obtain high-resolution land cover information from the National Land Cover Database (NLCD) through the Multi-Resolution Land Characteristics Consortium. Generation of the urban fraction field, called FRC_URB2D in WRF, involves first downloading the NLCD data over the region covered by the WRF domain, converting the data into the [binary format](#) used by geogrid, and finally extracting only the urban categories to a new urban fraction field. The following steps can serve as a guide through this process.

1. Download NLCD data from <http://gisdata.usgs.net/website/MRLC/viewer.php>. Either of the 1992, 2001, or 2006 datasets may be used. After selecting an area to download, make sure to select GeoTIFF format in the "Request Summary Page" by clicking on "Modify Data Request". If available, data may instead be downloaded in BIL format, in which case the format conversion described in the next step can be skipped.
2. After downloading the data, unpacking the archive should yield a directory with a .tif file and a .tfw file, among others. In order for the information in the GeoTIFF file to be useful, the .tif image must be converted into the binary format used by the WPS. This conversion can be accomplished using the GDAL translation tool, `gdal_translate`, (<http://gdal.org>) by running the command

```
> gdal_translate -of ENVI foo.tif data.bil
```

where `foo.tif` is the name of the GeoTIFF image that was downloaded in Step 1. The output format "ENVI" is a simple binary raster format that matches the format used by geogrid. After converting the GeoTIFF to a binary file, the resulting `data.bil` file must be renamed to `00001-ncols.00001-nrows`, where `ncols` is the number of columns (in i5.5 format) and `nrows` is the number of rows (also

in i5.5 format) in the image; *these values should have been printed to the screen when the gdal_translate program was run.*

3. Use the converter program available from <http://www2.mmm.ucar.edu/people/duda/uf/> to extract the urban categories from the binary tile and write a new tile of data containing urban fraction. The output file of this converter should be copied over the original land use tile, i.e., the urban fraction file should be renamed to 00001-ncols.00001-nrows, where ncols is the number of columns (in i5.5 format) and nrows is the number of rows (also in i5.5 format) in the tile, as in Step 2.
4. Create an index metadata file for the urban fraction data. In the directory created by unpacking the land use data, a .tfw file should also exist. The last two lines in this file give the location of the north-west corner of the data tile, which is used in the index file for variables known_lat and known_lon. If this location is given as (x,y) coordinates, in meters, then the coordinate converter utility available from <http://www2.mmm.ucar.edu/people/duda/uf/> may be used to convert to (latitude, longitude), which is required by the index file. The basic index file should contain the following elements:

```

type=continuous
projection=albers_nad83
dx=30.0
dy=30.0
known_x=1.0
known_y=2351.0          # <- edit
known_lat = 40.096571    # <- edit
known_lon = -105.405615  # <- edit
truelat1=29.5
truelat2=45.5
stdlon=-96.0
wordsize=1
scale_factor=0.01
row_order=top_bottom
tile_x=2407              # <- edit
tile_y=2351              # <- edit
tile_z=1
units="unitless"
description="urban fraction"

```

5. Add the following entry to the GEOGRID.TBL file before re-running the geogrid.exe program:

```

=====
name=FRC_URB2D
    priority=1
    dest_type=continuous
    fill_missing = 0.
    interp_option=default: average_gcell(1.0)+four_pt
    abs_path=default:/path/to/dataset/
=====

```

The path to the dataset and index files created in Step 3 and Step 4, respectively, should be substituted for '/path/to/dataset/' in the entry above.

Description of the Namelist Variables

A. SHARE section

This section describes variables that are used by more than one WPS program. For example, the `wrf_core` variable specifies whether the WPS is to produce data for the ARW or the NMM core – information which is needed by both the `geogrid` and `metgrid` programs.

1. `WRF_CORE` : A character string set to either 'ARW' or 'NMM' that tells the WPS which dynamical core the input data are being prepared for. Default value is 'ARW'.
2. `MAX_DOM` : An integer specifying the total number of domains/nests, including the parent domain, in the simulation. Default value is 1.
3. `START_YEAR` : A list of `MAX_DOM` 4-digit integers specifying the starting UTC year of the simulation for each nest. No default value.
4. `START_MONTH` : A list of `MAX_DOM` 2-digit integers specifying the starting UTC month of the simulation for each nest. No default value.
5. `START_DAY` : A list of `MAX_DOM` 2-digit integers specifying the starting UTC day of the simulation for each nest. No default value.
6. `START_HOUR` : A list of `MAX_DOM` 2-digit integers specifying the starting UTC hour of the simulation for each nest. No default value.
7. `END_YEAR` : A list of `MAX_DOM` 4-digit integers specifying the ending UTC year of the simulation for each nest. No default value.
8. `END_MONTH` : A list of `MAX_DOM` 2-digit integers specifying the ending UTC month of the simulation for each nest. No default value.
9. `END_DAY` : A list of `MAX_DOM` 2-digit integers specifying the ending UTC day of the simulation for each nest. No default value.
10. `END_HOUR` : A list of `MAX_DOM` 2-digit integers specifying the ending UTC hour of the simulation for each nest. No default value.

11. **START_DATE** : A list of MAX_DOM character strings of the form 'YYYY-MM-DD_HH:mm:ss' specifying the starting UTC date of the simulation for each nest. The `start_date` variable is an alternate to specifying `start_year`, `start_month`, `start_day`, and `start_hour`, and if both methods are used for specifying the starting time, the `start_date` variable will take precedence. No default value.

12. **END_DATE** : A list of MAX_DOM character strings of the form 'YYYY-MM-DD_HH:mm:ss' specifying the ending UTC date of the simulation for each nest. The `end_date` variable is an alternate to specifying `end_year`, `end_month`, `end_day`, and `end_hour`, and if both methods are used for specifying the ending time, the `end_date` variable will take precedence. No default value.

13. **INTERVAL_SECONDS** : The integer number of seconds between time-varying meteorological input files. No default value.

14. **ACTIVE_GRID** : A list of MAX_DOM logical values specifying, for each grid, whether that grid should be processed by `geogrid` and `metgrid`. Default value is `.TRUE.`.

15. **IO_FORM_GEOGRID** : The WRF I/O API format that the domain files created by the `geogrid` program will be written in. Possible options are: 1 for binary; 2 for NetCDF; 3 for GRIB1. When option 1 is given, domain files will have a suffix of `.int`; when option 2 is given, domain files will have a suffix of `.nc`; when option 3 is given, domain files will have a suffix of `.gr1`. Default value is 2 (NetCDF).

16. **OPT_OUTPUT_FROM_GEOGRID_PATH** : A character string giving the path, either relative or absolute, to the location where output files from `geogrid` should be written to and read from. Default value is `./`.

17. **DEBUG_LEVEL** : An integer value indicating the extent to which different types of messages should be sent to standard output. When `debug_level` is set to 0, only generally useful messages and warning messages will be written to standard output. When `debug_level` is greater than 100, informational messages that provide further runtime details are also written to standard output. Debugging messages and messages specifically intended for log files are never written to standard output, but are always written to the log files. Default value is 0.

B. GEOGRID section

This section specifies variables that are specific to the `geogrid` program. Variables in the `geogrid` section primarily define the size and location of all model domains, and where the static geographical data are found.

1. **PARENT_ID** : A list of MAX_DOM integers specifying, for each nest, the domain number of the nest's parent; for the coarsest domain, this variable should be set to 1. Default value is 1.

2. PARENT_GRID_RATIO : A list of MAX_DOM integers specifying, for each nest, the nesting ratio relative to the domain's parent. No default value.
3. I_PARENT_START : A list of MAX_DOM integers specifying, for each nest, the x-coordinate of the lower-left corner of the nest in the parent *unstaggered* grid. For the coarsest domain, a value of 1 should be specified. No default value.
4. J_PARENT_START : A list of MAX_DOM integers specifying, for each nest, the y-coordinate of the lower-left corner of the nest in the parent *unstaggered* grid. For the coarsest domain, a value of 1 should be specified. No default value.
5. S_WE : A list of MAX_DOM integers which should all be set to 1. Default value is 1.
6. E_WE : A list of MAX_DOM integers specifying, for each nest, the nest's full west-east dimension. For nested domains, `e_we` must be one greater than an integer multiple of the nest's `parent_grid_ratio` (i.e., $e_we = n * \text{parent_grid_ratio} + 1$ for some positive integer n). No default value.
7. S_SN : A list of MAX_DOM integers which should all be set to 1. Default value is 1.
8. E_SN : A list of MAX_DOM integers specifying, for each nest, the nest's full south-north dimension. For nested domains, `e_sn` must be one greater than an integer multiple of the nest's `parent_grid_ratio` (i.e., $e_sn = n * \text{parent_grid_ratio} + 1$ for some positive integer n). No default value.
9. GEOG_DATA_RES : A list of MAX_DOM character strings specifying, for each nest, a corresponding resolution or list of resolutions separated by + symbols of source data to be used when interpolating static terrestrial data to the nest's grid. For each nest, this string should contain a resolution matching a string preceding a colon in a `rel_path` or `abs_path` specification (see the [description of GEOGRID.TBL options](#)) in the GEOGRID.TBL file for each field. If a resolution in the string does not match any such string in a `rel_path` or `abs_path` specification for a field in GEOGRID.TBL, a default resolution of data for that field, if one is specified, will be used. If multiple resolutions match, the first resolution to match a string in a `rel_path` or `abs_path` specification in the GEOGRID.TBL file will be used. Default value is 'default'.
10. DX : A real value specifying the grid distance in the x-direction where the map scale factor is 1. For ARW, the grid distance is in meters for the 'polar', 'lambert', and 'mercator' projection, and in degrees longitude for the 'lat-lon' projection; for NMM, the grid distance is in degrees longitude. Grid distances for nests are determined recursively based on values specified for `parent_grid_ratio` and `parent_id`. No default value.
11. DY : A real value specifying the nominal grid distance in the y-direction where the map scale factor is 1. For ARW, the grid distance is in meters for the 'polar',

'lambert', and 'mercator' projection, and in degrees latitude for the 'lat-lon' projection; for NMM, the grid distance is in degrees latitude. Grid distances for nests are determined recursively based on values specified for `parent_grid_ratio` and `parent_id`. No default value.

12. `MAP_PROJ` : A character string specifying the projection of the simulation domain. For ARW, accepted projections are 'lambert', 'polar', 'mercator', and 'lat-lon'; for NMM, a projection of 'rotated_11' must be specified. Default value is 'lambert'.

13. `REF_LAT` : A real value specifying the latitude part of a (latitude, longitude) location whose (i,j) location in the simulation domain is known. For ARW, `ref_lat` gives the latitude of the center-point of the coarse domain by default (i.e., when `ref_x` and `ref_y` are not specified). For NMM, `ref_lat` always gives the latitude to which the origin is rotated. No default value.

14. `REF_LON` : A real value specifying the longitude part of a (latitude, longitude) location whose (i, j) location in the simulation domain is known. For ARW, `ref_lon` gives the longitude of the center-point of the coarse domain by default (i.e., when `ref_x` and `ref_y` are not specified). For NMM, `ref_lon` always gives the longitude to which the origin is rotated. For both ARW and NMM, west longitudes are negative, and the value of `ref_lon` should be in the range [-180, 180]. No default value.

15. `REF_X` : A real value specifying the i part of an (i, j) location whose (latitude, longitude) location in the simulation domain is known. The (i, j) location is always given with respect to the mass-staggered grid, whose dimensions are one less than the dimensions of the unstaggered grid. Default value is $((E_{WE}-1.)+1.)/2. = (E_{WE}/2.)$.

16. `REF_Y` : A real value specifying the j part of an (i, j) location whose (latitude, longitude) location in the simulation domain is known. The (i, j) location is always given with respect to the mass-staggered grid, whose dimensions are one less than the dimensions of the unstaggered grid. Default value is $((E_{SN}-1.)+1.)/2. = (E_{SN}/2.)$.

17. `TRUELAT1` : A real value specifying, for ARW, the first true latitude for the Lambert conformal projection, or the only true latitude for the Mercator and polar stereographic projections. For NMM, `truelat1` is ignored. No default value.

18. `TRUELAT2` : A real value specifying, for ARW, the second true latitude for the Lambert conformal conic projection. For all other projections, `truelat2` is ignored. No default value.

19. `STAND_LON` : A real value specifying, for ARW, the longitude that is parallel with the y-axis in the Lambert conformal and polar stereographic projections. For the regular latitude-longitude projection, this value gives the rotation about the earth's geographic poles. For NMM, `stand_lon` is ignored. No default value.

20. POLE_LAT : For the latitude-longitude projection for ARW, the latitude of the North Pole with respect to the computational latitude-longitude grid in which -90.0° latitude is at the bottom of a global domain, 90.0° latitude is at the top, and 180.0° longitude is at the center. Default value is 90.0.

21. POLE_LON : For the latitude-longitude projection for ARW, the longitude of the North Pole with respect to the computational lat/lon grid in which -90.0° latitude is at the bottom of a global domain, 90.0° latitude is at the top, and 180.0° longitude is at the center. Default value is 0.0.

22. GEOG_DATA_PATH : A character string giving the path, either relative or absolute, to the directory where the geographical data directories may be found. This path is the one to which `rel_path` specifications in the GEOGRID.TBL file are given in relation to. No default value.

23. OPT_GEOGRID_TBL_PATH : A character string giving the path, either relative or absolute, to the GEOGRID.TBL file. The path should not contain the actual file name, as GEOGRID.TBL is assumed, but should only give the path where this file is located. Default value is `'./geogrid/'`.

C. UNGRIB section

Currently, this section contains only two variables, which determine the output format written by `ungrib` and the name of the output files.

1. OUT_FORMAT : A character string set either to `'WPS'`, `'SI'`, or `'MM5'`. If set to `'MM5'`, `ungrib` will write output in the format of the MM5 pregrid program; if set to `'SI'`, `ungrib` will write output in the format of `grib_prep.exe`; if set to `'WPS'`, `ungrib` will write data in the WPS intermediate format. Default value is `'WPS'`.

2. PREFIX : A character string that will be used as the prefix for intermediate-format files created by `ungrib`; here, prefix refers to the string *PREFIX* in the filename *PREFIX:YYYY-MM-DD_HH* of an intermediate file. The prefix may contain path information, either relative or absolute, in which case the intermediate files will be written in the directory specified. This option may be useful to avoid renaming intermediate files if `ungrib` is to be run on multiple sources of GRIB data. Default value is `'FILE'`.

D. METGRID section

This section defines variables used only by the `metgrid` program. Typically, the user will be interested in the `fg_name` variable, and may need to modify other variables of this section less frequently.

1. **FG_NAME** : A list of character strings specifying the path and prefix of ungribbed data files. The path may be relative or absolute, and the prefix should contain all characters of the filenames up to, but not including, the colon preceding the date. When more than one `fg_name` is specified, and the same field is found in two or more input sources, the data in the last encountered source will take priority over all preceding sources for that field. Default value is an empty list (i.e., no meteorological fields).
2. **CONSTANTS_NAME** : A list of character strings specifying the path and full filename of ungribbed data files which are time-invariant. The path may be relative or absolute, and the filename should be the complete filename; since the data are assumed to be time-invariant, no date will be appended to the specified filename. Default value is an empty list (i.e., no constant fields).
3. **IO_FORM_METGRID** : The WRF I/O API format that the output created by the metgrid program will be written in. Possible options are: 1 for binary; 2 for NetCDF; 3 for GRIB1. When option 1 is given, output files will have a suffix of .int; when option 2 is given, output files will have a suffix of .nc; when option 3 is given, output files will have a suffix of .gr1. Default value is 2 (NetCDF).
4. **OPT_OUTPUT_FROM_METGRID_PATH** : A character string giving the path, either relative or absolute, to the location where output files from metgrid should be written to. The default value is the current working directory (i.e., the default value is `'./'`).
5. **OPT_METGRID_TBL_PATH** : A character string giving the path, either relative or absolute, to the METGRID.TBL file; the path should not contain the actual file name, as METGRID.TBL is assumed, but should only give the path where this file is located. Default value is `'./metgrid/'`.
5. **PROCESS_ONLY_BDY**: An integer specifying the number of boundary rows and columns to be processed by metgrid for time periods after the initial time; for the initial time, metgrid will always interpolate to every grid point. Setting this option to the intended value of `spec_bdy_width` in the WRF namelist.input will speed up processing in metgrid, but it should not be set if interpolated data are needed in the domain interior. If this option is set to zero, metgrid will horizontally interpolate meteorological data to every grid point in the model domains. *This option is only available for ARW.* Default value is 0.

Description of GEOGRID.TBL Options

The GEOGRID.TBL file is a text file that defines parameters of each of the data sets to be interpolated by geogrid. Each data set is defined in a separate section, with sections being delimited by a line of equality symbols (e.g., `'====='`). Within each section, there are specifications, each of which has the form of *keyword=value*. Some keywords are required in each data set section, while others are optional; some keywords

are mutually exclusive with other keywords. Below, the possible keywords and their expected range of values are described.

1. NAME : A character string specifying the name that will be assigned to the interpolated field upon output. No default value.
2. PRIORITY : An integer specifying the priority that the data source identified in the table section takes with respect to other sources of data for the same field. If a field has n sources of data, then there must be n separate table entries for the field, each of which must be given a unique value for *priority* in the range $[1, n]$. No default value.
3. DEST_TYPE : A character string, either `categorical` or `continuous`, that tells whether the interpolated field from the data source given in the table section is to be treated as a continuous or a categorical field. No default value.
4. INTERP_OPTION : A sequence of one or more character strings, which are the names of interpolation methods to be used when horizontally interpolating the field. Available interpolation methods are: `average_4pt`, `average_16pt`, `wt_average_4pt`, `wt_average_16pt`, `nearest_neighbor`, `four_pt`, `sixteen_pt`, `search(r)`, and `average_gcell(r)`. For the search method (`search`), the optional argument *r* specifies the maximum search radius in units of grid points in the grid of the source data; the default search radius is 1200 points. For the grid cell average method (`average_gcell`), the optional argument *r* specifies the minimum ratio of source data resolution to simulation grid resolution at which the method will be applied; unless specified, $r = 0.0$, and the option is used for any ratio. When a sequence of two or more methods are given, the methods should be separated by a + sign. No default value.
5. SMOOTH_OPTION : A character string giving the name of a smoothing method to be applied to the field after interpolation. Available smoothing options are: `1-2-1`, `smth-desmth`, and `smth-desmth_special` (ARW only). Default value is null (i.e., no smoothing is applied).
6. SMOOTH_PASSES : If smoothing is to be performed on the interpolated field, `smooth_passes` specifies an integer number of passes of the smoothing method to apply to the field. Default value is 1.
7. REL_PATH : A character string specifying the path relative to the path given in the namelist variable `geog_data_path`. A specification is of the general form `RES_STRING:REL_PATH`, where `RES_STRING` is a character string identifying the source or resolution of the data in some unique way and may be specified in the namelist variable `geog_data_res`, and `REL_PATH` is a path relative to `geog_data_path` where the index and data tiles for the data source are found. More than one `rel_path` specification may be given in a table section if there are multiple sources or resolutions for the data source, just as multiple resolutions may be specified (in a sequence delimited by + symbols) for `geog_data_res`. See also `abs_path`. No default value.

8. **ABS_PATH** : A character string specifying the absolute path to the index and data files for the data source. A specification is of the general form *RES_STRING:ABS_PATH*, where *RES_STRING* is a character string identifying the source or resolution of the data in some unique way and may be specified in the namelist variable `geog_data_res`, and *ABS_PATH* is the absolute path to the data source's files. More than one `abs_path` specification may be given in a table section if there are multiple sources or resolutions for the data source, just as multiple resolutions may be specified (in a sequence delimited by + symbols) for `geog_data_res`. See also `rel_path`. No default value.

9. **OUTPUT_STAGGER** : A character string specifying the grid staggering to which the field is to be interpolated. For ARW domains, possible values are `u`, `v`, and `m`; for NMM domains, possible values are `hh` and `vv`. Default value for ARW is `m`; default value for NMM is `hh`.

10. **LANDMASK_WATER** : One or more comma-separated integer values giving the indices of the categories within the field that represents water. When `landmask_water` is specified in the table section of a field for which `dest_type=categorical`, the LANDMASK field will be computed from the field using the specified categories as the water categories. The keywords `landmask_water` and `landmask_land` are mutually exclusive. Default value is null (i.e., a landmask will not be computed from the field).

11. **LANDMASK_LAND** : One or more comma-separated integer values giving the indices of the categories within the field that represents land. When `landmask_water` is specified in the table section of a field for which `dest_type=categorical`, the LANDMASK field will be computed from the field using the specified categories as the land categories. The keywords `landmask_water` and `landmask_land` are mutually exclusive. Default value is null (i.e., a landmask will not be computed from the field).

12. **MASKED** : Either `land` or `water`, indicating that the field is not valid at land or water points, respectively. If the `masked` keyword is used for a field, those grid points that are of the masked type (land or water) will be assigned the value specified by `fill_missing`. Default value is null (i.e., the field is not masked).

13. **FILL_MISSING** : A real value used to fill in any missing or masked grid points in the interpolated field. Default value is 1.E20.

14. **HALT_ON_MISSING** : Either `yes` or `no`, indicating whether geogrid should halt with a fatal message when a missing value is encountered in the interpolated field. Default value is `no`.

15. **DOMINANT_CATEGORY** : When specified as a character string, the effect is to cause geogrid to compute the dominant category from the fractional categorical field, and to output the dominant category field with the name specified by the value of `dominant_category`. This option can only be used for fields with `dest_type=categorical`. Default value is null (i.e., no dominant category will be computed from the fractional categorical field).

16. **DOMINANT_ONLY** : When specified as a character string, the effect is similar to that of the `dominant_category` keyword: geogrid will compute the dominant category from the fractional categorical field and output the dominant category field with the name specified by the value of `dominant_only`. Unlike with `dominant_category`, though, when `dominant_only` is used, the fractional categorical field will not appear in the geogrid output. This option can only be used for fields with `dest_type=categorical`. Default value is null (i.e., no dominant category will be computed from the fractional categorical field).

17. **DF_DX** : When `df_dx` is assigned a character string value, the effect is to cause geogrid to compute the directional derivative of the field in the x-direction using a central difference along the interior of the domain, or a one-sided difference at the boundary of the domain; the derivative field will be named according to the character string assigned to the keyword `df_dx`. Default value is null (i.e., no derivative field is computed).

18. **DF_DY** : When `df_dy` is assigned a character string value, the effect is to cause geogrid to compute the directional derivative of the field in the y-direction using a central difference along the interior of the domain, or a one-sided difference at the boundary of the domain; the derivative field will be named according to the character string assigned to the keyword `df_dy`. Default value is null (i.e., no derivative field is computed).

19. **Z_DIM_NAME** : For 3-dimensional output fields, a character string giving the name of the vertical dimension, or z-dimension. A continuous field may have multiple levels, and thus be a 3-dimensional field, and a categorical field may take the form of a 3-dimensional field if it is written out as fractional fields for each category. No default value.

20. **FLAG_IN_OUTPUT** : A character string giving the name of a global attribute which will be assigned a value of 1 and written to the geogrid output. Default value is null (i.e., no flag will be written for the field).

Description of index Options

Related to the GEOGRID.TBL are the index files that are associated with each static data set. An index file defines parameters specific to that data set, while the GEOGRID.TBL file describes how each of the data sets should be treated by geogrid. As with the GEOGRID.TBL file, specifications in an index file are of the form *keyword=value*. Below are possible keywords and their possible values.

1. **PROJECTION** : A character string specifying the projection of the data, which may be either `lambert`, `polar`, `mercator`, `regular_11`, `albers_nad83`, or `polar_wgs84`. No default value.

-
2. **TYPE** : A character string, either `categorical` or `continuous`, that determines whether the data in the data files should be interpreted as a continuous field or as discrete indices. For categorical data represented by a fractional field for each possible category, `type` should be set to `continuous`. No default value.
 3. **SIGNED** : Either `yes` or `no`, indicating whether the values in the data files (which are always represented as integers) are signed in two's complement form or not. Default value is `no`.
 4. **UNITS** : A character string, enclosed in quotation marks ("), specifying the units of the interpolated field; the string will be written to the geogrid output files as a variable time-independent attribute. No default value.
 5. **DESCRIPTION** : A character string, enclosed in quotation marks ("), giving a short description of the interpolated field; the string will be written to the geogrid output files as a variable time-independent attribute. No default value.
 6. **DX** : A real value giving the grid spacing in the x-direction of the data set. If `projection` is one of `lambert`, `polar`, `mercator`, `albers_nad83`, or `polar_wgs84`, `dx` gives the grid spacing in meters; if `projection` is `regular_ll`, `dx` gives the grid spacing in degrees. No default value.
 7. **DY** : A real value giving the grid spacing in the y-direction of the data set. If `projection` is one of `lambert`, `polar`, `mercator`, `albers_nad83`, or `polar_wgs84`, `dy` gives the grid spacing in meters; if `projection` is `regular_ll`, `dy` gives the grid spacing in degrees. No default value.
 8. **KNOWN_X** : A real value specifying the i-coordinate of an (i,j) location corresponding to a (latitude, longitude) location that is known in the projection. Default value is 1.
 9. **KNOWN_Y** : A real value specifying the j-coordinate of an (i,j) location corresponding to a (latitude, longitude) location that is known in the projection. Default value is 1.
 10. **KNOWN_LAT** : A real value specifying the latitude of a (latitude, longitude) location that is known in the projection. No default value.
 11. **KNOWN_LON** : A real value specifying the longitude of a (latitude, longitude) location that is known in the projection. No default value.
 12. **STD_LON** : A real value specifying the longitude that is parallel with the y-axis in conic and azimuthal projections. No default value.

13. TRUELAT1 : A real value specifying the first true latitude for conic projections or the only true latitude for azimuthal projections. No default value.
14. TRUELAT2 : A real value specifying the second true latitude for conic projections. No default value.
15. WORDSIZE : An integer giving the number of bytes used to represent the value of each grid point in the data files. No default value.
16. TILE_X : An integer specifying the number of grid points in the x-direction, *excluding any halo points*, for a single tile of source data. No default value.
17. TILE_Y : An integer specifying the number of grid points in the y-direction, *excluding any halo points*, for a single tile of source data. No default value.
18. TILE_Z : An integer specifying the number of grid points in the z-direction for a single tile of source data; this keyword serves as an alternative to the pair of keywords `tile_z_start` and `tile_z_end`, and when this keyword is used, the starting z-index is assumed to be 1. No default value.
19. TILE_Z_START : An integer specifying the starting index in the z-direction of the array in the data files. If this keyword is used, `tile_z_end` must also be specified. No default value.
20. TILE_Z_END : An integer specifying the ending index in the z-direction of the array in the data files. If this keyword is used, `tile_z_start` must also be specified. No default value.
21. CATEGORY_MIN : For categorical data (`type=categorical`), an integer specifying the minimum category index that is found in the data set. If this keyword is used, `category_max` must also be specified. No default value.
22. CATEGORY_MAX : For categorical data (`type=categorical`), an integer specifying the maximum category index that is found in the data set. If this keyword is used, `category_min` must also be specified. No default value.
23. TILE_BDR : An integer specifying the halo width, in grid points, for each tile of data. Default value is 0.
24. MISSING_VALUE : A real value that, when encountered in the data set, should be interpreted as missing data. No default value.
25. SCALE_FACTOR : A real value that data should be scaled by (through multiplication) after being read in as integers from tiles of the data set. Default value is 1.

-
26. **ROW_ORDER** : A character string, either `bottom_top` or `top_bottom`, specifying whether the rows of the data set arrays were written proceeding from the lowest-index row to the highest (`bottom_top`) or from highest to lowest (`top_bottom`). This keyword may be useful when utilizing some USGS data sets, which are provided in `top_bottom` order. Default value is `bottom_top`.
27. **ENDIAN** : A character string, either `big` or `little`, specifying whether the values in the static data set arrays are in big-endian or little-endian byte order. Default value is `big`.
28. **ISWATER** : An integer specifying the land use category of water. Default value is 16.
29. **ISLAKE** : An integer specifying the land use category of inland water bodies. Default value is -1 (i.e., no separate inland water category).
30. **ISICE** : An integer specifying the land use category of ice. Default value is 24.
31. **ISURBAN** : An integer specifying the land use category of urban areas. Default value is 1.
32. **ISOILWATER** : An integer specifying the soil category of water. Default value is 14.
33. **MMINLU** : A character string, enclosed in quotation marks ("), indicating which section of WRF's `LANDUSE.TBL` and `VEGPARM.TBL` will be used when looking up parameters for land use categories. Default value is `"usgs"`.

Description of METGRID.TBL Options

The `METGRID.TBL` file is a text file that defines parameters of each of the meteorological fields to be interpolated by `metgrid`. Parameters for each field are defined in a separate section, with sections being delimited by a line of equality symbols (e.g., `'====='`). Within each section, there are specifications, each of which has the form of *keyword=value*. Some keywords are required in a section, while others are optional; some keywords are mutually exclusive with other keywords. Below, the possible keywords and their expected range of values are described.

1. **NAME** : A character string giving the name of the meteorological field to which the containing section of the table pertains. The name should exactly match that of the field as given in the intermediate files (and, thus, the name given in the `Vtable` used in generating the intermediate files). This field is required. No default value.
2. **OUTPUT** : Either `yes` or `no`, indicating whether the field is to be written to the `metgrid` output files or not. Default value is `yes`.

3. **MANDATORY** : Either *yes* or *no*, indicating whether the field is required for successful completion of metgrid. Default value is *no*.
4. **OUTPUT_NAME** : A character string giving the name that the interpolated field should be output as. When a value is specified for `output_name`, the interpolation options from the table section pertaining to the field with the specified name are used. Thus, the effects of specifying `output_name` are two-fold: The interpolated field is assigned the specified name before being written out, and the interpolation methods are taken from the section pertaining to the field whose name matches the value assigned to the `output_name` keyword. No default value.
5. **FROM_INPUT** : A character string used to compare against the values in the `fg_name` namelist variable; if `from_input` is specified, the containing table section will only be used when the time-varying input source has a filename that contains the value of `from_input` as a substring. Thus, `from_input` may be used to specify different interpolation options for the same field, depending on which source of the field is being processed. No default value.
6. **OUTPUT_STAGGER** : The model grid staggering to which the field should be interpolated. For ARW, this must be one of *u*, *v*, and *m*; for NMM, this must be one of *hh* and *vv*. Default value for ARW is *m*; default value for NMM is *hh*.
7. **IS_U_FIELD** : Either *yes* or *no*, indicating whether the field is to be used as the wind U-component field. For ARW, the wind U-component field must be interpolated to the U staggering (`output_stagger=u`); for NMM, the wind U-component field must be interpolated to the V staggering (`output_stagger=vv`). Default value is *no*.
8. **IS_V_FIELD** : Either *yes* or *no*, indicating whether the field is to be used as the wind V-component field. For ARW, the wind V-component field must be interpolated to the V staggering (`output_stagger=v`); for NMM, the wind V-component field must be interpolated to the V staggering (`output_stagger=vv`). Default value is *no*.
9. **INTERP_OPTION** : A sequence of one or more character strings, which are the names of interpolation methods to be used when horizontally interpolating the field. Available interpolation methods are: `average_4pt`, `average_16pt`, `wt_average_4pt`, `wt_average_16pt`, `nearest_neighbor`, `four_pt`, `sixteen_pt`, `search(r)`, and `average_gcell(r)`. For the search method (`search`), the optional argument *r* specifies the maximum search radius in units of grid points in the grid of the source data; the default search radius is 1200 points. For the grid cell average method (`average_gcell`), the optional argument *r* specifies the minimum ratio of source data resolution to simulation grid resolution at which the method will be applied; unless specified, *r* = 0.0, and the option is used for any ratio. When a sequence of two or more methods are given, the methods should be separated by a + sign. Default value is `nearest_neighbor`.

10. **INTERP_MASK** : The name of the field to be used as an interpolation mask, along with the value within that field which signals masked points and an optional relational symbol, < or >. A specification takes the form *field(?maskval)*, where *field* is the name of the field, ? is an optional relational symbol (< or >), and *maskval* is a real value. Source data points will not be used in interpolation if the corresponding point in the *field* field is equal, greater than, or less than, the value of *maskval* for no relational symbol, a > symbol, or a < symbol, respectively. Default value is no mask.

11. **INTERP_LAND_MASK** : The name of the field to be used as an interpolation mask when interpolating to water points (determined by the static LANDMASK field), along with the value within that field which signals land points and an optional relational symbol, < or >. A specification takes the form *field(?maskval)*, where *field* is the name of the field, ? is an optional relational symbol (< or >), and *maskval* is a real value. Default value is no mask.

12. **INTERP_WATER_MASK** : The name of the field to be used as an interpolation mask when interpolating to land points (determined by the static LANDMASK field), along with the value within that field which signals water points and an optional relational symbol, < or >. A specification takes the form *field(?maskval)*, where *field* is the name of the field, ? is an optional relational symbol (< or >), and *maskval* is a real value. Default value is no mask.

13. **FILL_MISSING** : A real number specifying the value to be assigned to model grid points that received no interpolated value, for example, because of missing or incomplete meteorological data. Default value is 1.E20.

14. **Z_DIM_NAME** : For 3-dimensional meteorological fields, a character string giving the name of the vertical dimension to be used for the field on output. Default value is `num_metgrid_levels`.

15. **DERIVED** : Either `yes` or `no`, indicating whether the field is to be derived from other interpolated fields, rather than interpolated from an input field. Default value is `no`.

16. **FILL_LEV** : The `fill_lev` keyword, which may be specified multiple times within a table section, specifies how a level of the field should be filled if that level does not already exist. A generic value for the keyword takes the form *DLEVEL:FIELD(SLEVEL)*, where *DLEVEL* specifies the level in the field to be filled, *FIELD* specifies the source field from which to copy levels, and *SLEVEL* specifies the level within the source field to use. *DLEVEL* may either be an integer or the string `all`. *FIELD* may either be the name of another field, the string `const`, or the string `vertical_index`. If *FIELD* is specified as `const`, then *SLEVEL* is a constant value that will be used to fill with; if *FIELD* is specified as `vertical_index`, then (*SLEVEL*) must not be specified, and the value of the vertical index of the source field is used; if *DLEVEL* is 'all', then all levels from the field specified by the `level_template` keyword are used to fill the corresponding levels in the field, one at a time. No default value.

17. **LEVEL_TEMPLATE** : A character string giving the name of a field from which a list of vertical levels should be obtained and used as a template. This keyword is used in conjunction with a `fill_lev` specification that uses `all` in the *DLEVEL* part of its specification. No default value.

18. **MASKED** : Either `land`, `water`, or `both`. Setting **MASKED** to `land` or `water` indicates that the field should not be interpolated to WRF land or water points, respectively; however, setting **MASKED** to `both` indicates that the field should be interpolated to WRF land points using only land points in the source data and to WRF water points using only water points in the source data. When a field is masked, or invalid, the static **LANDMASK** field will be used to determine which model grid points the field should be interpolated to; invalid points will be assigned the value given by the **FILL_MISSING** keyword. Whether a source data point is land or water is determined by the masks specified using the **INTERP_LAND_MASK** and **INTERP_WATER_MASK** options. Default value is null (i.e., the field is valid for both land and water points).

19. **MISSING_VALUE** : A real number giving the value in the input field that is assumed to represent missing data. No default value.


20. **VERTICAL_INTERP_OPTION** : A character string specifying the vertical interpolation method that should be used when vertically interpolating to missing points. Currently, this option is not implemented. No default value.

21. **FLAG_IN_OUTPUT** : A character string giving the name of a global attribute which will be assigned a value of 1 and written to the metgrid output if the interpolated field is to be output (output=yes). Default value is null (i.e., no flag will be written for the field).

Available Interpolation Options in Geogrid and Metgrid


Through the **GEOGRID.TBL** and **METGRID.TBL** files, the user can control the method by which source data – either static fields in the case of geogrid or meteorological fields in the case of metgrid – are interpolated. In fact, a list of interpolation methods may be given, in which case, if it is not possible to employ the *i*-th method in the list, the (*i*+1)-st method will be employed, until either some method can be used or there are no methods left to try in the list. For example, to use a four-point bi-linear interpolation scheme for a field, we could specify `interp_option=four_pt`. However, if the field had areas of missing values, which could prevent the `four_pt` option from being used, we could request that a simple four-point average be tried if the `four_pt` method couldn't be used by specifying `interp_option=four_pt+average_4pt` instead. Below, each of the available interpolation options in the WPS are described conceptually; for the details of each method, the user is referred to the source code in the file `WPS/geogrid/src/interp_options.F`.

1. four_pt : Four-point bi-linear interpolation



The four-point bi-linear interpolation method requires four valid source points a_{ij} , $1 \leq i, j \leq 2$, surrounding the point (x, y) , to which geogrid or metgrid must interpolate, as illustrated in the figure above. Intuitively, the method works by linearly interpolating to the x -coordinate of the point (x, y) between a_{11} and a_{12} , and between a_{21} and a_{22} , and then linearly interpolating to the y -coordinate using these two interpolated values.

2. sixteen_pt : Sixteen-point overlapping parabolic interpolation

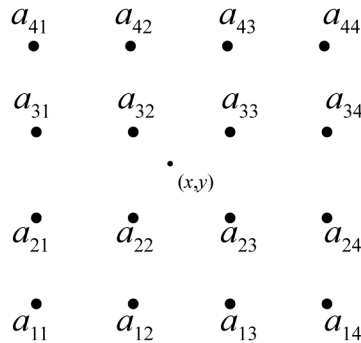

The sixteen_pt overlapping parabolic interpolation method requires sixteen valid source points surrounding the point (x, y) , as illustrated in the figure above. The method works by fitting one parabola to the points a_{i1} , a_{i2} , and a_{i3} , and another parabola to the points a_{i2} , a_{i3} , and a_{i4} , for row i , $1 \leq i \leq 4$; then, an intermediate interpolated value p_i within row i at the x -coordinate of the point is computed by taking an average of the values of the two parabolas evaluated at x , with the average being weighted linearly by the distance of x from a_{i2} and a_{i3} . Finally, the interpolated value at (x, y) is found by performing the same operations as for a row of points, but for the column of interpolated values p_i to the y -coordinate of (x, y) .

3. average_4pt : Simple four-point average interpolation

The four-point average interpolation method requires at least one valid source data point from the four source points surrounding the point (x,y) . The interpolated value is simply the average value of all valid values among these four points.

4. wt_average_4pt : Weighted four-point average interpolation

The weighted four-point average interpolation method can handle missing or masked source data points, and the interpolated value is given as the weighted average of all valid values, with the weight w_{ij} for the source point a_{ij} , $1 \leq i, j \leq 2$, given by

$$w_{ij} = \max \{0, 1 - \sqrt{(x - x_i)^2 + (y - y_j)^2} \}.$$

Here, x_i is the x -coordinate of a_{ij} and y_j is the y -coordinate of a_{ij} .

5. average_16pt : Simple sixteen-point average interpolation

The sixteen-point average interpolation method works in an identical way to the four-point average, but considers the sixteen points surrounding the point (x,y) .

6. wt_average_16pt : Weighted sixteen-point average interpolation

The weighted sixteen-point average interpolation method works like the weighted four-point average, but considers the sixteen points surrounding (x,y) ; the weights in this method are given by

$$w_{ij} = \max \{0, 2 - \sqrt{(x - x_i)^2 + (y - y_j)^2} \},$$

where x_i and y_j are as defined for the weighted four-point method, and $1 \leq i, j \leq 4$.


7. nearest_neighbor : Nearest neighbor interpolation

The nearest neighbor interpolation method simply sets the interpolated value at (x,y) to the value of the nearest source data point, regardless of whether this nearest source point is valid, missing, or masked.

8. search : Breadth-first search interpolation

The breadth-first search option works by treating the source data array as a 2-d grid graph, where each source data point, whether valid or not, is represented by a vertex. Then, the value assigned to the point (x,y) is found by beginning a breadth-first search at the vertex corresponding to the nearest neighbor of (x,y) , and stopping once a vertex representing a valid (i.e., not masked or missing) source data point is found. In effect, this method can be thought of as "nearest *valid* neighbor".

9. average_gcell : Model grid-cell average

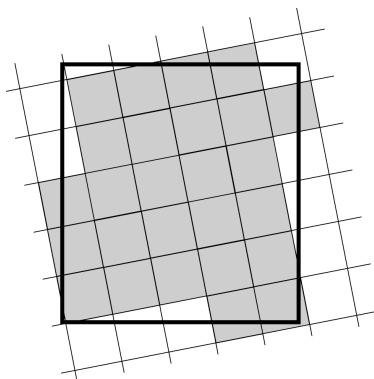

The grid-cell average interpolator may be used when the resolution of the source data is higher than the resolution of the model grid. For a model grid cell I , the method takes a simple average of the values of all source data points that are nearer to the center of I than to the center of any other grid cell. The operation of the grid-cell average method is illustrated in the figure above, where the interpolated value for the model grid cell – represented as the large rectangle – is given by the simple average of the values of all of the shaded source grid cells.

Land Use and Soil Categories in the Static Data

The default land use and soil category data sets that are provided as part of the WPS static data tar file contain categories that are matched with the USGS categories described in the VEGPARM.TBL and SOILPARM.TBL files in the WRF run directory. Descriptions of the 24 land use categories and 16 soil categories are provided in the tables below.

Table 1: USGS 24-category Land Use Categories

Land Use Category	Land Use Description
1	Urban and Built-up Land
2	Dryland Cropland and Pasture
3	Irrigated Cropland and Pasture
4	Mixed Dryland/Irrigated Cropland and Pasture
5	Cropland/Grassland Mosaic
6	Cropland/Woodland Mosaic
7	Grassland
8	Shrubland
9	Mixed Shrubland/Grassland
10	Savanna
11	Deciduous Broadleaf Forest
12	Deciduous Needleleaf Forest
13	Evergreen Broadleaf
14	Evergreen Needleleaf
15	Mixed Forest
16	Water Bodies
17	Herbaceous Wetland
18	Wooden Wetland
19	Barren or Sparsely Vegetated
20	Herbaceous Tundra
21	Wooded Tundra
22	Mixed Tundra
23	Bare Ground Tundra
24	Snow or Ice

Table 2: IGBP-Modified MODIS 20-category Land Use Categories

Land Use Category	Land Use Description
1	Evergreen Needleleaf Forest
2	Evergreen Broadleaf Forest
3	Deciduous Needleleaf Forest
4	Deciduous Broadleaf Forest
5	Mixed Forests
6	Closed Shrublands
7	Open Shrublands
8	Woody Savannas
9	Savannas
10	Grasslands
11	Permanent Wetlands
12	Croplands

13	Urban and Built-Up
14	Cropland/Natural Vegetation Mosaic
15	Snow and Ice
16	Barren or Sparsely Vegetated
17	Water
18	Wooded Tundra
19	Mixed Tundra
20	Barren Tundra

Table 3: 16-category Soil Categories

Soil Category	Soil Description
1	Sand
2	Loamy Sand
3	Sandy Loam
4	Silt Loam
5	Silt
6	Loam
7	Sandy Clay Loam
8	Silty Clay Loam
9	Clay Loam
10	Sandy Clay
11	Silty Clay
12	Clay
13	Organic Material
14	Water
15	Bedrock
16	Other (land-ice)

WPS Output Fields

Below, a listing of the global attributes and fields that are written to the geogrid program's output files is given. This listing is an abridged version of the output from the `ncdump` program when run on a typical `geo_em.d01.nc` file.

```
netcdf geo_em.d01 {
dimensions:
    Time = UNLIMITED ; // (1 currently)
    DateStrLen = 19 ;
    west_east = 73 ;
    south_north = 60 ;
    south_north_stag = 61 ;
    west_east_stag = 74 ;
    land_cat = 24 ;
```

```
soil_cat = 16 ;
month = 12 ;
variables:
char Times(Time, DateStrLen) ;
float XLAT_M(Time, south_north, west_east) ;
    XLAT_M:units = "degrees latitude" ;
    XLAT_M:description = "Latitude on mass grid" ;
float XLONG_M(Time, south_north, west_east) ;
    XLONG_M:units = "degrees longitude" ;
    XLONG_M:description = "Longitude on mass grid" ;
float XLAT_V(Time, south_north_stag, west_east) ;
    XLAT_V:units = "degrees latitude" ;
    XLAT_V:description = "Latitude on V grid" ;
float XLONG_V(Time, south_north_stag, west_east) ;
    XLONG_V:units = "degrees longitude" ;
    XLONG_V:description = "Longitude on V grid" ;
float XLAT_U(Time, south_north, west_east_stag) ;
    XLAT_U:units = "degrees latitude" ;
    XLAT_U:description = "Latitude on U grid" ;
float XLONG_U(Time, south_north, west_east_stag) ;
    XLONG_U:units = "degrees longitude" ;
    XLONG_U:description = "Longitude on U grid" ;
float CLAT(Time, south_north, west_east) ;
    CLAT:units = "degrees latitude" ;
    CLAT:description = "Computational latitude on mass grid" ;
float CLONG(Time, south_north, west_east) ;
    CLONG:units = "degrees longitude" ;
    CLONG:description = "Computational longitude on mass grid" ;
float MAPFAC_M(Time, south_north, west_east) ;
    MAPFAC_M:units = "none" ;
    MAPFAC_M:description = "Mapfactor on mass grid" ;
float MAPFAC_V(Time, south_north_stag, west_east) ;
    MAPFAC_V:units = "none" ;
    MAPFAC_V:description = "Mapfactor on V grid" ;
float MAPFAC_U(Time, south_north, west_east_stag) ;
    MAPFAC_U:units = "none" ;
    MAPFAC_U:description = "Mapfactor on U grid" ;
float MAPFAC_MX(Time, south_north, west_east) ;
    MAPFAC_MX:units = "none" ;
    MAPFAC_MX:description = "Mapfactor (x-dir) on mass grid" ;
float MAPFAC_VX(Time, south_north_stag, west_east) ;
    MAPFAC_VX:units = "none" ;
    MAPFAC_VX:description = "Mapfactor (x-dir) on V grid" ;
float MAPFAC_UX(Time, south_north, west_east_stag) ;
    MAPFAC_UX:units = "none" ;
    MAPFAC_UX:description = "Mapfactor (x-dir) on U grid" ;
float MAPFAC_MY(Time, south_north, west_east) ;
    MAPFAC_MY:units = "none" ;
    MAPFAC_MY:description = "Mapfactor (y-dir) on mass grid" ;
float MAPFAC_VY(Time, south_north_stag, west_east) ;
    MAPFAC_VY:units = "none" ;
    MAPFAC_VY:description = "Mapfactor (y-dir) on V grid" ;
float MAPFAC_UY(Time, south_north, west_east_stag) ;
    MAPFAC_UY:units = "none" ;
    MAPFAC_UY:description = "Mapfactor (y-dir) on U grid" ;
float E(Time, south_north, west_east) ;
    E:units = "-" ;
    E:description = "Coriolis E parameter" ;
float F(Time, south_north, west_east) ;
    F:units = "-" ;
    F:description = "Coriolis F parameter" ;
float SINALPHA(Time, south_north, west_east) ;
    SINALPHA:units = "none" ;
```

```

        SINALPHA:description = "Sine of rotation angle" ;
float COSALPHA(Time, south_north, west_east) ;
        COSALPHA:units = "none" ;
        COSALPHA:description = "Cosine of rotation angle" ;
float LANDMASK(Time, south_north, west_east) ;
        LANDMASK:units = "none" ;
        LANDMASK:description = "Landmask : 1=land, 0=water" ;
float LANDUSEF(Time, land_cat, south_north, west_east) ;
        LANDUSEF:units = "category" ;
        LANDUSEF:description = "24-category USGS landuse" ;
float LU_INDEX(Time, south_north, west_east) ;
        LU_INDEX:units = "category" ;
        LU_INDEX:description = "Dominant category" ;
float HGT_M(Time, south_north, west_east) ;
        HGT_M:units = "meters MSL" ;
        HGT_M:description = "Topography height" ;
float SLPX(Time, south_north, west_east) ;
        SLPX:units = "-" ;
        SLPX:description = "df/dx" ;
float SLPY(Time, south_north, west_east) ;
        SLPY:units = "-" ;
        SLPY:description = "df/dy" ;
float HGT_U(Time, south_north, west_east_stag) ;
        HGT_U:units = "meters MSL" ;
        HGT_U:description = "Topography height" ;
float HGT_V(Time, south_north_stag, west_east) ;
        HGT_V:units = "meters MSL" ;
        HGT_V:description = "Topography height" ;
float SOILTEMP(Time, south_north, west_east) ;
        SOILTEMP:units = "Kelvin" ;
        SOILTEMP:description = "Annual mean deep soil temperature" ;
float SOILCTOP(Time, soil_cat, south_north, west_east) ;
        SOILCTOP:units = "category" ;
        SOILCTOP:description = "16-category top-layer soil type" ;
float SCT_DOM(Time, south_north, west_east) ;
        SCT_DOM:units = "category" ;
        SCT_DOM:description = "Dominant category" ;
float SOILCBOT(Time, soil_cat, south_north, west_east) ;
        SOILCBOT:units = "category" ;
        SOILCBOT:description = "16-category top-layer soil type" ;
float SCB_DOM(Time, south_north, west_east) ;
        SCB_DOM:units = "category" ;
        SCB_DOM:description = "Dominant category" ;
float ALBEDO12M(Time, month, south_north, west_east) ;
        ALBEDO12M:units = "percent" ;
        ALBEDO12M:description = "Monthly surface albedo" ;
float GREENFRAC(Time, month, south_north, west_east) ;
        GREENFRAC:units = "fraction" ;
        GREENFRAC:description = "Monthly green fraction" ;
float SNOALB(Time, south_north, west_east) ;
        SNOALB:units = "percent" ;
        SNOALB:description = "Maximum snow albedo" ;
float SLOPECAT(Time, south_north, west_east) ;
        SLOPECAT:units = "category" ;
        SLOPECAT:description = "Dominant category" ;
float CON(Time, south_north, west_east) ;
        CON:units = "" ;
        CON:description = "orographic convexity" ;
float VAR(Time, south_north, west_east) ;
        VAR:units = "m" ;
        VAR:description = "stdev of subgrid-scale orographic height" ;
float OA1(Time, south_north, west_east) ;
        OA1:units = "" ;

```

```

        OA1:description = "orographic asymmetry" ;
float OA2(Time, south_north, west_east) ;
        OA2:units = "" ;
        OA2:description = "orographic asymmetry" ;
float OA3(Time, south_north, west_east) ;
        OA3:units = "" ;
        OA3:description = "orographic asymmetry" ;
float OA4(Time, south_north, west_east) ;
        OA4:units = "" ;
        OA4:description = "orographic asymmetry" ;
float OL1(Time, south_north, west_east) ;
        OL1:units = "fraction" ;
        OL1:description = "effective orographic length" ;
float OL2(Time, south_north, west_east) ;
        OL2:units = "fraction" ;
        OL2:description = "effective orographic length" ;
float OL3(Time, south_north, west_east) ;
        OL3:units = "fraction" ;
        OL3:description = "effective orographic length" ;
float OL4(Time, south_north, west_east) ;
        OL4:units = "fraction" ;
        OL4:description = "effective orographic length" ;

// global attributes:
        :TITLE = "OUTPUT FROM GEOGRID V3.3" ;
        :SIMULATION_START_DATE = "0000-00-00_00:00:00" ;
        :WEST-EAST_GRID_DIMENSION = 74 ;
        :SOUTH-NORTH_GRID_DIMENSION = 61 ;
        :BOTTOM-TOP_GRID_DIMENSION = 0 ;
        :WEST-EAST_PATCH_START_UNSTAG = 1 ;
        :WEST-EAST_PATCH_END_UNSTAG = 73 ;
        :WEST-EAST_PATCH_START_STAG = 1 ;
        :WEST-EAST_PATCH_END_STAG = 74 ;
        :SOUTH-NORTH_PATCH_START_UNSTAG = 1 ;
        :SOUTH-NORTH_PATCH_END_UNSTAG = 60 ;
        :SOUTH-NORTH_PATCH_START_STAG = 1 ;
        :SOUTH-NORTH_PATCH_END_STAG = 61 ;
        :GRIDTYPE = "C" ;
        :DX = 30000.f ;
        :DY = 30000.f ;
        :DYN_OPT = 2 ;
        :CEN_LAT = 34.83001f ;
        :CEN_LON = -81.03f ;
        :TRUELAT1 = 30.f ;
        :TRUELAT2 = 60.f ;
        :MOAD_CEN_LAT = 34.83001f ;
        :STAND_LON = -98.f ;
        :POLE_LAT = 90.f ;
        :POLE_LON = 0.f ;
        :corner_lats = 28.17127f, 44.36657f, 39.63231f, 24.61906f,
28.17842f, 44.37617f, 39.57811f, 24.57806f, 28.03772f, 44.50592f, 39.76032f,
24.49431f, 28.04484f, 44.51554f, 39.70599f, 24.45341f ;
        :corner_lons = -93.64893f, -92.39661f, -66.00165f, -72.6405f, -
93.80048f, -92.59155f, -65.83557f, -72.5033f, -93.65717f, -92.3829f, -65.9313f,
-72.68539f, -93.80841f, -92.57831f, -65.76495f, -72.54843f ;
        :MAP_PROJ = 1 ;
        :MMINLU = "USGS" ;
        :NUM_LAND_CAT = 24;
        :ISWATER = 16 ;
        :ISLAKE = -1;
        :ISICE = 24 ;
        :ISURBAN = 1 ;

```


```

:ISOILWATER = 14 ;
:grid_id = 1 ;
:parent_id = 1 ;
:i_parent_start = 1 ;
:j_parent_start = 1 ;
:i_parent_end = 74 ;
:j_parent_end = 61 ;
:parent_grid_ratio = 1 ;
:sr_x = 1 ;
:sr_y = 1 ;
:FLAG_MF_XY = 1 ;
}

```

The global attributes `corner_lats` and `corner_lons` contain the lat-lon location of the corners of the domain with respect to different grid staggarings (mass, u , v , and unstaggered). The locations referred to by each element of the `corner_lats` and `corner_lons` arrays are summarized in the table and figure below.

Array index	Staggering	Corner
1	Mass	Lower-left
2		Upper-left
3		Upper-right
4		Lower-right
5	U	Lower-left
6		Upper-left
7		Upper-right
8		Lower-right
9	V	Lower-left
10		Upper-left
11		Upper-right
12		Lower-right
13	Unstaggered	Lower-left
14		Upper-left
15		Upper-right
16		Lower-right

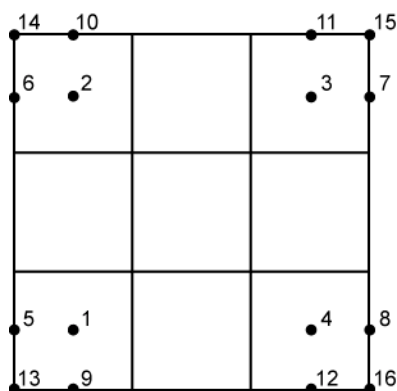

In addition to the fields in a geogrid output file (e.g., geo_em.d01.nc), the following fields and global attributes will also be present in a typical output file from the metgrid program, run with the default METGRID.TBL file and meteorological data from NCEP's GFS model.

```
netcdf met_em.d01.2009-01-05_12:00:00 {
dimensions:
    Time = UNLIMITED ; // (1 currently)
    DateStrLen = 19 ;
    west_east = 73 ;
    south_north = 60 ;
    num_metgrid_levels = 27 ;
    num_sm_levels = 4 ;
    num_st_levels = 4 ;
    south_north_stag = 61 ;
    west_east_stag = 74 ;
    z-dimension0012 = 12 ;
    z-dimension0016 = 16 ;
    z-dimension0024 = 24 ;
variables:
    char Times(Time, DateStrLen) ;
    float PRES(Time, num_metgrid_levels, south_north, west_east) ;
        PRES:units = "" ;
        PRES:description = "" ;
    float SOIL_LAYERS(Time, num_st_layers, south_north, west_east) ;
        SM:units = "" ;
        SM:description = "" ;
    float SM(Time, num_sm_levels, south_north, west_east) ;
        SM:units = "" ;
        SM:description = "" ;
    float ST(Time, num_st_levels, south_north, west_east) ;
        ST:units = "" ;
        ST:description = "" ;
    float GHT(Time, num_metgrid_levels, south_north, west_east) ;
        GHT:units = "m" ;
        GHT:description = "Height" ;
    float SNOW(Time, south_north, west_east) ;
        SNOW:units = "kg m-2" ;
        SNOW:description = "Water equivalent snow depth" ;
    float SKINTEMP(Time, south_north, west_east) ;
        SKINTEMP:units = "K" ;
        SKINTEMP:description = "Skin temperature (can use for SST also)" ;
    float SOILHGT(Time, south_north, west_east) ;
        SOILHGT:units = "m" ;
        SOILHGT:description = "Terrain field of source analysis" ;
    float LANDSEA(Time, south_north, west_east) ;
        LANDSEA:units = "proprtn" ;
        LANDSEA:description = "Land/Sea flag (1=land, 0 or 2=sea)" ;
    float SEAICE(Time, south_north, west_east) ;
        SEAICE:units = "proprtn" ;
        SEAICE:description = "Ice flag" ;
    float ST100200(Time, south_north, west_east) ;
        ST100200:units = "K" ;
        ST100200:description = "T 100-200 cm below ground layer (Bottom)"
;

    float ST040100(Time, south_north, west_east) ;
        ST040100:units = "K" ;
        ST040100:description = "T 40-100 cm below ground layer (Upper)" ;
    float ST010040(Time, south_north, west_east) ;
```

```

        ST010040:units = "K" ;
        ST010040:description = "T 10-40 cm below ground layer (Upper)" ;
float ST000010(Time, south_north, west_east) ;
        ST000010:units = "K" ;
        ST000010:description = "T 0-10 cm below ground layer (Upper)" ;
float SM100200(Time, south_north, west_east) ;
        SM100200:units = "kg m-3" ;
        SM100200:description = "Soil Moist 100-200 cm below gr layer" ;
float SM040100(Time, south_north, west_east) ;
        SM040100:units = "kg m-3" ;
        SM040100:description = "Soil Moist 40-100 cm below grn layer" ;
float SM010040(Time, south_north, west_east) ;
        SM010040:units = "kg m-3" ;
        SM010040:description = "Soil Moist 10-40 cm below grn layer" ;
float SM000010(Time, south_north, west_east) ;
        SM000010:units = "kg m-3" ;
        SM000010:description = "Soil Moist 0-10 cm below grn layer (Up)" ;
float PSFC(Time, south_north, west_east) ;
        PSFC:units = "Pa" ;
        PSFC:description = "Surface Pressure" ;
float RH(Time, num_metgrid_levels, south_north, west_east) ;
        RH:units = "%" ;
        RH:description = "Relative Humidity" ;
float VV(Time, num_metgrid_levels, south_north_stag, west_east) ;
        VV:units = "m s-1" ;
        VV:description = "V" ;
float UU(Time, num_metgrid_levels, south_north, west_east_stag) ;
        UU:units = "m s-1" ;
        UU:description = "U" ;
float TT(Time, num_metgrid_levels, south_north, west_east) ;
        TT:units = "K" ;
        TT:description = "Temperature" ;
float PMSL(Time, south_north, west_east) ;
        PMSL:units = "Pa" ;
        PMSL:description = "Sea-level Pressure" ;

// global attributes:
        :TITLE = "OUTPUT FROM METGRID V3.3" ;
        :SIMULATION_START_DATE = "2009-01-05_12:00:00" ;
        :WEST-EAST_GRID_DIMENSION = 74 ;
        :SOUTH-NORTH_GRID_DIMENSION = 61 ;
        :BOTTOM-TOP_GRID_DIMENSION = 27 ;
        :WEST-EAST_PATCH_START_UNSTAG = 1 ;
        :WEST-EAST_PATCH_END_UNSTAG = 73 ;
        :WEST-EAST_PATCH_START_STAG = 1 ;
        :WEST-EAST_PATCH_END_STAG = 74 ;
        :SOUTH-NORTH_PATCH_START_UNSTAG = 1 ;
        :SOUTH-NORTH_PATCH_END_UNSTAG = 60 ;
        :SOUTH-NORTH_PATCH_START_STAG = 1 ;
        :SOUTH-NORTH_PATCH_END_STAG = 61 ;
        :GRIDTYPE = "C" ;
        :DX = 30000.f ;
        :DY = 30000.f ;
        :DYN_OPT = 2 ;
        :CEN_LAT = 34.83001f ;
        :CEN_LON = -81.03f ;
        :TRUELAT1 = 30.f ;
        :TRUELAT2 = 60.f ;
        :MOAD_CEN_LAT = 34.83001f ;
        :STAND_LON = -98.f ;
        :POLE_LAT = 90.f ;
        :POLE_LON = 0.f ;

```

```
        :corner_lats = 28.17127f, 44.36657f, 39.63231f, 24.61906f,
28.17842f, 44.37617f, 39.57811f, 24.57806f, 28.03772f, 44.50592f, 39.76032f,
24.49431f, 28.04484f, 44.51554f, 39.70599f, 24.45341f ;
        :corner_lons = -93.64893f, -92.39661f, -66.00165f, -72.6405f, -
93.80048f, -92.59155f, -65.83557f, -72.5033f, -93.65717f, -92.3829f, -65.9313f,
-72.68539f, -93.80841f, -92.57831f, -65.76495f, -72.54843f ;
        :MAP_PROJ = 1 ;
        :MMINLU = "USGS" ;
        :NUM_LAND_CAT = 24;
        :ISWATER = 16 ;
        :ISLAKE = -1;
        :ISICE = 24 ;
        :ISURBAN = 1 ;
        :ISOILWATER = 14 ;
        :grid_id = 1 ;
        :parent_id = 1 ;
        :i_parent_start = 1 ;
        :j_parent_start = 1 ;
        :i_parent_end = 74 ;
        :j_parent_end = 61 ;
        :parent_grid_ratio = 1 ;
        :sr_x = 1 ;
        :sr_y = 1 ;
        :NUM_METGRID_SOIL_LEVELS = 4 ;
        :FLAG_METGRID = 1 ;
        :FLAG_EXCLUDED_MIDDLE = 0 ;
        :FLAG_SOIL_LAYERS = 1 ;
        :FLAG_SNOW = 1 ;
        :FLAG_PSFC = 1 ;
        :FLAG_SM000010 = 1 ;
        :FLAG_SM010040 = 1 ;
        :FLAG_SM040100 = 1 ;
        :FLAG_SM100200 = 1 ;
        :FLAG_ST000010 = 1 ;
        :FLAG_ST010040 = 1 ;
        :FLAG_ST040100 = 1 ;
        :FLAG_ST100200 = 1 ;
        :FLAG_SLP = 1 ;
        :FLAG_SOILHGT = 1 ;
        :FLAG_MF_XY = 1 ;
    }
```

Chapter 4: WRF Initialization

Table of Contents

- [Introduction](#)
- [Initialization for Ideal Data Cases](#)
- [Initialization for Real Data Cases](#)

Introduction

The [WRF](#) model has two large classes of simulations that it is able to generate: those with an *ideal* initialization and those utilizing *real* data. The idealized simulations typically manufacture an initial condition file for the WRF model from an existing 1-D or 2-D sounding and assume a simplified analytic orography. The real-data cases usually require pre-processing from the WPS package, which provides each atmospheric and static field with fidelity appropriate to the chosen grid resolution for the model. The WRF model executable itself is not altered by choosing one initialization option over another (idealized *vs.* real), but the WRF model pre-processors (the `real.exe` and `ideal.exe` programs) are specifically built based upon a user's selection.

The `real.exe` and `ideal.exe` programs are never used together. Both the `real.exe` and `ideal.exe` are the programs that are processed just prior to the WRF model run.

The ideal *vs.* real cases are divided as follows:

- Ideal cases – initialization programs named “`ideal.exe`”
 - 3d
 - `em_b_wave` - baroclinic wave, 100 km
 - `em_fire` – surface fire, 50 m
 - `em_heldsuarez` – global case with polar filtering, 625 km
 - `em_les` – large eddy simulation, 100 m
 - `em_quarter_ss` - super cell, 2 km
 - `em_tropical_cyclone` – hurricane, 15 km
 - 2d
 - `em_grav2d_x` – gravity current, 100 m
 - `em_hill2d_x` – flow over a hill, 2 km
 - `em_seabreeze2d_x` – water and land, 2 km, full physics
 - `em_squall2d_x` – squall line, 250 m
 - `em_squall2d_y` – transpose of above problem

- 1d
 - em_scm_xy – single column model, 4 km, full physics
- Real data cases – initialization program named “real.exe”
 - em_real – examples from 4 to 30 km, full physics

The selection of the type of forecast is made when issuing the `./compile` statement. When selecting a different case to study, the code must be re-compiled to choose the correct initialization for the model. For example, after configuring the setup for the architecture (with the `./configure` command), if the user issues the command `./compile em_real`, then the initialization program is built using `module_initialize_real.F` as the target module (one of the `./WRFV3/dyn_em/module_initialize_*.F` files). Similarly, if the user specifies `./compile em_les`, then the Fortran module for the large eddy simulation (`module_initialize_les.F`) is automatically inserted into the build for `ideal.exe`. Note that the WRF forecast model is identical for both of these initialization programs. In each of these initialization modules, the same sort of activities goes on:

- compute a base state / reference profile for geopotential and column pressure
- compute the perturbations from the base state for geopotential and column pressure
- initialize meteorological variables: u, v, potential temperature, vapor mixing ratio
- define a vertical coordinate
- interpolate data to the model’s vertical coordinate
- initialize static fields for the map projection and the physical surface; for many of the idealized cases, these are simplified initializations, such as map factors set to one, and topography elevation set to zero

Both the `real.exe` program and `ideal.exe` programs share a large portion of source code, to handle the following duties:

- read data from the namelist
- allocate space for the requested domain, with model variables specified at run-time
- generate initial condition file

The real-data case does some additional processing:

- read meteorological and static input data from the WRF Preprocessing System (WPS)
- prepare soil fields for use in the model (usually, vertical interpolation to the required levels for the specified land surface scheme)
- check to verify that soil categories, land use, land mask, soil temperature, sea surface temperature are all consistent with each other

- multiple input time periods are processed to generate the lateral boundary conditions, which are required unless processing a global forecast
- 3d boundary data (u, v, potential temperature, vapor mixing ratio, total geopotential) are coupled with total column pressure

The “real.exe” program may be run as either a serial or a distributed memory job. Since the idealized cases only require that the initialization run for a single time period (no lateral boundary file is required) and are, therefore, quick to process, all of the “ideal.exe” programs should be run on a single processor. The Makefile for the 2-D cases will not allow the user to build the code with distributed memory parallelism. For large 2-D cases, if the user requires OpenMP, the variables **nproc_x** and **nproc_y** must be set in the **domains** portion of the namelist file **namelist.input** (**nproc_y** must be set to 1, and **nproc_x** then set to the number of processors).

Initialization for Ideal Cases

The program “ideal.exe” is the program in the WRF system that allows a user to run a controlled scenario. Typically this program requires no input except for the **namelist.input** and the **input_sounding** files (except for the **b_wave** case which uses a 2-D binary sounding file). The program outputs the **wrfinput_d01** file that is read by the WRF model executable (“wrf.exe”). Since no external data is required to run the idealized cases, even for researchers interested in real-data cases, the idealized simulations are an easy way to insure that the model is working correctly on a particular architecture and compiler.

Idealized runs can use any of the boundary conditions except “**specified**”, and are not, by default, set up to run with sophisticated physics (other than from microphysics). Most have no radiation, surface fluxes or frictional effects (other than the sea breeze case, LES, and the global Held-Suarez). The idealized cases are mostly useful for dynamical studies, reproducing converged or otherwise known solutions, and idealized cloud modeling.

There are 1-D, 2-D and 3-D examples of idealized cases, with and without topography, and with and without an initial thermal perturbation. The namelist can control the size of the domain, number of vertical levels, model top height, grid size, time step, diffusion and damping properties, boundary conditions, and physics options. A large number of existing namelist settings are already found within each of the directories associated with a particular case.

The **input_sounding** file (already in appropriate case directories) can be any set of levels that goes at least up to the model top height (**ztop**) in the namelist. The first line includes the surface pressure (hPa), potential temperature (K) and moisture mixing ratio (g/kg). Each subsequent line has five input values: height (meters above sea-level), potential temperature (K), vapor mixing ratio (g/kg), x-direction wind component (m/s),

and y-direction wind component (m/s). The “ideal.exe” program interpolates the data from the **input_sounding** file, and will extrapolate if not enough data is provided.

The base state sounding for idealized cases is the initial sounding, minus the moisture, and therefore does not have to be defined separately. Note for the baroclinic wave case: a 1-D input sounding is not used because the initial 3-D arrays are read-in from the file **input_jet**. This means for the baroclinic wave case, the **namelist.input** file cannot be used to change the horizontal or vertical dimensions since they are specified in the **input_jet** file.

Making modifications, apart from namelist-controlled options or soundings, has to be done by editing the Fortran code. Such modifications would include changing the topography, the distribution of vertical levels, the properties of an initialization thermal bubble, or preparing a case to use more physics, such as a land-surface model. The Fortran code to edit is contained in

./WRFV3/dyn_em/module_initialize_[case].F, where **[case]** is the case chosen in compilation, e.g. **module_initialize_squall2d_x.F**. The subroutine to modify is **init_domain_rk**. To change the vertical levels, only the 1-D array **znw** must be defined, containing the full levels, starting from 1 at $k=1$, and ending with 0 at $k=kde$. To change the topography, only the 2-D array **ht** must be defined, making sure it is periodic if those boundary conditions are used. To change the thermal perturbation bubble, search for the string “bubble” to locate the code to change.

Each of the ideal cases provides an excellent set of default examples to the user. The method to specify a thermal bubble is given in the super cell case. In the hill2d case, the topography is accounted for properly in setting up the initial 3-D arrays, so that example should be followed for any topography cases. A symmetry example in the squall line cases tests that your indexing modifications are correct. Full physics options are demonstrated in the seabreeze2d_x case.

Available Ideal Test Cases

The available test cases are

1. 2-D squall2d_x (test/em_squall2d_x)
 - 2D squall line (x,z) using Kessler microphysics and a fixed $300 \text{ m}^2/\text{s}$ viscosity.
 - periodicity condition used in y so that 3D model produces 2D simulation.
 - v velocity should be zero and there should be no variation in y in the results.
2. 2-D squall2d_y (test/em_squall2d_y)
 - Same as squall2d_x, except with (x) rotated to (y).
 - u velocity should be zero and there should be no variation in x in the results.
3. 3-D quarter-circle shear supercell simulation (test/em_quarter_ss).
 - Left and right moving supercells are produced.

-
- See the README.quarter_ss file in the test directory for more information.
 - 4. 2-D flow over a bell-shaped hill (x,z) (test/em_hill2d_x)
 - 10 km half-width, 2 km grid-length, 100 m high hill, 10 m/s flow, $N=0.01/s$, 30 km high domain, 80 levels, open radiative boundaries, absorbing upper boundary.
 - Case is in linear hydrostatic regime, so vertical tilted waves with ~6-km vertical wavelength.
 - 5. 3-D baroclinic waves (test/em_b_wave)
 - Baroclinically unstable jet $u(y,z)$ on an f-plane.
 - Symmetric north and south, periodic east and west boundaries.
 - 100-km grid size, 16-km top, with 4-km damping layer.
 - 41x81 points in (x,y), 64 layers.
 - 6. 2-D gravity current (test/em_grav2d_x)
 - Test case is described in Straka et al, *INT J NUMER METH FL* **17** (1): 1-22 July 15 1993.
 - See the README.grav2d_x file in the test directory.
 - 7. 2-D sea breeze (test/em_seabreeze_x)
 - 2-km grid size, 20-km top, land/water.
 - Can be run with full physics, radiation, surface, boundary layer, and land options.
 - 8. 3-D large eddy simulation (test/em_les)
 - 100-m grid size, 2-km top.
 - Surface layer physics with fluxes.
 - Doubly periodic
 - 9. 3-D Held-Suarez (test/em_heldsuarez)
 - global domain, 625 km in x-direction, 556 km in y-direction, 120-km top.
 - Radiation, polar filter above 45° .
 - Period in x-direction, polar boundary conditions in y-direction
 - 10. 1-D single column model (test/em_scm_xy)
 - 4-km grid size, 12-km top
 - Full physics
 - Doubly periodic
 - 11. 3-D surface fire (test/em_fire)
 - Geoscientific Model Development Discussions (*GMDD*) **4**, 497-545, 2011, <http://www.geosci-model-dev-discuss.net/4/497/2011/gmdd-4-497-2011.html>
 - 50-m, 4.5-km top
 - 10:1 subgrid ratio, no physics
 - Open boundaries
 - 12. 3-D tropical cyclone (test/em_tropical_cyclone)
 - Test case described in Jordan, *J METEOR* **15**, 91-97, 1958.
 - 15-km, 25-km top
 - f-plane ($f=0.5e-5$, about 20 N), SST=28 C
 - Full physics with a simple radiative cooling, no cumulus
 - Doubly periodic

Initialization for Real Data Cases

The real-data WRF cases are those that have the input data to the “real.exe” program provided by the WRF Preprocessing System (WPS). This data from the WPS was originally generated from a previously-run external analysis or forecast model. The original data was most-likely in [GriB](#) format and was most-likely ingested into the WPS by first ftp'ing the raw GriB data from one of the national weather agencies' anonymous ftp sites.

For example, suppose a single-domain WRF forecast is desired, with the following criteria:

- 2000 January 24 1200 UTC through January 25 1200 UTC
- the original GriB data is available at 6-h increments

The following coarse-grid files will be generated by the WPS (starting date through ending date, at 6-h increments):

- `met_em.d01.2000-01-24_12:00:00.nc`
- `met_em.d01.2000-01-24_18:00:00.nc`
- `met_em.d01.2000-01-25_00:00:00.nc`
- `met_em.d01.2000-01-25_06:00:00.nc`
- `met_em.d01.2000-01-25_12:00:00.nc`

The convention is to use "**met**" to signify data that is output from the WPS “metgrid.exe” program and input into the “real.exe” program. The "**d01**" portion of the name identifies to which domain this data refers, which permits nesting. The next set of characters is the validation date/time (UTC), where each WPS output file has only a single time-slice of processed data. The file extension suffix “**.nc**” refers to the output format from WPS which must be in netCDF for the “real.exe” program. For regional forecasts, multiple time periods must be processed by “real.exe” so that a lateral boundary file is available to the model. The global option for WRF requires only an initial condition.

The WPS package delivers data that is ready to be used in the WRF system by the “real.exe” program.

- The data adheres to the WRF IO API. Unless you are developing special tools, stick with the netCDF option to communicate between the WPS package and “real.exe”.
- The data has already been horizontally interpolated to the correct grid-point staggering for each variable, and the winds are correctly rotated to the WRF model map projection.
- 3-D meteorological data required from the WPS: pressure, u, v, temperature, relative humidity, geopotential height
- Optional 3-D hydrometeor data may be provided to the real program at run-time, but these fields will not be used in the coarse-grid lateral boundary file. Fields

named: QR, QC, QS, QI, QG, QH, QNI (mixing ratio for rain, cloud, snow, ice, graupel, hail, and number concentration) are eligible for input from the metgrid output files.

- 3D soil data from the WPS: soil temperature, soil moisture, soil liquid (optional, depending on physics choices in the WRF model)
- 2D meteorological data from the WPS: sea level pressure, surface pressure, surface u and v, surface temperature, surface relative humidity, input elevation
- 2-D meteorological optional data from WPS: sea surface temperature, physical snow depth, water equivalent snow depth
- 2D static data for the physical surface: terrain elevation, land use categories, soil texture categories, temporally-interpolated monthly data, land sea mask, elevation of the input model's topography
- 2D static data for the projection: map factors, Coriolis, projection rotation, computational latitude
- constants: domain size, grid distances, date
- The WPS data may either be isobaric or some more-generalized vertical coordinate, where each column is monotonic in pressure
- All 3-D meteorological data (wind, temperature, height, moisture, pressure) must have the same number of levels, and variables must have the exact same levels. For example, it is not acceptable to have more levels for temperature (for example) than height. Likewise, it is not acceptable to have an extra level for the horizontal wind components, but not for moisture.

Real Data Test Case: 2000 January 24/12 through 25/12

- A test data set is accessible from the [WRF download page](#). Under the "WRF Model Test Data" list, select the January data. This is a 74x61, 30-km domain centered over the eastern US.
- Make sure you have successfully built the code (fine-grid nested initial data is available in the download, so the code may be built with the basic nest option), `./WRFV3/main/real.exe` and `./WRFV3/main/wrf.exe` must both exist.
- In the `./WRFV3/test/em_real` directory, copy the namelist for the January case to the default name

- `cp namelist.input.jan00 namelist.input`

- Link the WPS files (the "`met_em*`" files from the download) into the `./WRFV3/test/em_real` directory.
- For a single processor, to execute the real program, type `real.exe` (this should take less than a minute for this small case with five time periods).
- After running the "real.exe" program, the files "`wrfinput_d01`" and "`wrfbdy_d01`" should be in this directory; these files will be directly used by the WRF model.

- The “wrf.exe” program is executed next (type **wrf.exe**), this should only take a few minutes (only a 12-h forecast is requested in the namelist file).
- The output file **wrfout_d01:2000-01-24_12:00:00** should contain a 12-h forecast at 3-h intervals.

Considerations for Recent Releases

- Since a new simple ocean model has been included in the WRF code, the old namelist option for activating an ocean mixed layer is no longer suitable. The variable OMLCALL has been switched to SF_OCEAN_PHYSICS.
- The default behavior of the base state has been modified. Starting with release version 3.5, the isothermal temperature is no longer zero. With this change, the base state temperature no longer gets colder than 200 K (default in the Registry, though a user can override this option with a namelist setting). This fixes the problem associated with layers being too thick near the model top. A side effect of thinning-out these model layers is that users may need to increase the number of vertical levels.
- The common availability of a valid seaice field in the input provided from the metgrid program has made obsolete the option to autoconvert “cold enough” water points to seaice. By default, the temperature at which water converts to seaice is now 100 K, a temperature cold enough that the option will never be triggered.

Chapter 5: WRF Model

Table of Contents

- [Introduction](#)
- [Installing WRF](#)
- [Running WRF](#)
 - [Idealized Case](#)
 - [Real Data Case](#)
 - [Restart Run](#)
 - [Two-Way Nested Runs](#)
 - [One-Way Nested Run Using ndown](#)
 - [Moving Nested Run](#)
 - [Three-dimensional Analysis Nudging](#)
 - [Observation Nudging](#)
 - [Global Run](#)
 - [DFI Run](#)
 - [SST Update](#)
 - [Adaptive Time Stepping](#)
 - [Stochastic Kinetic-Energy Backscatter Option](#)
 - [Run-Time IO](#)
 - [Output Time Series](#)
 - [Using IO Quilting](#)
- [Examples of namelists for various applications](#)
- [Check Output](#)
- [Trouble Shooting](#)
- [Physics and Dynamics Options](#)
- [Summary of PBL Physics Options](#)
- [Summary of Microphysics Options](#)
- [Summary of Cumulus Parameterization Options](#)
- [Summary of Radiation Options](#)
- [Description of Namelist Variables](#)
- [WRF Output Fields](#)

Introduction

The WRF model is a fully compressible and nonhydrostatic model (with a run-time hydrostatic option). Its vertical coordinate is a terrain-following hydrostatic pressure coordinate. The grid staggering is the Arakawa C-grid. The model uses the Runge-Kutta 2nd and 3rd order time integration schemes, and 2nd to 6th order advection schemes in both the horizontal and vertical. It uses a time-split small step for acoustic and gravity-wave modes. The dynamics conserves scalar variables.

The WRF model code contains an initialization program (either for real-data, *real.exe*, or idealized data, *ideal.exe*; see Chapter 4), a numerical integration program (*wrf.exe*), a program to do one-way nesting (*ndown.exe*), and a program to do tropical storm bogussing (*tc.exe*). The WRF model, Version 3, supports a variety of capabilities. These include

- Real-data and idealized simulations
- Various lateral boundary condition options for real-data and idealized simulations
- Full physics options, and various filter options
- Positive-definite advection scheme
- Non-hydrostatic and hydrostatic (runtime option)
- One-way and two-way nesting, and a moving nest
- Three-dimensional analysis nudging
- Observation nudging
- Regional and global applications
- Digital filter initialization

Other References

- WRF tutorial presentation:
<http://www.mmm.ucar.edu/wrf/users/supports/tutorial.html>
- WRF-ARW Tech Note: <http://www.mmm.ucar.edu/wrf/users/pub-doc.html>
- See chapter 2 of this document for software requirement.

Installing WRF

Before compiling the WRF code on a computer, check to see if the netCDF library is installed. This is because one of the supported WRF I/O options is netCDF, and it is the one commonly used and supported by the post-processing programs. If the netCDF is installed in a directory other than `/usr/local/`, then find the path, and use the environment variable `NETCDF` to define where the path is. To do so, type

```
setenv NETCDF path-to-netcdf-library
```

Often the netCDF library and its include/ directory are collocated. If this is not the case, create a directory, link both netCDF lib and include directories in this directory, and use the environment variable to set the path to this directory. For example,

```
netcdf_links/lib -> /netcdf-lib-dir/lib
netcdf_links/include -> /where-include-dir-is/include

setenv NETCDF /directory-where-netcdf_links-is/netcdf_links
```

If the netCDF library is not available on the computer, it needs to be installed first. NetCDF source code or pre-built binary may be downloaded from, and installation instruction can be found on, the [Unidata Web page](http://www.unidata.ucar.edu/) at <http://www.unidata.ucar.edu/>.

Hint: for Linux users:

If PGI, Intel, gfortran or g95 compilers are used on a Linux computer, make sure netCDF is installed using the same compiler. Use the NETCDF environment variable to point to the PGI/Intel/g95 compiled netCDF library.

Hint: If using netCDF-4, make sure that the new capabilities (such as parallel I/O based on HDF5) are not activated at the install time, unless you intend to use the compression capability from netCDF-4 (supported in V3.5. More info below).

The WRF source code tar file can be downloaded from http://www.mmm.ucar.edu/wrf/users/download/get_source.html. Once the tar file is unzipped (`gunzip WRFV3.TAR.gz`), and untared (`tar -xf WRFV3.TAR`), it will create a WRFV3/ directory. This contains:

Makefile	Top-level makefile
README	General information about the WRF/ARW core
README_test_cases	Explanation of the test cases
README.NMM	General information for the WRF/NMM core
README.DA	General information for WRFDA
README.rsl_output	Information for dealing with rsl files
README.io_config	Information for runtime IO
README.windtrubine	Information on using wind farm parameterization
README.hydro	Information on WRF-Hydro
Registry/	Directory for WRF Registry files
arch/	Directory where compile options are gathered
clean	script to clean created files and executables
compile	script for compiling the WRF code
configure	script to create the <i>configure.wrf</i> file for compiling
chem/	WRF chemistry, supported by NOAA/GSD
dyn_em/	Directory for ARW dynamics and numerics
dyn_exp/	Directory for a 'toy' dynamic core
dyn_nmm/	Directory for NMM dynamics and numerics, supported by DTC
external/	Directory that contains external packages, such as those for IO, time keeping and MPI
frame/	Directory that contains modules for the WRF framework

inc/	Directory that contains ‘include’ files
main/	Directory for main routines, such as wrf.F, and all executables after compilation
phys/	Directory for all physics modules
run/	Directory where one may run WRF
share/	Directory that contains mostly modules for the WRF mediation layer and WRF I/O
test/	Directory that contains test case directories, may be used to run WRF
tools/	Directory that contains tools for developers

The steps to compile and run the model are:

1. configure: generate a configuration file for compilation
2. compile: compile the code
3. run the model

Go to the WRFV3 (top) directory and type

```
./configure
```

and a list of choices for your computer should appear. These choices range from compiling for a single processor job (serial), to using OpenMP shared-memory (smpar) or distributed-memory parallelization (dmpar) options for multiple processors, or a combination of shared-memory and distributed-memory options (dm+sm). When a selection is made, a second choice for compiling nesting will appear. For example, on a Linux computer, the above steps may look like:

```
> setenv NETCDF /usr/local/netcdf-pgi
> ./configure

checking for perl5... no
checking for perl... found /usr/bin/perl (perl)
Will use NETCDF in dir: /usr/local/netcdf-pgi
PHDF5 not set in environment. Will configure WRF for use without.
$JASPERLIB or $JASPERINC not found in environment, configuring to build
without grib2 I/O...
-----
Please select from among the following supported platforms.

1.  Linux i486 i586 i686, gfortran compiler with gcc  (serial)
2.  Linux i486 i586 i686, gfortran compiler with gcc  (smpar)
3.  Linux i486 i586 i686, gfortran compiler with gcc  (dmpar)
4.  Linux i486 i586 i686, gfortran compiler with gcc  (dm+sm)
5.  Linux i486 i586 i686, g95 compiler with gcc      (serial)
6.  Linux i486 i586 i686, g95 compiler with gcc      (dmpar)
7.  Linux i486 i586 i686, PGI compiler with gcc      (serial)
8.  Linux i486 i586 i686, PGI compiler with gcc      (smpar)
```

-
9. Linux i486 i586 i686, PGI compiler with gcc (dmpar)
 10. Linux i486 i586 i686, PGI compiler with gcc (dm+sm)
 11. Linux x86_64 i486 i586 i686, ifort compiler with icc (non-SGI installations) (serial)
 12. Linux x86_64 i486 i586 i686, ifort compiler with icc (non-SGI installations) (smpar)
 13. Linux x86_64 i486 i586 i686, ifort compiler with icc (non-SGI installations) (dmpar)
 14. Linux x86_64 i486 i586 i686, ifort compiler with icc (non-SGI installations) (dm+sm)
 15. Linux i486 i586 i686 x86_64, PathScale compiler with pathcc (serial)
 16. Linux i486 i586 i686 x86_64, PathScale compiler with pathcc (dmpar)

Enter selection [1-16] : 9

Compile for nesting? (0=no nesting, 1=basic, 2=preset moves, 3=vortex following) [default 0]: 1

Enter the appropriate options that are best for your computer and application.

When the return key is hit, a `configure.wrf` file will be created. Edit compile options/paths, if necessary.

Hint: It is helpful to start with something simple, such as the serial build. If it is successful, move on to build smpar or dmpar code. Remember to type ‘clean -a’ between each build.

Hint: If you anticipate generating a netCDF file that is larger than 2Gb (whether it is a single- or multi-time period data [e.g. model history]) file), you may set the following environment variable to activate the large-file support option from netCDF (in c-shell):

```
setenv WRFIO_NCD_LARGE_FILE_SUPPORT 1
```

Hint: If you would like to use parallel netCDF (p-netCDF) developed by Argonne National Lab (<http://trac.mcs.anl.gov/projects/parallel-netcdf>), you will need to install p-netCDF separately, and use the environment variable PNETCDF to set the path:

```
setenv PNETCDF path-to-pnetcdf-library
```

Hint: Since V3.5, compilation may take a bit longer due to the addition of the CLM4 module. If you do not intend to use the CLM4 land-surface model option, you can modify your `configure.wrf` file by removing `-DWRF_USE_CLM` from `ARCH_LOCAL`.

To compile the code, type

```
./compile
```

and the following choices will appear:

Usage:

```
compile wrf          compile wrf in run dir (Note, no real.exe,  
ndown.exe or ideal.exe generated)
```

```
or choose a test case (see README_test_cases for details):
```

```
compile em_b_wave  
compile em_esmf_exp (example only)  
compile em_grav2d_x  
compile em_heldsuarez  
compile em_hill2d_x  
compile em_les  
compile em_quarter_ss  
compile em_real  
compile em_seabreeze2d_x  
compile em_squall2d_x  
compile em_squall2d_y  
compile em_tropical_cyclone  
compile exp_real (example of a toy solver)  
compile nmm_real (NMM solver)
```

```
compile -h          help message
```

where **em** stands for the Advanced Research WRF dynamic solver (which currently is the 'Eulerian mass-coordinate' solver). Type one of the above to compile. When you switch from one test case to another, you must type one of the above to recompile. The recompile is necessary to create a new initialization executable (i.e. `real.exe`, and `ideal.exe` - there is a different `ideal.exe` for each of the idealized test cases), while `wrf.exe` is the same for all test cases.

If you want to remove all object files (except those in the `external/` directory) and executables, type '`clean`'.

Type '`clean -a`' to remove built files in ALL directories, including `configure.wrf` (the original `configure.wrf` will be saved to `configure.wrf.backup`). This is recommended if you make any mistake during the process, or if you have edited the `configure.wrf` or Registry files.

Hint: If you have trouble compiling routines, like `solve_em.F`, you can try to run the `configure` script with the optional argument '`-s`', i.e.

```
./configure -s
```

This will configure to compile `solve_em.F` and a few other routines with reduced optimization.

If you would like to turn off optimization for all the code, say during code development and debugging, you can run the *configure* script with option `'-d'`:

```
./configure -d
```

Beginning with V3.5, the compression function in netCDF4 is supported. This option will typically reduce the file size by more than 50%. It will require netCDF4 to be installed with the option `--enable-netcdf-4`. Before compiling WRF, you will need to set the environment variable NETCDF4. In a C-shell environment, type `setenv NETCDF4 1`, followed by `'configure'` and `'compile'`.

For more detailed information, visit:

<http://www.mmm.ucar.edu/wrf/users/wrfv3.5/building-netcdf4.html>

a. Idealized case

For any 2D test case (labeled in the case names), serial or OpenMP (`smmpar`) compile options must be used. Additionally, you must only choose the `'0=no nesting'` option when you configure. For all other cases, you may use serial or parallel (`dmpar`) and nesting. Suppose you would like to compile and run the 2-dimensional squall case, type

```
./compile em_squall2d_x >& compile.log
```

After a successful compilation, you should have two executables created in the **main/** directory: **ideal.exe** and **wrf.exe**. These two executables will be linked to the corresponding `test/case_name` and `run/` directories. `cd` to either directory to run the model.

It is a good practice to save the entire compile output to a file. When the executables are not present, this output is useful to help diagnose the compile errors.

b. Real-data case

For a real-data case, type

```
./compile em_real >& compile.log &
```

When the compile is successful, it will create three executables in the **main/** directory: `ndown.exe`, `real.exe` and `wrf.exe`.

real.exe: for WRF initialization of real data cases

ndown.exe : for one-way nesting

wrf.exe : WRF model integration

Like in the idealized cases, these executables will be linked to the `test/em_real` and `run/` directories. `cd` to one of these two directories to run the model.

Running WRF

One may run the model executables in either the `run/` directory, or the `test/case_name` directory. In either case, one should see executables `ideal.exe` or `real.exe` (and `ndown.exe`), and `wrf.exe`, linked files (mostly for real-data cases), and one or more `namelist.input` files in the directory.

Hint: If you would like to run the model executables in a different directory, copy or link the files in the `test/em_*` directory to that directory, and run from there.

a. Idealized case

Suppose the test case `em_squall2d_x` is compiled. To run, type

```
cd test/em_squall2d_x
```

Edit the `namelist.input` file (see `README.namelist` in the `WRFV3/run/` directory or its [Web version](#)) to change length of integration, frequency of output, size of domain, timestep, physics options, and other parameters.

If you see a script in the test case directory, called `run_me_first.csh`, run this one first by typing:

```
./run_me_first.csh
```

This links some physics data files that might be needed to run the case.

*Note: when running `em_fire`, you must copy everything from the ‘hill_simple’ directory into your current working directory in order for it to run correctly.

```
cp hill_simple/* .
```

To run the initialization program, type

```
./ideal.exe
```

This program will typically read an input sounding file located in that directory, and generate an initial condition file `wrfinput_d01`. All idealized cases do not require a lateral boundary file because of the boundary condition choices they use, such as the periodic option. If the job is run successfully, the last thing it prints should be: ‘wrf: SUCCESS COMPLETE IDEAL INIT’.

To run the model and save the standard output to a file, type

```
./wrf.exe >& wrf.out &
```

or for a 3D test case compiled with MPI (dmpar) option,

```
mpirun -np 4 ./wrf.exe
```

If successful, the wrf output file will be written to a file named

```
wrfout_d01_0001-01-01_00:00:00.
```

Pairs of `rsl.out.*` and `rsl.error.*` files will appear with any MPI runs. These are standard out and error files. Note that the execution command for MPI runs may be different on different machines and for different MPI installation. Check the user manual.

If the model run is successful, the last thing printed in the `'wrf.out'` or `rsl.*.0000` files should be: `'wrf: SUCCESS COMPLETE WRF'`. Output files

`wrfout_d01_0001-01-01*` and `wrfrst*` should be present in the run directory, depending on how namelist variables are specified for output. The time stamp on these files originates from the start times in the namelist file.

b. Real-data case

To make a real-data case run, `cd` to the working directory by typing

```
cd test/em_real (or cd run)
```

Start with the `namelist.input` template file in the directory and edit it to match your case.

Running a real-data case requires successfully running the **WRF Preprocessing System** programs (or WPS). Make sure `met_em.*` files from WPS are seen in the run directory (either link or copy the files):

```
cd test/em_real
ls -l ../../../../WPS/met_em*
ln -s ../../../../WPS/met_em* .
```

Make sure you edit the following variables in the `namelist.input` file:

<code>start_*, end_*</code>	start and end times for data processing and model integration
<code>interval_seconds</code>	input data interval for boundary conditions
<code>time_step</code>	model time step, and can be set as large as 6*DX (in km)
<code>e_ws, e_sn, e_vert</code>	domain dimensions in west-east, south-north and vertical
<code>dx, dy</code>	model grid distance in meters
<code>num_metgrid_levels:</code>	number of incoming data levels (can be found by using the <code>ncdump</code> command on the <code>met_em.*</code>

	file)
num_metgrid_soil_levels:	number of incoming soil data levels
eta_levels:	model <i>eta</i> levels from 1 to 0, if you choose to do so. If not, <i>real</i> will compute a nice set of <i>eta</i> levels. The computed eta levels have 7 half levels in the lowest 1 km or so, and stretches to constant δz .

Other options for use to assist vertical interpolation are:

use_surface:	whether to use surface input data
extrap_type:	vertical extrapolation of non-temperature fields
t_extrap_type	vertical extrapolation for potential temperature
use_levels_below_ground	use levels below the input surface level
force_sfc_in_vinterp	force vertical interpolation to use surface data
lowest_lev_from_sfc	place surface data in the lowest model level
p_top_requested	pressure top used in the model, default is 5000 Pa
interp_type	vertical interpolation method: linear in p or log(p) (default)
lagrange_order	vertical interpolation order, linear or quadratic (default)
zap_close_levels	allow surface data to be used if it is close to a constant pressure level
smooth_cg_topo	smooth topography on the outer rows and columns in domain 1
use_tavg_for_tsk	whether to use diurnally-averaged surface temp as skin temp. The diurnally- averaged surface temp can be computed using the WPS utility <code>avg_tsfc.exe</code> . This option can be used when SKINTEMP is not present.

To run the real-data initialization program, compiled using serial or OpenMP (smpar) options, type

```
./real.exe >& real.out
```

Successful completion of the job should have ‘real_em: SUCCESS EM_REAL INIT’ printed at the end of the real.out file. It should also produce wrfinput_d01 and wrfbdy_d01 files. In the real data case, both files are required.

Run the WRF model by typing

```
./wrf.exe
```

A successful run should produce one or several output files with names like `wrfout_d<domain>_<date>` (where `<domain>` represents domain ID, and `<date>` represents a date string with the format `yyyy-mm-dd_hh:mm:ss`). For example, if you start the model at 1200 UTC, January 24 2000, then your first output file should have the name:

```
wrfout_d01_2000-01-24_12:00:00
```

The time stamp on the file name is always the first time the output file is written. It is always good to check the times written to the output file by typing:

```
ncdump -v Times wrfout_d01_2000-01-24_12:00:00
```

You may have other wrfout files, depending on the namelist options (how often you split the output files by using the namelist option `frames_per_outfile`). You may also create restart files if you have a restart frequency (`restart_interval` in the namelist.input file) set within your total integration time. The restart file should have names like

```
wrfrst_d<domain>_<date>
```

The time stamp on a restart file is the time at which that restart file is valid.

For DM (distributed memory) parallel systems, some form of the **mpirun** command will be needed to run the executables. For example, on a Linux cluster, the command to run MPI code, using 4 processors, may look like:

```
mpirun -np 4 ./real.exe
mpirun -np 4 ./wrf.exe
```

On some IBMs, the command for a batch job may be:

```
poe ./real.exe
poe ./wrf.exe
```

or

```
mpirun.lsf ./wrf.exe (on NCAR IBM bluefire)
```

c. Restart Run

A restart run allows a user to extend a run to a longer simulation period. It is effectively a continuous run made of several shorter runs. Hence the results at the end of one or more restart runs should be identical to a single run without any restart.

In order to do a restart run, one must first create a restart file. This is done by setting the namelist variable `restart_interval` (unit is in minutes) to be equal to or less than

the simulation length in the first model run, as specified by `run_*` variables or `start_*` and `end_*` times. When the model reaches the time to write a restart file, a restart file named `wrfrst_d<domain>_<date>` will be written. The date string represents the time when the restart file is valid.

When one starts the restart run, edit the `namelist.input` file, so that your `start_*` time will be set to the restart time (which is the time the restart file is written). The other namelist variable one must set is `restart`, this variable should be set to `.true.` for a restart run.

In summary, these namelists should be modified:

<code>start_*, end_*</code> :	start and end times for restart model integration
<code>restart</code> :	logical to indicate whether the run is a restart or not

If the history and restart intervals are changed in a restart run, and the outcome isn't what is expected to be, use namelist `'override_restart_timers = .true.'`

If history output is desired at the time of restart, use namelist `'write_hist_at_0h_rst = .true.'`

Hint: Typically the restart file is a lot bigger in size than the history file, hence one may find that it is even ok to write a single model history output time to a file in netCDF format (`frame_per_outfile=1`), but it may fail to write a restart file. This is because the basic netCDF file support is only 2Gb. There are two solutions to the problem. The first is to simply set the namelist option `io_form_restart = 102` (instead of 2), and this will force the restart file to be written into multiple pieces, one per processor. As long as one restarts the model using the same number of processors, this option works well (and one should restart the model with the same number of processors in any case). The second solution is to recompile the code using the netCDF large file support option (see the section on “Installing WRF” in this chapter).

d. Two-way Nested Runs

A two-way nested run is a run in which multiple domains at different grid resolutions are run simultaneously and communicate with each other: The coarser domain provides boundary values for the nest, and the nest feeds its calculation back to the coarser domain. The model can handle multiple domains at the same nest level (no overlapping nest), and multiple nest levels (telescoping).

When preparing for a nested run, make sure that the code is compiled with basic nest options (option 1).

Most of options to start a nest run are handled through the namelist. *All variables in the `namelist.input` file that have multiple columns of entries need to be edited with*

caution. Start with a namelist template. The following are the key namelist variables to modify:

`start_*, end_*`: start and end simulation times for the nest

`input_from_file`: whether a nest requires an input file (e.g. `wrfinput_d02`). This is typically used for a real data case, since the nest input file contains nest topography and land information.

`fine_input_stream`: which fields from the nest input file are used in nest initialization. The fields to be used are defined in the Registry.EM. Typically they include static fields (such as terrain and landuse), and masked surface fields (such as skin temperature, soil moisture and temperature). Useful for a nest starting at a later time than the coarse domain.

`max_dom`: the total number of domains to run. For example, if you want to have one coarse domain and one nest, set this variable to 2.

`grid_id`: domain identifier that is used in the wrfout naming convention. The most coarse grid must have `grid_id` of 1.

`parent_id`: used to indicate the parent domain of a nest. `grid_id` value is used.

`i_parent_start/j_parent_start`: lower-left corner starting indices of the nest domain in its parent domain. These parameters should be the same as in `namelist.wps`.

`parent_grid_ratio`: integer parent-to-nest domain grid size ratio. Typically an odd number ratio is used in real-data applications.

`parent_time_step_ratio`: integer time-step ratio for the nest domain. It may be different from the `parent_grid_ratio`, though they are typically set the same.

`feedback`: this is the key setup to define a two-way nested (or one-way nested) run. When `feedback` is on, the values of the coarse domain are overwritten by the values of the variables (average of cell values for mass points, and average of the cell-face values for horizontal momentum points) in the nest at the coincident points. For masked fields, only the single point value at the collocating points is fed back. If the `parent_grid_ratio` is even, an arbitrary choice of the southwest corner point value is used for feedback. This is the reason it is better to use an odd `parent_grid_ratio` with this option. When `feedback` is off, it is equivalent to a one-way nested run, since nest results are not reflected in the parent domain.

`smooth_option`: this is a smoothing option for the parent domain in the area of the nest if `feedback` is on. Three options are available: 0 = no smoothing; 1 = 1-2-1 smoothing; 2 = smoothing-desmoothing.

3-D Idealized Cases

For 3-D idealized cases, no nest input files are required. The key here is the specification of the `namelist.input` file. What the model does is to interpolate all variables required in the nest from the coarse domain fields. Set

`input_from_file = T, F,`

Real Data Cases

For real-data cases, three input options are supported. The first one is similar to running the idealized cases. That is to have all fields for the nest interpolated from the coarse domain (`input_from_file = T, F`). The disadvantage of this option is obvious: one will not benefit from the higher resolution static fields (such as terrain, landuse, and so on).

The second option is to set `input_from_file = T` for each domain, which means that the nest will have a nest `wrfinput` file to read in. The limitation of this option is that this only allows the nest to start at the same time as the coarse domain.

The third option is, in addition to setting `input_from_file = T` for each domain, also set `fine_input_stream = 2` for each domain. Why a value of 2? This is based on the Registry setting, which designates certain fields to be read in from the auxiliary input stream number 2. This option allows the nest initialization to use 3-D meteorological fields interpolated from the coarse domain, static fields and masked, and time-varying surface fields from the nest `wrfinput`; hence it allows a nest to start at a later time than hour 0. Setting `fine_input_stream = 0` is equivalent to the second option.

To run `real.exe` for a nested run, one must first run WPS and create data for all the nests. Suppose WPS is run for a 24 hour period, two-domain nested case starting at 1200 UTC Jan 24 2000. Then the following files should be generated in a WPS directory:

```
met_em.d01.2000-01-24_12:00:00
met_em.d01.2000-01-24_18:00:00
met_em.d01.2000-01-25_00:00:00
met_em.d01.2000-01-25_06:00:00
met_em.d01.2000-01-25_12:00:00
met_em.d02.2000-01-24_12:00:00
```

Typically only the first time period of the nest input file is needed to create a nest `wrfinput` file. Link or move all these files to the run directory.

Edit the `namelist.input` file and set the correct values for all relevant variables, described on the previous pages (in particular, set `max_dom = 2`, for the total number of domains to run), as well as physics options. Type the following to run:

```
./real.exe >& real.out  
or  
mpirun -np 4 ./real.exe
```

If successful, this will create all input files for coarse, as well as nested domains. For a two-domain example, these are created:

```
wrfinput_d01  
wrfinput_d02  
wrfbdy_d01
```

To run WRF, type

```
./wrf.exe  
or  
mpirun -np 4 ./wrf.exe
```

If successful, the model should create wrfout files for both domain 1 and 2:

```
wrfout_d01_2000-01-24_12:00:00  
wrfout_d02_2000-01-24_12:00:00
```

e. One-way Nested Run Using `ndown`

WRF supports two separate one-way nested options. In this section, one-way nesting is defined as a finer-grid-resolution run, made as a subsequent run after the coarser-grid-resolution run, where the `ndown` program is run in-between the two simulations. The initial and lateral boundary conditions for this finer-grid run are obtained from the coarse grid run, with input from higher resolution terrestrial fields (e.g. terrain, landuse, etc.), and masked surface fields (such as soil temperature and moisture). The program that performs this task is `ndown.exe`.

***Note** that the use of this program requires the code to be compiled for nesting.

When one-way nesting is used, the coarse-to-fine grid ratio is only restricted to be an integer. An integer less than or equal to 5 is recommended. Frequent output (e.g. hourly) from the coarse grid run is also recommended to provide better boundary specifications. Do not change physics options when running `ndown` (you can change some physics options when making wrf runs), and do not remove fields from Registry if you plan to use `ndown`.

Step 1: Make a coarse grid run.

This is no different than any of the single-domain WRF runs, as described above. Do output history files as often as you can, and this will provide better and more frequent boundary conditions for the next model run.

Step 2: Run `geogrid.exe` (gives `geo_em.d01` and `geo_em.d02` files) and `metgrid.exe` for two domains (as if you are making a 2-way nested run).

This will generate WPS output files for domain 1 (`met_em.d01.<date>`) and domain 2 (`met_em.d02.<date>`).

Step 3: Run `real.exe` for 2 domains.

The purpose of this step is to ingest higher resolution terrestrial fields and corresponding land-water masked soil fields.

- Copy the `met_em*` files into the directory from which you will be running `real.exe`.
- Edit the `namelist.input` file, changing ‘`max_dom = 2`’, and making sure columns 1 and 2 are set-up for a 2 domain run, editing the correct start time and grid dimensions.
- Run **`real.exe`**. This will produce a `wrfinput_d01` file, a `wrfinput_d02` file, and a `wrfbdy_d01` file.
- Rename the `wrfinput_d02` file to `wrfndi_d02`.

Step 4: Make the final fine-grid initial and boundary condition files, by running `ndown.exe`

- Since V3.2, one must add `io_form_auxinput2 = 2` in the `&time_control` section of `namelist.input` to run `ndown.exe` successfully. (If one desires to refine the vertical resolution when running `ndown`, set `vert_refine_fact = integer` (new in V3.2). There are no other changes required in the `namelist` or in the procedure. Another way to refine vertical resolution is to use the utility program `v_interp` (see the chapter for ‘Utilities and Tools’ for details)).
- Change `namelist` variable `interval_seconds` to reflect the history output interval from the coarse domain model run.
- Do not change physics options until after running `ndown` program.
- Run **`ndown.exe`**, which uses input from the coarse grid `wrfout` file(s), and the `wrfndi_d02` file generated from Step 3 above. This will produce a `wrfinput_d02` and `wrfbdy_d02` file.

Note that the program `ndown` may be run serially or in MPI, depending on the selected compile option. The `ndown` program must be built to support nesting, however. To run the program, type



```
./ndown.exe  
or  
mpirun -np 4 ./ndown.exe
```

Step 5: Make the fine-grid WRF run

-
- Rename `wrfininput_d02` and `wrfbdy_d02` to `wrfininput_d01` and `wrfbdy_d01`, respectively.
 - Rename (or move) the original `wrfout_d01*` files to something else (or another directory) so as to not overwrite them.
 - Edit `namelist.input`, moving all of the fine-grid domain data from column 2 to column 1 so that this run will be for the fine-grid domain only. Make sure that the `time_step` is set to comply with the fine-grid domain (typically $6 \times DX$). It may be beneficial to save `namelist.input` to something else prior to this step in case you need to repeat this process in the future. Save the newly-edited `namelist` as `namelist.input`.

 - The WRF model's physics options may be modified between runs (the WRF model before `ndown` and the WRF model after `ndown`, but do use the same physics from the first run when running `ndown`), except generally for the land surface scheme option which has different number of soil depths depending on the scheme. Users may take advantage of a feature that allows both the initial and lateral boundaries to use the moist and scalar arrays (`have_bcs_moist` and `have_bcs_scalar`, respectively). This option is only to be used during the WRF model run which follows the `ndown` processing. With this option, a user must keep the microphysics options the same between forecasts. The advantage is that the previous WRF model provides realistic lateral boundary tendencies for all of the microphysical variables, instead of a simple "zero inflow" or "zero gradient outflow".
 - Run WRF for this grid.
 - *Keep in mind that the output from this run will be in the form `wrfout_d01*` but it will actually be output for domain 2. It may help to rename these to avoid future confusion.

The figure on the next page summarizes the data flow for a one-way nested run using the program `ndown`.

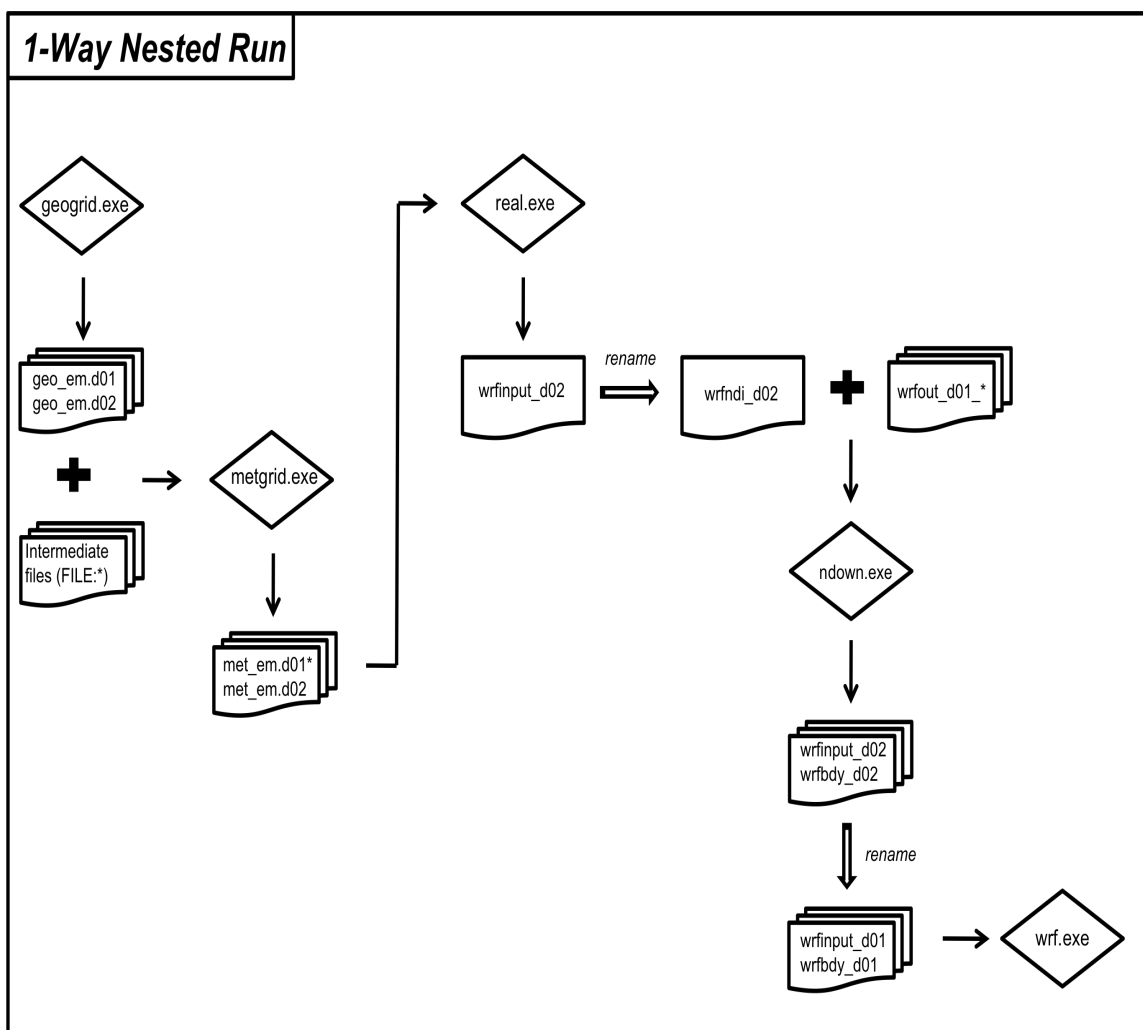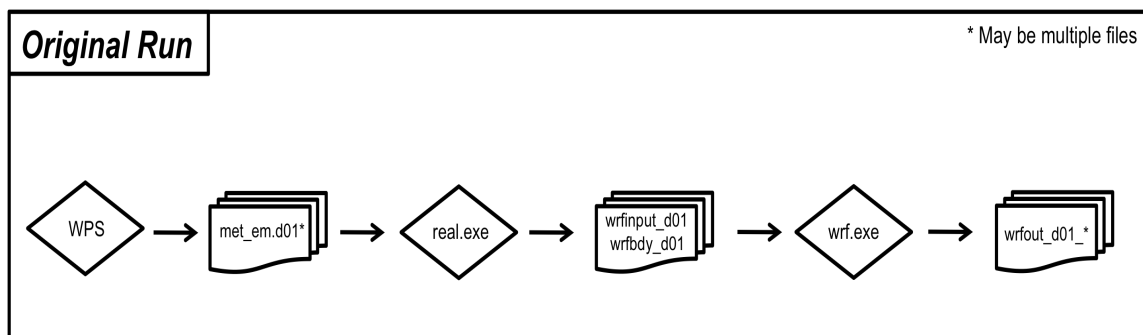

f. Moving-Nested Run

Two types of moving tests are allowed in WRF. In the first option, a user specifies the nest movement in the namelist. The second option is to move the nest automatically, based on an automatic vortex-following algorithm. This option is designed to follow the movement of a well-defined tropical cyclone.

To make the specified moving nested run, select the right nesting compile option (option ‘preset moves’). Note that code compiled with this option will not support static nested runs. To run the model, only the coarse grid input files are required. In this option, the nest initialization is defined from the coarse grid data - no nest input is used. In addition to the namelist options applied to a nested run, the following needs to be added to the namelist section `&domains`:

`num_moves`: the total number of moves one can make in a model run. A move of any domain counts against this total. The maximum is currently set to 50, but it can be changed by changing `MAX_MOVES` in `frame/module_driver_constants.F`.

`move_id`: a list of nest IDs, one per move, indicating which domain is to move for a given move.

`move_interval`: the number of minutes from the beginning of the run until a move is supposed to occur. The nest will move on the next time step after the specified instant of model time has passed.

`move_cd_x, move_cd_y`: distance in the number of grid points and direction of the nest move (positive numbers indicate moving toward east and north, while negative numbers indicate moving toward west and south).

Parameter `max_moves` is set to be 50, but can be modified in the source code file `frame/module_driver_constants.F`, if needed.

To make the automatic moving nested runs, select the ‘vortex-following’ option when configuring. Again note that this compile would only support the auto-moving nest, and will not support the specified moving nested run or static nested run at the same time. Again, no nest input is needed. If one wants to use values other than the default ones, add and edit the following namelist variables in the `&domains` section:

`vortex_interval`: how often the vortex position is calculated in minutes (default is 15 minutes).

`max_vortex_speed`: used with `vortex_interval` to compute the search radius for the new vortex center position (default is 40 m/sec).

`corral_dist`: the distance in the number of coarse grid cells that the moving nest is allowed to get near the mother domain boundary (default is 8). This parameter can be used to center the telescoped nests so that all nests are moved together with the storm.

`track_level`: the pressure level (in Pa) where the vortex is tracked.

`time_to_move`: the time (in minutes) to move a nest. This option may help with the case when the storm is still too weak to be tracked by the algorithm.

When the automatic moving nest is employed, the model dumps the vortex center location, with minimum mean sea-level pressure and maximum 10-m winds in a standard-out file (e.g. `rsl.out.0000`). Typing `'grep ATCF rsl.out.0000'` will produce a list of storm information at a 15-minute interval:

ATCF	2007-08-20_12:00:00	20.37	-81.80	929.7	133.9
ATCF	2007-08-20_12:15:00	20.29	-81.76	929.3	133.2

In both types of moving-nest runs, the initial location of the nest is specified through `i_parent_start` and `j_parent_start` in the `namelist.input` file.

Since V3.6, a capability to incorporate high-resolution terrain and landuse input in a moving nest run (Chen, Shuyi S., Wei Zhao, Mark A. Donelan, James F. Price, Edward J. Walsh, 2007: The CBLAST-Hurricane Program and the Next-Generation Fully Coupled Atmosphere–Wave–Ocean Models for Hurricane Research and Prediction. *Bull. Amer. Meteor. Soc.*, **88**, 311–317.doi: <http://dx.doi.org/10.1175/BAMS-88-3-311>). To activate this option,

- At compile time, one needs to set environment variable, `TERRAIN_AND_LANDUSE` to 1. In `cshell`,

```
setenv TERRAIN_AND_LANDUSE 1
```

followed by doing ‘configure’ and ‘compile’.

- At run time, add these namelists in `&time_control`:

```
input_from_hires      = .true., .true.,  
rsmas_data_path       = "terrain and landuse data directory"
```

The automatic moving nest works best for a well-developed vortex.

g. Analysis Nudging Runs (Upper-Air and/or Surface)

Prepare input data to WRF as usual using WPS. If nudging is desired in the nest domains, make sure all time periods for all domains are processed in WPS. For surface-analysis nudging (new in Version 3.1), OBSGRID needs to be run after METGRID, and it will output a `wrfsfdda_d01` file that the WRF model reads for this option.

Set the following options before running `real.exe`, in addition to others described earlier (see the namelists in `examples.namelist` in the `test/em_real/` directory, for guidance):

```
grid_fdda = 1
```

```
grid_sfdda = 1
```

Run `real.exe` as before, and this will create, in addition to `wrfinput_d0*` and `wrfbdy_d01` files, a file named `'wrffdda_d0*'`. Other grid-nudging namelists are ignored at this stage, but it is good practice to fill them all in before one runs `real`. In particular, set

```
gfdda_inname      = "wrffdda_d<domain>"
gfdda_interval    = time interval of input data in minutes
gfdda_end_h       = end time of grid-nudging in hours

sgfdda_inname     = "wrfsfdda_d<domain>"
sgfdda_interval   = time interval of input data in minutes
sgfdda_end_h      = end time of surface grid-nudging in hours
```

See http://www.mmm.ucar.edu/wrf/users/wrfv3.1/How_to_run_grid_fdda.html and `README.grid_fdda` in `WRFV3/test/em_real/` for more information.

Spectral Nudging is a new upper-air nudging option since Version 3.1. This selectively nudges the coarser scales only, but is otherwise set up the same way as grid-nudging. This option also nudges geopotential height. The wave numbers defined here are the number of waves contained in the domain, and the number is the maximum one that is nudged.

```
grid_fdda = 2
xwavenum = 3
ywavenum = 3
```

h. Observation Nudging Run

In addition to the usual input data preparation using WPS, station observation files are required. See http://www.mmm.ucar.edu/wrf/users/wrfv3.1/How_to_run_obs_fdda.html for instructions. The observation file names expected by WRF are `OBS_DOMAIN101` for domain 1, and `OBS_DOMAIN201` for domain 2, etc.

Observation nudging is activated in the model by the following namelists in `&fdda`:

```
obs_nudge_opt = 1
fdda_start     = 0 (obs nudging start time in minutes)
fdda_end       = 360 (obs nudging end time in minutes)
```

and in `&time_control`

```
auxinput11_interval_s = 180, 180, 180, (set the interval to be small enough so
                                         that all observations will be checked)
```

Look for an example to set other obs nudging namelist variables in the file `examples.namelists` in `test/em_real/` directory. See http://www.mmm.ucar.edu/wrf/users/wrfv3.1/How_to_run_obs_fdda.html and `README.obs_fdda` in `WRFV3/test/em_real/` for more information.

i. Global Run

WRFV3 supports global capability. To make a global run, run WPS, starting with the namelist template `namelist.wps.gloabl`. Set `map_proj = 'lat-lon'`, and grid dimensions `e_we` and `e_sn` without setting `dx` and `dy` in `namelist.wps`. The `geogrid` program will calculate grid distances, and their values can be found in the global attribute section of `geo_em.d01.nc` file. Type `ncdump -h geo_em.d01.nc` to find out the grid distances, which will be needed in filling out WRF's `namelist.input` file. Grid distances in x and y directions may be different, but it is best that they are set similarly or the same. WRF and WPS assume the earth is a sphere, and its radius is 6370 km. There are no restrictions on what to use for grid dimensions, but for effective use of the polar filter in WRF, the east-west dimension should be set to $2^P \cdot 3^Q \cdot 5^R + 1$ (where P, Q, and R are any integers, including 0).

Run the rest of the WPS programs as usual but only for one time period. This is because the domain covers the entire globe, and lateral boundary conditions are no longer needed.

Run the program `real.exe` as usual and for one time period only. The lateral boundary file `wrfbdy_d01` is not needed.

Copy `namelist.input.global` to `namelist.input`, and edit it. Run the model as usual.

Note: since this is not a commonly-used configuration in the model, use it with caution. Not all physics and diffusion options have been tested with it, and some options may not work well with polar filters. Also, positive-definite and monotonic advection options do not work with polar filters in a global run because polar filters can generate negative values of scalars. This implies, too, that WRF-Chem cannot be run with positive-definite and monotonic options in a global WRF setup.

As an extension to the global lat-lon grid, the regional domain can also be set using a lat-lon grid. To do so, one needs to set both grid dimensions, and grid distances in degrees. Again `geogrid` will calculate the grid distance, assuming the earth is a sphere and its radius is 6370 km. Find the grid distance in meters in the netCDF file, and use the value for WRF's `namelist.input` file.

j. Using Digital Filter Initialization

Digital filter initialization (DFI) is a new option in V3. It is a way to remove initial model imbalance as, for example, measured by the surface pressure tendency. This might be important when one is interested in the 0 – 6 hour simulation/forecast. It runs a digital filter during a short model integration, backward and forward, and then starts the forecast. In WRF implementation, this is all done in a single job. With the V3.3 release, DFI can be used for multiple domains with concurrent nesting, with feedback disabled.

There is no special requirement for data preparation.

Start with the namelist template `namelist.input.dfi`. This namelist file contains an extra namelist record for DFI: `&dfi_control`. Edit it to match your case configuration. For a typical application, the following options are used:

```
dfi_opt = 3 (Note: if doing a restart, this must be changed to 0)
dfi_nfilter = 7 (filter option: Dolph)
dfi_cutoff_seconds = 3600 (should not be longer than the filter window)
For time specification, it typically needs to integrate backward for 0.5 to 1 hour, and
integrate forward for half of the time.
```

If option `dfi_write_filtered_input` is set to true, a filtered `wrfinput` file, `wrfinput_initialized_d01`, will be produced when you run `wrf`.

In Version 3.2, a constant boundary condition option is introduced for DFI. To use it, set `constant_bc = 1` in `&bdy_control`

If a different time step is used for DFI, one may use `time_step_dfi` to set it.

k. Using sst_update option

The WRF model physics does not predict sea-surface temperature, vegetation fraction, albedo and sea ice. For long simulations, the model provides an alternative to read-in the time-varying data and update these fields. In order to use this option, one must have access to time-varying SST and sea ice fields. Twelve monthly values of vegetation fraction and albedo are available from the `geogrid` program. Once these fields are processed via WPS, one may activate the following options in the namelist record `&time_control` before running the program `real.exe` and `wrf.exe`:

```
io_form_auxinput4      = 2
auxinput4_inname       = "wrflowinp_d<domain>" (created by real.exe)
auxinput4_interval     = 360, 360, 360,
```

and in `&physics`

```
sst_update = 1
```

Note that this option doesn't work with `sf_ocean_physics` options.

l. Using Adaptive Time Stepping

Adaptive time stepping is a way to maximize the time step that the model can use while keeping the model numerically stable. The model time step is adjusted based on the domain-wide horizontal and vertical stability criterion (called the Courant-Friedrichs-Lewy (CFL) condition). The following set of values would typically work well.

```
use_adaptive_time_step = .true.  
step_to_output_time = .true. (but nested domains may still be writing output at  
the desired time. Try to use adjust_output_times = .true. to make up for this.)  
target_cfl = 1.2, 1.2, 1.2,  
max_step_increase_pct = 5, 51, 51, (a large percentage value for the nest allows  
the time step for the nest to have more freedom to adjust)  
starting_time_step = the actual value or -1 (which means 6*DX at start time)  
max_time_step : use fixed values for all domains, e.g. 8*DX  
min_time_step : use fixed values for all domains, e.g. 4*DX  
adaptation_domain: which domain is driving the adaptive time step
```

Also see the description of [these options](#) in the list of namelist on page 5-43.

m. Option to stochastically perturb forecast

Stochastic kinetic-energy backscatter scheme (SKEBS)

Since Version 3.3, WRF has an option to stochastically perturb forecasts via a stochastic kinetic-energy backscatter scheme (SKEBS; Shutts, 2005, QJRM5). The scheme introduces temporally and spatially correlated perturbations to the rotational wind components u , v , and potential temperature θ . An application and verification of this scheme to mesoscale ensemble forecast in the mid-latitudes is available in Berner et. al, 2011, Monthly Weather Review, 139, 1972—1995 (<http://journals.ametsoc.org/doi/abs/10.1175/2010MWR3595.1>).

SKEBS generates perturbation tendency fields ru_tendf_stoch (in m^2/s^3), rv_tendf_stoch (m^2/s^3), rt_tendf_stoch (K/s^2) for u , v and θ , respectively. For new applications we recommend to output the magnitude and spatial patterns of these perturbation fields and compare them to the physics tendency fields for the same variables. Within the scheme, these perturbation fields are then coupled to mass and added to physics tendencies of u , v , and θ . The stochastic perturbations fields for wind and temperature are controlled by the kinetic and potential energy they inject into the flow. The injected energy is expressed as backscattered dissipation rate for streamfunction and temperature respectively.

Since the scheme uses Fast Fourier Transforms (FFTs) provided in the library FFTPACK, we recommend the number of gridpoints in each direction to be product of small primes. If the number of gridpoints in one direction is a large prime, computational

cost may increase substantially. Multiple domains are supported by interpolating the forcing from the largest domain for which the scheme is turned on (normally the parent domain) down to all nested domain.

At present, default settings for the scheme have been thoroughly tested on synoptic and meso-scale domains over the mid-latitudes and as such offer a starting point. Relationships between backscatter amplitudes and perturbation fields for a given variable are not necessarily proportional due to the complexity of the scheme.

To facilitate adjustment of the scheme parameters to user-specific applications, many parameters previously hard-coded in the scheme have become namelist parameters in version WRFV3.6.

Users wishing to adjust default settings are strongly advised to read details addressed in the technical document available at <http://www.cgd.ucar.edu/~berner/skebs.html>, which also contains details on version history, derivations, and examples.

Note that the current version should provide bit-reproducible results except for OpenMP. Restart capability was added starting with version V3.7.

Further documentation is available at <http://www.cgd.ucar.edu/~berner/skebs.html>

The namelist parameters to control the stochastic schemes are found in the namelist.input file currently under the &stoch section (new namelist record since V3.6):

skebs	Replaces the namelist parameter <code>stoch_forc_opt</code> which was used up to V3.6. Latter is still maintained, but obsolete. = 0, 0, 0: No stochastic parameterization = 1, 1, 1: Use SKEB scheme
tot_backscat_psi	Total backscattered dissipation rate for streamfunction; Controls amplitude of rotational wind perturbations Default value is $1.0\text{E-}5 \text{ m}^2/\text{s}^3$.
tot_backscat_t	Total backscattered dissipation rate for potential temperature; Controls amplitude of potential temperature perturbations. Default value is $1.0\text{E-}6 \text{ m}^2/\text{s}^3$.
ztau_psi	Decorrelation time (in s) for streamfunction perturbations. Default is 10800s (=0.5h). Depending on application a preferable value is 216000s (6h).
ztau_t	Decorrelation time (in s) for potential temperature perturbations. Default 10800s. Depending on application a preferable

	value is 216000s (6h).
rexponent_psi	Spectral slope for streamfunction perturbations. Default is -1.83 for a kinetic-energy forcing spectrum with slope -5/3.
rexponent_t	Spectral slope of potential temperature perturbations. Default is -1.83 for a potential energy forcing spectrum with slope -1.83 ² .
kminforc	Minimal forcing wavenumber in longitude for streamfunction perturbations. Default is 1.
lminforc	Minimal forcing wavenumber in latitude for streamfunction perturbations. Default is 1.
kminforc_t	Minimal forcing wavenumber in longitude for potential temperature perturbations. Default is 1.
lminforc_t	Minimal forcing wavenumber in latitude for potential temperature perturbations. Default is 1.
kmaxforc	Maximal forcing wavenumber in longitude for streamfunction perturbations. Default is maximal possible wavenumbers determined by number of gridpoints in longitude.
lmaxforc	Maximal forcing wavenumber in latitude for streamfunction perturbations. Default is maximal possible wavenumbers determined by number of gridpoints in latitude.
kmaxforc_t	Maximal forcing wavenumber in longitude for potential temperature perturbations. Default is maximal possible wavenumbers determined by number of gridpoints in longitude.
lmaxforc_t	Maximal forcing wavenumber in latitude for potential temperature perturbations. Default is maximal possible wavenumbers determined by number of gridpoints in latitude.
zsigma2_eps	Noise variance in autoregressive process defining streamfunction perturbations.
zsigma2_eta	Noise variance in autoregressive process defining in potential temperature perturbations.
skebs_vertstruc	Replaces the namelist parameter

	<p>stoch_vertstruc_opt which was used up to V3.6. Latter is still maintained, but obsolete.</p> <p>= 0, 0, 0: Constant vertical structure of random pattern generator</p> <p>= 1, 1, 1: Random phase vertical structure with westward tilt</p>
nens	Seed for random number stream. For ensemble forecasts this parameter needs to be different for each member. The seed is a function of initial start time to ensure different random number streams for forecasts starting from different initial times.
iseed_skebs	Seed for random number stream for skebs. Will be combined with seed nens signifying ensemble member number and initial start time to ensure different random number streams for forecasts starting from different initial times and for different ensemble members.

(From Berner)

Option to generate a random perturbation field

This option generates a random perturbations field. The stochastic pattern is centered on 0 and has a prescribed standard deviation. This pattern can be used for user-implemented perturbations of e.g., lower boundary conditions or parameters in the physics parameterizations. Currently it is only used to generate perturbations of the boundary tendencies of the WRF-CHEM. The namelist parameters to control the random perturbation option are found in the namelist.input file under the &stoch section (new namelist record since V3.6):

rand_perturb	= 0, 0, 0: No random perturbations = 1, 1, 1: Create random perturbation field
lengthscale_rand_pert	Random Perturbation Lengthscale (in m). Default is 500000m.
timescale_rand_pert	Temporal decorrelation of random field (in s). Default is 21600s.
gridpt_stddev_rand_pert	Standard deviation of random perturbation field at each gridpoint. Default is 0.03.
stddev_cutoff_rand_pert	Cutoff tails of perturbation pattern above this threshold standard deviation. Default is 3.0 (standard deviations).
rand_pert_vertstruc	Vertical structure for random perturbation field: 0=constant, 1=random phase with tilt

nens	Seed for random number stream. For ensemble forecasts this parameter needs to be different for each member. The seed is a function of initial start time to ensure different random number streams for forecasts starting from different initial times.
iseed_rand_pert	Seed for random number stream for rand_perturb. Will be combined with seed nens signifying ensemble member number and initial start time to ensure different random number streams for forecasts starting from different initial times and for different ensemble members.

(From Berner)

Option to perturb the boundary conditions

This option allows for the addition of perturbations to the boundary tendencies for u and v wind components and potential temperature in WRF stand-alone runs. Users may provide a pattern or use the pattern generated by SKEBS.

The perturb_bdy option runs independently of SKEBS and as such may be run with or without the SKEB scheme, which operates solely on the interior grid. However, selecting perturb_bdy=1 will require the generation of a domain-size random array, thus computation time may increase.

Selecting perturb_bdy=2 will require the user to provide a pattern. Arrays are initialized and called: field_u_tend_perturb, field_v_tend_perturb, field_t_tend_perturb. These arrays will need to be filled with desired pattern in spec_bdytend_perturb in share/module_bc.F or spec_bdy_dry_perturb in dyn_em/module_bc_em.F.

The namelist parameters to control the perturb boundary conditions option are found in the namelist.input file under the &stoch section:

```
perturb_bdy = 0 : No boundary perturbations (default)
              = 1 : Use SKEBS pattern for boundary perturbations
              = 2 : Use other user provided pattern for boundary perturbations
```

(From Fossell, nee Smith)

Option to perturb the boundary tendencies in WRF-CHEM

This option adds random perturbations to the chemistry boundary tendencies in WRF-CHEM. The random perturbation pattern is controlled by all the parameters for the

namelist option "rand_perturb", and stored as the variable named "RAND_PERT" in the wrfout file.

The perturb_chem_bdy option runs independently of RAND_PERTURB and as such may be run with or without the RAND_PERTURB scheme, which operates solely on the interior grid. However, selecting perturb_bdy_chem=1 will require the generation of a domain-size random array, thus computation time may increase.

perturb_chem_bdy = 0 : No boundary perturbations to tendencies in WRF-CHEM(default)
 = 1 : Use RAND_PERTURB pattern for boundary perturbations

(From Ha)

n. Run-Time IO

With the release of WRF version 3.2, IO decisions may now be updated as a run-time option. Previously, any modification to the IO (such as which variable is associated with which stream) was handled via the Registry, and changes to the Registry always necessitate a cycle of `clean -a`, `configure`, and `compile`. This compile-time mechanism is still available and it is how most of the WRF IO is defined. However, should a user wish to add (or remove) variables from various streams, that capability is available as an option.

First, the user lets the WRF model know where the information for the run-time modifications to the IO is located. This is a text file (`my_file_d01.txt`), one for each domain, defined in the `namelist.input` file, located in the `time_control` namelist record.

```
&time_control
iofields_filename = "my_file_d01.txt", "my_file_d02.txt"
ignore_iofields_warning = .true.,
/
```

The contents of the text file associates a stream ID (0 is the default history and input) with a variable, and whether the field is to be added or removed. The state variables must already be defined in the Registry file. Following are a few examples:

```
-:h:0:RAIN,RAINNC
```

would remove the fields RAIN and RAINNC from the standard history file.

```
+:h:7:RAIN,RAINNC
```

would add the fields RAIN and RAINNC to an output stream #7.

The available options are:

- + or -, add or remove a variable
- 0-24, integer, which stream

i or h, input or history

field name in the Registry – this is the first string in quotes. Note: do not include any spaces in between field names.

It is not necessary to remove fields from one stream to insert them in another. It is OK to have the same field in multiple streams.

The second namelist variable, `ignore_iofields_warning`, tells the program what to do if it encounters an error in these user-specified files. The default value, `.TRUE.`, is to print a warning message but continue the run. If set to `.FALSE.`, the program will abort if there are errors in these user-specified files.

Note that any field that can be part of the optional IO (either the input or output streams) must already be declared as a state variable in the Registry. Care needs to be taken when specifying the names of the variables that are selected for the run-time IO. The "name" of the variable to use in the text file (defined in the `namelist.input` file) is the quoted string from the Registry file. Most of the WRF variables have the same string for the name of the variable used inside the WRF source code (column 3 in the Registry file, non-quoted, and not the string to use) and the name of the variable that appears in the netCDF file (column 9 in the Registry file, quoted, and that is the string to use).

o. Output Diagnostics

1. Time series output. To activate the option, a file called "tslist" must be present in the WRF run directory. The `tslist` file contains a list of locations defined by their latitude and longitude along with a short description and an abbreviation for each location. A sample file looks something like this:

```
#-----#
# 24 characters for name | pfx | LAT | LON |
#-----#
Cape Hallett             hallt -72.330  170.250
McMurdo Station         mcm   -77.851  166.713
```

The first three lines in the file are regarded as header information, and are ignored. Given a `tslist` file, for each location inside a model domain (either coarse or nested) a file containing time series variables at each model time step will be written with the name `pfx.d<domain>.TS`, where `pfx` is the specified prefix for the location in the `tslist` file. The maximum number of time series locations is controlled by the namelist variable `max_ts_locs` in the namelist record `&domains`. The default value is 5. The time series output contains selected variables at the surface, including 2-m temperature, vapor mixing ratio, 10-m wind components, u and v, rotated to the earth coordinate, etc.. More information for time series output can be found in `WRFV3/run/README.tslist`.

Starting in V3.5, in addition to surface variables, vertical profiles of earth-relative U and V, potential temperature, water vapor, and geopotential height will also be output. The

default number of levels in the output is 15, but can be changed with namelist variable `max_ts_level`.

2. Pressure level output. This is activated by adding a namelist record `&diag`, and set `p_lev_diag = 1`. The option can output U, V, wind speed, T, dew point T, RH and geopotential height at a number of pressure levels.

```
&diag
p_lev_diag = 1
num_press_level = 4,
press_levels = 85000, 70000, 50000, 20000,
```

The output goes to auxiliary output stream 23, so the following should be set in `&time_control`:

```
auxhist23_interval = 360, 360,
frames_per_auxhist23 = 100, 100,
io_form_auxhist23 = 2
```

3. `nwp_diagnostics = 1` in `&time_control`. Convective storm diagnostics. This option outputs maximum 10 m wind speed, max helicity in 2 - 5 km layer, maximum vertical velocity in updraft and downdraft below 400 mb, mean vertical velocity in 2 - 5 km layer, and maximum column graupel in a time-window between history output times. The extra fields go to history file.

4. `output_diagnostics = 1` in `&time_control`. Climate diagnostics. This option outputs 36 surface diagnostic variables: maximum and minimum, times when max and min occur, mean value, standard deviation of the mean for T2, Q2, TSK, U10, V10, 10 m wind speed, RAINCV, RAINNCV (the last two are time-step rain). The output goes to auxiliary output stream 3, and hence it needs the following:

```
auxhist3_outname = "wrfxtrm_d<domain>_<date>"
auxhist3_interval = 1440, 1440,
frames_per_auxhist3 = 100, 100,
io_form_auxhist3 = 2
```

Since this option computes daily max and min, and so on, it is advisable to do restart at daily interval.

5. `do_avgflx_em = 1` in `&dynamics`. This option outputs history-time averaged, column-pressure coupled U, V and W for downstream transport models. If Grell-type of schemes is used, `do_avg_cugd = 1` will output time-averaged convective mass-fluxes.

6. Others in `&physics`

`do_radar_ref = 1`: compute radar reflectivity using microphysics-specific parameters in the model. Works for `mp_physics = 2,4,6,7,8,10,14,16`.

`prec_acc_dt = 60`: Time interval for outputting precipitation variables (rain from cumulus and microphysics schemes, and snow from microphysics scheme) (unit in minutes).

p. WRF-Hydro

This is a new capability in V3.5. It couples WRF model with hydrology processes (such as routing and channeling). Using WRF-Hydro requires a separate compile by using environment variable `WRF_HYDRO`. In c-shell environment, do

```
setenv WRF_HYDRO 1
```

before doing ‘configure’ and ‘compile’. Once WRF is compiled, copy files from `hydro/Run/` directory to your working directory (e.g. `test/em_real/`). A separately prepared geogrid file is also required. Please refer the following web site for detailed information: http://www.ral.ucar.edu/projects/wrf_hydro/. (*From W. Yu*)

q. Using IO Quilting

This option allows a few processors to be set aside to be responsible for output only. It can be useful and performance-friendly if the domain size is large, and/or the time taken to write an output time is becoming significant when compared to the time taken to integrate the model in between the output times. There are two variables for setting the option:

`nio_tasks_per_group`: How many processors to use per IO group for IO quilting.
Typically 1 or 2 processors should be sufficient for this purpose.
`nio_groups`: How many IO groups for IO. Default is 1.

*Note: This option is only used for `wrf.exe`. It does not work for `real` or `ndown`.

Examples of namelists for various applications

A few physics options sets (plus model top and the number of vertical levels) are provided here for reference. They may provide a good starting point for testing the model in your application. Also note that other factors will affect the outcome; for example, the domain setup, the distributions of vertical model levels, and input data.

a. 1 – 4 km grid distances, convection-permitting runs for a 1- 3 day run (as used for the NCAR spring real-time convection forecast over the US in 2013):

```

mp_physics           = 8,
ra_lw_physics        = 4,
ra_sw_physics        = 4,
radt                 = 10,
sf_sfclay_physics    = 2,
sf_surface_physics   = 2,
bl_pbl_physics       = 2,
bldt                 = 0,
cu_physics           = 0,

ptop_requested       = 5000,
e_vert               = 40,

```

b. 10 – 20 km grid distances, 1- 3 day runs (e.g., NCAR daily real-time runs over the US):

```

mp_physics           = 8,
ra_lw_physics        = 4,
ra_sw_physics        = 4,
radt                 = 15,
sf_sfclay_physics    = 1,
sf_surface_physics   = 2,
bl_pbl_physics       = 1,
bldt                 = 0,
cu_physics           = 3,
cudt                 = 0,

ptop_requested       = 5000,
e_vert               = 30,

```

c. Cold region 10 – 30 km grid sizes (e.g. used in NCAR’s Antarctic Mesoscale Prediction System):

```

mp_physics           = 4,
ra_lw_physics        = 4,
ra_sw_physics        = 2,
radt                 = 15,
sf_sfclay_physics    = 2,
sf_surface_physics   = 2,
bl_pbl_physics       = 2,
bldt                 = 0,
cu_physics           = 1,
cudt                 = 5,
fractional_seaice     = 1,
seaice_threshold      = 0.0,

ptop_requested       = 1000,
e_vert               = 44,

```

d. Hurricane applications (e.g. 36, 12, and 4 km nesting used by NCAR's real-time hurricane runs in 2012):

mp_physics	= 6,
ra_lw_physics	= 4,
ra_sw_physics	= 4,
radt	= 10,
sf_sfclay_physics	= 1,
sf_surface_physics	= 2,
bl_pbl_physics	= 1,
bldt	= 0,
cu_physics	= 6, (only on 36/12 km grid)
cudt	= 0,
isftcflx	= 2,
ptop_requested	= 2000,
e_vert	= 36,

e. Regional climate case at 10 – 30 km grid sizes (e.g. used in NCAR's regional climate runs):

mp_physics	= 6,
ra_lw_physics	= 3,
ra_sw_physics	= 3,
radt	= 30,
sf_sfclay_physics	= 1,
sf_surface_physics	= 2,
bl_pbl_physics	= 1,
bldt	= 0,
cu_physics	= 1,
cudt	= 5,
sst_update	= 1,
tmn_update	= 1,
sst_skin	= 1,
bucket_mm	= 100.0,
bucket_J	= 1.e9,
ptop_requested	= 1000,
e_vert	= 51,
spec_bdy_width	= 10,
spec_zone	= 1,
relax_zone	= 9,
spec_exp	= 0.33,

Check Output

Once a model run is completed, it is good practice to check a couple of things quickly.

If you have run the model on multiple processors using MPI, you should have a number of `rsl.out.*` and `rsl.error.*` files. Type `'tail rsl.out.0000'` to see if you get `'SUCCESS COMPLETE WRF'`. This is a good indication that the model has run successfully.

The namelist options are written to a separate file: `namelist.output`.

Check the output times written to the `wrfout*` file by using the `netCDF` command:

```
ncdump -v Times wrfout_d01_YYYY-mm-dd_hh:00:00
```

Take a look at either the `rsl.out.0000` file or other standard-out files. This file logs the times taken to compute for one model time step, and to write one history and restart output file:

```
Timing for main: time 2006-01-21_23:55:00 on domain 2: 4.91110 elapsed seconds.
Timing for main: time 2006-01-21_23:56:00 on domain 2: 4.73350 elapsed seconds.
Timing for main: time 2006-01-21_23:57:00 on domain 2: 4.72360 elapsed seconds.
Timing for main: time 2006-01-21_23:57:00 on domain 1: 19.55880 elapsed seconds.
```

and

```
Timing for Writing wrfout_d02_2006-01-22_00:00:00 for domain 2: 1.17970 elapsed seconds.
Timing for main: time 2006-01-22_00:00:00 on domain 1: 27.66230 elapsed seconds.
Timing for Writing wrfout_d01_2006-01-22_00:00:00 for domain 1: 0.60250 elapsed seconds.
```

If the model did not run to completion, take a look at these standard output/error files too. If the model has become numerically unstable, it may have violated the CFL criterion (for numerical stability). Check whether this is true by typing the following:

```
grep cfl rsl.error.* or grep cfl wrf.out
```

you might see something like these:

```
5 points exceeded cfl=2 in domain          1 at time 4.200000
MAX AT i,j,k: 123 48 3 cfl,w,d(eta)= 4.165821
21 points exceeded cfl=2 in domain          1 at time 4.200000
MAX AT i,j,k: 123 49 4 cfl,w,d(eta)= 10.66290
```

When this happens, consider using the namelist option `w_damping`, and/or reducing the time step.

Trouble Shooting

If the model aborts very quickly, it is likely that either the computer memory is not large enough to run the specific configuration, or the input data have some serious problem. For the first problem, try to type ‘unlimit’ or ‘ulimit -s unlimited’ to see if more memory and/or stack size can be obtained.

For OpenMP (smpar-compiled code), the stack size needs to be set large, but not unlimited. Unlimited stack size may crash the computer.

To check if the input data is the problem, use ncview or another netCDF file browser.

Another frequent error seen is ‘module_configure: initial_config: error reading namelist’. This is an error message from the model complaining about errors and typos in the `namelist.input` file. Edit the `namelist.input` file with caution. If unsure, always start with an available template. A namelist record where the namelist read error occurs is provided in the V3 error message, and it should help with identifying the error.

Physics and Dynamics Options

Physics Options

WRF offers multiple physics options that can be combined in any way. The options typically range from simple and efficient, to sophisticated and more computationally costly, and from newly developed schemes, to well-tried schemes such as those in current operational models.

The choices vary with each major WRF release, but here we will outline those available in WRF Version 3.

1. Microphysics (`mp_physics`)

- a. Kessler scheme: A warm-rain (i.e. no ice) scheme used commonly in idealized cloud modeling studies (`mp_physics` = 1).
- b. Lin et al. scheme: A sophisticated scheme that has ice, snow and graupel processes, suitable for real-data high-resolution simulations (2).
- c. WRF Single-Moment 3-class scheme: A simple, efficient scheme with ice and snow processes suitable for mesoscale grid sizes (3).
- d. WRF Single-Moment 5-class scheme: A slightly more sophisticated version of (c) that allows for mixed-phase processes and super-cooled water (4).

- e. Eta microphysics: The operational microphysics in NCEP models. A simple efficient scheme with diagnostic mixed-phase processes. For fine resolutions (< 5km) use option (5) and for coarse resolutions use option (95).
- f. WRF Single-Moment 6-class scheme: A scheme with ice, snow and graupel processes suitable for high-resolution simulations (6).
- g. Goddard microphysics scheme. A scheme with ice, snow and graupel processes suitable for high-resolution simulations (7). New in Version 3.0.
- h. New Thompson et al. scheme: A new scheme with ice, snow and graupel processes suitable for high-resolution simulations (8). This adds rain number concentration and updates the scheme from the one in Version 3.0. New in Version 3.1.
- i. Milbrandt-Yau Double-Moment 7-class scheme (9). This scheme includes separate categories for hail and graupel with double-moment cloud, rain, ice, snow, graupel and hail. New in Version 3.2.
- j. Morrison double-moment scheme (10). Double-moment ice, snow, rain and graupel for cloud-resolving simulations. New in Version 3.0.
- k. WRF Double-Moment 5-class scheme (14). This scheme has double-moment rain. Cloud and CCN for warm processes, but is otherwise like WSM5. New in Version 3.1.
- l. WRF Double-Moment 6-class scheme (16). This scheme has double-moment rain. Cloud and CCN for warm processes, but is otherwise like WSM6. New in Version 3.1.
- m. Stony Brook University (Y. Lin) scheme (13). This is a 5-class scheme with riming intensity predicted to account for mixed-phase processes. New in Version 3.3.
- n. NSSL 2-moment scheme (17, 18). New since Version 3.4, this is a two-moment scheme for cloud droplets, rain drops, ice crystals, snow, graupel, and hail. It also predicts average graupel particle density, which allows graupel to span the range from frozen drops to low-density graupel. There is an additional option to predict cloud condensation nuclei (CCN, option 18) concentration (intended for idealized simulations). The scheme is intended for cloud-resolving simulations ($dx \leq 2km$) in research applications. Since V3.5, two more one-moment schemes have been added (19 and 21). Option 19 is a single-moment version of the NSSL scheme, and option 21 is similar to Gilmore et al. (2004).
- o. CAM V5.1 2-moment 5-class scheme.
- p. Thompson aerosol-aware (28). This scheme considers water- and ice-friendly aerosols. A climatology dataset may be used to specify initial and boundary conditions for the aerosol variables (Thompson and Eidhammer, 2014, JAS.) New in Version 3.6.
- q. HUJI (Hebrew University of Jerusalem, Israel) spectral bin microphysics, full (32) and ‘fast’ (30) versions are available since Version 3.6.

2.1 Longwave Radiation (*ra_lw_physics*)

- a. RRTM scheme (*ra_lw_physics* = 1): Rapid Radiative Transfer Model. An accurate scheme using look-up tables for efficiency. Accounts for multiple bands, and microphysics species. For trace gases, the volume-mixing ratio values for

CO₂=330e-6, N₂O=0. and CH₄=0. in pre-V3.5 code; in V3.5, CO₂=379e-6, N₂O=319e-9 and CH₄=1774e-9. See section 2.3 for time-varying option.

b. GFDL scheme (99): Eta operational radiation scheme. An older multi-band scheme with carbon dioxide, ozone and microphysics effects.

c. CAM scheme (3): from the CAM 3 climate model used in CCSM. Allows for aerosols and trace gases. It uses yearly CO₂, and constant N₂O (311e-9) and CH₄ (1714e-9). See section 2.3 for the time-varying option.

d. RRTMG scheme (4): A new version of RRTM added in Version 3.1. It includes the MCICA method of random cloud overlap. For major trace gases, CO₂=379e-6, N₂O=319e-9, CH₄=1774e-9. See section 2.3 for the time-varying option.

e. New Goddard scheme (5). Efficient, multiple bands, ozone from climatology. It uses constant CO₂=337e-6, N₂O=320e-9, CH₄=1790e-9. New in Version 3.3.

f. Fu-Liou-Gu scheme (7). multiple bands, cloud and cloud fraction effects, ozone profile from climatology and tracer gases. CO₂=345e-6. New in Version 3.4.

2.2 Shortwave Radiation (*ra_sw_physics*)

a. Dudhia scheme: Simple downward integration allowing efficiently for clouds and clear-sky absorption and scattering (*ra_sw_physics* = 1).

b. Goddard shortwave: Two-stream multi-band scheme with ozone from climatology and cloud effects (2).

c. GFDL shortwave: Eta operational scheme. Two-stream multi-band scheme with ozone from climatology and cloud effects (99).

d. CAM scheme: from the CAM 3 climate model used in CCSM. Allows for aerosols and trace gases (3).

e. RRTMG shortwave. A new shortwave scheme with the MCICA method of random cloud overlap (4). New in Version 3.1.

f. New Goddard scheme (5). Efficient, multiple bands, ozone from climatology. New in Version 3.3.

g. Fu-Liou-Gu scheme (7). multiple bands, cloud and cloud fraction effects, ozone profile from climatology, can allow for aerosols. New in Version 3.4.

h. Held-Suarez relaxation. A temperature relaxation scheme designed for idealized tests only (31).

i. Slope and shading effects. *slope_rad* = 1 modifies surface solar radiation flux according to terrain slope. *topo_shad* = 1 allows for shadowing of neighboring grid cells. Use only with high-resolution runs with grid size less than a few kilometers. Since Version 3.2, these are available for all shortwave options.

j. *swrad_scatt*: scattering turning parameter for *ra_sw_physics* = 1. Default value is 1, which is equivalent to 1.e-5 m²/kg. When the value is greater than 1, it increases the scattering.

2.3 Input to radiation options

- a. CAM Green House Gases: Provides yearly green house gases from 1765 to 2500. The option is activated by compiling WRF with the macro `-DCLWRF GHG` added in `configure.wrf`. Once compiled, CAM, RRTM and RRTMG long-wave schemes will see these gases. Five scenario files are available: from IPCC AR5: `CAMtr_volume_mixing_ratio.RCP4.5`, `CAMtr_volume_mixing_ratio.RCP6`, and `CAMtr_volume_mixing_ratio.RCP8.5`; from IPCC AR4: `CAMtr_volume_mixing_ratio.A1B`, and `CAMtr_volume_mixing_ratio.A2`. The default points to the RCP8.5 file. New in Version 3.5.
- b. Climatological ozone and aerosol data for RRTMG: The ozone data is adapted from CAM radiation (`ra_*_physics=3`), and it has latitudinal (2.82 degrees), height and temporal (monthly) variation, as opposed to the default ozone used in the scheme that only varies with height. This is activated by the namelist option `o3input = 2`. The aerosol data is based on Tegen et al. (1997), which has 6 types: organic carbon, black carbon, sulfate, sea salt, dust and stratospheric aerosol (volcanic ash, which is zero). The data also has spatial (5 degrees in longitude and 4 degrees in latitudes) and temporal (monthly) variations. The option is activated by the namelist option `aer_opt = 1`. New in Version 3.5.
- c. Aerosol input for RRTMG and Goddard radiation options (`aer_opt = 2`). Either AOD or AOD plus Angstrom exponent, single scattering albedo, and cloud asymmetry parameter can be provided via constant values from namelist or 2D input fields via auxiliary input stream 15. Aerosol type can be set too. New in V3.6.

2.4 Cloud fraction option

`icloud:` = 1, use Xu-Randall method; = 2, use threshold method which gives either 0 or 1 cloud fraction.

3.1 Surface Layer (`sf_sfclay_physics`)

- a. MM5 similarity: Based on Monin-Obukhov with Carlsion-Boland viscous sub-layer and standard similarity functions from look-up tables (`sf_sfclay_physics = 91`).
- b. Eta similarity: Used in Eta model. Based on Monin-Obukhov with Zilitinkevich thermal roughness length and standard similarity functions from look-up tables (2).
- c. Pleim-Xiu surface layer. (7). New in Version 3.0.
- d. QNSE surface layer. Quasi-Normal Scale Elimination PBL scheme's surface layer option (4). New in Version 3.1.
- e. MYNN surface layer. Nakanishi and Niino PBL's surface layer scheme (5). New in Version 3.1.
- f. TEMF surface layer. Total Energy – Mass Flux surface layer scheme. New in Version 3.3.
- g. Revised MM5 surface layer scheme (option 11 prior to V3.6, renamed to option 1 since V3.6): Remove limits and use updated stability functions. New in Version 3.4. (Jimenez et al. MWR 2012).

h. *iz0tlnd* = 1 (for *sf_sfclay_physics* = 1 or 2), Chen-Zhang thermal roughness length over land, which depends on vegetation height, 0 = original thermal roughness length in each *sfclay* option. New in Version 3.2.

3.2 Land Surface (*sf_surface_physics*)

a. 5-layer thermal diffusion: Soil temperature only scheme, using five layers (*sf_surface_physics* = 1).

b. Noah Land Surface Model: Unified NCEP/NCAR/AFWA scheme with soil temperature and moisture in four layers, fractional snow cover and frozen soil physics. New modifications are added in Version 3.1 to better represent processes over ice sheets and snow covered area.

- In V3.6, a sub-tiling option is introduced, and it is activated by namelist *sf_surface_mosaic* = 1, and the number of tiles in a grid box is defined by namelist *mosaic_cat*, with a default value of 3.

c. RUC Land Surface Model: RUC operational scheme with soil temperature and moisture in six layers, multi-layer snow and frozen soil physics (3).

d. Pleim-Xiu Land Surface Model. Two-layer scheme with vegetation and sub-grid tiling (7). New in Version 3.0: The Pleim-Xiu land surface model (PX LSM; Pleim and Xiu 1995; Xiu and Pleim 2001) was developed and improved over the years to provide realistic ground temperature, soil moisture, and surface sensible and latent heat fluxes in mesoscale meteorological models. The PX LSM is based on the ISBA model (Noilhan and Planton 1989), and includes a 2-layer force-restore soil temperature and moisture model. the top layer is taken to be 1 cm thick, and the lower layer is 99 cm. Grid aggregate vegetation and soil parameters are derived from fractional coverage of land use categories and soil texture types. There are two indirect nudging schemes that correct biases in 2-m air temperature and moisture by dynamic adjustment of soil moisture (Pleim and Xiu, 2003) and deep soil temperature (Pleim and Gilliam, 2009).

Users should recognize that the PX LSM was primarily developed for retrospective simulation, where surface-based observations are available to inform the indirect soil nudging. While soil nudging can be disabled using the FDDA namelist.input setting "pxlsm_soil_nudge," little testing has been done in this mode, although some users have reported reasonable results. Gilliam and Pleim (2010) discuss the implementation in the WRF model and provide typical configurations for retrospective applications. If soil nudging is activated, modelers must use the [Obsgrid objective re-analysis utility](#) to produce a surface nudging file with the naming convention "wrfsfdda_d0*." Obsgrid takes WPS "met_em*" files and LittleR observation files and produces the "wrfsfdda_d0*" file. The PX LSM uses 2-m temperature and mixing ratio re-analyses from this file for the deep soil moisture and temperature nudging. If modelers want to test PX LSM in forecast mode with soil nudging activated, forecasted 2-m temperature and mixing ratio can be used with empty observation files to produce the "wrfsfdda_d0*" files, using Obsgrid, but results will be tied to the governing forecast model.

f. Noah-MP (multi-physics) Land Surface Model: uses multiple options for key land-atmosphere interaction processes. Noah-MP contains a separate vegetation canopy defined by a canopy top and bottom with leaf physical and radiometric properties used in a two-stream canopy radiation transfer scheme that includes shading effects. Noah-MP contains a multi-layer snow pack with liquid water storage and melt/refreeze capability and a snow-interception model describing loading/unloading, melt/refreeze, and sublimation of the canopy-intercepted snow. Multiple options are available for surface water infiltration and runoff, and groundwater transfer and storage including water table depth to an unconfined aquifer. Horizontal and vertical vegetation density can be prescribed or predicted using prognostic photosynthesis and dynamic vegetation models that allocate carbon to vegetation (leaf, stem, wood and root) and soil carbon pools (fast and slow). New in Version 3.4. (Niu et al. 2011)

g. SSiB Land Surface Model: This is the third generation of the Simplified Simple Biosphere Model (Xue et al. 1991; Sun and Xue, 2001). SSiB is developed for land/atmosphere interaction studies in the climate model. The aerodynamic resistance values in SSiB are determined in terms of vegetation properties, ground conditions and bulk Richardson number according to the modified Monin–Obukhov similarity theory. SSiB-3 includes three snow layers to realistically simulate snow processes, including destructive metamorphism, densification process due to snow load, and snow melting, which substantially enhances the model’s ability for the cold season study. To use this option, *ra_lw_physics* and *ra_sw_physics* should be set to either 1, 3, or 4. The second full model level should be set to no larger than 0.982 so that the height of that level is higher than vegetation height. New in Version 3.4.

h. Fractional sea-ice (*fractional_seaice* = 1). Treat sea-ice as fractional field. Require fractional sea-ice as input data. Data sources may include those from GFS or the National Snow and Ice Data Center (<http://nsidc.org/data/seaice/index.html>). Use XICE for Vtable entry instead of SEAICE. This option works with *sf_sfclay_physics* = 1, 2, 5, and 7, and *sf_surface_physics* = 2, 3, and 7 in the present release. New in Version 3.1.

i. CLM4 (Community Land Model Version 4, Oleson et al. 2010; Lawrence et al. 2010): CLM4 was developed at the National Center for Atmospheric Research with many external collaborators and represents a state-of-the-science land surface process model. It contains sophisticated treatment of biogeophysics, hydrology, biogeochemistry, and dynamic vegetation. In CLM4, the land surface in each model grid cell is characterized into five primary sub-grid land cover types (glacier, lake, wetland, urban, and vegetated). The vegetated sub-grid consists of up to 4 plant functional types (PFTs) that differ in physiology and structure. The WRF input land cover types are translated into the CLM4 PFTs through a look-up table. The CLM4 vertical structure includes a single-layer vegetation canopy, a five-layer snowpack, and a ten-layer soil column. An earlier version of CLM has been quantitatively evaluated within WRF in Jin and Wen (2012; JGR-Atmosphere), Lu and Kueppers (2012; JGR-Atmosphere), and Subin et al. (2011; Earth Interactions) (*from Jin*). New in Version 3.5. Updated for 20/21 category MODIS landuse data in V3.6.

3.3 Urban Surface (*sf_urban_physics* – replacing old switch *ucmcall*)

- a. Urban canopy model (1): 3-category UCM option with surface effects for roofs, walls, and streets.
- b. BEP (2). Building Environment Parameterization: Multi-layer urban canopy model that allows for buildings higher than the lowest model levels. Only works with Noah LSM and BouLac and MYJ PBL options. New in Version 3.1.
- c. BEM (3). Building Energy Model. Adds to BEP, building energy budget with heating and cooling systems. Works with same options as BEP. New in Version 3.2.

3.4 Lake Physics (sf_lake_physics)

- a. CLM 4.5 lake model (1). The lake scheme was obtained from the Community Land Model version 4.5 (Oleson et al. 2013) with some modifications by Gu et al. (2013). It is a one-dimensional mass and energy balance scheme with 20-25 model layers, including up to 5 snow layers on the lake ice, 10 water layers, and 10 soil layers on the lake bottom. The lake scheme is used with actual lake points and lake depth derived from the WPS, and it also can be used with user defined lake points and lake depth in WRF (lake_min_elev and lakdepth_default). The lake scheme is independent of a land surface scheme and therefore can be used with any land surface scheme embedded in WRF. The lake scheme developments and evaluations were included in Subin et al. (2012) and Gu et al. (2013) (Subin et al. 2012: Improved lake model for climate simulations, J. Adv. Model. Earth Syst., 4, M02001. DOI:10.1029/2011MS000072; Gu et al. 2013: Calibration and validation of lake surface temperature simulations with the coupled WRF-Lake model. Climatic Change, 1-13, 10.1007/s10584-013-0978-y).

4. Planetary Boundary layer (bl_pbl_physics)

- a. Yonsei University scheme: Non-local-K scheme with explicit entrainment layer and parabolic K profile in unstable mixed layer (*bl_pbl_physics* = 1).
- b. Mellor-Yamada-Janjic scheme: Eta operational scheme. One-dimensional prognostic turbulent kinetic energy scheme with local vertical mixing (2).
- c. MRF scheme: Older version of (a) with implicit treatment of entrainment layer as part of non-local-K mixed layer (99).
- d. ACM2 PBL: Asymmetric Convective Model with non-local upward mixing and local downward mixing (7). New in Version 3.0.
- e. Quasi-Normal Scale Elimination PBL (4). A TKE-prediction option that uses a new theory for stably stratified regions (Available since 3.1). Daytime part uses eddy diffusivity mass-flux method with shallow convection (*mfshconv* = 1) which is added in Version 3.4.
- f. Mellor-Yamada Nakanishi and Niino Level 2.5 PBL (5). Predicts sub-grid TKE terms. New in Version 3.1.
- g. Mellor-Yamada Nakanishi and Niino Level 3 PBL (6). Predicts TKE and other second-moment terms. New in Version 3.1.
- h. BouLac PBL (8): Bougeault-Lacarrère PBL. A TKE-prediction option. New in Version 3.1. Designed for use with BEP urban model.

- i. UW (Bretherton and Park) scheme (9). TKE scheme from CESM climate model. New in Version 3.3.
- j. Total Energy - Mass Flux (TEMF) scheme (10). Sub-grid total energy prognostic variable, plus mass-flux type shallow convection. New in Version 3.3.
- k. LES PBL: A large-eddy-simulation (LES) boundary layer is available in Version 3. For this, *bl_pbl_physic* = 0, *isfflx* = 1, and *sf_sfclay_physics* and *sf_surface_physics* are selected. This uses diffusion for vertical mixing and must use *diff_opt* = 2, and *km_opt* = 2 or 3, see below. Alternative idealized ways of running the LESPBL are chosen with *isfflx* = 0 or 2. New in Version 3.0.
- l. Grenier-Bretherton-McCaa scheme: This is a TKE scheme. Tested in cloud-topped PBL cases. New in Version 3.5.
- m. *topo_wind*: = 1: Topographic correction for surface winds to represent extra drag from sub-grid topography and enhanced flow at hill tops (Jimenez and Dudhia, JAMC 2012). Works with YSU PBL only. New in Version 3.4. = 2: a simpler terrain variance-related correction. New in Version 3.5.

5. Cumulus Parameterization (*cu_physics*)

- a. Kain-Fritsch scheme: Deep and shallow convection sub-grid scheme using a mass flux approach with downdrafts and CAPE removal time scale (*cu_physics* = 1).
 - *kfeta_trigger* = 1 – default trigger; = 2 – moisture-advection modulated trigger function [based on Ma and Tan (2009, Atmospheric Research)]. May improve results in subtropical regions when large-scale forcing is weak.
 - *cu_rad_feedback* = true – allow sub-grid cloud fraction interaction with radiation. New in V3.6. (Alapaty et al. 2012, Geophysical Research Letters)
- b. Betts-Miller-Janjic scheme. Operational Eta scheme. Column moist adjustment scheme relaxing towards a well-mixed profile (2).
- c. Grell-Devenyi (GD) ensemble scheme: Multi-closure, multi-parameter, ensemble method with typically 144 sub-grid members (moved to option 93 in V3.5).
- d. Simplified Arakawa-Schubert (4). Simple mass-flux scheme with quasi-equilibrium closure with shallow mixing scheme (and momentum transport in NMM only). Adapted for ARW in Version 3.3.
- e. Grell 3D is an improved version of the GD scheme that may also be used on high resolution (in addition to coarser resolutions) if subsidence spreading (option *cugd_avedx*) is turned on (5). New in Version 3.0.
- f. Tiedtke scheme (U. of Hawaii version) (6). Mass-flux type scheme with CAPE-removal time scale, shallow component and momentum transport. New in Version 3.3.
- g. Zhang-McFarlane scheme (7). Mass-flux CAPE-removal type deep convection from CESM climate model with momentum transport. New in Version 3.3.
- h. New Simplified Arakawa-Schubert (14). New mass-flux scheme with deep and shallow components and momentum transport. New in Version 3.3.

- i. New Simplified Arakawa-Schubert (84, HWRF version). New mass-flux scheme with deep and shallow components and momentum transport. New in Version 3.4.
- j. Grell-Freitas (GF) scheme (3): An improved GD scheme that tries to smooth the transition to cloud-resolving scales, as proposed by Arakawa et al. (2004). New in Version 3.5.
- k. Old Kain-Fritsch scheme: Deep convection scheme using a mass flux approach with downdrafts and CAPE removal time scale (99).

6. Shallow convection option (*shcu_physics*)

- a. *ishallow* = 1, shallow convection option on. Works together with Grell 3D scheme (*cu_physics* = 5) – will move to *shcu_physics* category in the future.
- b. UW (Bretherton and Park) scheme (2). Shallow cumulus option from CESM climate model with momentum transport. New in Version 3.3.
- c. GRIMS (Global/Regional Integrated Modeling System) scheme: it represents the shallow convection process by using eddy-diffusion and the pal algorithm, and couples directly to the YSU PBL scheme. New in Version 3.5.

7. Other physics options

- a. Options to use for tropical storm and hurricane applications:
 - *sf_ocean_physics* = 1 (renamed from *omlcall* in previous versions): Simple ocean mixed layer model (1): 1-D ocean mixed layer model following that of Pollard, Rhines and Thompson (1972). Two other namelist options are available to specify the initial mixed layer depth (although one may ingest real mixed layer depth data) (*oml_hml0*) and a temperature lapse rate below the mixed layer (*oml_gamma*). Since V3.2, this option works with all *sf_surface_physics* options.
 - *sf_ocean_physics* = 2: New in V3.5. 3D Price-Weller-Pinkel (PWP) ocean model based on Price et al. (1994). This model predicts horizontal advection, pressure gradient force, as well as mixed layer processes. Only simple initialization via namelist variables *ocean_z*, *ocean_t*, and *ocean_s* is available in V3.5.
 - *isftcflx*: Modify surface bulk drag (Donelan) and enthalpy coefficients to be more in line with recent research results of those for tropical storms and hurricanes. This option also includes dissipative heating term in heat flux. It is only available for *sf_sfclay_physics* = 1. There are two options for computing enthalpy coefficients: *isftcflx* = 1: constant Z_{0q} (since V3.2) for heat and moisture; *isftcflx* = 2 Garratt formulation, slightly different forms for heat and moisture.
- b. Other options for long simulations (new in Version 3.1):
 - *tmn_update*: update deep soil temperature (1).
 - *sst_skin*: calculate skin SST based on Zeng and Beljaars (2005) (1)
 - *bucket_mm*: bucket reset value for water equivalent precipitation accumulations (value in mm, -1 = inactive).

- *bucket_J*: bucket reset value for energy accumulations (value in Joules, -1 = inactive). Only works with CAM and RRTMG radiation (*ra_lw_physics* = 3 and 4 and *ra_sw_physics* = 3 and 4) options.
 - To drive WRF model with climate data that does not have leap year, there is a compile option to do that. Edit `configure.wrf` and add `-DNO_LEAP_CALENDAR` to the macro `ARCH_LOCAL`.
- c. Land model input options:
- *usemonalb*: When set to `.true.`, it uses monthly albedo fields from geogrid, instead of table values
 - *rdlai2d*: When set to `.true.`, it uses monthly LAI data from geogrid (new in V3.6) and the field will also go to `wrflowinp` file if *sst_update* is 1.
- d. *gwd_opt*: Gravity wave drag option. Can be activated when grid size is greater than 10 km. May be beneficial for simulations longer than 5 days and over a large domain with mountain ranges. It is recommended that this option is used only with unrotated lat/long (e.g. global) or Mercator projections because the input orographic sub-grid asymmetry arrays assume this grid orientation. New in Version 3.1.
- e. *windfarm_opt*: Wind turbine drag parameterization scheme. It represents sub-grid effects of specified turbines on wind and TKE fields. The physical characteristics of the wind farm is read in from a file and use of the manufacturers' specification is recommended. An example of the file is provided in `run/wind-turbine-1.tbl`. The location of the turbines are read in from a file, `windturbines.txt`. See `README.windturbine` in `WRFV3/` directory for more detail. New in Version 3.3, and in this version it only works with 2.5 level MYNN PBL option (*bl_pbl_physics*=5), and updated in V3.6.

8. Physics sensitivity options

- a. *no_mp_heating*: When set to 1, it turns off latent heating from microphysics. When using this option, *cu_physics* should be set to 0.
- b. *icloud*: When set to 0, it turns off cloud effect on optical depth in shortwave radiation options 1, 4 and longwave radiation option 1, 4. Note since V3.6, this namelist also controls which cloud fraction method to use for radiation.
- c. *isfflx*: When set to 0, it turns off both sensible and latent heat fluxes from the surface. This option works for *sf_sfclay_physics* = 1, 5, 7, 11.
- d. *ifsnow*: When set to 0, it turns off snow effect in *sf_surface_physics* = 1.

Diffusion and Damping Options

Diffusion in WRF is categorized under two parameters: the diffusion option and the K option. The diffusion option selects how the derivatives used in diffusion are calculated, and the K option selects how the K coefficients are calculated. Note that when a PBL option is selected, vertical diffusion is done by the PBL scheme, and not by the diffusion scheme. In Version 3, vertical diffusion is also linked to the surface fluxes.

1.1 Diffusion Option (*diff_opt*)

- a. Simple diffusion: Gradients are simply taken along coordinate surfaces (*diff_opt* = 1).
- b. Full diffusion: Gradients use full metric terms to more accurately compute horizontal gradients in sloped coordinates (*diff_opt* = 2).

1.2 K Option (*km_opt*)

Note that when using a PBL scheme, only options (a) and (d) below make sense, because (b) and (c) are designed for 3d diffusion.

- a. Constant: K is specified by namelist values for horizontal and vertical diffusion (*km_opt* = 1).
- b. 3d TKE: A prognostic equation for turbulent kinetic energy is used, and K is based on TKE (*km_opt* = 2).
- c. 3d Deformation: K is diagnosed from 3d deformation and stability following a Smagorinsky approach (*km_opt* = 3).
- d. 2d Deformation: K for horizontal diffusion is diagnosed from just horizontal deformation. The vertical diffusion is assumed to be done by the PBL scheme (*km_opt* = 4).

1.3 6th Order Horizontal Diffusion (*diff_6th_opt*)

6th-order horizontal hyper diffusion (del^6) on all variables to act as a selective short-wave numerical noise filter. Can be used in conjunction with *diff_opt*. = 1: simple; = 2: positive definite. Option 2 is recommended.

1.4 Nonlinear Backscatter Anisotropic (NBA) (*sfs_opt*)

Sub-grid turbulent stress option for momentum in LES applications. New in Version 3.2. *sfs_opt* = 1 diagnostic sub-grid stress to be used with *diff_opt* = 2 and *km_opt* = 2 or 3. *sfs_opt* = TKE sub-grid stress to be used with *diff_opt* = 2 and *km_opt* = 2.

2. Damping Options

These are independently activated choices.

- a. Upper Damping: Either a layer of increased diffusion (*damp_opt* = 1) or a Rayleigh relaxation layer (2) or an implicit gravity-wave damping layer (3, new in Version 3.0), can be added near the model top to control reflection from the upper boundary.
- b. Vertical velocity damping (*w_damping*): For operational robustness, vertical motion can be damped to prevent the model from becoming unstable with locally large vertical velocities. This only affects strong updraft cores, so has very little impact on results otherwise.
- c. Divergence Damping (*sm_div*): Controls horizontally-propagating sound waves.
- d. External Mode Damping (*em_div*): Controls upper-surface (external) waves.
- e. Time Off-centering (*epssm*): Controls vertically-propagating sound waves.

Advection Options

- a. Horizontal advection orders for momentum (*h_mom_adv_order*) and scalar (*h_sca_adv_order*) can be 2nd to 6th, with 5th order being the recommended one.
- b. Vertical advection orders for momentum (*v_mom_adv_order*) and scalar (*v_sca_adv_order*) can be 2nd and 6th, with 3rd order being the recommended one.
- c. Monotonic transport (option 2, new in Version 3.1) and positive-definite advection option (option 1) can be applied to moisture (*moist_adv_opt*), scalar (*scalar_adv_opt*), chemistry variables (*chem_adv_opt*) and tke (*tke_adv_opt*). Option 1 replaces *pd_moist* = .true. etc. in previous versions.
- d. WENO (weighted essentially non-oscillatory) (option 3 for 5th order WENO; option 4 for 5th order WENO with positive definite limiter): for moisture (*moist_adv_opt*), scalar (*scalar_adv_opt*), chemistry variables (*chem._adv_opt*) and TKE (*tke_adv_opt*). For momentum, *momentum_adv_opt* = 3.

Some notes about using monotonic and positive-definite advection options:

The positive-definite and monotonic options are available for moisture, scalars, chemical scalars and TKE in the ARW solver. Both the monotonic and positive-definite transport options conserve scalar mass locally and globally and are consistent with the ARW mass conservation equation. We recommend using the positive-definite option for moisture variables on all real-data simulations. The monotonic option may be beneficial in chemistry applications and for moisture and scalars in some instances.

When using these options there are certain aspects of the ARW integration scheme that should be considered in the simulation configuration.

(1) The integration sequence in ARW changes when the positive-definite or monotonic options are used. When the options are not activated, the timestep tendencies from the physics (excluding microphysics) are used to update the scalar mixing ratio at the same time as the transport (advection). The microphysics is computed, and moisture is updated, based on the transport+physics update. When the monotonic or positive definite options are activated, the scalar mixing ratio is first updated with the physics tendency, and the new updated values are used as the starting values for the transport scheme. The microphysics update occurs after the transport update using these latest values as its starting point. It is important to remember that for any scalars, the local and global conservation properties, positive definiteness and monotonicity depend upon each update possessing these properties.

(2) Some model filters may not be positive definite.

- i. *diff_6th_opt* = 1 is not positive definite nor monotonic. Use *diff_6th_opt* = 2 if you need this diffusion option (*diff_6th_opt* = 2 is monotonic and positive-definite). We have encountered cases where the departures from monotonicity and positive-definiteness have been very noticeable.
- ii. *diff_opt* = 1 and *km_opt* = 4 (a commonly-used real-data case mixing option)

is not guaranteed to be positive-definite nor monotonic due to the variable eddy diffusivity, K . We have not observed significant departures from positive-definiteness or monotonicity when this filter is used with these transport options.

- iii. The diffusion option that uses a user-specified constant eddy viscosity is positive definite and monotonic.
- iv. Other filter options that use variable eddy viscosity are not positive definite or monotonic.

(3) Most of the model physics are not monotonic nor should they be - they represent sources and sinks in the system. All should be positive definite, although we have not examined and tested all options for this property.

(4) The monotonic option adds significant smoothing to the transport in regions where it is active. You may want to consider turning off the other model filters for variables using monotonic transport (filters such as the second and sixth order horizontal filters). At present it is not possible to turn off the filters for the scalars but not for the dynamics using the namelist - one must manually comment out the calls in the solver.

Other Dynamics Options

- a. The model can be run hydrostatically by setting the *non_hydrostatic* switch to *.false*.
- b. The Coriolis term can be applied to wind perturbation (*pert_coriolis* = *.true.*) only (idealized only).
- c. For *diff_opt* = 2 only, vertical diffusion may act on full fields (not just on perturbation from the 1D base profile (*mix_full_fields* = *.true.*; idealized only).

Lateral Boundary Condition Options

- a. Periodic (*periodic_x* / *periodic_y*): for idealized cases.
- b. Open (*open_xs*, *open_xe*, *open_ys*, *open_ye*): for idealized cases.
- c. Symmetric (*symmetric_xs*, *symmetric_xe*, *symmetric_ys*, *symmetric_ye*): for idealized cases.
- d. Specified (*specified*): for real-data cases. The first row and column are specified with external model values (*spec_zone* = 1, and it should not change). The rows and columns in *relax_zone* have values blended from an external model and WRF. The value of *relax_zone* may be changed, as long as *spec_bdy_width* = *spec_zone* + *relax_zone*. This can be used with *periodic_x* in tropical channel simulations.
spec_exp: exponential multiplier for the relaxation zone ramp, used with a *specified* boundary condition. 0. = linear ramp, default; 0.33 = $\sim 3 \cdot dx$ exp decay factor. This may be useful for long simulations.
- e. Nested (*nested*): for real and idealized cases.

Summary of PBL Physics Options

bl_pbl_physics	Scheme	Reference	Added
1	YSU	Hong, Noh and Dudhia (2006, MWR)	2004
2	MYJ	Janjic (1994, MWR)	2000
3	GFS	Hong and Pan (1996, MWR)	2005
4	QNSE	Sukoriansky, Galperin and Perov (2005, BLM)	2009
5	MYNN2	Nakanishi and Niino (2006, BLM)	2009
6	MYNN3	Nakanishi and Niino (2006, BLM)	2009
7	ACM2	Pleim (2007, JAMC)	2008
8	BouLac	Bougeault and Lacarrere (1989, MWR)	2009
9	UW	Bretherton and Park (2009, JC)	2011
10	TEMF	Angevine, Jiang and Mauriten (2010, MWR)	2011
12	GBM	Grenier and Bretherton (2001, MWR)	2013
99	MRF	Hong and Pan (1996, MWR)	2000

bl_pbl_physics	Scheme	Cores	sf_sfclay_physics	Prognostic variables	Diagnostic variables	Cloud mixing
1	YSU	ARW/ NMM	1, (91)*		exch_h	QC,QI
2	MYJ	ARW/ NMM	2	TKE_PBL	el_myj, exch_h	QC,QI
3	GFS (hwrf)	NMM	3			QC,QI
4	QNSE- EDMF	ARW/ NMM	4	TKE_PBL	el_pbl, exch_h, exch_m	QC,QI
5	MYNN2	ARW	1,2,5,(91)	QKE	Tsq, Qsq, Cov, exch_h, exch_m	QC

6	MYNN3	ARW	1,2,5,(91)	QKE, Tsq, Qsq, Cov	exch_h, exch_m	QC
7	ACM2	ARW	1,7,(91)			QC,QI
8	BouLac	ARW	1,2,(91)	TKE_PBL	el_pbl, exch_h, exch_m, wu_tur, wv_tur, wt_tur, wq_tur	QC
9	UW	ARW	1,2,(91)	TKE_PBL	exch_h, exch_m	QC
10	TEMF	ARW	10	TE_TEMF	*_temf	QC, QI
12	GBM	ARW	1,(91)	TKE_PBL	el_pbl, exch_tke	QC, QI
99	MRF	ARW/ NMM	1,(91)			QC, QI

* sfclay option 11 was renamed to 1, and original option 1 to 91 in Version 3.6.

Summary of Microphysics Options

mp_physics Scheme		Reference	Added
1	Kessler	Kessler (1969)	2000
2	Lin (Purdue)	Lin, Farley and Orville (1983, JCAM)	2000
3	WSM3	Hong, Dudhia and Chen (2004, MWR)	2004
4	WSM5	Hong, Dudhia and Chen (2004, MWR)	2004
5	Eta (Ferrier)	Rogers, Black, Ferrier, Lin, Parrish and DiMego (2001, web doc)	2000
6	WSM6	Hong and Lim (2006, JKMS)	2004
7	Goddard	Tao, Simpson and McCumber (1989, MWR)	2008
8	Thompson	Thompson, Field, Rasmussen and Hall (2008, MWR)	2009
9	Milbrandt 2-mom	Milbrandt and Yau (2005, JAS)	2010

10	Morrison 2-mom	Morrison, Thompson and Tatarskii (2009, MWR)	2008
11	CAM 5.1	Neale et al. (2012, NCAR Tech Note)	2013
13	SBU-YLin	Lin and Colle (2011, MWR)	2011
14	WDM5	Lim and Hong (2010, MWR)	2009
16	WDM6	Lim and Hong (2010, MWR)	2009
17	NSSL 2-mom	Mansell, Ziegler and Bruning (2010, JAS)	2012
18	NSSL 2-mom w/ CCN prediction	Mansell, Ziegler and Bruning (2010, JAS)	2012
19	NSSL 1-mom		2013
21	NSSL 1-momlfo		2013
28	Thompson aerosol- aware	Thompson and Eidhammer (2014, JAS)	2014
30	HUJI SBM ‘fast’	Khain et al. (2010, JAS)	2014
32	HUJI SBM full	Khain et al. (2004, JAS)	2014

mp_physics	Scheme	Cores	Mass Variables	Number Variables
1	Kessler	ARW	Qc Qr	
2	Lin (Purdue)	ARW (Chem)	Qc Qr Qi Qs Qg	
3	WSM3	ARW	Qc Qr	
4	WSM5	ARW/NMM	Qc Qr Qi Qs	
5	Eta (Ferrier)	ARW/NMM	Qc Qr Qs (Qt*)	
6	WSM6	ARW/NMM	Qc Qr Qi Qs Qg	
8	Thompson	ARW/NMM	Qc Qr Qi Qs Qg	Ni Nr
9	Milbrandt 2-mom	ARW	Qc Qr Qi Qs Qg Qh	Nc Nr Ni Ns Ng Nh
10	Morrison 2-mom	ARW (Chem)	Qc Qr Qi Qs Qg	Nr Ni Ns Ng
11	CAM 5.1	ARW	Qc Qr Qi Qs Qg	Nr Ni Ns Ng

13	SBU-YLin	ARW	Qc Qr Qi Qs	
14	WDM5	ARW	Qc Qr Qi Qs	Nn** Nc Nr
16	WDM6	ARW	Qc Qr Qi Qs Qg	Nn** Nc Nr
17	NSSL 2-mom	ARW	Qc Qr Qi Qs Qg Qh	Nc Nr Ni Ns Ng Nh
18	NSSL 2-mom +CCN	ARW	Qc Qr Qi Qs Qg Qh	Nc Nr Ni Ns Ng Nh Nn Vg
19	NSSL 1-mom	ARW	Qc Qr Qi Qs Qg Qh	Vg***
21	NSSL 1-momlfo	ARW	Qc Qr Qi Qs Qg	
28	Thompson aerosol-aware	ARW/NMM	Qc Qr Qi Qs Qg	Ni Nr Nwf Nif
30	HUJI fast	ARW	Qc Qr Qs Qg Qi	Nc Nr Ns Ni Ng Nn
32	HUJI full	ARW	Qc Qr Qs Qg Qh Qip Qic Qid Qnn	Nc Nr Ns Ng Nip Nic Nid Nn

* Advects only total condensates ** Nn = CCN number *** Vg: graupel volume

Summary of Cumulus Parameterization Options

cu_physics	Scheme	Reference	Added
1	Kain-Fritsch	Kain (2004, JAM)	2000
2	Betts-Miller-Janjic	Janjic (1994, MWR; 2000, JAS)	2002
3	Grell-Freitas	Grell et al. (2013)	2013
4	Old Simplified Arakawa-Schubert	Pan and Wu (1995), NMC Office Note 409	2005/ 2011
5	Grell-3	-	2008
6	Tiedtke	Tiedtke (1989, MWR), Zhang et al. (2011, MWR)	2011
7	Zhang-McFarlane	Zhang and McFarlane (1995, AO)	2011
14	New SAS	Han and Pan (2011, Wea. Forecasting)	2011

84	New SAS (HWRF)	Han and Pan (2011, Wea. Forecasting)	2012
93	Grell-Devenyi	Grell and Devenyi (2002, GRL)	2002
99	Old Kain-Fritsch	Kain and Fritsch (1990, JAS; 1993, Meteo. Monogr.)	2000

cu_physics	Scheme	Cores	Moisture Tendencies	Momentum Tendencies	Shallow Convection
1	Kain-Fritsch	ARW / NMM	Qc Qr Qi Qs	no	yes
2	BMJ	ARW / NMM	-	no	yes
3	GF	ARW	Qc Qi	no	yes
4	OSAS	ARW / NMM	Qc Qi	yes (NMM)	yes (ARW)
5	G3	ARW	Qc Qi	no	yes
6	Tiedtke	ARW / NMM	Qc Qi	yes	yes
7	Zhang-McFarlane	ARW	Qc Qi	yes	no
14	NSAS	ARW	Qc Qr Qi Qs	yes	yes
84	NSAS (HWRF)	NMM	Qc Qi	yes	
93	GD	ARW	Qc Qi	no	no
99	old KF	ARW	Qc Qr Qi Qs	no	no

Summary of Radiation Physics Options

ra_sw_physics	Scheme	Reference	Added
1	Dudhia	Dudhia (1989, JAS)	2000
2	Goddard	Chou and Suarez (1994, NASA Tech Memo)	2000
3	CAM	Collins et al. (2004, NCAR Tech Note)	2006
4	RRTMG	Iacono et al. (2008, JGR)	2009

5	New Goddard	Chou and Suarez (1999, NASA Tech Memo)	2011
7	FLG	Gu et al. (2011, JGR), Fu and Liou (1992, JAS)	2012
99	GFDL	Fels and Schwarzkopf (1981, JGR)	2004

ra_sw_ physics	Scheme	Cores+Chem	Microphysics Interaction	Cloud Fraction	Ozone
1	Dudhia	ARW NMM + Chem(PM2.5)	Qc Qr Qi Qs Qg	1/0	none
2	GSFC	ARW+Chem(τ)	Qc Qi	1/0	5 profiles
3	CAM	ARW	Qc Qi Qs	max-rand overlap	lat/month
4	RRTMG	ARW + Chem (τ), NMM	Qc Qr Qi Qs	max-rand overlap	1 profile or lat/month
5	New Goddard	ARW	Qc Qr Qi Qs Qg	1/0	5 profiles
7	FLG	ARW	Qc Qr Qi Qs Qg	1/0	5 profiles
99	GFDL	ARW NMM	Qc Qr Qi Qs	max-rand overlap	lat/date

ra_lw_ physics	Scheme	Reference	Added
1	RRTM	Mlawer et al. (1997, JGR)	2000
3	CAM	Collins et al. (2004, NCAR Tech Note)	2006
4	RRTMG	Iacono et al. (2008, JGR)	2009
5	New Goddard	Chou and Suarez (1999, NASA Tech Memo)	2011
7	FLG	Gu et al. (2011, JGR), Fu and Liou (1992, JAS)	2012
31	Held-Suarez		2008
99	GFDL	Fels and Schwarzkopf (1981, JGR)	2004

ra_lw_ physics	Scheme	Cores+Chem	Microphysics Interaction	Cloud Fraction	Ozone	GHG
1	RRTM	ARW NMM	Qc Qr Qi Qs Qg	1/0	1 profile	constant or yearly GHG

3	CAM	ARW	Qc Qi Qs	max-rand overlap	lat/month	yearly CO2 or yearly GHG
4	RRTMG	ARW + Chem (τ), NMM	Qc Qr Qi Qs	max-rand overlap	1 profile or lat/month	constant or yearly GHG
5	New Goddard	ARW	Qc Qr Qi Qs Qg	1/0	5 profiles	constant
7	FLG	ARW	Qc Qr Qi Qs Qg	1/0	5 profiles	constant
31	Held- Suarez	ARW	none	none		none
99	GFDL	ARW NMM	Qc Qr Qi Qs	max-rand overlap	lat/date	constant

Description of Namelist Variables

The following is a description of the namelist variables. The variables that are a function of nests are indicated by (*max_dom*) following the variable. Also see the Registry/Registry.EM and run/README.namelist files in the WRFV3/ for more detailed information.

Variable Names	Input Option	Description
&time_control		<i>options for time control</i>
run_days	1	run time in days
run_hours	0	run time in hours *note: if it is more than 1 day, you may use both run_days and run_hours or just run_hours. e.g. if the total run length is 36 hrs, you may set run_days = 1, and run_hours = 12, or run_days = 0, and run_hours = 36
run_minutes	0	run time in minutes
run_seconds	0	run time in seconds
start_year (max_dom)	2012	4 digit year of starting time
start_month (max_dom)	06	2 digit month of starting time
start_day (max_dom)	11	2 digit day of starting time
start_hour (max_dom)	12	2 digit hour of starting time
start_minute (max_dom)	00	2 digit minute of starting time
start_second (max_dom)	00	2 digit second of starting time *note: the start time is used to name the first wrfout file. It also controls the start time for nest domains, and the time to restart
end_year (max_dom)	2012	4 digit year of ending time
end_month (max_dom)	06	2 digit month of ending time
end_day (max_dom)	12	2 digit day of ending time
end_hour (max_dom)	12	2 digit hour of ending time
end_minute (max_dom)	00	2 digit minute of ending time
end_second (max_dom_	00	2 digit second of ending time *note: all end times also control when the nest domain integrations end. All start and end times are used by <i>real.exe</i> . You may use either run_days/run_hours/etc. or end_year/month/day/hour/etc. to control the length of model

		integration; but run_days/run_hours takes precedence over the end times. The program <i>real.exe</i> uses start and end times only
interval_seconds	10800	time interval between the incoming real data, which will be the interval between the lateral boundary condition file (for <i>real</i> only)
input_from_file (max_dom)	.true.	(logical); whether the nested run will have input files for domains other than domain 1
fine_input_stream (max_dom)		selected fields from nest input
	0	(default) all fields from nest input are used
	2	only nest input specified from input stream 2 (defined in the Registry) are used. In V3.2, this requires <code>io_form_auxinput2</code> to be set
history_interval (max_dom)	60	history output file interval in minutes (integer only)
history_interval_d (max_dom)	1	history output file interval in days (integer only); used as an alternative to <code>history_interval</code>
history_interval_h (max_dom)	1	history output file interval in hours (integer only); used as an alternative to <code>history_interval</code>
history_interval_m (max_dom)	1	history output file interval in minutes (integer only); used as an alternative to <code>history_interval</code> and is equivalent to <code>history_interval</code>
history_interval_s (max_dom)	1	history output file interval in seconds (integer only); used as an alternative to <code>history_interval</code>
frames_per_outfile (max_dom)	1	number of output times bulked into each history file; used to split output files into smaller pieces
restart	.false.	(logical); whether this run is a restart

restart_interval	1440	restart output file interval in minutes
override_restart_timers (<i>new since V3.5.1</i>)	.false.	(default) uses all output intervals (including history) given by the wrfst files
	.true.	uses restart output intervals given by the namelist
write_hist_at_0h_rst	.false.	(default) does not give a history file at the initial time of restart (prevents overwriting original history file at this time)
	.true.	gives a history file at the initial time of restart
reset_simulation_start	.false.	whether to overwrite the simulation start date with the forecast start time
auxinput1_inname	"met_em.d<domain> <date>"	(default); name of input file from WPS
auxinput4_inname	"wrflowinp_d<domain>"	name of input file for lower boundary file; works with <code>sst_update = 1</code>
auxinput4_interval (max_dom)	360	file interval in minutes for lower boundary file; works with <code>sst_update = 1</code>
io_form_auxinput4	2	IO format for wrflowinp files; required for V3.2; works with <code>sst_update = 1</code>
io_form_history		the format in which the history output file will be
	2	netCDF
	102	split netCDF files, one per processor *note: no supported post-processing software for split files
	1	binary format *note: no supported post-processing software available
	4	PHDF5 format *note: no supported post-processing software available
	5	GRIB1
	10	GRIB2
	11	parallel netCDF
io_form_restart		the format in which the restart output files will be
	2	nedCDF
	102	split netCDF files, one per

		processor (must restart with the same number of processors)
io_form_input		the format of the input files
	2	netCDF
	102	allows the program <i>real.exe</i> to read in split met_em* files, and write split wrfinput files. No split file for the wrfbdy file.
io_form_boundary		the format for the wrfbdy file
	2	netCDF format
	4	PHD5 format
	5	GRIB1 format
	10	GRIB2 format
	11	pnetCDF format
ncd_nofill	.true.	(default) only a single write, not the write/read/write sequence (new in V3.6)
io_form_auxinput2		IO format for input stream 2 data
	2	netCDF format
	4	PHD5 format
	5	GRIB1 format
	10	GRIB2 format
	11	pnetCDF format
diag_print	0	(default) When set to 1 or 2, it allows some simple diagnostic fields to be output
	1	domain-averaged 3-hourly hydrostatic surface pressure tendency (Dpsfc/Dt), and dry-hydrostatic column pressure tendency (Dmu/Dt) will appear in stdout file.
	2	in addition to those listed above, domain-averaged rainfall, surface evaporation, and sensible and latent heat fluxes will be output in stdout file.
debug_level	0	giving this a larger value (50, 100, 200, etc.) increases the debugging print-outs when running WRF
auxhist2_outname	"rainfall_d<domain>"	file name to write additional output to a different unit or output stream.. If not specified, <i>auxhist2_d<domain>_<date></i> will be used. Also note that to write

		variables in output other than the history file requires either a change in the Registry.EM_COMMON file, or the use of the option <code>iofields_filename</code> option.
<code>auxhist2_interval</code> (<code>max_dom</code>)	10	the interval in minutes for the output
<code>io_form_auxhist2</code>		output format for using <code>auxhist2</code>
	2	netCDF format
	4	PHD5 format
	5	GRIB1 format
	10	GRIB2 format
	11	pnetCDF format
<code>frames_per_auxhist2</code> (<code>max_dom</code>)	1000	how many output times will be in each output file
<code>auxinput11_interval</code>	10	interval in minutes for obs nudging input. It should be set as the same (or more) frequency as <code>obs_ionf</code> (with the unit of the coarse domain time step)
<code>auxinput11_end_h</code>	6	end of the observation time (in hours), when using the <code>diag_print</code> option
<code>nocolons</code>	<code>.false.</code>	when set to <code>.true.</code> this replaces the colons with underscores in the output file names
<code>write_input</code>	<code>.true.</code>	write input-formatted data as output for 3DVAR application
<code>inputout_interval</code>	180	interval in minutes when using the <code>write_input</code> option
<code>input_outname</code>	"wrf_3dvar_input_d<domain> <date>"	Output file name from 3DVAR
<code>inputout_begin_y</code>	0	beginning year to write 3DVAR data
<code>inputout_begin_d</code>	0	beginning day to write 3DVAR data
<code>inputout_begin_h</code>	3	beginning hour to write 3DVAR data
<code>inputout_begin_m</code>	0	beginning minute to write 3DVAR data
<code>inputout_begin_s</code>	0	beginning second to write 3DVAR data
<code>inputout_end_y</code>	0	ending year to write 3DVAR data
<code>inputout_end_d</code>	0	ending day to write 3DVAR data
<code>inputout_end_h</code>	12	ending hour to write 3DVAR data

inputout_end_m	0	ending minute to write 3DVAR data
inputout_end_s	0	ending second to write 3DVAR data
		<i>*NOTE: The above example shows that the input-formatted data are output starting from hour 3 to hour 12 in a 180-min interval.</i>
all_ic_times	.false.	when set to .true., allows you to output a wrfinput file for all time periods
adjust_output_times	.false.	(default); adjust output times to the nearest hour
output_ready_flag <i>(new since V3.6.1)</i>	.true.	(default = .false.); when turned on, the model will write out an empty file with the name wrfoutReady_d<domain>_<date>. This is useful in production runs so that post-processing code can check on the existence of this file to start doing processing.
output_diagnostics <i>(new since V3.3.1)</i>	0	turned off
	1	36 surface diagnostic arrays (max/min/mean/std) in the time interval are specified. The output goes to auxiliary history output stream 3 with default file name 'wrfxtrm_d<domain>_<date>'. You must also set io_form_auxhist3 = 2, auxhist3_interval = 1440, 1440, and frames_per_auxhist3 = 1000, 1000.
nwp_diagnostics <i>(new since V3.5)</i>	0	turned off
For automatic moving nests		
input_from_hires (max_dom) <i>(new since V3.6)</i>	.false.	When set to .true., high-resolution terrain and landuse will be used in the nests (requires special input data, and environment variable TERRAIN_AND_LANDUSE set at compile time). This option will

		overwrite <code>input_from_file</code> option for nest domains.
<code>rsmas_data_path</code>	<i>“high-res-data-directory”</i>	Directory path where the high-res data is
	1	output 7 history-interval maximum or mean diagnostic fields in wrfout: 10 m surface wind max, max positive and negative w, max helicity in the 2-5 km layer, mean w, max column-integrated graupel
<code>iofields_filename</code> (<code>max_dom</code>)	<i>"my_iofields_list.txt"</i>	an option to request particular variables to appear in output, if they are not already, or to not appear if they do and you do not want them to. You must also create a text file (<i>my_iofields_list.txt</i>) in which you will declare the variables to be output. It will be a single line of text, e.g.: <code>+:h:7:RAIN,RAINNC</code> or <code> -:h:0:RAIN,RAINNC</code>
<code>ignore_iofields_warning</code>	<code>.true.</code>	tells the model to continue if an error is encountered in the user-specified files
	<code>.false.</code>	tells the model to abort if an error is encountered in the user-specified files
&domains		<i>dimensions, nesting, parameters</i>
<code>time_step</code>	60	time step for integration seconds (recommended $6 \times dx$ in km for a typical case)
<code>time_step_fract_num</code>	0	numerator for fractional time step
<code>time_step_fract_den</code>	1	denominator for fractional time step. E.g., if you want to use 60.3 sec as your time step, set <code>time_step = 60</code> , <code>time_step_fract_num = 3</code> , and <code>time_step_fract_den = 10</code> .
<code>time_step_dfi</code>	60	time step when setting <code>dfi_opt = 1</code> , may be different from the regular time step
<code>max_dom</code>	1	the number of domains over which you are running
<code>s_we (max_dom)</code>	1	start index in x (west-east)

		direction (leave as is)
e_we (max_dom)	91	end index in x (west_east) direction (staggered dimension)
s_sn (max_dom)	1	start index in y (south-north) direction (leave as is)
e_sn (max_dom)	82	end index in y (south-north) direction (staggered dimension)
s_vert (max_dom)	1	start index in z (vertical) direction (leave as is)
e_vert (max_dom)	30	end index in z (vertical) direction (staggered dimension -- this refers to full levels). Most variables are on unstaggered levels. *Note: Vertical dimensions need to be the same for all nests
dx (max_dom)	30000	grid length in x-direction (in meters)
dy (max_dom)	30000	grid length in y-direction (in meters)
ztop (max_dom)	19000	height in meters; used to define model top for idealized cases
grid_id (max_dom)	1	domain identifier
parent_id (max_dom)	0	ID of the parent domain
i_parent_start (max_dom)	1	the starting lower-left corner i- indice from the parent domain
j_parent_start (max_dom)	1	the starting lower-left corner j indice from the parent domain
parent_grid_ratio (max_dom)	1	parent-to-nest domain grid size ratio. *Note: for real data cases the ratio must be odd; for ideal data cases, the ratio can be even if feedback is set to 0.
parent_time_step_ratio (max_dom)	1	parent-to-nest time step ratio; this can be different from the parent_grid_ratio
feedback	0	no feedback
	1	feedback from nest to its parent domain
smooth_option	0	no smoothing
	1	1-2-1 smoothing option for parent domain; used only with feedback=1
	2	(default) smoothing-desmoothing option for parent domain; used only with feedback=1

hypsothetic_opt	2 <i>(default changed to 2 beginning V3.4)</i>	(default) computes height in program <i>real.exe</i> and pressure in the model (ARW only) by using an alternative method (less biased when compared against input data)
	1	original method
max_ts_locs	5	maximum number of time series locations
Options for Program <i>real.exe</i>		
num_metgrid_levels	40	number of vertical levels in WPS output (type <code>ncdump -h</code> on one of the <code>met_em*</code> files to find out this number)
num_metgrid_soil_levels	4	number of soil levels or layers in WPS output (type <code>ncdump -h</code> on one of the <code>met_em*</code> files to find out this number)
eta_levels	1.0, 0.99, ...0.0	model <i>eta</i> levels from 1 to 0. If not given, <i>real</i> will provide a set of levels
force_sfc_in_vinterp	1	(default) use the surface level as the lower boundary when interpolating through this many eta levels
	0	perform traditional trapping interpolation
interp_theta <i>(new since V3.3.1)</i>	.false. <i>(default changed to .false. beginning V3.4)</i>	(default) vertically interpolates temperature (which may reduce bias when compared with input data)
	.true.	vertically interpolates potential temperature
p_top_requested	5000	pressure top (in Pa) to use in the model; must be available in WPS data
interp_type	2	(default) vertical interpolation that is linear in log(pressure)
	1	vertical interpolation that is linear in pressure
extrap_type	2	(default) vertical extrapolation of non-temperature variables, using the lowest level as constant below ground
	1	vertical extrapolation of non-

		temperature variables, using the 2 lowest levels
t_extrap_type		vertical extrapolation for potential temp:
	2	(default) -6.5 K/km lapse rate for temperature
	1	isothermal
	3	constant theta
use_levels_below_ground		in vertical interpolation, whether to use levels below input surface level
	.true.	(default) use input isobaric levels below input surface
	.false.	extrapolate when WRF location is below input surface level
use_surface	.true.	(default) uses input surface level data in vertical interpolation
	.false.	do not use input surface data
lagrange_order	2	(default) quadratic vertical interpolation order
	1	linear vertical interpolation order
	9	Cubic spline
lowest_lev_from_sfc	.false.	(default) use traditional interpolation
	.true.	use surface values for the lowest <i>eta</i> (u,v,t,q)
sfcv_to_sfcv	.true	optional method to compute model's surface pressure when incoming data only has surface pressure and terrain, but not sea-level pressure (default is .false.)
use_tavg_for_tsk	.true.	uses diurnally-averaged surface temp as skin temp. The diurnally-averaged surface temp can be computed using WPS utility <code>avg_tsfc.exe</code> . May use this option when SKINTEMP is not present (default is .false.)
rh2qv_wrt_liquid (<i>new since V3.3</i>)	.true.	(default) computes qv with respect to liquid water
	.false.	computes qv with respect to ice
rh2qv_method (<i>new since V3.3</i>)		which method to use to computer mixing ratio from RH:
	1	(default) old MM5 method

	2	uses a WMO recommended method (WMO-No. 49, corrigendum, August 2000)
smooth_cg_topo	.true.	smooths the outer rows and columns of the domain 1 topography with respect to the input data (default is .false.)
vert_refine_fact	1	vertical refinement factor for <i>ndown</i> (1 = same number of vertical levels as the coarse domain, 2 = double the vertical resolution, and so on)
Options for Preset Moving Nest		
num_moves	2	total # of moves for all domains
move_id (max_moves)	2, 2,	a list of nest domain ID's, one per move
move_interval (max_moves)	60, 120,	time in minutes since the start of this domain
move_cd_x (max_moves)	1, -1,	the # of parent domain grid cells to move in the i-direction
move_cd_y (max_moves)	-1, 1,	the # of parent domain grid cells to move in the j-direction (positive in increasing i/j directions, and negative in decreasing i/j directions. Only 1, 0, and -1 is permitted.
Options for Automatic Moving Nest		
vortex_interval (max_dom)	15	how often the new vortex position is computed (in mins)
max_vortex_speed (max_dom)	40	used to compute the search radius for the new vortex position (in m/s)
corral_dist (max_dom)	8	how close the moving nest is allowed to get to the coarse grid boundary. This # sets the minimum limit of grid cells allowed between them.
track_level	50000	pressure level value (Pa) at which the tropical storm vortex is tracked
time_to_move (max_dom)	0.,	time (in mins) to start moving nest
Options for Adaptive Time Step		
use_adaptive_time_step	.true.	use adaptive time step (default is .false.)

step_to_output_time	.true.	modifies the time step so that the exact history time is reached
target_cfl (max_dom)	1.2., 1.2., 1.2.,	if vertical CFL \leq this value, then time step is increased
target_hcfl (max_dom) (new since V3.3)	0.84, 0.84, 0.84,	if horizontal CFL \leq this value, the time step is increased
max_step_increase_pct (max_dom)	5, 51, 51,	percentage of previous time step to increase if the max CFL is \leq target_cfl
starting_time_step (max_dom)	-1, -1, -1,	flag -1 implies 6*dx is used to start the model. Any positive integer specifies the time step the model will use to start (in seconds). *Note: when use_adaptive_time_step = .true., the value specified for time_step is ignored.
starting_time_step_den (max_dom) (new since V3.6)	0	denominator for starting_time_step (so that fractional time step can be used)
max_time_step (max_dom)	-1, -1, -1,	flag -1 implies the maximum time step is 3*starting_time_step. Any positive integer specifies the maximum time step (in seconds).
max_time_step_den (max_dom) (new since V3.6)	0	denominator for max_time_step
min_time_step (max_dom)	-1, -1, -1,	flag -1 implies the minimum time step is 0.5*starting_time_step. Any positive integer specifies the minimum time step (in seconds).
min_time_step_den (max_dom) (new since V3.6)	0	denominator for min_time_step
adaptation_domain	1	(default) specifies which domain to use to drive adaptive time stepping
Options to Control Parallel Computing		
tile_sz_x	0	number of points in tile x direction (open MP only)
tile_sz_y	0	number of points in tile y direction; can be determined automatically (open MP only)
numtiles	1	number of tiles per patch (alternative to above 2 items; open MP only)

nproc_x	-1	(default) turned off; code will do automatic decomposition (MPI only)
	>1	number of processors in x for decomposition (MPI only)
nproc_y	-1	(default) turned off; code will do automatic decomposition (MPI only)
	>1	number of processors in y for decomposition (MPI only)
Options for 3D Ocean Model		
ocean_levels	30	(default) number of ocean levels when using <code>sf_ocean_physics = 2</code>
ocean_z	(values for # of ocean_levels)	vertical profile of layer depth (m) for number of <code>ocean_levels</code> . See /run/README.namelist for more details.
ocean_t	(values for # of ocean_levels)	vertical profile of ocean temps (K) for number of <code>ocean_levels</code> .
ocean_s	(values for # of ocean_levels)	vertical profile of salinity.
&physics		
mp_physics (max_dom)	0	(default) no microphysics
	1	Kessler scheme
	2	Lin et al. scheme
	3	WSM 3-class simple ice scheme
	4	WSM 5-class scheme
	5	Ferrier (new Eta) microphysics, operational High-Resolution Window
	6	WSM 6-class graupel scheme
	7	Goddard GCE scheme (also uses <code>gsfcgce_hail</code> and <code>gsfcgce_2ice</code>)
	8	Thompson graupel scheme (2-moment scheme in V3.1)
	9	Milbrandt-Yau 2-moment scheme
	10	Morrison 2-moment scheme
<i>(new since V3.5)</i>	11	CAM 5.1 5-class scheme
<i>(new since V3.3)</i>	13	SBU_YLin, 5-class scheme
	14	WRF double moment, 5-class scheme

	16	WRF double moment, 6-class scheme
<i>(new since V3.4)</i>	17	NSSL 2-moment 4-ice scheme (steady background CCN)
<i>(new since V3.4)</i>	18	NSSL 2-moment 4-ice scheme with predicted CCN (better for idealized than real cases)
<i>(new since V3.5)</i>	19	NSSL 1-moment, 6-class scheme
<i>(new since V3.5)</i>	21	NSSL-LFO 1-moment, 6-class; very similar to Gilmore et al. 2004; can set intercepts and particle densities in physics namelist, e.g., <code>nssl_cnor</code> for NSSL 1-moment schemes, intercept and particle densities can be set for snow, graupel, hail, and rain. For the 1- and 2-moment schemes, the shape parameters for graupel and hail can be set. See <code>/WRFV3/run/README.namelist</code> file for specifics
<i>(new since V3.6)</i>	28	aerosol-aware Thompson scheme with water- and ice-friendly aerosol climatology (new for V3.6); this option has 2 climatological aerosol input options: <code>use_aero_icbs = .F.</code> (use constant values), and <code>use_aero_icbc = .T.</code> (use input from WPS)
<i>(new since V3.6)</i>	30	HUJI (Hebrew University of Jerusalem, Israel) spectral bin microphysics, fast version
<i>(new since V3.6)</i>	32	HUJI spectral bin microphysics, full version
	95	Ferrier (old Eta), operational NAM (WRF NMM)
	98	Thompson scheme in V3.0
<code>do_radar_ref</code> <i>(new since V3.4.1)</i>	0	allows radar reflectivity to be computed using mp-scheme-specific parameters. Currently works for <code>mp_physics = 2,4,6,7,8,10,14,16</code> 0: off 1: on
<code>mp_zero_out</code>		for non-zero mp_physics options,

		this keeps moisture variables above a threshold value ≥ 0 . An alternative (and better) way to keep moisture variables positive is to use the <code>moist_adv_opt</code> .
	0	(default) no action taken; no adjustment to any moisture field
	1	except for Q_v , all other moisture arrays are set to zero if they fall below a critical value
	2	$Q_v \geq 0$ and all other moisture arrays are set to zero if they fall below a critical value
<code>mp_zero_out_thresh</code>	1.e-8	critical value for moisture variable threshold, below which moisture arrays (except for Q_v) are set to zero (unit: kg/kg)
<code>mp_tend_lim</code>	10.	limit on temp tendency from microphysics latent heating when radar data assimilation is used
<code>gsfcgce_hail</code>	0	(default) running gsfcgce scheme with graupel
	1	running gsfcgce scheme with hail
<code>gsfcgce_2ice</code>	0	(default) running gsfcgce scheme with snow, ice, and graupel/hail
	1	running gsfcgce scheme with only ice and snow (<code>gsfcgce_hail</code> is ignored)
	2	running gsfcgce scheme with only ice and graupel (used only in very extreme situation; <code>gsfcgce_hail</code> is ignored)
<i>The following 9 namelists are for NSSL 1-moment schemes</i>		
<code>nssl_alpha</code>	0	shape parameter for graupel
<code>nssl_alphal</code>	2	shape parameter for hail
<code>nssl_cnoh</code>	4.e5	graupel intercept
<code>nssl_cnohl</code>	4.e4	hail intercept
<code>nssl_cnor</code>	8.e5	rain intercept
<code>nssl_cnos</code>	3.e6	snow intercept
<code>nssl_rho_qh</code>	500.	graupel density
<code>nssl_rho_ghl</code>	900.	hail density
<code>nssl_rho_qs</code>	100.	snow density
<code>no_mp_heating</code>	1	turn off latent heating from a microphysics scheme (0 is off and is default)

ra_lw_physics (max_dom)	0	(default) no longwave radiation
	1	rrtm scheme (Default values for GHG in V3.5: co2vmr=379.e-6, n2ovmr=319.e-9, ch4vmr=1774.e-9; Values used in previous versions: co2vmr=330.e-6, n2ovmr=0., ch4vmr=0.)
	3	CAM scheme *Note: restart must be at 6-hourly interval; also requires levsiz, paerlev, cam_abs_dim1(2); see below
	4	rrtmg scheme (Default values for GHG in V3.5: co2vmr=379.e-6, n2ovmr=319.e-9, ch4vmr=1774.e-9)
(new since V3.3)	5	Goddard scheme
(new since V3.4)	7	FLG (UCLA) scheme
	31	Earth Held-Suarez forcing
	99	GFDL (Eta) longwave (semi-supported); also must use co2tf = 1 for ARW
ra_sw_physics (max_dom)	0	(default) no shortwave radiation
	1	Dudhia scheme (ptop > 50 mb)
	2	(old) Goddard shortwave scheme
	3	CAM scheme (restart must be at 6-hourly interval); must set levsiz, paerlev, cam_abs_dim1/2
	4	rrtmg scheme
(new since V3.3)	5	Goddard scheme
(new since V3.4)	7	FLG (UCLA) scheme
	99	GFDL (Eta) longwave (semi-supported); must use co2tf = 1 for ARW
radt (max_dom)	30	minutes between radiation physics calls. Recommended 1 minute per km of dx (e.g. 10 for 10 km grid); use the same value for all nests
swint_opt (new since V3.5.1)		Interpolation of shortwave radiation based on the updated solar zenith angle between radiation calls
	0	no interpolation
	1	use interpolation

ra_call_offset	0	default; call radiation after output time
	-1	may call radiation just before output time.
co2tf	1	CO2 transmission function flag for GFDL radiation only. Set it to 1 for ARW, which allows generation of CO2 function internally
<i>* Note: The following 5 variables for CAM are automatically set since V3.2</i>		
cam_abs_freq_s	21600	default CAM clear sky longwave absorption calculation frequency (recommended minimum value to speed scheme up)
levsiz	59	(default) number of ozone data levels for CAM radiation
paerlev	29	(default) number of aerosol data levels for CAM radiation
cam_abs_dim1	4	(default) dimension for absnxt (absorption save array) in CAM radiation
cam_abs_dim2	same as e_vert	(default) dimension for abstot (2nd absorption save array) in CAM radiation
o3input (new since V3.5)		ozone input option (RRTMG only)
	0	using profile inside the scheme
	2	using CAM ozone data (ozone.formatted)
aer_opt		aerosol input option (RRTMG only)
	0	off
(new since V3.5)	1	using Tegen climatology
(new since V3.6)	2	using J. A. Ruiz-Arias method (see other aer* options)
alevsiz	12	no of vertical levels in aerosol data. Value set automatically.
no_src_types	6	no of aerosol types: organic and black carbon, sea salt, sulfate, dust and stratospheric aerosol (volcanic ash – currently 0). Value set automatically.
	0	do not interpolate (default)
	1	interpolate
<i>*The following aerosol options allow RRTMG and new Goddard radiation schemes to see it, but the aerosols are constant during the model integration</i>		
aer_aod550_opt	1	(default) input constant value for AOD at 550 nm from namelist; in

		this case, the value is read from <code>aer_aod550_val</code>
	2	input value from auxiliary input 5; it is a time-varying 2D grid in netcdf wrf-compatible format.
<code>aer_aod550_val</code>	0.12	(default) value to be used with <code>aer_aod550_opt = 1</code>
<code>aer_angexp_opt</code>	1	(default) input constant value for Angstrom exponent from namelist. In this case, the value is read from <code>aer_angexp_val</code>
	2	input value from auxiliary input 5, as in <code>aer_aod550_opt</code>
	3	Angstrom exponent value estimated from the aerosol type defined in <code>aer_type</code> , and modulated with the RH in WRF.
<code>aer_angexp_val</code>	1.3	(default) value to be used with <code>aer_angexp_opt = 1</code>
<code>aer_ssa_opt</code>	1	(default) input constant value for single scattering albedo from namelist. In this case, the value is read from <code>aer_ssa_val</code>
	2	input value from auxiliary input 5, as in <code>aer_aod550_opt</code>
	3	single scattering albedo value estimated from the aerosol type defined in <code>aer_type</code> , and modulated with the RH in WRF.
<code>aer_ssa_val</code>	0.85	(default) value to be used with <code>aer_ssa_opt = 1</code>
<code>aer_asy_opt</code>	1	(default) input constant value for asymmetry parameter from namelist. In this case, the value is read from <code>aer_asy_val</code>
	2	input value from auxiliary input 5, as in <code>aer_aod550_opt</code>
	3	asymmetry parameter value estimated from the aerosol type defined in <code>aer_type</code> , and modulated with the RH in WRF.
<code>aer_asy_val</code>	0.9	(default) value to be used with <code>aer_asy_opt = 1</code>
<code>aer_type</code>		aerosol type to be used with the above aerosol options

	1	(default) rural
	2	urban
	3	maritime
sf_sfclay_physics (max_dom)		surface layer option
	0	(default) no surface-layer
<i>(since V3.6; option 11 for V3.4 and V3.5)</i>	1	Revised MM5 Monin-Obukhov scheme (Jimenez, renamed in v3.6)
	2	Monin-Obukhov (Janjic Eta) scheme
	3	NCEP GFS scheme (NMM only)
	4	QNSE
	5	MYNN
	7	Pleim-Xiu (ARW only), only tested with Pleim-Xiu surface and ACM2 PBL
<i>(new since V3.3)</i>	10	TEMF (ARW only)
<i>(since V3.6; option 1 in earlier versions)</i>	91	old MM5 surface layer scheme (previously option 1)
iz0tlnd <i>(new since V3.2)</i>		switch to control land thermal roughness length
	0	(default) old, or non-vegetation dependent thermal roughness length over land
	1	veg dependent Chen-Zhang Czil
sf_surface_physics (max_dom)		land-surface option (set this before running <i>real.exe</i> ; also make sure num_soil_layers is set correctly)
	0	(default) no surface temp prediction
	1	thermal diffusion scheme
	2	unified Noah land-surface model
	3	RUC land-surface model
<i>(new since V3.4)</i>	4	Noah-MP land-surface model (additional options under the &noah_mp section)
<i>(new since V3.5)</i>	5	CLM4 (Community Land Model Version 4)
	7	Pleim-Xiu scheme (ARW only)
<i>(new since V3.4)</i>	8	SSiB land-surface model (ARW only). Works with ra_lw_physics = 1, 3, or 4, and ra_sw_physics = 1, 3, or 4

sf_urban_physics		activate urban canopy model (in Noah LSM only)
	0	(default) off
	1	Single-layer, UCM
	2	Multi-layer, Building Environment Parameterization (BEP) scheme (works only with the MYJ and BouLac PBL)
	3	Multi-layer, Building Environment Model (BEM) scheme (works only with MYJ and BouLac PBL)
ua_phys (<i>new since V3.5</i>)	.false.	Option to activate UA Noah LSM changes to use a different snow-cover physics. Aimed toward improving treatment of snow as it relates to the vegetation canopy.
num_soil_layers		number of soil layers in land surface model (set before running <i>real.exe</i>)
	5	(default) thermal diffusion scheme for temp only
	4	Noah land-surface model
	6	RUC land-surface model
	10	CLM4 land-surface model
	2	Pleim-Xu land-surface model
	3	SSiB land-surface model
bl_pbl_physics (max_dom)		boundary layer option
	0	(default) no boundary-layer
	1	YSU scheme; use sf_sfclay_physics =1
	2	Mellor-Yamada-Janjic (Eta) TKE scheme; use sf_sfclay_physics=2
	3	NCEP GFS scheme (NMM only); use sf_sfclay_physics=3
	4	QNSE-EDMF; use sf_sfclay_physics=4
	5	MYNN 2.5 level TKE; use sf_sfclay_physics=1, 2, or 5
	6	MYNN 3rd level TKE; use sf_sfclay_physics=5
	7	ACM2 (Pleim) scheme (ARW only); use sf_sfclay_physics=1 or 7

	8	Bougeault and Lacarrere (BouLac) TKE; use sf_sfclay_physics=1 or 2
<i>(new since V3.3)</i>	9	Bretherton-Park/UW TKE scheme; use sf_sfclay_physics=1 or 2
<i>(new since V3.3)</i>	10	TEMF scheme (ARW only); use sf_sfclay_physics=10
<i>(new since V3.5)</i>	12	GBM TKE-type scheme (ARW only); use sf_sfclay_physics=1
	94	Quasi-Normal Scale Elimination PBL scheme (to be removed in the future)
	99	MRF scheme (to be removed in the future)
mfshconv (max_dom)	1	turns on day-time EDMF for QNSE (0=off)
bldt (max_dom)	0	minutes between boundary-layer physics calls (0=call every time step)
topo_wind (max_dom) <i>(new since V3.4)</i>		turns on topographic surface wind correction, and requires extra input from geogrid. YSU PBL only
	0	off
	1	Jimenez method
	2	UW method
bl_mynn_tkebudget (max_dom) <i>(new since V3.4.1)</i>	0	(default) off
	1	adds MYNN tke budget terms to output
bl_mynn_tkeadvect (max_dom) <i>(new since V3.5)</i>	.false.	(default) off; does not advect tke in MYNN scheme (default)
	.true.	do MYNN tke advection
	0	(default) turned off
scalar_pblmix <i>(new since V3.6)</i>	0	(default) off
	1	mix scalar fields consistent with PBL option (exch_h)
tracer_pblmix <i>(new since V3.6)</i>	0	(default) off
	1	mix tracer fields consistent with PBL option (exch_h)

sf_surface_mosaic (<i>new since V3.6</i>)		option to mosaic landuse categories for Noah LSM
	0	(default) use dominant category only
	1	use mosaic landuse categories
mosaic_lu (<i>new since V3.4</i>)	1	option to specify landuse parameters based on a mosaic approach, when using the RUC land surface model; default is 0 (off)
mosaic_soil (<i>new since V3.4</i>)	1	option to specify soil parameters based on a mosaic approach, when using the RUC land surface model; default is 0 (off)
mosaic_cat (<i>new since V3.6</i>)	3	(default) number of mosaic landuse categories in a grid cell
grav_settling (max_dom) (<i>new since V3.5.1</i>)		gravitational settling of fog/cloud droplets (Now works for any PBL scheme, since V3.5.1)
	0	(default) no settling of cloud droplets
	1	settling from Dyunkerke 1991 (in atmosphere at surface)
	2	Fogdes (vegetation and wind speed dependent; Katata et al. 2008) at surface, and Dyunkerke in the atmosphere
cu_physics (max_dom)		cumulus parameterization option
	0	(default) no cumulus parameterization
	1	Kain-Fritsch (new Eta) scheme
	2	Betts-Miller-Janjic scheme
(<i>new since V3.5, replacing Grell-Devenyi scheme</i>)	3	Grell-Freitas ensemble scheme
(<i>new to ARW since V3.3</i>)	4	Old GFS Simplified Arakawa-Schubert (SAS)
	5	New Grell scheme (G3)
(<i>new since V3.3</i>)	6	Tiedtke scheme (ARW only)
(<i>new since V3.3</i>)	7	Zhang-McFarlane from CESM (works with MYJ and UW PBL)
(<i>new since V3.3</i>)	14	New GFS SAS from YSU (ARW only)
	84	New SAS (HWRF)
(<i>option 3 before V3.5</i>)	93	Grell-Devenyi ensemble scheme
	99	previous Kain-Fritsch scheme
cutdt	0	minutes between cumulus physics

		calls; should be set to 0 when using all <code>cu_physics</code> except Kain-Fritsch (0 = call every time step)
<code>kfeta_trigger</code>	1	The way to determines whether a grid point is convective; used only with <code>cu_physics=1</code> . = 1, default, original.
<i>(new since V3.3)</i>	2	moisture-advection based trigger (Ma and Tan 2009; ARW only)
	3	relative humidity-dependent
<code>ishallow</code>	1	shallow convection used with <code>cu_physics=3</code> or 5 (default is 0 = off)
<code>shcu_physics (max_dom)</code>		independent shallow cumulus option (not tied to deep convection)
	0	no independent shallow cumulus
<i>(new since V3.3)</i>	2	Park and Bretherton shallow cumulus from CAM5
<i>(new since V3.5)</i>	3	GRIMS scheme
<i>*Note: The following 5 options show recommended #'s. If you would like to use any other number, consult the code to understand what you are doing.</i>		
<code>maxiens</code>	1	Grell-Devenyi and G3 only
<code>maxens</code>	3	Grell-Devenyi only
<code>maxens2</code>	3	Grell-Devenyi only
<code>maxens3</code>	16	Grell-Devenyi only
<code>ensdim</code>	144	Grell-Devenyi only
<code>cugd_avedx</code>	1	(default) number of grid boxes over which subsidence is spread, for large grid distances
	3	for small grid distances ($DX < 5$ km)
<code>nsas_dx_factor</code> <i>(New since V3.6)</i>	0	(default); off
	1	nsas grid distance dependent option
<code>cu_diag (max_dom)</code>	0	Additional time-averaged diagnostics from <code>cu_physics</code> (use only with <code>cu_physics=3, 5, and 93</code>)
<code>convtrans_avglen_m</code>	30	averaging time for convective transport output variables (in minutes; only use with <code>cu_physics=3, 5 and 93</code>)

isfflx		<p>heat and moisture fluxes from the surface for real-data cases and when a PBL is used (only works with <code>sf_sfclay_physics=1, 5, 7, or 11</code>)</p> <p>1 = fluxes are on 0 = fluxes are off</p> <p>It also controls surface fluxes when <code>diff_opt = 2</code> and <code>km_opt = 3</code>, and a PBL isn't used</p> <p>0 = constant fluxes defined by <code>tke_drag_coefficient</code> and <code>tke_heat_flux</code> 1 = use model-computed u^* and heat and moisture fluxes 2 = use model-computed u^* and specified heat flux by <code>tke_heat_flux</code></p>
ifsnow		snow-cover effects (only works for <code>sf_surface_physics=1</code>)
	1	(default) with snow-cover effect
	0	without snow-cover effect
icloud (<i>new since V3.6</i>)		(default) cloud effect to the optical depth in radiation (only works with <code>ra_sw_physics=1, 4</code> and <code>ra_lw_physics=1, 4</code>); since V3.6 this also controls the cloud fraction options
	1	(default) with cloud effect, and use cloud fraction option 1 (Xu-Randall method)
	0	without cloud effect
	2	with cloud effect, and use cloud fraction option 2
cu_rad_feedback (max dom)	.true.	sub-grid cloud effect to the optical depth in radiation currently it works only for GF, G3, GD, and KF schemes; also need to set <code>cu_diag = 1</code> for GF, G3, and GD schemes (default is .false. = off)
swrad_scatter	1	scattering tuning parameter; default 1 is $1.e-5 \text{ m}^{-2} \text{ kg}^{-1}$ (only for <code>ra_sw_physics=1</code>). Increase

		for more scattering.
surface_input_source		where landuse and soil category data come from
	1	(default) WPS/geogrid, but with dominant categories recomputed in real
	2	GRIB data from another model (only if arrays VEGCAT/SOILCAT exist)
	3	use dominant land and soil categories from WPS/geogrid
pxlsm_smois_init (max_dom)		Pleim-Xu land-surface model soil moisture initialization option
	0	from analysis
	1	(default) from LANDUSE.TBL (SLMO, or moisture availability)
num_land_cat		number of land categories in input data
	24	(default) for USGS
	20	for MODIS
	28	for USGS if including lake category
	21	for MODIS if including lake category
	40	NLCD2006 (North America only)
num_soil_cat	16	number of soil categories in input data
usemonalb	.true.	use monthly albedo map instead of table values (recommended for sst_update=1)
	.false.	(default) use table values
rdmaxalb	.true.	(default) use snow albedo from geogrid
	.false.	use snow albedo from table
rdlai2d <i>(data available to use this option since V3.6)</i>	.true.	use LAI (Leaf Area Index) from input data. If sst_update is 1, then LAI will also appear in wrflowinp file
	.false.	(default) use LAI from table
seaice_threshold	100. <i>(default value of 100 since V3.5.1; was 271 in earlier versions)</i>	If skin temp (TSK) is less than this value, water points are changed to sea ice. If water point + 5-layer slab scheme, set to land point and permanent ice; if water point + Noah scheme, set to land point, permanent ice, set temps from 2 m

		to surface, and set smois and sh2o. The default value was changed to 100. From 271. in 3.5.1 to avoid mixed-up use with fractional seaice input. Used by <code>sf_surface_physics = 1, 2, 3, 4, 8</code>
sst_update		option to use time-varying SST, seaice, vegetation fraction, and albedo during a model simulation (set before running <i>real.exe</i>)
	0	(default) no SST update
	1	<i>real.exe</i> will create wrflowinp file(s) at the same time interval as the available input data. These files contain SST, XICE, ALBEDO, and VEGFRA. Also set <code>auxinput4_inname = "wrflowinp_d<domain>"</code> , <code>auxinput4_interval</code> and (in V3.2) <code>io_form_auxinput4</code> in namelist section <i>&time_control</i>
tmn_update	1	update deep layer soil temperature, useful for long simulations (multi-year runs; default is 0 = off)
lagday	150	days over which tmn (deep layer soil temp) is computed using skin temperature
sst_skin	1	calculate skin SST, useful for long simulations (multi-year runs; default is 0 = off)
bucket_mm		bucket reset values for water accumulation (unit in mm), useful for long simulations (multi-year runs)
	-1	(default) inactive
bucket_j		bucket reset value for energy accumulations (unit in Joules); useful for long simulations (multi-year runs)
	-1	(default) inactive
slope_rad (max_dom)	1	use slope-dependent radiation; for <code>ra_sw_physics</code>
	0	(default) off
topo_shading (max_dom)	1	applies neighboring-point shadow effects for <code>ra_sw_physics</code>

	0	(default) off
shadlen	25000	maximum length of orographic shadow (in meters); use with <code>topo_shading=1</code>
sf_ocean_physics (replacing <code>omlcall</code> beginning with V3.5)		activate ocean model
	0	off
	1	activate a simple ocean mixed layer (oml) model
(new since V3.5)	2	activate a 3D PWP ocean model
omdt	1.	3D PWP time step (minutes). It can be set the same as the WRF time step in corresponding nested grids, but omdt should be no less than 1.0 minute.
oml_hml0 (for sf_ocean_physics=1)	≥ 0	initial ocean mixed layer depth value (m); constant everywhere (50 is default)
	< 0	use input
oml_gamma (for sf_ocean_physics=1)	0.14	(K m ⁻¹) lapse rate in deep water (below the mixed layer) for oml
ocean_levels (for sf_ocean_physics=2)	30	number of vertical levels in 3D ocean model
isftcflx		alternative Ck (exchange coefficient for temp and moisture), Cd (drag coefficient for momentum) formulation for tropical storm application
	0	(default) off for Ck
	1	Donelan Cd + constant Z _{0q} for Ck
	2	Donelan Cd + Garratt Ck
fractional_seaice	1	treats seaice as a fractional field; works with <code>sf_sfclay_physics = 1, 2, 4, 5, or 7</code> Also set <code>seaice_threshold=0.</code>
	0	(default) either ice or no ice flag
seaice_albedo_opt (new since V3.4)		option to set albedo over sea ice
	0	seaice albedo is a constant value from namelist option

		seaice_albedo_default
	1	seaice albedo is a function of air temp, skin temp, and snow
	2	seaice albedo read in from input variable ALBSI
seaice_albedo_default	0.65 (changed from 0.8)	default value of seaice albedo for seaice_albedo_opt=0
seaice_snowdepth_opt (new since V3.5)		method for treating snow depth on sea ice
	0	snow depth on sea ice is bounded by seaice_snowdepth_min and seaice_snowdepth_max
	1	snow depth on sea ice read in from input array SNOWSI (bounded by seaice_snowdepth_min and seaice_snowdepth_max)
seaice_snowdepth_max	1.e10	maximum allowed accumulation of snow (m) on sea ice
seaice_snowdepth_min	0.001	minimum snow depth (m) on sea ice
seaice_thickness_opt		option for treating seaice thickness
	0	seaice thickness is uniform value taken from namelist variable seaice_thickness_default
	1	seaice_thickness is read in from input variable ICEDEPTH
seaice_thickness_default	3.0	default value of seaice thickness for seaice_thickness_opt=0
prec_acc_dt (max_dom)	0.	bucket reset time interval between outputs for cumulus or grid-scale precipitation (in minutes). If set >0, this will output 3 new 2d fields: <i>prec_acc_c</i> , <i>prec_acc_nc</i> , and <i>snow_acc_nc</i> (descriptions of these can be found in the Registry.EM_COMMON file)
traj_opt (new since V3.5)	1	activate forward trajectories (default 0)
num_traj	0	number of trajectories to be released
<i>* The following are options for the lake model</i>		
sf_lake_physics (max_dom) (new since V3.6)	1	lake model on (default is 0 = off)
lakedepth_default	50	(default) lake depth (in meters). If

(max_dom)		there is no lake depth information in the input data, then lake depth is assumed to be 50m)
lake_min_elev (max_dom)	5	(default) minimum elevation of lakes; may be used to determine whether a water point is a lake in the absence of a lake category. If the landuse type includes 'lake' (i.e., Modis_lake andn USGS_LAKE); this variable is of no effects
use_lakedepth	1	(default) option to use lake depth data. Lake depth data is available beginning in the V3.6 geogrid program. If the lake depth data was not processed, but this switch is set to 1, the program will stop and tell the user to go back to geogrid program.
lightning_option (max_dom) <i>(new since V3.5)</i>		Lightning parameterization option to allow flash rate prediction without chemistry. Requires do_radar_ref on.
	0	off
	1	PR92 based on maximum w, redistributes flashes within dBZ > 20 (for convection resolved runs)
	2	PR92 based on 20 dBZ top, redistributes flashes within dBZ > 20 (for convection resolved runs)
<i>(New since V3.6.1)</i>	3	Predicting the potential for lightning activity (based on Yair et al., 2010)
	11	PR92 based on level of neutral buoyancy from convective parameterization (for scale where a CPS is used, intended for use at $10 < dx < 50$ km)
lightning_dt (max_dom) <i>(new since V3.5)</i>	0.	time interval (seconds) for calling lightning parameterization. Default uses model time step
lightning_start_seconds (max_dom) <i>(new since V3.5)</i>	0.	start time for calling lightning parameterization. Recommends at least 10 minutes for spin-up
flashrate_factor (max_dom) <i>(new since</i>	1.0	Factor to adjust the predicted number of flashes. Recommends

V3.5)		1.0 for <code>lightning_option = 11</code> between <code>dx=10</code> and <code>50 km</code> . Manual tuning recommended for all other options independently for each nest.
<code>cellcount_method</code> (<code>max_dom</code>)		method for counting storm cells. Used by CRM options (<code>lightning_options=1,2</code>)
	0	model determines method used
	1	tile-wide, appropriate for large domains
	2	domain-wide, appropriate for sing-storm domains
<code>cldtop_adjustment</code> (<code>max_dom</code>)	0.	adjustment from LNB in km. Used by <code>lightning_option=11</code> . Default is 0, but recommends 2 km
<code>iccg_method</code> (<code>max_dom</code>)		IC:CG partitioning method (IC: intra-cloud; CG: cloud-to-ground)
	0	Default method depending on lightning option, currently all options use <code>iccg_method=2</code> by default
	1	Constant everywhere, set with namelist options <code>iccg_prescribed (num den) #</code> , default is 0./1. (all CG)
	2	Coarsely prescribed 1995-1999 NLDN/OTD climatology based on Boccippio et al. (2001)
	3	Parameterization by Price and Rind (1993) based on cold-cloud depth
	4	Gridded input via arrays <code>iccg_in_(num den)</code> from <code>wrfinput</code> for monthly mapped ratios. Points with 0/0 values use ratio defined by <code>iccg_prescribed (num den)</code>
<code>iccg_prescribed_num</code> (<code>max_dom</code>)	0.	Numerator of user-specified prescribed IC:CG
<code>iccg_prescribed_den</code> (<code>max_dom</code>)	1.	Denominator of user-specified prescribed IC:CG
For Wind Turbine Drag Parameterization		
<code>windfarm_opt</code> (<i>new since</i>	1	simulates the effects of wind

V3.3)		turbines in the atmospheric evolution (default is 0 = off)
windfarm_ij (<i>new since V3.3</i>)		whether to use lat-lon or i-j coordinate as wind turbine locations
	0	(default) the coordinates of the turbines are defined in terms of lat-lon
	1	the coordinates of the turbines are defined in terms of grid points

For Stochastic Kinetic-Energy Backscatter Scheme (SKEB; used to perturb a forecast)		
stoch_force_opt (max_dom) (<i>new since V3.3</i>)	1	Stochastic kinetic-energy backscatter scheme (SKEB) turned on (0=off)
stoch_vertstruc_opt (max_dom)	0	constant vertical structure of random pattern generator
	1	random phase vertical structure of random pattern generator
tot_backscat_psi	1.0E-5	controls amplitude of rotational wind perturbations
tot_backscat_t	1.0E-6	controls amplitude of potential temperature perturbations
nens	1	an integer that controls random number stream, which will then change the run. When running an ensemble, this can be ensemble member number, so that each ensemble member gets a different random number stream, hence a different perturbed run.
<i>new since V3.6:</i>		
ztau_psi	10800.0	(default) decorrelation time of noise for psi perturb
ztau_t	10800.0	(default) decorrelation time of noise for theta perturb
rexponent_psi	-1.83	(default) spectral slope of forcing for psi
rexponent_t	-1.83	(default) spectral slope of forcing for theta
zsigma_eps	0.833	(default) variance of noise for psi perturb
zsigma_eta	0.833	(default) variance of noise for theta perturb

kminforc	1	(default) minimum forcing wavenumber in longitude for psi perturb
lminforc	1	(default) minimum forcing wavenumber in latitude for psi perturb
kiminforc	1	(default) minimum forcing wavenumber in longitude for theta perturb
lminforc	1	(default) minimum forcing wavenumber in latitude for theta perturb
kmaxforc	1000000	(default) maximum forcing wavenumber in longitude for psi perturb
lmaxforc	1000000	(default) maximum forcing wavenumber in latitude for psi perturb
kmaxforc	1000000	(default) maximum forcing wavenumber in longitude for theta perturb
lmaxforc	1000000	(default) maximum forcing wavenumber in latitude for theta perturb
&noah_mp		<i>options for the Noah-MP land surface model ; see:</i> <i>http://www.rap.ucar.edu/research/land/technology/noahmp_lsm.php</i>
dveg		dynamic vegetation option
	1	off [LAI (Leaf Area Index) from table; FVEG (veg fraction) = shdfac (model variable for veg fraction)]
	2	on
	3	off (LAI from table; FVEG calculated)
	4	(default) off (LAI from table; FVEG = maximum veg. fraction)
opt_crs		stomatal resistance option
	1	(default) Ball-Berry
	2	Jarvis
opt_sfc		surface layer drag coefficient calculation
	1	(default) Monin-Obukhov
	2	original Noah
	3	MYJ consistent

	4	YSU consistent
opt_btr		soil moisture factor for stomatal resistance
	1	Noah
	2	CLM
	3	SSiB
opt_run	1	(default) TOPMODEL with groundwater
	2	TOPMODEL with equilibrium water table
	3	original surface and subsurface runoff (free drainage)
	4	BATS (Biosphere-Atmosphere Transfer Scheme) surface and subsurface runoff (free drainage)
opt_frz		supercooled liquid water option
	1	(default) no iteration
	2	Koren's iteration
opt_inf		soil permeability option
	1	(default) linear effect, more permeable
	2	non-linear effect, less permeable
opt_rad		radiative transfer option
	1	modified two-stream
	2	two-stream applied to grid cell
	3	(default) two-stream applied to vegetated fraction
opt_alb		ground surface albedo option
	1	BATS
	2	(default) CLASS (Canadian Land Surface Scheme)
opt_snf		precipitation partitioning between snow and rain
	1	(default) Jordan (1991)
	2	BATS; snow when SFCTMP < TFRZ+2.2
	3	show when SFCTMP < TFRZ
opt_tbot		soil temp lower boundary condition
	1	zero heat flux
	2	(default) TBOT at 8 m from input file
opt_stc		snow/soil temperature time scheme
	1	(default) semi-implicit
	2	fully-implicit

&fdda		<i>options for grid, obs and spectral nudging</i>
(For Grid Nudging)		
grid_fdda (max_dom)	0	(default) off
	1	grid analysis nudging on
	2	spectral analysis nudging option
gfdda_inname	"wrffdda_d<do main>"	name of fdda input file that will be produced when running real
gfdda_interval_m (max_dom)	360	time interval (in mins) between analysis times
gfdda_end_h (max_dom)	6	time (hr) to stop nudging after the start of the forecast
io_form_gfdda		analysis data format
	2	netCDF format
	4	PHD5 format
	5	GRIB1 format
	10	GRIB2 format
	11	pnetCDF format
fgdt (max_dom)	0	calculation frequency (in mins) for analysis nudging; 0=every time step (which is recommended)
if_no_pbl_nudging_uv (max_dom)	0	(default) nudging in the PBL
	1	no nudging of u and v in the PBL
if_no_pbl_nudging_t (max_dom)	0	(default) nudging in the PBL
	1	no nudging of temp in the PBL
if_no_pbl_nudging_q (max_dom)	0	(default) nudging in the PBL
	1	no nudging of qvapor in the PBL
if_zfac_uv (max_dom)	0	(default) nudge u and v in all layers
	1	limit nudging to levels above k_zfac_uv
k_zfac_uv	10	model level below which nudging is switched off for u and v
if_zfac_t (max_dom)	0	(default) nudge temp in all layers
	1	limit nudging to levels above k_zfac_t
k_zfac_t	10	model level below which nudging is switched off for temp
if_zfac_q (max_dom)	0	(default) nudge qvapor in all layers
	1	limit nudging to levels above k_zfac_q
k_zfac_q	10	model level below which nudging

		is switched off for qvapor
guv (max_dom)	0.0003	nudging coefficient for u and v (s^{-1})
gt (max_dom)	0.0003	nudging coefficient for temp (s^{-1})
gq (max_dom)	0.0003	nudging coefficient for qvapor (s^{-1})
if_ramping	0	(default) nudging ends as a step function
	1	ramping nudging down at the end of the period
dtramp_min	60.	time (min) for ramping function; 60.0 = ramping starts at last analysis time, -60.0 = ramping ends at last analysis time
grid_sfdda (max_dom)	1	surface grid-nudging on (default is 0=off)
sgfdda_inname	"wrfsfdda_d<domain>"	defined name for surface nudging input file (from program <i>obsgrid</i>)
sgfdda_interval_m (max_dom)	360	time interval (in mins) between surface analysis times
sgfdda_end_h (max_dom)	6	time (in hours) to stop surface nudging after start of the forecast
io_form_sgfdda	2	surface analysis format (2=netCDF)
guv_sfc (max_dom)	0.0003	nudging coefficient for u and v (s^{-1})
gt_sfc (max_dom)	0.0003	nudging coefficient for temp (s^{-1})
gq_sfc (max_dom)	0.0003	nudging coefficient for qvapor (s^{-1})
rinblw	250.	radius of influence used to determine the confidence (or weights) for the analysis, which is based on the distance between the grid point to the nearest obs. The analysis without nearby observation is used at a reduced weight.
(For Spectral Nudging)		
fgdtzero (max_dom)	1	nudging tendencies are set to zero in between fdda calls
	0	(default) not active
if_no_pbl_nudging_ph (max_dom)	1	no nudging of ph in the PBL
	0	(default) nudging of ph in the PBL
if_zfac_ph (max_dom)	0	(default) nudge ph in all layers
	1	limit nudging to levels above k_zfac_ph
k_zfac_ph	10	model level below which nudging

		is switched off for water ph
gph (max_dom)	0.0003	nudging coefficient for ph (s^{-1})
dk_zfac_uv (max_dom)	1	depth in k between k_zfac_uv to dk_zfac_uv where nudging increases linearly to full strength
dk_zfac_t (max_dom)	1	depth in k between k_zfac_t to dk_zfac_t where nudging increases linearly to full strength
dk_zfac_ph (max_dom)	1	depth in k between k_zfac_ph to dk_zfac_ph where nudging increases linearly to full strength
xwavenum	3	top wave number to nudge in x-direction (0 is default)
ywavenum	3	top wave number to nudge in y-direction (0 is default)
(For Obs Nudging)		
obs_nudge_opt (max_dom)	1	obs-nudging fdda on for each domain (default is 0=off); also must set auxinput11_interval and auxinput11_end_h under &time_control
max_obs	150000	max number of observations used on a domain during any given time window (default is 0)
fdda_start (max_dom)	0.	obs nudging start time (min)
fdda_end (max_dom)	180.	obs nudging end time (min)
obs_nudge_wind (max_dom)	1	nudge wind on
	0	(default) off
obs_coef_wind (max_dom)	6.e-4	nudging coefficient for wind (s^{-1})
obs_nudge_temp (max_dom)	1	nudge temperature on
	0	(default) off
obs_coef_temp (max_dom)	6.e-4	nudging coefficient for temp (s^{-1})
obs_nudge_mois (max_dom)	1	nudge water vapor mixing ratio
	0	(default) off
obs_coef_mois (max_dom)	6.e-4	nudging coefficient for water vapor mixing ratio (s^{-1})
obs_coef_pstr	0.	nudging coefficient for surface pressure (s^{-1}) (not used)
obs_rinxy	200.	horizontal radius of influence (km; 200 is a reasonable value, but should be adjusted, based on data density)
obs_rinsig	0.1	vertical radius of influence in eta (0.1 is a reasonable value, but

		should be adjusted, based on data density)
obs_twindo (max_dom)	0.666667	half-period time window over which an observation will be used for nudging (hrs)
obs_npfi	10	frequency in coarse grid timesteps for diagnostic prints
obs_ionf (max_dom)	1	frequency in coarse grid timesteps for obs input and err calc
obs_idynin	1	for dynamic initialization using a ramp-down function to gradually turn off the FDDA before the pure forecast (default is 0=off)
obs_dtramp	40.	time period (mins) over which the nudging is ramped down from one to zero
obs_prt_max	1000	maximum allowed obs entries in diagnostic printout
obs_prt_freq (max_dom)	1000	frequency in obs index for diagnostic printout
obs_ipf_in4dob	.true.	print obs input diagnostics (default is .false.=off)
obs_ipf_errob	.true.	print obs error diagnostics (default is .false.=off)
obs_ipf_nudob	.true.	print obs nudge diagnostics (default is .false.=off)
obs_ipf_init	.true.	(default) enable obs printed warning messages
obs_no_pbl_nudge_uv (max_dom)	1	no wind-nudging within the PBL
	0	(default) wind-nudging within the PBL
obs_no_pbl_nudge_t (max_dom)	1	no temperature-nudging within the PBL
	0	(default) temperature-nudging within the PBL
obs_no_pbl_nudge_q (max_dom)	1	no moisture-nudging within the PBL
	0	(default) no moisture-nudging within the PBL
obs_nudgezfullr1_uv	50	Vertical influence full weight height for LML obs, regime 1, winds
obs_nudgezrampr1_uv	50	vertical influence ramp-to-zero height for LML obs, regime 1, winds

obs_nudgezfullr2_uv	50	Vertical influence full weight height for LML obs, regime 2, winds
obs_nudgezrampr2_uv	50	vertical influence ramp-to-zero height for LML obs, regime 2, winds
obs_nudgezfullr4_uv	-5000	Vertical influence full weight height for LML obs, regime 4, winds
obs_nudgezrampr4_uv	50	Vertical influence ramp-to-zero height for LML obs, regime 4, winds
obs_nudgezfullr1_t	50	Vertical influence full weight height for LML obs, regime 1, temperature
obs_nudgezrampr1_t	50	Vertical influence ramp-to-zero height for LML obs, regime 1, temperature
obs_nudgezfullr2_t	50	Vertical influence full weight height for LML obs, regime 2, temperature
obs_nudgezrampr2_t	50	Vertical influence ramp-to-zero height for LML obs, regime 2, temperature
obs_nudgezfullr4_t	-5000	Vertical influence full weight height for LML obs, regime 4, temperature
obs_nudgezrampr4_t	50	Vertical influence ramp-to-zero height for LML obs, regime 4, temperature
obs_nudgezfullr1_q	50	Vertical influence full weight height for LML obs, regime 1, temperature
obs_nudgezrampr1_q	50	Vertical influence ramp-to-zero height for LML obs, regime 1, temperature
obs_nudgezfullr2_q	50	Vertical influence full weight height for LML obs, regime 2, temperature
obs_nudgezrampr2_q	50	Vertical influence ramp-to-zero height for LML obs, regime 2, temperature
obs_nudgezfullr4_q	-5000	Vertical influence full weight height for LML obs, regime 4, temperature
obs_nudgezrampr4_q	50	Vertical influence ramp-to-zero

		height for LML obs, regime 4, temperature
obs_nudgefullmin	50	minimum depth (m) through which vertical influence function remains 1.0
obs_nudgezrampmin	50	minimum depth (m) through which vert infl fcn decreases from 1 to 0
obs_nudgezmax	3000	max depth (m) in which vert infl function is non-zero
obs_sfcfact	1.0	scale factor applied to time window for surface obs
obs_sfcfacr	1.0	scale factor applied to horiz radius of influence for surface obs
obs_dpsex	7.5	max pressure change (cb) allowed within horiz radius of influence
obs_sfc_scheme_horiz		horizontal spreading scheme for surface obs
	0	(default) WRF scheme
	1	original MM5 scheme
obs_sfc_scheme_vert		vertical spreading scheme for surface obs
	0	(default) regime vif scheme
	1	original scheme (simple scheme)
obs_max_sndng_gap	20	max allowed pressure gap between soundings for interpolation (cb)
obs_scl_neg_qv_innov (<i>new since V3.6</i>)	0	0: default behavior 1: prevent nudging toward negative Qv
&dynamics		<i>Diffusion, damping options, advection options</i>
rk_ord		time-integration scheme option
	2	Runge-Kutta 2nd order
	3	(default/recommended) Runge-Kutta 3rd order
diff_opt (max_dom)		turbulence and mixing option
	0	no turbulence or explicit spatial numerical filters (km_opt is ignored)
	1	(default) evaluates 2nd order diffusion term on coordinate surfaces, uses kvdif for vertical diffusion unless PBL option is used, may be used with km_opt = 1 (recommended for real-data

		case) and 4
	2	evaluates mixing terms in physical space (stress form) (x,y,z); turbulence parameterization is chosen by specifying <code>km_opt</code>
<code>km_opt (max_dom)</code>		eddy coefficient option
	1	(default) constant (use <code>khdif</code> and <code>kvdif</code>)
	2	1.5 order TKE closure (3D) ** Not recommended for $DX > 2$ km
	3	Smagorinsky first order closure (3D) **Not recommended for $DX > 2$ km
	4	horizontal Smagorinsky first order closure (recommended for real-data case)
<code>diff_6th_opt (max_dom)</code>		6th-order numerical diffusion
	0	(default) no 6th-order diffusion
	1	6th-order numerical diffusion
	2	6th-order numerical diffusion, but prohibit up-gradient diffusion
<code>diff_6th_factor</code>	0.12	6th-order numerical diffusion non-dimensional rate (max value 1.0 corresponds to complete removal of 2dx wave in one timestep)
<code>damp_opt</code>		upper-level damping flag
	0	(default) no damping
	1	with diffusive damping; maybe used for real-data cases (<code>dampcoef</code> nondimensional ~ 0.01 to 0.1)
	2	with Rayleigh damping (<code>dampcoef</code> inverse time scale [1/s], e.g. 0.003)
	3	with Rayleigh damping (<code>dampcoef</code> inverse time scale [1/s], e.g. 0.2; for real-data cases)
<code>zdamp (max_dom)</code>	5000	damping depth (m) from model top
<code>dampcoef (max_dom)</code>	0.	damping coefficient (see <code>damp_opt</code>)
<code>w_damping</code>		vertical velocity damping flag (for operational use)
	0	(default) no damping
	1	with damping
<code>base_pres</code>	100000	base state surface pressure (Pa);

		real only., not recommended to change.
base_temp	290.	base state temperature (K); real only
base_lapse	50.	real-data ONLY, lapse rate (K), not recommended to change
iso_temp	200. <i>(default value changed to 200 in V3.5)</i>	isothermal temperature in stratosphere; enables model to be extended to 5 mb; real only. Default value changed to 200 since V3.5
base_pres_strat <i>(New since V3.6.1)</i>	5500.	real data, em ONLY, base state pressure (Pa) at bottom of the stratosphere, US Standard atmosphere 55 hPa
use_baseparm_fr_nml	.false.	for backward compatibility; to use with old wrfinput file produced prior to V3.4
use_input_w <i>(new since V3.3.1)</i>	. false.	whether to use vertical velocity from input file
khdif (max_dom)	0.	horizontal diffusion constant (m ² /s)
kvdif (max_dom)	0.	vertical diffusion constant (m ² /s)
smdiv (max_dom)	0.1	divergence damping (0.1 is typical)
emdiv (max_dom)	0.01	external-mode filter coef for mass coordinate model (0.01 is typical for real-data cases)
epssm (max_dom)	0.1	time off-centering for vertical sound waves
non-hydrostatic (max_dom)	.true.	(default) running the model in non-hydrostatic mode
	.false.	running the model in hydrostatic mode
pert_coriolis (max_dom)	.false.	coriolis only acts on wind perturbation (only for idealized)
top_lid (max_dom)	.false.	zero vertical motion at top of domain (only for idealized)
mix_full_fields	.false.	used with diff_opt = 2; value of .true. is recommended, except for highly idealized numerical tests; damp_opt must not be =1 if .true. is chosen; .false. means subtract 1D base-state profile before mixing (only for idealized)
mix_isotropic (max_dom)	0	(default) anisotropic

		vertical/horizontal diffusion
	1	isotropic; for km_opt = 2, 3
mix_upper_bound (max_dom)	0.1	non-dimensional upper limit for diffusion coefficients; for km_opt = 2, 3
h_mom_adv_order (max_dom)	5	horizontal momentum advection order; 5 (default) = 5th, etc.
v_mom_adv_order (max_dom)	3	vertical momentum advection order; 3 (default) = 3rd, etc.
h_sca_adv_order (max_dom)	5	horizontal scalar advection order; 5 (default) = 5th, etc
v_sca_adv_order (max_dom)	3	vertical scalar advection order; 3 (default) = 3rd, etc.
time_step_sound (max_dom)	4	number of sound steps per timestep (if using a time_step much larger than 6*DX (in km), increase number of sound steps (default is 0))
moist_adv_opt (max_dom)		advection options for moisture
	0	simple
	1	(default) positive-definite
	2	monotonic
	3	5th-order WENO (Weighted Essentially Non-Oscillatory)
<i>(new since V3.4)</i>	4	5th-order WENO with positive definite
scalar_adv_opt (max_dom)		advection options for scalars
	0	simple
	1	(default) positive-definite
	2	monotonic
	3	5th-order WENO
	4	5th-order WENO with positive definite
tke_adv_opt (max_dom)		advection options for TKE
	0	simple
	1	(default) positive-definite
	2	monotonic
	3	5th-order WENO
	4	5th-order WENO with positive definite
chem_adv_opt (max_dom)		advection options for chem variables
	0	simple
	1	(default) positive definite
	2	monotonic

	3	5th-order WENO
	4	5th-order WENO with positive definite
tracer_adv_opt (max_dom)		advection options for tracer variables
	0	simple
	1	(default) positive definite
	2	monotonic
	3	5th-order WENO
	4	5th-order WENO with positive definite
momentum_adv_opt		advection options for momentum
	1	(default) standard
<i>(new since V3.4)</i>	3	5th-order WENO
tke_drag_coefficient (max_dom)	0	surface drag coefficient (Cd, dimensionless) for diff_opt = 2 only
tke_heat_flux (max_dom)	0	surface thermal flux (H/rho*cp), K ms ⁻¹ , for diff_opt = 2 only
fft_filter_lat	45.	the latitude above which the polar filter is turned on for global model
gwd_opt	1	gravity wave drag option; use when grid size > 10 km (default is 0=off)
do_avgflx_em (max_dom)	1	outputs time-averaged mass-coupled advective velocities (default is 0 = off)
do_avgflx_cugd (max_dom)	1	outputs time_averaged convective mass-fluxes from the Grell-Devenyi ensemble scheme (default is 0 = off; only takes effect if do_avgflx_em = 1, and cu_physics = 93)
sfs_opt (max_dom)		nonlinear backscatter and anisotropy (NBA)
	0	(default) off
	1	NBA, using diagnostic stress terms (km_opt = 2, 3 for scalars)
	2	NBA, using tke-based stress terms (km_opt = 2, 3 needed)
m_opt (max_dom)	1	adds output of Mij stress terms when NBA is not used (default is 0 = off)
tracer_opt (max_dom)	2	activates 8 pre-defined tracers in the Registry (default is 0 = off)

rad_nudge	1	option to nudge toward initial sounding in idealized TC case (default is 0 = off)
&bdy_control		<i>boundary condition control</i>
spec_bdy_width	5	total number of rows for specified boundary value nudging (real only)
spec_zone	1	number of points in specified zone (specified b.c. option; real only)
relax_zone	4	number of points in relaxation zone (spec b.c. option; real only)
specified	.true.	specified boundary condition; only can be used for domain 1 (default is .false.; real only)
spec_exp	0.	exponential multiplier for relaxation zone ramp for specified = .true.; default is 0. = linear ramp; 0.33 = $\sim 3 \cdot DX$ exp decay factor (real only)
periodic_x (max_dom)	.true.	periodic boundary conditions in x-direction (default is .false.)
symmetric_xs (max_dom)	.true.	symmetric boundary conditions at x start (west; default is .false.)
symmetric_xe (max_dom)	.true.	symmetric boundary conditions at x end (east; default is .false.)
open_xs (max_dom)	.true.	open boundary conditions at x start (west; default is .false.)
open_xe (max_dom)	.true.	open boundary conditions at x end (east; default is .false.)
periodic_y (max_dom)	.true.	periodic boundary conditions in y-direction (default is .false.)
symmetric_ys (max_dom)	.true.	symmetric boundary conditions at y start (south; default is .false.)
symmetric_ye (max_dom)	.true.	symmetric boundary conditions at y end (north; default is .false.)
open_ys (max_dom)	.true.	open boundary conditions at y start (south; default is .false.)
open_ye (max_dom)	.true.	open boundary conditions at y end (north; default is .false.)
nested (max_dom)	.false., .true., .true.	nested boundary conditions (must be set to .true. for nests)
polar (max_dom)	.true.	polar boundary condition ($v=0$ at polarward-most v-point) for global application (default is .false.)
constant_bc	.true.	constant boundary condition used with DFI (default is .false.)

perturb_bdy (<i>new since V3.5</i>)		perturb lateral boundary conditions
	0	no boundary perturbation
	1	use SKEBS pattern for boundary perturbation
	2	use other user-provided pattern for boundary perturbation
have_bcs_moist (<i>new since V3.5.1</i>)	.false.	do not use microphysics variables in boundary file in model run after ndown (default)
	.true.	use microphysics variables in boundary file
have_bcs_scalar (<i>new since V3.5.1</i>)	.false.	do not use scalar variables in boundary file in model run after ndown (default)
	.true.	use scalar variables in boundary file
&namelist_quilt		<i>options for asynchronous I/O for MPI applications</i>
nio_tasks_per_group	0	(default) no quilting
	>0	# of processors used for IO quilting per IO group
nio_groups	1	default; may be set to higher value for nesting IO or history and restart IO
&grib2		
background_proc_id	255	(default); background generating process identifier, typically defined by the originating center to identify the background data that was used in creating the data; this is octet 13 of Section 4 in the grib2 message
forecast_proc_id	255	(default) analysis or generating forecast process identifier, typically defined by the originating center to identify the forecast process that was used to generate the data; this is octet 14 of Section 4 in the grib2 message
production_status	255	(default) production status of processed data in the grib2 message; see Code Table 1.3 of the grib2 manual; this is octet 20 of Section 1 in the grib2 record.

compression		the compression method to encode the output grib2 message; only jpeg2000 and PNG are supported.
	40	(default) for jpeg2000
	41	PNG
&dfi_control		<i>digital filter options control (does not yet support nesting)</i>
dfi_opt	0	(default) no digital filter initialization
	1	digital filter launch (DFL)
	2	diabatic DFI (DDFI)
	3	(recommended) twice DFI (TDFI)
dfi_nfilter	0	uniform filter
	1	Lanczos filter
	2	Hamming filter
	3	Blackman filter
	4	Kaiser filter
	5	Potter filter
	6	Dolph window filter
	7	(default; recommended) Dolph filter
	8	recursive high-order filter
dfi_write_filtered_input	.true.	whether to write wrfinput file with filtered model state before beginning forecast
dfi_write_dfi_history	.false.	whether to write wrfout files during filtering integration
dfi_cutoff_seconds	3600	cutoff period (s) for the filter; should not be longer than the filter window
dfi_time_dim	1000	maximum number of time steps for filtering period; this value can be larger than necessary
		<i>for a model that starts from 2001061112, the below setup specifies 1 hour backward integration</i>
dfi_bckstop_year	2001	4-digit year of stop time for backward DFI integration
dfi_bckstop_month	06	2-digit month of stop time for backward DFI integration
dfi_bckstop_day	11	2-digit day of stop time for backward DFI integration
dfi_bckstop_hour	11	2-digit hour of stop time for

		backward DFI integration
dfi_bckstop_minute	00	2-digit minute of stop time for backward DFI integration
dfi_bckstop_second	00	2-digit second of stop time for backward DFI integration
		<i>for a model that starts at 2001061112, the below setup specifies 30 minutes of forward integration</i>
dfi_fwdstop_year	2001	4-digit year of stop time for forward DFI integration
dfi_fwdstop_month	06	2-digit month of stop time for forward DFI integration
dfi_fwdstop_day	11	2-digit day of stop time for forward DFI integration
dfi_fwdstop_hour	12	2-digit hour of stop time for forward DFI integration
dfi_fwdstop_minute	30	2-digit minute of stop time for forward DFI integration
dfi_fwdstop_second	00	2-digit second of stop time for forward DFI integration
dfi_radar	0	DFI radar data assimilation switch
&scm		<i>for the single-column model (SCM) option only</i>
scm_force	0	(default) single column forcing turned off
	1	single column forcing on
scm_force_dx	4000.	DX for SCM forcing (m)
num_force_layers	8	number of SCM input forcing layers
scm_lu_index	2	SCM landuse category (2 = dryland, cropland, and pasture; others can be found in the LANDUSE.TBL)
scm_isltyp	4	SCM soil category (4 = silt loam; others can be found in the SOILPARM.TBL)
scm_vegfra	0.5	SCM vegetation fraction
scm_canwat	0.0	SCM canopy water (kg m^{-2})
scm_lat	36.605	SCM latitude
scm_lon	-97.485	SCM longitude
scm_th_adv	.true.	turn on theta advection in SCM
scm_wind_adv	.true.	turn on wind advection in SCM
scm_qv_adv	.true.	turn on moisture advection in SCM

scm_vert_adv	.true.	turn on vertical advection in SCM
scm_ql_adv	.true.	turn on liquid advection in SCM (default is .false. = off)
num_force_soil_layers	5	number of SCM soil forcing layers
scm_soilt_force	.true.	turn on soil temperature forcing in SCM (default is .false. = off)
scm_soilq_force	.true.	turn on soil moisture forcing in SCM (default is .false. = off)
scm_force_th_largescale	.true.	turn on large-scale theta forcing in SCM (default is .false. = off)
scm_force_qv_largescale	.true.	turn on large-scale qv forcing in SCM (default is .false. = off)
scm_force_ql_largescale	.true.	turn on large-scale ql forcing in SCM (default is .false. = off)
scm_force_wind_largescale	.true.	turn on large-scale wind forcing in SCM (default is .false. = off)
&tc		<i>controls for tc_em.exe only</i>
insert_bogus_storm	.false.	T/F for inserting a bogus tropical storm
remove_storm	.false.	T/F for only removing the original TC
num_storm	1	number of bogus TC
latc_loc	-999.	center latitude of the bogus TC
lonc_loc	-999.	center longitude of the bogus TC
vmax_meters_per_second (max_dom)	-999.	wind max of bogus storm (m s^{-1})
rmax	-999.	maximum radius outward from storm center of bogus TC
vmax_ratio (max_dom)	-999.	ratio for representative maximum winds, 0.75 for 45 km grid, and 0.9 for 15 km grid
rankine_lid	-999.	top pressure limit for the TC bogus scheme
&diags (new since V3.4.1)		<i>output fields on pressure levels</i> Also need to set auxhist23_outname="wrfpress_d< domain>_<date>" io_form_auxhist23 = 2, auxhist23_interval = 180, 180, frames_per_auxhist23 = 100, 100,
p_lev_diags	0	0/1 whether to output pressure level diagnostics
num_press_levels	4	Number of pressure levels
press_levels (max_plevs)	0	Pressure levels in Pa

use_tot_or_hyd_p	2	1: use total pressure 2: use hydrostatic pressure
p_lev_missing	-999.	Missing value below ground
&afwa (<i>new since V3.6</i>)		
afwa_diag_opt (max_dom)	0	(default) AFWA diagnostic option (1 = on)
afwa_ptype_opt (max_dom)	0	(default) precip type option (1 = on)
afwa_vil_opt (max_dom)	0	(default) vertical int liquid option (1 = on)
afwa_radar_opt (max_dom)	0	(default) radar option (1 = on)
afwa_severe_opt (max_dom)	0	(default) severe weather option (1 = on)
afwa_icing_opt (max_dom)	0	(default) icing option (1 = on)
afwa_vis_opt (max_dom)	0	(default) visibility option (1 = on)
afwa_cloud_opt (max_dom)	0	(default) cloud option (1 = on)
afwa_ptype_ccn_tmp	264.15	(default) CCN temperature for precipitation type calculation
afwa_ptype_tot_melt	50	(default) total melting energy for precipitation type calculation
afwa_ccn_conc (<i>new since V3.6.1</i>)	1.0E8	(default) CCN concentration
afwa_hail_opt (<i>new since V3.6.1</i>)		hail/graupel switch
	1	(default) hail
	0	graupel

WRF Output Fields

List of Fields

The following is an edited output list from the netCDF command '*ncdump -h*'. Note that valid output fields will depend on the model options used. If the fields have zero values, then the fields are not computed by the model options selected.

```
ncdump -h wrfout_d<domain>_<date>

netcdf wrfout_d01_2000-01-24_12:00:00

dimensions:
    Time = UNLIMITED ; // (1 currently)
    DateStrLen = 19 ;
    west_east = 73 ;
    south_north = 60 ;
    bottom_top = 27 ;
    bottom_top_stag = 28 ;
    soil_layers_stag = 4 ;
    west_east_stag = 74 ;
    south_north_stag = 61 ;

variables:
    char Times(Time, DateStrLen) ;
    float LU_INDEX(Time, south_north, west_east) ;
        LU_INDEX:description = "LAND USE CATEGORY" ;
        LU_INDEX:units = "" ;
    float ZNU(Time, bottom_top) ;
        ZNU:description = "eta values on half (mass) levels" ;
        ZNU:units = "" ;
    float ZNW(Time, bottom_top_stag) ;
        ZNW:description = "eta values on full (w) levels" ;
        ZNW:units = "" ;
    float ZS(Time, soil_layers_stag) ;
        ZS:description = "DEPTHS OF CENTERS OF SOIL LAYERS" ;
        ZS:units = "m" ;
    float DZS(Time, soil_layers_stag) ;
        DZS:description = "THICKNESSES OF SOIL LAYERS" ;
        DZS:units = "m" ;
    float U(Time, bottom_top, south_north, west_east_stag) ;
        U:description = "x-wind component" ;
        U:units = "m s-1" ;
    float V(Time, bottom_top, south_north_stag, west_east) ;
        V:description = "y-wind component" ;
        V:units = "m s-1" ;
    float W(Time, bottom_top_stag, south_north, west_east) ;
        W:description = "z-wind component" ;
        W:units = "m s-1" ;
    float PH(Time, bottom_top_stag, south_north, west_east) ;
        PH:description = "perturbation geopotential" ;
        PH:units = "m2 s-2" ;
    float PHB(Time, bottom_top_stag, south_north, west_east) ;
        PHB:description = "base-state geopotential" ;
        PHB:units = "m2 s-2" ;
    float T(Time, bottom_top, south_north, west_east) ;
        T:description = "perturbation potential temperature (theta-t0)" ;
        T:units = "K" ;
    float MU(Time, south_north, west_east) ;
        MU:description = "perturbation dry air mass in column" ;
```

```
        MU:units = "Pa" ;
float MUB(Time, south_north, west_east) ;
    MUB:description = "base state dry air mass in column" ;
    MUB:units = "Pa" ;
float NEST_POS(Time, south_north, west_east) ;
    NEST_POS:description = "-" ;
    NEST_POS:units = "-" ;
float P(Time, bottom_top, south_north, west_east) ;
    P:description = "perturbation pressure" ;
    P:units = "Pa" ;
float PB(Time, bottom_top, south_north, west_east) ;
    PB:description = "BASE STATE PRESSURE" ;
    PB:units = "Pa" ;
float FNM(Time, bottom_top) ;
    FNM:description = "upper weight for vertical stretching" ;
    FNM:units = "" ;
float FNP(Time, bottom_top) ;
    FNP:description = "lower weight for vertical stretching" ;
    FNP:units = "" ;
float RDNW(Time, bottom_top) ;
    RDNW:description = "inverse d(eta) values between full (w) levels" ;
    RDNW:units = "" ;
float RDN(Time, bottom_top) ;
    RDN:description = "inverse d(eta) values between half (mass) levels" ;
    RDN:units = "" ;
float DNW(Time, bottom_top) ;
    DNW:description = "d(eta) values between full (w) levels" ;
    DNW:units = "" ;
float DN(Time, bottom_top) ;
    DN:description = "d(eta) values between half (mass) levels" ;
    DN:units = "" ;
float CFN(Time) ;
    CFN:description = "extrapolation constant" ;
    CFN:units = "" ;
float CFN1(Time) ;
    CFN1:description = "extrapolation constant" ;
    CFN1:units = "" ;
float P_HYD(Time, bottom_top, south_north, west_east) ;
    P_HYD:description = "hydrostatic pressure" ;
    P_HYD:units = "Pa" ;
float Q2(Time, south_north, west_east) ;
    Q2:description = "QV at 2 M" ;
    Q2:units = "kg kg-1" ;
float T2(Time, south_north, west_east) ;
    T2:description = "TEMP at 2 M" ;
    T2:units = "K" ;
float TH2(Time, south_north, west_east) ;
    TH2:description = "POT TEMP at 2 M" ;
    TH2:units = "K" ;
float PSFC(Time, south_north, west_east) ;
    PSFC:description = "SFC PRESSURE" ;
    PSFC:units = "Pa" ;
float U10(Time, south_north, west_east) ;
    U10:description = "U at 10 M" ;
    U10:units = "m s-1" ;
float V10(Time, south_north, west_east) ;
    V10:description = "V at 10 M" ;
    V10:units = "m s-1" ;
float RDX(Time) ;
    RDX:description = "INVERSE X GRID LENGTH" ;
    RDX:units = "" ;
float RDY(Time) ;
    RDY:description = "INVERSE Y GRID LENGTH" ;
    RDY:units = "" ;
float RESM(Time) ;
```

```

    RESM:description = "TIME WEIGHT CONSTANT FOR SMALL STEPS" ;
    RESM:units = "" ;
float ZETATOP(Time) ;
    ZETATOP:description = "ZETA AT MODEL TOP" ;
    ZETATOP:units = "" ;
float CF1(Time) ;
    CF1:description = "2nd order extrapolation constant" ;
    CF1:units = "" ;
float CF2(Time) ;
    CF2:description = "2nd order extrapolation constant" ;
    CF2:units = "" ;
float CF3(Time) ;
    CF3:description = "2nd order extrapolation constant" ;
    CF3:units = "" ;
int ITIMESTEP(Time) ;
    ITIMESTEP:description = "" ;
    ITIMESTEP:units = "" ;
float XTIME(Time) ;
    XTIME:description = "minutes since simulation start" ;
    XTIME:units = "" ;
float QVAPOR(Time, bottom_top, south_north, west_east) ;
    QVAPOR:description = "Water vapor mixing ratio" ;
    QVAPOR:units = "kg kg-1" ;
float QCLOUD(Time, bottom_top, south_north, west_east) ;
    QCLOUD:description = "Cloud water mixing ratio" ;
    QCLOUD:units = "kg kg-1" ;
float QRAIN(Time, bottom_top, south_north, west_east) ;
    QRAIN:description = "Rain water mixing ratio" ;
    QRAIN:units = "kg kg-1" ;
float LANDMASK(Time, south_north, west_east) ;
    LANDMASK:description = "LAND MASK (1 FOR LAND, 0 FOR WATER)" ;
    LANDMASK:units = "" ;
float TSLB(Time, soil_layers_stag, south_north, west_east) ;
    TSLB:description = "SOIL TEMPERATURE" ;
    TSLB:units = "K" ;
float SMOIS(Time, soil_layers_stag, south_north, west_east) ;
    SMOIS:description = "SOIL MOISTURE" ;
    SMOIS:units = "m3 m-3" ;
float SH2O(Time, soil_layers_stag, south_north, west_east) ;
    SH2O:description = "SOIL LIQUID WATER" ;
    SH2O:units = "m3 m-3" ;
float SEAICE(Time, south_north, west_east) ;
    SEAICE:description = "SEA ICE FLAG" ;
    SEAICE:units = "" ;
float XICEM(Time, south_north, west_east) ;
    XICEM:description = "SEA ICE FLAG (PREVIOUS STEP)" ;
    XICEM:units = "" ;
float SFROFF(Time, south_north, west_east) ;
    SFROFF:description = "SURFACE RUNOFF" ;
    SFROFF:units = "mm" ;
float UDROFF(Time, south_north, west_east) ;
    UDROFF:description = "UNDERGROUND RUNOFF" ;
    UDROFF:units = "mm" ;
int IVGTYP(Time, south_north, west_east) ;
    IVGTYP:description = "DOMINANT VEGETATION CATEGORY" ;
    IVGTYP:units = "" ;
int ISLTYP(Time, south_north, west_east) ;
    ISLTYP:description = "DOMINANT SOIL CATEGORY" ;
    ISLTYP:units = "" ;
float VEGFRA(Time, south_north, west_east) ;
    VEGFRA:description = "VEGETATION FRACTION" ;
    VEGFRA:units = "" ;
float GRDFLX(Time, south_north, west_east) ;
    GRDFLX:description = "GROUND HEAT FLUX" ;
    GRDFLX:units = "W m-2" ;

```

```
float SNOW(Time, south_north, west_east) ;
    SNOW:description = "SNOW WATER EQUIVALENT" ;
    SNOW:units = "kg m-2" ;
float SNOWH(Time, south_north, west_east) ;
    SNOWH:description = "PHYSICAL SNOW DEPTH" ;
    SNOWH:units = "m" ;
float RHOSN(Time, south_north, west_east) ;
    RHOSN:description = " SNOW DENSITY" ;
    RHOSN:units = "kg m-3" ;
float CANWAT(Time, south_north, west_east) ;
    CANWAT:description = "CANOPY WATER" ;
    CANWAT:units = "kg m-2" ;
float SST(Time, south_north, west_east) ;
    SST:description = "SEA SURFACE TEMPERATURE" ;
    SST:units = "K" ;
float SSTS(K)(Time, south_north, west_east) ;
    SSTS(K):description = "SKIN SEA SURFACE TEMPERATURE" ;
    SSTS(K):units = "K" ;
float MAPFAC_M(Time, south_north, west_east) ;
    MAPFAC_M:description = "Map scale factor on mass grid" ;
    MAPFAC_M:units = "" ;
float MAPFAC_U(Time, south_north, west_east_stag) ;
    MAPFAC_U:description = "Map scale factor on u-grid" ;
    MAPFAC_U:units = "" ;
float MAPFAC_V(Time, south_north_stag, west_east) ;
    MAPFAC_V:description = "Map scale factor on v-grid" ;
    MAPFAC_V:units = "" ;
float MAPFAC_MX(Time, south_north, west_east) ;
    MAPFAC_MX:description = "Map scale factor on mass grid, x direction" ;
    MAPFAC_MX:units = "" ;
float MAPFAC_MY(Time, south_north, west_east) ;
    MAPFAC_MY:description = "Map scale factor on mass grid, y direction" ;
    MAPFAC_MY:units = "" ;
float MAPFAC_UX(Time, south_north, west_east_stag) ;
    MAPFAC_UX:description = "Map scale factor on u-grid, x direction" ;
    MAPFAC_UX:units = "" ;
float MAPFAC_UY(Time, south_north, west_east_stag) ;
    MAPFAC_UY:description = "Map scale factor on u-grid, y direction" ;
    MAPFAC_UY:units = "" ;
float MAPFAC_VX(Time, south_north_stag, west_east) ;
    MAPFAC_VX:description = "Map scale factor on v-grid, x direction" ;
    MAPFAC_VX:units = "" ;
float MF_VX_INV(Time, south_north_stag, west_east) ;
    MF_VX_INV:description = "Inverse map scale factor on v-grid, x direction" ;
    MF_VX_INV:units = "" ;
float MAPFAC_VY(Time, south_north_stag, west_east) ;
    MAPFAC_VY:description = "Map scale factor on v-grid, y direction" ;
    MAPFAC_VY:units = "" ;
float F(Time, south_north, west_east) ;
    F:description = "Coriolis sine latitude term" ;
    F:units = "s-1" ;
float E(Time, south_north, west_east) ;
    E:description = "Coriolis cosine latitude term" ;
    E:units = "s-1" ;
float SINALPHA(Time, south_north, west_east) ;
    SINALPHA:description = "Local sine of map rotation" ;
    SINALPHA:units = "" ;
float COSALPHA(Time, south_north, west_east) ;
    COSALPHA:description = "Local cosine of map rotation" ;
    COSALPHA:units = "" ;
float HGT(Time, south_north, west_east) ;
    HGT:description = "Terrain Height" ;
    HGT:units = "m" ;
float HGT_SHAD(Time, south_north, west_east) ;
    HGT_SHAD:description = "Height of orographic shadow" ;
```

```

        HGT_SHAD:units = "m" ;
float TSK(Time, south_north, west_east) ;
    TSK:description = "SURFACE SKIN TEMPERATURE" ;
    TSK:units = "K" ;
float P_TOP(Time) ;
    P_TOP:description = "PRESSURE TOP OF THE MODEL" ;
    P_TOP:units = "Pa" ;
float T00(Time) ;
    T00:description = "BASE STATE TEMPERATURE" ;
    T00:units = "K" ;
float P00(Time) ;
    P00:description = "BASE STATE PRESURE" ;
    P00:units = "Pa" ;
float TLP(Time) ;
    TLP:description = "BASE STATE LAPSE RATE" ;
    TLP:units = "" ;
float TISO(Time) ;
    TISO:description = "TEMP AT WHICH THE BASE T TURNS CONST" ;
    TISO:units = "K" ;
float MAX_MSTFX(Time) ;
    MAX_MSTFX:description = "Max map factor in domain" ;
    MAX_MSTFX:units = "" ;
float MAX_MSTFY(Time) ;
    MAX_MSTFY:description = "Max map factor in domain" ;
    MAX_MSTFY:units = "" ;
float RAINC(Time, south_north, west_east) ;
    RAINC:description = "ACCUMULATED TOTAL CUMULUS PRECIPITATION" ;
    RAINC:units = "mm" ;
float RAINSH(Time, south_north, west_east) ;
    RAINSH:description = "ACCUMULATED SHALLOW CUMULUS PRECIPITATION" ;
    RAINSH:units = "mm" ;
float RAINNC(Time, south_north, west_east) ;
    RAINNC:description = "ACCUMULATED TOTAL GRID SCALE PRECIPITATION" ;
    RAINNC:units = "mm" ;
float PRATEC(Time, south_north, west_east) ;
    PRATEC:description = "PRECIP RATE FROM CUMULUS SCHEME" ;
    PRATEC:units = "mm s-1" ;
float RAINCV(Time, south_north, west_east) ;
    RAINCV:description = "TIME-STEP CUMULUS PRECIPITATION" ;
    RAINCV:units = "mm" ;
float SNOWNC(Time, south_north, west_east) ;
    SNOWNC:description = "ACCUMULATED TOTAL GRID SCALE SNOW AND ICE" ;
    SNOWNC:units = "mm" ;
float GRAUPELNC(Time, south_north, west_east) ;
    GRAUPELNC:description = "ACCUMULATED TOTAL GRID SCALE GRAUPEL" ;
    GRAUPELNC:units = "mm" ;
float SWDOWN(Time, south_north, west_east) ;
    SWDOWN:description = "DOWNWARD SHORT WAVE FLUX AT GROUND SURFACE" ;
    SWDOWN:units = "W m-2" ;
float GLW(Time, south_north, west_east) ;
    GLW:description = "DOWNWARD LONG WAVE FLUX AT GROUND SURFACE" ;
    GLW:units = "W m-2" ;
float SWNORM(Time, south_north, west_east) ;
    SWNORM:description = "NORMAL SHORT WAVE FLUX AT GROUND SURFACE" ;
    SWNORM:units = "W m-2" ;
float OLR(Time, south_north, west_east) ;
    OLR:description = "TOA OUTGOING LONG WAVE" ;
    OLR:units = "W m-2" ;
float XLAT(Time, south_north, west_east) ;
    XLAT:description = "LATITUDE, SOUTH IS NEGATIVE" ;
    XLAT:units = "degree_north" ;
float XLONG(Time, south_north, west_east) ;
    XLONG:description = "LONGITUDE, WEST IS NEGATIVE" ;
    XLONG:units = "degree_east" ;
float XLAT_U(Time, south_north, west_east_stag) ;

```

```

        XLAT_U:description = "LATITUDE, SOUTH IS NEGATIVE" ;
        XLAT_U:units = "degree_north" ;
float XLONG_U(Time, south_north, west_east) ;
        XLONG_U:description = "LONGITUDE, WEST IS NEGATIVE" ;
        XLONG_U:units = "degree_east" ;
float XLAT_V(Time, south_north, west_east) ;
        XLAT_V:description = "LATITUDE, SOUTH IS NEGATIVE" ;
        XLAT_V:units = "degree_north" ;
float XLONG_V(Time, south_north, west_east) ;
        XLONG_V:description = "LONGITUDE, WEST IS NEGATIVE" ;
        XLONG_V:units = "degree_east" ;
float ALBEDO(Time, south_north, west_east) ;
        ALBEDO:description = "ALBEDO" ;
        ALBEDO:units = "-" ;
float ALBBCK(Time, south_north, west_east) ;
        ALBBCK:description = "BACKGROUND ALBEDO" ;
        ALBBCK:units = "" ;
float EMISS(Time, south_north, west_east) ;
        EMISS:description = "SURFACE EMISSIVITY" ;
        EMISS:units = "" ;
float NOAHRES(Time, south_north, west_east) ;
        NOAHRES:description = "RESIDUAL OF THE NOAH SURFACE ENERGY BUDGET" ;
        NOAHRES:units = "W m{-2}" ;
float TMN(Time, south_north, west_east) ;
        TMN:description = "SOIL TEMPERATURE AT LOWER BOUNDARY" ;
        TMN:units = "K" ;
float XLAND(Time, south_north, west_east) ;
        XLAND:description = "LAND MASK (1 FOR LAND, 2 FOR WATER)" ;
        XLAND:units = "" ;
float ZNT(Time, south_north, west_east) ;
        ZNT:description = "TIME-VARYING ROUGHNESS LENGTH" ;
        ZNT:units = "m" ;
float UST(Time, south_north, west_east) ;
        UST:description = "U* IN SIMILARITY THEORY" ;
        UST:units = "m s-1" ;
float PBLH(Time, south_north, west_east) ;
        PBLH:description = "PBL HEIGHT" ;
        PBLH:units = "m" ;
float HFX(Time, south_north, west_east) ;
        HFX:description = "UPWARD HEAT FLUX AT THE SURFACE" ;
        HFX:units = "W m-2" ;
float QFX(Time, south_north, west_east) ;
        QFX:description = "UPWARD MOISTURE FLUX AT THE SURFACE" ;
        QFX:units = "kg m-2 s-1" ;
float LH(Time, south_north, west_east) ;
        LH:description = "LATENT HEAT FLUX AT THE SURFACE" ;
        LH:units = "W m-2" ;
float SNOWC(Time, south_north, west_east) ;
        SNOWC:description = "FLAG INDICATING SNOW COVERAGE (1 FOR SNOW COVER)" ;
        SNOWC:units = "" ;
int SAVE_TOPO_FROM_REAL(Time) ;
        SAVE_TOPO_FROM_REAL:description = "1=original topo from real/0=topo
        modified by WRF" ;
        SAVE_TOPO_FROM_REAL:units = "flag" ;

```

List of Global Attributes

```
// global attributes:
```

```

:TITLE = " OUTPUT FROM WRF V3.6 MODEL" ;
:START_DATE = "2000-01-24_12:00:00" ;
:SIMULATION_START_DATE = "2000-01-24_12:00:00" ;

```



```
:WEST-EAST_GRID_DIMENSION = 74 ;
:SOUTH-NORTH_GRID_DIMENSION = 61 ;
:BOTTOM-TOP_GRID_DIMENSION = 28 ;
:DX = 30000.f ;
:DY = 30000.f ;
:STOCH_FORCE_OPT = 0 ;
:GRIDTYPE = "C" ;
:DIFF_OPT = 1 ;
:KM_OPT = 4 ;
:DAMP_OPT = 0 ;
:DAMPCOEFF = 0.2f ;
:KHDIF = 0.f ;
:KVDIF = 0.f ;
:MP_PHYSICS = 3 ;
:RA_LW_PHYSICS = 1 ;
:RA_SW_PHYSICS = 1 ;
:SF_SFCLAY_PHYSICS = 1 ;
:SF_SURFACE_PHYSICS = 2 ;
:BL_PBL_PHYSICS = 1 ;
:CU_PHYSICS = 1 ;
:SF_LAKE_PHYSICS = 0 ;
:SURFACE_INPUT_SOURCE = 1 ;
:SST_UPDATE = 0 ;
:GRID_FDDA = 0 ;
:GFDDA_INTERVAL_M = 0 ;
:GFDDA_END_H = 0 ;
:GRID_SFDDA = 0 ;
:SGFDDA_INTERVAL_M = 0 ;
:SGFDDA_END_H = 0 ;
:HYPSONOMETRIC_OPT = 2 ;
:SF_URBAN_PHYSICS = 0 ;
:SHCU_PHYSICS = 0 ;
:MFSHCONV = 0 ;
:FEEDBACK = 1 ;
:SMOOTH_OPTION = 0 ;
:SWRAD_SCAT = 1.f ;
:W_DAMPING = 0 ;
:DT = 180.f ;
:RADT = 30.f ;
:BLDT = 0.f ;
:CUDT = 5.f ;
:AER_OPT = 0 ;
:SWINT_OPT = 0 ;
:AER_TYPE = 1 ;
:AER_AOD550_OPT = 1 ;
:AER_ANGEXP_OPT = 1 ;
:AER_SSA_OPT = 1 ;
:AER_ASY_OPT = 1 ;
:AER_AOD550_VAL = 0.12f ;
:AER_ANGEXP_VAL = 1.3f ;
:AER_SSA_VAL = 0.f ;
:AER_ASY_VAL = 0.f ;
:MOIST_ADV_OPT = 1 ;
:SCALAR_ADV_OPT = 1 ;
:TKE_ADV_OPT = 1 ;
:DIFF_6TH_OPT = 0 ;
:DIFF_6TH_FACTOR = 0.12f ;
:OBS_NUDGE_OPT = 0 ;
:BUCKET_MM = -1.f ;
:BUCKET_J = -1.f ;
:PREC_ACC_DT = 0.f ;
:SF_OCEAN_PHYSICS = 0 ;
:ISFTCFLX = 0 ;
:ISHALLOW = 0 ;
:ISFFLX = 1 ;
```

```

:ICLOUD = 1 ;
:ICLOUD_CU = 0 ;
:TRACER_PBLMIX = 1 ;
:SCALAR_PBLMIX = 0 ;
:GRAV_SETTLING = 0 ;
:DFI_OPT = 0 ;
:WEST-EAST_PATCH_START_UNSTAG = 1 ;
:WEST-EAST_PATCH_END_UNSTAG = 73 ;
:WEST-EAST_PATCH_START_STAG = 1 ;
:WEST-EAST_PATCH_END_STAG = 74 ;
:SOUTH-NORTH_PATCH_START_UNSTAG = 1 ;
:SOUTH-NORTH_PATCH_END_UNSTAG = 60 ;
:SOUTH-NORTH_PATCH_START_STAG = 1 ;
:SOUTH-NORTH_PATCH_END_STAG = 61 ;
:BOTTOM-TOP_PATCH_START_UNSTAG = 1 ;
:BOTTOM-TOP_PATCH_END_UNSTAG = 27 ;
:BOTTOM-TOP_PATCH_START_STAG = 1 ;
:BOTTOM-TOP_PATCH_END_STAG = 28 ;
:GRID_ID = 1 ;
:PARENT_ID = 0 ;
:I_PARENT_START = 1 ;
:J_PARENT_START = 1 ;
:PARENT_GRID_RATIO = 1 ;
:DT = 180.f ;
:CEN_LAT = 34.83002f ;
:CEN_LON = -81.03f ;
:TRUELAT1 = 30.f ;
:TRUELAT2 = 60.f ;
:MOAD_CEN_LAT = 34.83002f ;
:STAND_LON = -98.f ;
:POLE_LAT = 90.f ;
:POLE_LON = 0.f ;
:GMT = 12.f ;
:JULYR = 2000 ;
:JULDAY = 24 ;
:MAP_PROJ = "Lambert Conformal" ;
:MMINLU = "USGS" ;
:NUM_LAND_CAT = 24 ;
:ISWATER = 16 ;
:ISLAKE = -1 ;
:ISICE = 24 ;
:ISURBAN = 1 ;
:ISOILWATER = 14 ;

```

Special WRF Output Variables

The WRF model outputs the state variables defined in the Registry file, and these state variables are used in the model's prognostic equations. Some of these variables are perturbation fields; therefore the following definitions for reconstructing meteorological variables are necessary:

total geopotential	$PH + PHB$
total geopotential height in m	$(PH + PHB) / 9.81$
total potential temperature in_K	$T + 300$
total pressure in mb	$(P + PB) * 0.01$

wind components, grid relative	U, V
surface pressure in Pa	psfc
surface winds, grid relative	U10, V10 (valid at mass points)
surface temperature and mixing ratio	T2, Q2

The definitions for map projection options:

map_proj =	1: Lambert Conformal
	2: Polar Stereographic
	3: Mercator
	6: latitude and longitude (including global)

Chapter 6: WRF Data Assimilation

Table of Contents

- [Introduction](#)
- [Installing WRFDA for 3D-Var Run](#)
- [Installing WRFPLUS and WRFDA for 4D-Var Run](#)
- [Running Observation Preprocessor \(OBSPROC\)](#)
- [Running WRFDA](#)
- [Radiance Data Assimilation in WRFDA](#)
- [Precipitation Data Assimilation in WRFDA 4D-Var](#)
- [Updating WRF Boundary Conditions](#)
- [Running gen_be](#)
- [Additional WRFDA Exercises](#)
- [WRFDA with Multivariate Background Error \(MBE\) Statistics](#)
- [WRFDA Diagnostics](#)
- [Hybrid Data Assimilation](#)
- [ETKF Data Assimilation](#)
- [Description of Namelist Variables](#)


Introduction

Data assimilation is the technique by which **observations** are combined with an NWP product (the **first guess** or background forecast) and their respective error statistics to provide an improved estimate (the **analysis**) of the atmospheric (or oceanic, Jovian, etc.) state. Variational (Var) data assimilation achieves this through the iterative minimization of a prescribed cost (or penalty) function. Differences between the analysis and observations/first guess are penalized (damped) according to their perceived error. The difference between three-dimensional (3D-Var) and four-dimensional (4D-Var) data assimilation is the use of a numerical forecast model in the latter.

The MMM Division of NCAR supports a unified (global/regional, multi-model, 3/4D-Var) model-space data assimilation system (WRFDA) for use by the NCAR staff and collaborators, and is also freely available to the general community, together with further documentation, test results, plans etc., from the WRFDA web-page (<http://www2.mmm.ucar.edu/wrf/users/wrfda/index.html>).

Various components of the WRFDA system are shown in blue in the sketch below, together with their relationship with the rest of the WRF system.

WRFDA in the WRF Modeling System

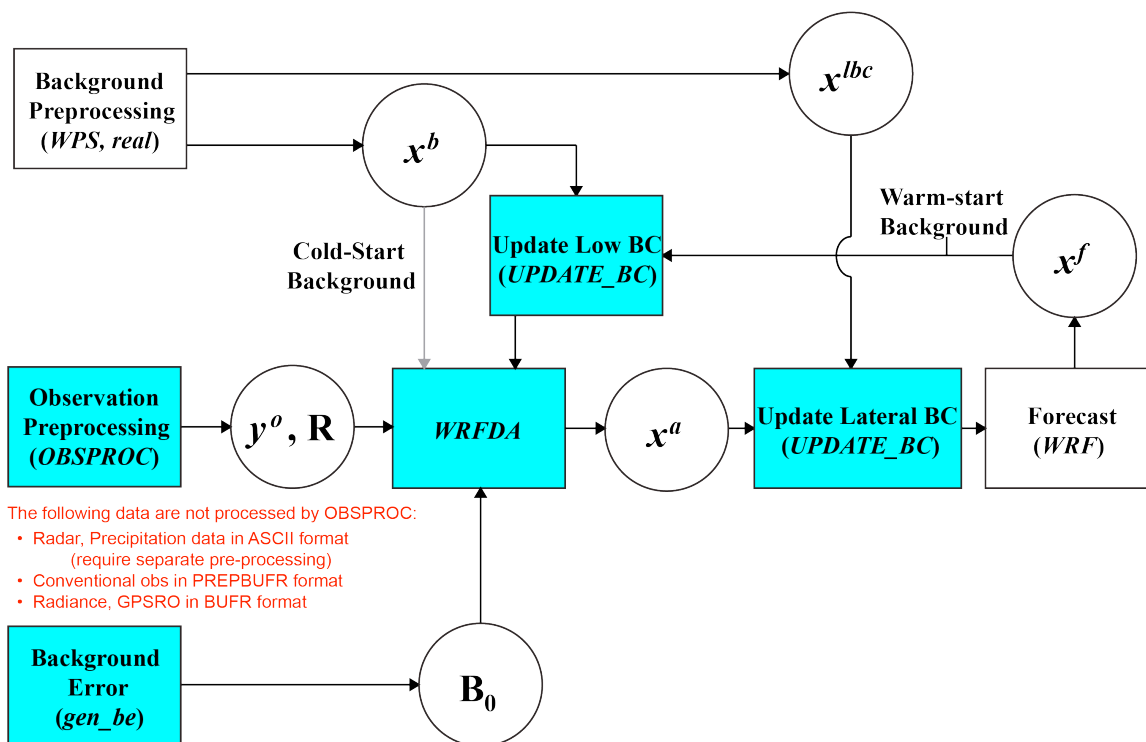

- x^b first guess, either from a previous WRF forecast or from WPS/real.exe output.
 x^{lbc} lateral boundary from WPS/real.exe output.
 x^a analysis from the WRFDA data assimilation system.
 x^f WRF forecast output.
 y^o observations processed by OBSPROC. (note: PREPBUFR input, radar, radiance, and rainfall data do not go through OBSPROC)
 B_0 background error statistics from generic BE data (CV3) or gen_be.
 R observational and representative error statistics.

In this chapter, you will learn how to install and run the various components of the WRFDA system. For training purposes, you are supplied with a test case, including the following input data:

- an observation file (which must be processed through OBSPROC),
- a netCDF background file (WPS/real.exe output, the first guess of the analysis)
- background error statistics (estimate of errors in the background file).

This tutorial dataset can be downloaded from the WRFDA Users Page (<http://www2.mmm.ucar.edu/wrf/users/wrfda/download/testdata.html>), and will be described later in more detail. In your own work, however, you will have to create all these input files yourself. See the section [Running Observation Preprocessor](#) for creating your observation files. See the section [Running gen_be](#) for generating your background error statistics file, if you want to use cv_options=5 or cv_options=6.

Before using your own data, we suggest that you start by running through the WRFDA-related programs using the supplied test case. This serves two purposes: First, you can learn how to run the programs with data we have tested ourselves, and second you can test whether your computer is capable of running the entire modeling system. After you have done the tutorial, you can try running other, more computationally intensive case studies, and experimenting with some of the many namelist variables.

WARNING: It is impossible to test every permutation of computer, compiler, number of processors, case, namelist option, etc. for every WRFDA release. The namelist options that are supported are indicated in the “WRFDA/var/README.namelist”, and these are the default options.

Hopefully, our test cases will prepare you for the variety of ways in which you may wish to run your own WRFDA experiments. Please inform us about your experiences.

As a professional courtesy, we request that you include the following references in any publication that uses any component of the community WRFDA system:

Barker, D.M., W. Huang, Y.R. Guo, and Q.N. Xiao., 2004: A Three-Dimensional (3DVAR) Data Assimilation System For Use With MM5: Implementation and Initial Results. *Mon. Wea. Rev.*, **132**, 897-914.

Huang, X.Y., Q. Xiao, D.M. Barker, X. Zhang, J. Michalakes, W. Huang, T. Henderson, J. Bray, Y. Chen, Z. Ma, J. Dudhia, Y. Guo, X. Zhang, D.J. Won, H.C. Lin, and Y.H. Kuo, 2009: Four-Dimensional Variational Data Assimilation for WRF: Formulation and Preliminary Results. *Mon. Wea. Rev.*, **137**, 299–314.

Barker, D., X.-Y. Huang, Z. Liu, T. Auligné, X. Zhang, S. Rugg, R. Ajjaji, A. Bourgeois, J. Bray, Y. Chen, M. Demirtas, Y.-R. Guo, T. Henderson, W. Huang, H.-C. Lin, J. Michalakes, S. Rizvi, and X. Zhang, 2012: The Weather Research and Forecasting Model's Community Variational/Ensemble Data Assimilation System: WRFDA. *Bull. Amer. Meteor. Soc.*, **93**, 831–843.

Running WRFDA requires a Fortran 90 compiler. We have tested the WRFDA system on the following platforms: IBM (XLF), SGI Altix (IFORT), PC/Linux (IFORT, GFORTRAN, PGF90), and Macintosh (G95/GFORTRAN/PGF90). Please let us know if this does not meet your requirements, and we will attempt to add other machines to our list of supported architectures, as resources allow. Although we are interested in hearing about your experiences in modifying compiler options, we do not recommend making changes to the configure file used to compile WRFDA.

Installing WRFDA for 3D-Var Run

a. Obtaining WRFDA Source Code

Users can download the WRFDA source code from http://www2.mmm.ucar.edu/wrf/users/wrfda/download/get_source.html.

Note: WRFDA compiles with the `-r8` (8-byte real numbers) option while WRF compiles with `-r4` (4-byte real numbers). For this reason, WRF and WRFDA cannot reside or be compiled in the same directory tree.

After the tar file is unzipped (`gunzip WRFDAV3.6.TAR.gz`) and untarred (`tar -xf WRFDAV3.6.TAR`), the directory `WRFDA` should be created. This directory contains the WRFDA source, external libraries, and fixed files. The following is a list of the system components and content for each subdirectory:

Directory Name	Content
<code>var/da</code>	WRFDA source code
<code>var/run</code>	Fixed input files required by WRFDA, such as background error covariance, radiance-related files, CRTM coefficients and <code>VARBC.in</code>
<code>var/external</code>	Libraries needed by WRFDA, includes CRTM, BUFR, LAPACK, BLAS
<code>var/obsproc</code>	OBSPROC source code, namelist, and observation error files
<code>var/gen_be</code>	Source code of <code>gen_be</code> , the utility to create background error statistics files
<code>var/build</code>	Builds all <code>.exe</code> files.

b. Compile WRFDA and Libraries

Some external libraries (e.g., LAPACK, BLAS, and NCEP BUFR) are included in the WRFDA tar file. To compile the WRFDA code, the only mandatory library is the netCDF library. You should set an environment variable `NETCDF` to point to the directory where your netCDF library is installed

```
> setenv NETCDF your_netcdf_path
```

If BUFR or PREPBUFR data are to be assimilated, BUFR libraries need to be compiled. The source code for BUFRLIB 10.2.3 (with minor modifications) is included in the WRFDA tar file. To compile this library, set the environment variable `BUFR` prior to compilation.

```
> setenv BUFR 1
```


If satellite radiance data are to be used, a Radiative Transfer Model (RTM) is required. The current RTM versions that WRFDA supports are CRTM V2.1.3 and RTTOV V11.1/11.2.

The CRTM V2.1.3 source code is included in the WRFDA tar file. To compile the library, prior to compilation set the environment variable CRTM:

```
> setenv CRTM 1
```

If the user wishes to use RTTOV, download and install the RTTOV v11 library before compiling WRFDA. This library can be downloaded from <http://nwpsaf.eu/deliverables/rtm/index.html>. **The RTTOV libraries must be compiled with the “emis_atlas” option in order to work with WRFDA; see the RTTOV “readme.txt” for instructions on how to do this.** After compiling RTTOV (see the RTTOV documentation for detailed instructions), set the “RTTOV” environment variable to the path where the `lib` directory resides. For example, if the library files can be found in `/usr/local/rttov11/pgi/lib/librttov11.*.a`, you should set RTTOV as:

```
> setenv RTTOV /usr/local/rttov11/pgi
```

Note: Make sure the required libraries were all compiled using the same compiler that will be used to build WRFDA, since the libraries produced by one compiler may not be compatible with code compiled with another.

Assuming all required libraries are available and the WRFDA source code is ready, you can start to build WRFDA using the following steps:

Enter the WRFDA directory and run the configure script:

```
> cd WRFDA
> ./configure wrfda
```

A list of configuration options should appear. Each option combines an operating system, a compiler type, and a parallelism option. Since the configuration script doesn’t check which compilers are *actually* installed on your system, be sure to select only among the options that you have available to you. The available parallelism options are single-processor (serial), shared-memory parallel (smpar), distributed-memory parallel (dmpar), and distributed-memory with shared-memory parallel (sm+dm). **However, shared-memory (smpar and sm+dm) options are not supported as of WRFDA Version 3.6, so we do not recommend selecting any of these options.**

For example, on a Linux machine such as NCAR’s Yellowstone, the above steps will look similar to the following:

```
> ./configure wrfda
checking for perl5... no
checking for perl... found /usr/bin/perl (perl)
```

Will use NETCDF in dir: /glade/apps/opt/netcdf/4.2/intel/default
 PHDF5 not set in environment. Will configure WRF for use without.
 \$JASPERLIB or \$JASPERINC not found in environment, configuring to build without
 grib2 I/O...

 Please select from among the following supported platforms.

1. Linux x86_64 i486 i586 i686, PGI compiler with gcc (serial)
2. Linux x86_64 i486 i586 i686, PGI compiler with gcc (smpar)
3. Linux x86_64 i486 i586 i686, PGI compiler with gcc (dmpar)
4. Linux x86_64 i486 i586 i686, PGI compiler with gcc (dm+sm)
5. Linux x86_64 i486 i586 i686 PGI compiler with pgcc YELLOWSTONE (serial)
6. Linux x86_64 i486 i586 i686 PGI compiler with pgcc YELLOWSTONE (smpar)
7. Linux x86_64 i486 i586 i686 PGI compiler with pgcc YELLOWSTONE (dmpar)
8. Linux x86_64 i486 i586 i686 PGI compiler with pgcc YELLOWSTONE (dm+sm)
9. Linux x86_64, PGI compiler with pgcc, SGI MPT (serial)
10. Linux x86_64, PGI compiler with pgcc, SGI MPT (smpar)
11. Linux x86_64, PGI compiler with pgcc, SGI MPT (dmpar)
12. Linux x86_64, PGI compiler with pgcc, SGI MPT (dm+sm)
13. Linux x86_64, PGI accelerator compiler with gcc (serial)
14. Linux x86_64, PGI accelerator compiler with gcc (smpar)
15. Linux x86_64, PGI accelerator compiler with gcc (dmpar)
16. Linux x86_64, PGI accelerator compiler with gcc (dm+sm)
17. Linux x86_64 i486 i586 i686, ifort compiler with icc (serial)
18. Linux x86_64 i486 i586 i686, ifort compiler with icc (smpar)
19. Linux x86_64 i486 i586 i686, ifort compiler with icc (dmpar)
20. Linux x86_64 i486 i586 i686, ifort compiler with icc (dm+sm)
21. Linux x86_64 i486 i586 i686, Xeon Phi (MIC architecture) ifort compiler
with icc (dm+sm)
22. Linux x86_64 i486 i586 i686, Xeon (SNB with AVX mods) ifort compiler
with icc (serial)
23. Linux x86_64 i486 i586 i686, Xeon (SNB with AVX mods) ifort compiler
with icc (smpar)
24. Linux x86_64 i486 i586 i686, Xeon (SNB with AVX mods) ifort compiler
with icc (dmpar)
25. Linux x86_64 i486 i586 i686, Xeon (SNB with AVX mods) ifort compiler
with icc (dm+sm)
26. Linux x86_64 i486 i586 i686, ifort compiler with icc YELLOWSTONE (serial)
27. Linux x86_64 i486 i586 i686, ifort compiler with icc YELLOWSTONE
(smpar)
28. Linux x86_64 i486 i586 i686, ifort compiler with icc YELLOWSTONE
(dmpar)
29. Linux x86_64 i486 i586 i686, ifort compiler with icc YELLOWSTONE
(dm+sm)
30. Linux x86_64 i486 i586 i686, ifort compiler with icc, SGI MPT (serial)
31. Linux x86_64 i486 i586 i686, ifort compiler with icc, SGI MPT (smpar)
32. Linux x86_64 i486 i586 i686, ifort compiler with icc, SGI MPT (dmpar)
33. Linux x86_64 i486 i586 i686, ifort compiler with icc, SGI MPT (dm+sm)
34. Linux x86_64 i486 i586 i686, ifort compiler with icc, IBM POE (serial)
35. Linux x86_64 i486 i586 i686, ifort compiler with icc, IBM POE (smpar)
36. Linux x86_64 i486 i586 i686, ifort compiler with icc, IBM POE (dmpar)
37. Linux x86_64 i486 i586 i686, ifort compiler with icc, IBM POE (dm+sm)
38. Linux i486 i586 i686 x86_64, PathScale compiler with pathcc (serial)
39. Linux i486 i586 i686 x86_64, PathScale compiler with pathcc (dmpar)
40. x86_64 Linux, gfortran compiler with gcc (serial)
41. x86_64 Linux, gfortran compiler with gcc (smpar)
42. x86_64 Linux, gfortran compiler with gcc (dmpar)
43. x86_64 Linux, gfortran compiler with gcc (dm+sm)

Enter selection [1-43] : 28

 Compile for nesting? (1=basic, 2=preset moves, 3=vortex following) [default 1]:
 Configuration successful. To build the model type compile .

After running the configuration script and choosing a compilation option, a `configure.wrf` file will be created. Because of the variety of ways that a computer can be configured, if the WRFDA build ultimately fails, there is a chance that minor modifications to the `configure.wrf` file may be needed.

To compile WRFDA, type

```
> ./compile all_wrfvar >& compile.out
```

Successful compilation will produce 44 executables: 43 of which are in the `var/build` directory and linked in the `var/da` directory, with the 44th, `obsproc.exe`, found in the `var/obsproc/src` directory. You can list these executables by issuing the command:

```
>ls -l var/build/*exe var/obsproc/src/obsproc.exe
-rwxr-xr-x 1 user 885143 Apr 4 17:22 var/build/da_advance_time.exe
-rwxr-xr-x 1 user 1162003 Apr 4 17:24 var/build/da_bias_airmass.exe
-rwxr-xr-x 1 user 1143027 Apr 4 17:23 var/build/da_bias_scan.exe
-rwxr-xr-x 1 user 1116933 Apr 4 17:23 var/build/da_bias_sele.exe
-rwxr-xr-x 1 user 1126173 Apr 4 17:23 var/build/da_bias_verif.exe
-rwxr-xr-x 1 user 1407973 Apr 4 17:23 var/build/da_rad_diags.exe
-rwxr-xr-x 1 user 1249431 Apr 4 17:22 var/build/da_tune_obs_desroziers.exe
-rwxr-xr-x 1 user 1186368 Apr 4 17:24 var/build/da_tune_obs_hollingsworth1.exe
-rwxr-xr-x 1 user 1083862 Apr 4 17:24 var/build/da_tune_obs_hollingsworth2.exe
-rwxr-xr-x 1 user 1193390 Apr 4 17:24 var/build/da_update_bc_ad.exe
-rwxr-xr-x 1 user 1245842 Apr 4 17:23 var/build/da_update_bc.exe
-rwxr-xr-x 1 user 1492394 Apr 4 17:24 var/build/da_verif_grid.exe
-rwxr-xr-x 1 user 1327002 Apr 4 17:24 var/build/da_verif_obs.exe
-rwxr-xr-x 1 user 26031927 Apr 4 17:31 var/build/da_wrfvar.exe
-rwxr-xr-x 1 user 1933571 Apr 4 17:23 var/build/gen_be_addmean.exe
-rwxr-xr-x 1 user 1944047 Apr 4 17:24 var/build/gen_be_cov2d3d_contrib.exe
-rwxr-xr-x 1 user 1927988 Apr 4 17:24 var/build/gen_be_cov2d.exe
-rwxr-xr-x 1 user 1945213 Apr 4 17:24 var/build/gen_be_cov3d2d_contrib.exe
-rwxr-xr-x 1 user 1941439 Apr 4 17:24 var/build/gen_be_cov3d3d_bin3d_contrib.exe
-rwxr-xr-x 1 user 1947331 Apr 4 17:24 var/build/gen_be_cov3d3d_contrib.exe
-rwxr-xr-x 1 user 1931820 Apr 4 17:24 var/build/gen_be_cov3d.exe
-rwxr-xr-x 1 user 1915177 Apr 4 17:24 var/build/gen_be_diags.exe
-rwxr-xr-x 1 user 1947942 Apr 4 17:24 var/build/gen_be_diags_read.exe
-rwxr-xr-x 1 user 1930465 Apr 4 17:24 var/build/gen_be_ensmean.exe
-rwxr-xr-x 1 user 1951511 Apr 4 17:24 var/build/gen_be_ensrf.exe
-rwxr-xr-x 1 user 1994167 Apr 4 17:24 var/build/gen_be_ep1.exe
-rwxr-xr-x 1 user 1996438 Apr 4 17:24 var/build/gen_be_ep2.exe
-rwxr-xr-x 1 user 2001400 Apr 4 17:24 var/build/gen_be_ekkf.exe
-rwxr-xr-x 1 user 1942988 Apr 4 17:24 var/build/gen_be_hist.exe
-rwxr-xr-x 1 user 2021659 Apr 4 17:24 var/build/gen_be_stage0_gsi.exe
-rwxr-xr-x 1 user 2012035 Apr 4 17:24 var/build/gen_be_stage0_wrf.exe
-rwxr-xr-x 1 user 1973193 Apr 4 17:24 var/build/gen_be_stage1_ldvar.exe
-rwxr-xr-x 1 user 1956835 Apr 4 17:24 var/build/gen_be_stage1.exe
-rwxr-xr-x 1 user 1963314 Apr 4 17:24 var/build/gen_be_stage1_gsi.exe
-rwxr-xr-x 1 user 1975042 Apr 4 17:24 var/build/gen_be_stage2_ldvar.exe
-rwxr-xr-x 1 user 1938468 Apr 4 17:24 var/build/gen_be_stage2a.exe
-rwxr-xr-x 1 user 1952538 Apr 4 17:24 var/build/gen_be_stage2.exe
-rwxr-xr-x 1 user 1202392 Apr 4 17:22 var/build/gen_be_stage2_gsi.exe
-rwxr-xr-x 1 user 1947836 Apr 4 17:24 var/build/gen_be_stage3.exe
-rwxr-xr-x 1 user 1928353 Apr 4 17:24 var/build/gen_be_stage4_global.exe
-rwxr-xr-x 1 user 1955622 Apr 4 17:24 var/build/gen_be_stage4_regional.exe
-rwxr-xr-x 1 user 1924416 Apr 4 17:24 var/build/gen_be_vertloc.exe
-rwxr-xr-x 1 user 2057673 Apr 4 17:24 var/build/gen_mbe_stage2.exe
-rwxr-xr-x 1 user 2110993 Apr 4 17:32 var/obsproc/src/obsproc.exe
```

The main executable for running WRFDA is `da_wrfvar.exe`. Make sure it has been created after the compilation: it is fairly common that all the executables will be successfully compiled except this main executable. If this occurs, please check the compilation log file carefully for any errors.

The basic `gen_be` utility for the regional model consists of `gen_be_stage0_wrf.exe`, `gen_be_stage1.exe`, `gen_be_stage2.exe`, `gen_be_stage2a.exe`, `gen_be_stage3.exe`, `gen_be_stage4_regional.exe`, and `gen_be_diags.exe`.

`da_update_bc.exe` is used for updating the WRF lower and lateral boundary conditions before and after a new WRFDA analysis is generated. This is detailed in the section on [Updating WRF Boundary Conditions](#).

`da_advance_time.exe` is a very handy and useful tool for date/time manipulation. Type `$WRFDA_DIR/var/build/da_advance_time.exe` to see its usage instructions.

`obsproc.exe` is the executable for preparing conventional observations for assimilation by WRFDA. Its use is detailed in the section on [Running Observation Preprocessor](#).

If you specified that the CRTM library was needed, check `$WRFDA_DIR/var/external/crtm_2.1.3/libsrc` to ensure that `libCRTM.a` was generated.

c. Clean Compilation

To remove all object files and executables, type:

```
./clean
```

To remove all build files, including `configure.wrf`, type:

```
./clean -a
```

The `clean -a` command is recommended if your compilation fails, or if the configuration file has been changed and you wish to restore the default settings.

Installing WRFPLUS and WRFDA for 4D-Var Run

If you intend to run WRF 4D-Var, it is necessary to have WRFPLUS installed. WRFPLUS contains the adjoint and tangent linear models based on a simplified WRF model, which includes a few simplified physics packages, such as surface drag, large scale condensation and precipitation, and cumulus parameterization.

To install WRFPLUS:

- Get the WRFPLUS zipped tar file from <http://www2.mmm.ucar.edu/wrf/users/wrfda/download/wrfplus.html>
- Unzip and untar the WRFPLUS file, then run the `configure` script

```
> gunzip WRFPLUSV3.6_r7153.tar.gz
```

```
> tar -xf WRFPLUSV3.6_r7153.tar
> cd WRFPLUSV3
> ./configure wrfplus
```

As with 3D-Var, “serial” means single-processor, and “dmpar” means Distributed Memory Parallel (MPI). Be sure to select the same option for WRFPLUS as you will use for WRFDA.

- Compile WRFPLUS

```
> ./compile em_real >& compile.out
> ls -ls main/*.exe
```

You should see the following files:

```
-rwxr-xr-x 1 user users 23179920 Apr  3 15:22 main/ndown.exe
-rwxr-xr-x 1 user users 22947466 Apr  3 15:22 main/nup.exe
-rwxr-xr-x 1 user users 23113961 Apr  3 15:22 main/real.exe
-rwxr-xr-x 1 user users 22991725 Apr  3 15:22 main/tc.exe
-rwxr-xr-x 1 user users 32785447 Apr  3 15:20 main/wrf.exe
```

Finally, set the environment variable WRFPLUS_DIR to the appropriate directory:

```
>setenv WRFPLUS_DIR ${your_source_code_dir}/WRFPLUSV3
```

To install WRFDA for the 4D-Var run:

- If you intend to use observational data in BUFR or PREPBUFR format, or if you intend to assimilate satellite radiance data, you need to set environment variables for BUFR, CRTM, and/or RTTOV. See [the previous 3D-Var section](#) for instructions.

```
>./configure 4dvar

>./compile all_wrfvar >& compile.out

>ls -ls var/build/*.exe var/obsproc/*.exe
```

You should see the same 44 executables as are listed in the above 3D-Var section, including `da_wrfvar.exe`

Running Observation Preprocessor (OBSPROC)

The OBSPROC program reads observations in LITTLE_R format (a text-based format, in use since the MM5 era). We have provided observations for the tutorial case, but for your own applications, you will have to prepare your own observation files. Please see http://www2.mmm.ucar.edu/wrf/users/wrfda/download/free_data.html for the sources of

some freely-available observations. Because the raw observation data files have many possible formats, such as ASCII, BUFR, PREPBUFR, MADIS (*note*: a converter for MADIS data to LITTLE_R is available on the WRFDA website: www2.mmm.ucar.edu/wrf/users/wrfda/download/madis.html), and HDF, the free data site also contains instructions for converting the observations to LITTLE_R format. To make the WRFDA system as general as possible, the LITTLE_R format was adopted as an intermediate observation data format for the WRFDA system, however, *the conversion of the user-specific source data to LITTLE_R format is the user's task*. A more complete description of the LITTLE_R format, as well as conventional observation data sources for WRFDA, can be found by reading the “Observation Pre-processing” tutorial found at http://www2.mmm.ucar.edu/wrf/users/wrfda/Tutorials/2014_July/tutorial_presentation_summer_2014.html, or by referencing [Chapter 7 of this User's Guide](#).

The purpose of OBSPROC is to:


- Remove observations outside the specified temporal and spatial domains
- Re-order and merge duplicate (in time and location) data reports
- Retrieve pressure or height based on observed information using the hydrostatic assumption
- Check multi-level observations for vertical consistency and superadiabatic conditions
- Assign observation errors based on a pre-specified error file
- Write out the observation file to be used by WRFDA in ASCII or BUFR format

The OBSPROC program (`obsproc.exe`) should be found under the directory `$WRFDA_DIR/var/obsproc/src` if “`compile all_wrfvar`” completed successfully.

If you haven't already, you should download the tutorial case, which contains example files for all the exercises in this User's Guide. The case can be found at the WRFDA website (<http://www2.mmm.ucar.edu/wrf/users/wrfda/download/testdata.html>).

a. Prepare observational data for 3D-Var

As an example, to prepare the observation file at the analysis time, all the observations in the range $\pm 1\text{h}$ will be processed, which means that (in the example case) the observations between 23h and 1h are treated as the observations at 0h. This is illustrated in the following figure:

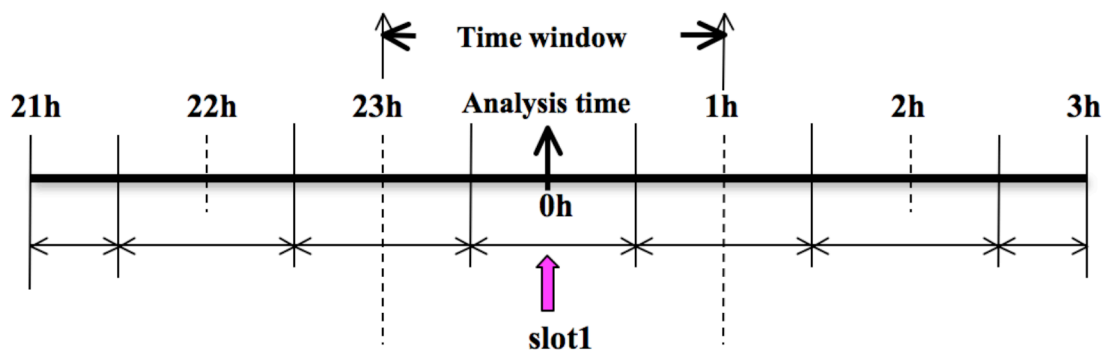

OBSPROC requires at least 3 files to run successfully:

- A namelist file (namelist.obsproc)
- An observation error file (obserr.txt)
- One or more observation files

To create the required namelist file, we have provided an example file `namelist_obsproc.3dvar.wrfvar-tut` in the `var/obsproc` directory. Thus, proceed as follows.

```
> cd $WRFDA_DIR/var/obsproc
> cp namelist_obsproc.3dvar.wrfvar-tut namelist.obsproc
```

Next, edit the namelist file, `namelist.obsproc`, to accommodate your experiments. You will likely only need to change variables listed under records 1, 2, 6, 7, and 8. See `$WRFDA_DIR/var/obsproc/README.namelist`, or the section [Description of Namelist Variables](#) for details; you should pay special attention to NESTIX and NESTJX.

If you are running the tutorial case, you should copy or link the sample observation file (`ob/2008020512/obs.2008020512`) to the `obsproc` directory. Alternatively, you can edit the namelist variable `obs_gts_filename` to point to the observation file's full path.

To run OBSPROC, type

```
> ./obsproc.exe >& obsproc.out
```

Once `obsproc.exe` has completed successfully, you will see an observation data file, with the name formatted `obs_gts_YYYY-MM-DD_HH:NN:SS.3DVAR`, in the `obsproc` directory. For the tutorial case, this will be `obs_gts_2008-02-05_12:00:00.3DVAR`. This is the input observation file to WRFDA. It is an ASCII file that contains a header section (listed below) followed by observations. The meanings and format of observations in the file are described in the last six lines of the header section.

```
TOTAL = 9066, MISS. = -888888.,
SYNOP = 757, METAR = 2416, SHIP = 145, BUOY = 250, BOGUS = 0, TEMP =
86,
AMDAR = 19, AIREP = 205, TAMDAR = 0, PILOT = 85, SATEM = 106, SATOB =
2556,
```

```


GPSPW = 187, GPSZD = 0, GPSRF = 3, GPSEP = 0, SSMT1 = 0, SSMT2 =
0,
TOVS = 0, QSCAT = 2190, PROFL = 61, AIRSR = 0, OTHER = 0,
PHIC = 40.00, XLONC = -95.00, TRUE1 = 30.00, TRUE2 = 60.00, XIM11 = 1.00, XJM11 =
1.00,
base_temp= 290.00, base_lapse= 50.00, PTOP = 1000., base_pres=100000.,
base_tropo_pres= 20000., base_strat_temp= 215.,
IXC = 60, JXC = 90, IPROJ = 1, IDD = 1, MAXNES= 1,
NESTIX= 60,
NESTJX= 90,
NUMC = 1,
DIS = 60.00,
NESTI = 1,
NESTJ = 1,
INFO = PLATFORM, DATE, NAME, LEVELS, LATITUDE, LONGITUDE, ELEVATION, ID.
SRFC = SLP, PW (DATA,QC,ERROR).
EACH = PRES, SPEED, DIR, HEIGHT, TEMP, DEW PT, HUMID (DATA,QC,ERROR)*LEVELS.
INFO_FMT = (A12,1X,A19,1X,A40,1X,I6,3(F12.3,11X),6X,A40)
SRFC_FMT = (F12.3,I4,F7.2,F12.3,I4,F7.3)
EACH_FMT = (3(F12.3,I4,F7.2),11X,3(F12.3,I4,F7.2),11X,3(F12.3,I4,F7.2))
#-----#
..... observations .....

```

Before running WRFDA, you may find it useful to learn more about various types of data that will be processed (e.g., their geographical distribution). This file is in ASCII format and so you can easily view it. For a graphical view of the file's content, there are NCL scripts available which can display the distribution and type of observations. In the WRFDA Tools package (can be downloaded at <http://www2.mmm.ucar.edu/wrf/users/wrfda/download/tools.html>), the relevant script is located at \$TOOLS_DIR/var/graphics/ncl/plot_ob_ascii_loc.ncl. You will need have NCL installed in your system to use this script; for more information on NCL, the NCAR Command Language, see <http://www.ncl.ucar.edu/>.

b. Prepare observational data for 4D-Var

To prepare the observation file, for example, at the analysis time 0h for 4D-Var, all observations from 0h to 6h will be processed and grouped in 7 sub-windows (slot1 through slot7) as illustrated in the following figure:

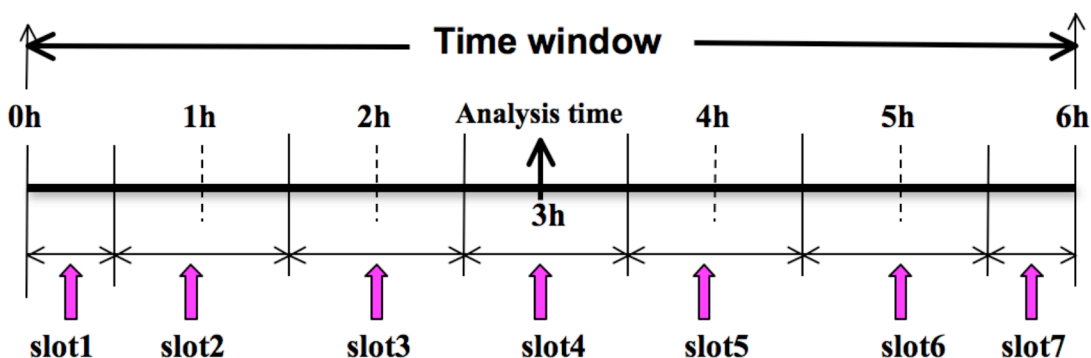

NOTE: The “Analysis time” in the above figure is not the actual analysis time (0h). It indicates the time_analysis setting in the namelist file, which in this example is three hours later than the actual analysis time. The actual analysis time is still 0h.

An example file (`namelist_obsproc.4dvar.wrfvar-tut`) has already been provided in the `var/obsproc` directory. Thus, proceed as follows:

```
> cd $WRFDA_DIR/var/obsproc
> cp namelist_obsproc.4dvar.wrfvar-tut namelist_obsproc
```

In the namelist file, you need to change the following variables to accommodate your experiments. In this tutorial case, the actual analysis time is 2008-02-05_12:00:00, **but in the namelist, `time_analysis` should be set to 3 hours later**. The different values of `time_analysis`, `num_slots_past`, and `time_slots_ahead` contribute to the actual times analyzed. For example, if you set `time_analysis = 2008-02-05_16:00:00`, and set the `num_slots_past = 4` and `time_slots_ahead=2`, the final results will be the same as before.

Edit all the domain settings according to your own experiment. You should pay special attention to NESTIX and NESTJX, which is described in the section [Description of Namelist Variables](#) for details.

If you are running the tutorial case, you should copy or link the sample observation file (`ob/2008020512/obs.2008020512`) to the `obsproc` directory. Alternatively, you can edit the namelist variable `obs_gts_filename` to point to the observation file's full path.

To run OBSPROC, type

```
> obsproc.exe >& obsproc.out
```

Once `obsproc.exe` has completed successfully, you will see 7 observation data files, which for the tutorial case are named

```
obs_gts_2008-02-05_12:00:00.4DVAR
obs_gts_2008-02-05_13:00:00.4DVAR
obs_gts_2008-02-05_14:00:00.4DVAR
obs_gts_2008-02-05_15:00:00.4DVAR
obs_gts_2008-02-05_16:00:00.4DVAR
obs_gts_2008-02-05_17:00:00.4DVAR
obs_gts_2008-02-05_18:00:00.4DVAR
```

They are the input observation files to WRF 4D-Var.

Running WRFDA

a. Download Test Data

The WRFDA system requires three input files to run:

- a) WRF *first guess* file, output from either WPS/real.exe (cold-start) or a WRF forecast (warm-start)

- b) Observations (in ASCII format, PREPBUFR or BUFR for radiance)
- c) A background error statistics file (containing background error covariance)

The following table summarizes the above info:

<i>Input Data</i>	<i>Format</i>	<i>Created By</i>
First Guess	NETCDF	WRF Preprocessing System (WPS) and real.exe or WRF
Observations	ASCII (PREPBUFR also possible)	Observation Preprocessor (OBSPROC)
Background Error Statistics	Binary	WRFDA gen_be utility or generic CV3

In the test case, you will store data in a directory defined by the environment variable `$DAT_DIR`. This directory can be in any location, and it should have read access. Type

```
> setenv DAT_DIR your_choice_of_dat_dir
```

Here, `your_choice_of_dat_dir` is the directory where the WRFDA input data is stored.

If you have not already done so, download the example data for the tutorial case, valid at 12 UTC 5th February 2008, from <http://www2.mmm.ucar.edu/wrf/users/wrfda/download/testdata.html>

Once you have downloaded the `WRFDAV3.6-testdata.tar.gz` file to `$DAT_DIR`, extract it by typing

```
> gunzip WRFDAV3.6-testdata.tar.gz
> tar -xvf WRFDAV3.6-testdata.tar
```

Now you should find the following four files under “`$DAT_DIR`”

```
ob/2008020512/ob.2008020512      # Observation data in "little_r" format
rc/2008020512/wrfinput_d01       # First guess file
rc/2008020512/wrfbdy_d01        # lateral boundary file
be/be.dat                        # Background error file
.....
```

At this point you should have three of the input files (first guess, observations from OBSPROC, and background error statistics files in the directory `$DAT_DIR`) required to run WRFDA, and have successfully downloaded and compiled the WRFDA code. If this is correct, you are ready to run WRFDA.

b. Run the Case—3D-Var

The data for the tutorial case is valid at 12 UTC 5 February 2008. The first guess comes

from the NCEP FNL (Final) Operational Global Analysis data, passed through the WRF-WPS and real.exe programs.

To run WRF 3D-Var, first create and enter into a working directory (for example, \$WRFDA_DIR/workdir), and set the environment variable WORK_DIR to this directory (e.g., setenv WORK_DIR \$WRFDA_DIR/workdir). Then follow the steps below:

```
> cd $WORK_DIR
> cp $WRFDA_DIR/var/test/tutorial/namelist.input .
> ln -sf $WRFDA_DIR/run/LANDUSE.TBL .
> ln -sf $DAT_DIR/rc/2008020512/wrfinput_d01 ./fg
> ln -sf $WRFDA_DIR/var/obsproc/obs_gts_2008-02-05_12:00:00.3DVAR
./ob.ascii (note the different name!)
> ln -sf $DAT_DIR/be/be.dat .
> ln -sf $WRFDA_DIR/var/da/da_wrfvar.exe .
```

Now edit the file namelist.input, which is a very basic namelist for the tutorial test case, and is shown below.

```
&wrfvar1
var4d=false,
print_detail_grad=false,
/
&wrfvar2
/
&wrfvar3
ob_format=2,
/
&wrfvar4
/
&wrfvar5
/
&wrfvar6
max_ext_its=1,
ntmax=50,
orthonorm_gradient=true,
/
&wrfvar7
cv_options=5,
/
&wrfvar8
/
&wrfvar9
/
&wrfvar10
test_transforms=false,
test_gradient=false,
/
&wrfvar11
/
&wrfvar12
/
&wrfvar13
/
&wrfvar14
/
&wrfvar15
/
&wrfvar16
/
&wrfvar17
/
&wrfvar18
analysis_date="2008-02-05_12:00:00.0000",
```

```
/
&wrfvar19
/
&wrfvar20
/
&wrfvar21
time_window_min="2008-02-05_11:00:00.0000",
/
&wrfvar22
time_window_max="2008-02-05_13:00:00.0000",
/
&wrfvar23
/
&time_control
start_year=2008,
start_month=02,
start_day=05,
start_hour=12,
end_year=2008,
end_month=02,
end_day=05,
end_hour=12,
/
&fdda
/
&domains
e_we=90,
e_sn=60,
e_vert=41,
dx=60000,
dy=60000,
/
&dft_control
/
&tc
/
&physics
mp_physics=3,
ra_lw_physics=1,
ra_sw_physics=1,
radt=60,
sf_sfclay_physics=1,
sf_surface_physics=1,
bl_pbl_physics=1,
cu_physics=1,
cudt=5,
num_soil_layers=5,
mp_zero_out=2,
co2tf=0,
/
&scm
/
&dynamics
/
&bdy_control
/
&grib2
/
&fire
/
&namelist_quilt
/
&perturbation
/
```

No edits should be needed if you are running the tutorial case without radiance data. If you plan to use the PREPBUFR-format data, change the `ob_format=1` in `&wrfvar3` in `namelist.input` and link the data as `ob.bufr`,

```
> ln -fs $DAT_DIR/ob/2008020512/gds1.t12.prepbufr.nr ob.bufr
```

Once you have changed any other necessary namelist variables, run WRFDA 3D-Var:

```
> da_wrfvar.exe >& wrfda.log
```

The file `wrfda.log` (or `rsl.out.0000`, if run in distributed-memory mode) contains important WRFDA runtime log information. Always check the log after a WRFDA run:

```
*** VARIATIONAL ANALYSIS ***
DYNAMICS OPTION: Eulerian Mass Coordinate
  alloc_space_field: domain          1,          606309816 bytes allocat
ed
WRF TILE   1 IS       1 IE       89 JS       1 JE       59
WRF NUMBER OF TILES = 1
Set up observations (ob)

Using ASCII format observation input

  scan obs ascii
end scan obs ascii
Observation summary
  ob time 1
    sound          86 global,      86 local
    synop         757 global,     750 local
    pilot          85 global,      85 local
    satem         106 global,     105 local
    geoamv       2556 global,    2499 local
    polaramv        0 global,        0 local
    airep         224 global,     221 local
    gpspw         187 global,     187 local
    gpsrf          3 global,        3 local
    metar        2416 global,    2408 local
    ships         145 global,     140 local
    ssmi_rv         0 global,        0 local
    ssmi_tb         0 global,        0 local
    ssmt1          0 global,        0 local
    ssmt2          0 global,        0 local
    qscat         2190 global,    2126 local
    profiler        61 global,      61 local
    buoy          247 global,     247 local
    bogus          0 global,        0 local
    pseudo         0 global,        0 local
    radar          0 global,        0 local
    radiance       0 global,        0 local
    airs retrieval  0 global,        0 local
    sonde_sfc       86 global,      86 local
    mtgirs         0 global,        0 local
    tamdar         0 global,        0 local

Set up background errors for regional application for cv_options = 5

Using the averaged regression coefficients for unbalanced part

WRF-Var dry control variables are:psi, chi_u, t_u and ps_u
Humidity control variable is rh

Vertical truncation for psi   = 15( 99.00%)
Vertical truncation for chi_u = 20( 99.00%)
Vertical truncation for t_u   = 29( 99.00%)
Vertical truncation for rh    = 22( 99.00%)

Scaling: var, len, ds:  0.100000E+01  0.100000E+01  0.600000E+05
Scaling: var, len, ds:  0.100000E+01  0.100000E+01  0.600000E+05
Scaling: var, len, ds:  0.100000E+01  0.100000E+01  0.600000E+05
```

```

Scaling: var, len, ds:  0.100000E+01  0.100000E+01  0.600000E+05
Scaling: var, len, ds:  0.100000E+01  0.100000E+01  0.600000E+05
Calculate innovation vector(iv)

```

Minimize cost function using CG method

```

Starting outer iteration : 1
Starting cost function: 2.53214888D+04, Gradient= 2.90675545D+02
For this outer iteration gradient target is: 2.90675545D+00

```

Iter	Cost Function	Gradient	Step
1	2.32498037D+04	2.55571188D+02	4.90384516D-02
2	2.14988144D+04	2.22354203D+02	5.36154186D-02
3	2.01389088D+04	1.62537907D+02	5.50108123D-02
4	1.93433827D+04	1.26984567D+02	6.02247687D-02
5	1.88877194D+04	9.84565874D+01	5.65160951D-02
6	1.86297777D+04	7.49071361D+01	5.32184146D-02
7	1.84886755D+04	5.41516421D+01	5.02941363D-02
8	1.84118462D+04	4.68329312D+01	5.24003071D-02
9	1.83485166D+04	3.53595537D+01	5.77476335D-02
10	1.83191278D+04	2.64947070D+01	4.70109040D-02
11	1.82984221D+04	2.06996271D+01	5.89930206D-02
12	1.82875693D+04	1.56426527D+01	5.06578447D-02
13	1.82807224D+04	1.15892153D+01	5.59631997D-02
14	1.82773339D+04	8.74778514D+00	5.04582959D-02
15	1.82751663D+04	7.22150257D+00	5.66521675D-02
16	1.82736284D+04	4.81374868D+00	5.89786400D-02
17	1.82728636D+04	3.82286871D+00	6.60104384D-02
18	1.82724306D+04	3.16737517D+00	5.92526480D-02
19	1.82721735D+04	2.23392283D+00	5.12604438D-02

Inner iteration stopped after 19 iterations

Final: 19 iter, J= 1.98187399D+04, g= 2.23392283D+00

Diagnostics

```

Final cost function J      =      19818.74

Total number of obs.      =      39800
Final value of J          =      19818.73988
Final value of Jo         =      16859.85861
Final value of Jb         =      2958.88127
Final value of Jc         =      0.00000
Final value of Je         =      0.00000
Final value of Jp         =      0.00000
Final value of Jl         =      0.00000
Final J / total num_obs   =      0.49796
Jb factor used(1)        =      1.00000      1.00000      1.00000
1.00000      1.00000
      1.00000      1.00000      1.00000      1.00000      1.00000
Jb factor used(2)        =      1.00000      1.00000      1.00000
1.00000      1.00000
      1.00000      1.00000      1.00000      1.00000      1.00000
Jb factor used(3)        =      1.00000      1.00000      1.00000
1.00000      1.00000
      1.00000      1.00000      1.00000      1.00000      1.00000
Jb factor used(4)        =      1.00000      1.00000      1.00000
1.00000      1.00000
      1.00000      1.00000      1.00000      1.00000      1.00000
Jb factor used(5)        =      1.00000      1.00000      1.00000
1.00000      1.00000
      1.00000      1.00000      1.00000      1.00000      1.00000
Jb factor used          =      1.00000
Je factor used          =      1.00000
VarBC factor used       =      1.00000

```

*** WRF-Var completed successfully ***

The file namelist.output.da (which contains the complete namelist settings) will be

generated after a successful run of `da_wrfvar.exe`. The settings appearing in `namelist.output.da`, but not specified in your `namelist.input`, are the default values from `$WRFDA_DIR/Registry/registry.var`.

After successful completion, `wrfvar_output` (the WRFDA analysis file, i.e. the new initial condition for WRF) should appear in the working directory along with a number of diagnostic files. Text files containing various diagnostics will be explained in the [WRFDA Diagnostics](#) section.

To understand the role of various important WRFDA options, try re-running WRFDA by changing different namelist options. For example, try making the WRFDA convergence criterion more stringent. This is achieved by reducing the value of “EPS” to e.g. 0.0001 by adding “EPS=0.0001” in the `namelist.input` record `&wrfvar6`. See the section [Additional WRFDA exercises](#) for more namelist options.

c. Run the Case—4D-Var

To run WRF 4D-Var, first create and enter a working directory, such as `$WRFDA_DIR/workdir`. Set the `WORK_DIR` environment variable (e.g. `setenv WORK_DIR $WRFDA_DIR/workdir`)

For the tutorial case, the analysis date is 2008020512 and the test data directories are:

```
> setenv DAT_DIR {directory where data is stored}
> ls -lr $DAT_DIR
ob/2008020512
ob/2008020513
ob/2008020514
ob/2008020515
ob/2008020516
ob/2008020517
ob/2008020518
rc/2008020512
be
```

Note: WRFDA 4D-Var is able to assimilate conventional observational data, satellite radiance BUFR data, and precipitation data. The input data format can be PREPBUFR format data or ASCII observation data, processed by OBSPROC.

Now follow the steps below:

1) Link the executable file

```
> cd $WORK_DIR
> ln -fs $WRFDA_DIR/var/da/da_wrfvar.exe .
```

2) Link the observational data, first guess, BE and LANDUSE.TBL, etc.

```
> ln -fs $DAT_DIR/ob/2008020512/ob.ascii+ ob01.ascii
> ln -fs $DAT_DIR/ob/2008020513/ob.ascii ob02.ascii
> ln -fs $DAT_DIR/ob/2008020514/ob.ascii ob03.ascii
> ln -fs $DAT_DIR/ob/2008020515/ob.ascii ob04.ascii
> ln -fs $DAT_DIR/ob/2008020516/ob.ascii ob05.ascii
```

```
> ln -fs $DAT_DIR/ob/2008020517/ob.ascii ob06.ascii
> ln -fs $DAT_DIR/ob/2008020518/ob.ascii- ob07.ascii

> ln -fs $DAT_DIR/rc/2008020512/wrfinput_d01 .
> ln -fs $DAT_DIR/rc/2008020512/wrfbdy_d01 .
> ln -fs wrfinput_d01 fg

> ln -fs $DAT_DIR/be/be.dat .
> ln -fs $WRFDA_DIR/run/LANDUSE.TBL .
> ln -fs $WRFDA_DIR/run/GENPARM.TBL .
> ln -fs $WRFDA_DIR/run/SOILPARM.TBL .
> ln -fs $WRFDA_DIR/run/VEGPARM.TBL .
> ln -fs $WRFDA_DIR/run/RTM_DATA_DBL RTM_DATA
```

3) Copy the sample namelist

```
> cp $WRFDA_DIR/var/test/4dvar/namelist.input .
```

4) Edit necessary namelist variables, link optional files

WRFDA 4D-Var has the capability to consider lateral boundary conditions as control variables as well during minimization. The namelist variable `var4d_lbc=true` turns on this capability. To enable this option, WRF 4D-Var needs not only the first guess at the beginning of the time window, but also the first guess at the end of the time window.

```
> ln -fs $DAT_DIR/rc/2008020518/wrfinput_d01 fg02
```

Please note: WRFDA beginners should not use this option until you have a good understanding of the 4D-Var lateral boundary conditions control. To disable this feature, make sure `var4d_lbc` in `namelist.input` is set to false.

If you use PREPBUFR format data, set `ob_format=1` in `&wrfvar3` in `namelist.input`. Because 12UTC PREPBUFR data only includes the data from 9UTC to 15UTC, for 4D-Var you should include 18UTC PREPBUFR data as well:

```
> ln -fs $DAT_DIR/ob/2008020512/gds1.t12.prepbufr.nr ob01.bufr
> ln -fs $DAT_DIR/ob/2008020518/gds1.t18.prepbufr.nr ob02.bufr
```

Edit `$WORK_DIR/namelist.input` to match your experiment settings. The most important namelist variables related to 4D-Var are listed below. Please refer to `README.namelist` under the `$WRFDA_DIR/var` directory. A common mistake users make is in the time information settings. The rules are: `analysis_date`, `time_window_min` and `start_xxx` in `&time_control` should always be equal to each other; `time_window_max` and `end_xxx` should always be equal to each other; and `run_hours` is the difference between `start_xxx` and `end_xxx`, which is the length of the 4D-Var time window.

```
&wrfvar1
var4d=true,
var4d_lbc=false,
var4d_bin=3600,
.....
/
.....
&wrfvar18
analysis_date="2008-02-05_12:00:00.0000",
/
.....
```



```

&wrfvar21
time_window_min="2008-02-05_12:00:00.0000",
/
.....
&wrfvar22
time_window_max="2008-02-05_18:00:00.0000",
/
.....
&time_control
run_hours=6,
start_year=2008,
start_month=02,
start_day=05,
start_hour=12,
end_year=2008,
end_month=02,
end_day=05,
end_hour=18,
interval_seconds=21600,
debug_level=0,
/
.....

```

5) Run WRF 4D-Var

```

> cd $WORK_DIR
> ./da_wrfvar.exe >& wrfda.log

```

Please note: If you utilize the lateral boundary conditions option (`var4d_lbc=true`), in addition to the analysis at the beginning of the time window (`wrfvar_output`), the analysis at the end of the time window will also be generated as `ana02`, which will be used in subsequent updating of boundary conditions before the forecast.

Radiance Data Assimilation in WRFDA

This section gives a brief description for various aspects related to radiance assimilation in WRFDA. Each aspect is described mainly from the viewpoint of usage, rather than more technical and scientific details, which will appear in a separate technical report and scientific paper. Namelist parameters controlling different aspects of radiance assimilation will be detailed in the following sections. It should be noted that this section does not cover general aspects of the assimilation process with WRFDA; these can be found in other sections of chapter 6 of this user's guide, or other WRFDA documentation.

a. Running WRFDA with radiances

In addition to the basic input files (`LANDUSE.TBL`, `fg`, `ob.ascii`, `be.dat`) mentioned in the [“Running WRFDA”](#) section, the following additional files are required for radiances: radiance data in NCEP BUFR format, `radiance_info` files, `VARBC.in`, and RTM (CRTM or RTTOV) coefficient files.

Edit `namelist.input` (Pay special attention to `&wrfvar4`, `&wrfvar14`, `&wrfvar21`, and `&wrfvar22` for radiance-related options. A very basic `namelist.input` for running the radiance test case is provided in `WRFDA/var/test/radiance/namelist.input`)

```
> ln -sf $DAT_DIR/gdas1.t00z.1bamua.tm00.bufr_d ./amsua.bufr
> ln -sf $DAT_DIR/gdas1.t00z.1bamub.tm00.bufr_d ./amsub.bufr
> ln -sf $WRFDA_DIR/var/run/radiance_info ./radiance_info # (radi-
ance_info is a directory)
> ln -sf $WRFDA_DIR/var/run/VARBC.in ./VARBC.in
(CRTM only) > ln -sf WRFDA/var/run/crtm_coeffs ./crtm_coeffs
#(crtm_coeffs is a directory)
(RTTOV only) > ln -sf your_RTTOV_path/rtcoef_rttov11/rttov7pred51L
./rttov_coeffs # (rttov_coeffs is a directory)
```

See the following sections for more details on each aspect of radiance assimilation.

b. Radiance Data Ingest

Currently, the ingest interface for NCEP BUFR radiance data is implemented in WRFDA. The radiance data are available through NCEP's public ftp server ([ftp://ftp.ncep.noaa.gov/pub/data/nccf/com/gfs/prod/gdas.\\${yyyymmddhh}](ftp://ftp.ncep.noaa.gov/pub/data/nccf/com/gfs/prod/gdas.${yyyymmddhh})) in near real-time (with a 6-hour delay) and can meet requirements for both research purposes and some real-time applications.

As of Version 3.4, WRFDA can read data from the NOAA ATOVS instruments (HIRS, AMSU-A, AMSU-B and MHS), the EOS Aqua instruments (AIRS, AMSU-A) and DMSP instruments (SSMIS). Note that NCEP radiance BUFR files are separated by instrument names (i.e., one file for each type of instrument), and each file contains global radiance (generally converted to brightness temperature) within a 6-hour assimilation window, from multi-platforms. For running WRFDA, users need to rename NCEP corresponding BUFR files (table 1) to **hirs3.bufr** (including HIRS data from NOAA-15/16/17), **hirs4.bufr** (including HIRS data from NOAA-18/19, METOP-2), **amsua.bufr** (including AMSU-A data from NOAA-15/16/18/19, METOP-2), **amsub.bufr** (including AMSU-B data from NOAA-15/16/17), **mhs.bufr** (including MHS data from NOAA-18/19 and METOP-1 and -2), **airs.bufr** (including AIRS and AMSU-A data from EOS-AQUA), **ssmis.bufr** (SSMIS data from DMSP-16, AFWA provided), **iasi.bufr** (IASI data from METOP-1 and -2) and **seviri.bufr** (SEVIRI data from Meteosat 8-10) for WRFDA filename convention. Note that the **airs.bufr** file contains not only AIRS data but also AMSU-A, which is collocated with AIRS pixels (1 AMSU-A pixel collocated with 9 AIRS pixels). Users must place these files in the working directory where the WRFDA executable is run. It should also be mentioned that WRFDA reads these BUFR radiance files directly without the use of any separate pre-processing program. All processing of radiance data, such as quality control, thinning, bias correction, etc., is carried out within WRFDA. This is different from conventional observation assimilation, which requires a pre-processing package (OBSPROC) to generate WRFDA readable ASCII files. For reading the radiance BUFR files, WRFDA must be compiled with the NCEP BUFR library (see <http://www.nco.ncep.noaa.gov/sib/decoders/BUFRLIB/>).

Table 1: NCEP and WRFDA radiance BUFR file naming convention

NCEP BUFR file names

```
gdas1.t00z.airsev.tm00.bufr_d
gdas1.t00z.1bamua.tm00.bufr_d
gdas1.t00z.1bamub.tm00.bufr_d
gdas1.t00z.atms.tm00.bufr_d
gdas1.t00z.1bh3rs3.tm00.bufr_d
gdas1.t00z.1bh3rs4.tm00.bufr_d
gdas1.t00z.mtiasi.tm00.bufr_d
gdas1.t00z.1bmhs.tm00.bufr_d
gdas1.t00z.sevcsr.tm00.bufr_d
```

WRFDA naming convention

```
airs.bufr
amsua.bufr
amsub.bufr
atms.bufr
hirs3.bufr
hirs4.bufr
iasi.bufr
mhs.bufr
seviri.bufr
```

Namelist parameters are used to control the reading of corresponding BUFR files into WRFDA. For instance, **USE_AMSUAOBS**, **USE_AMSUBOBS**, **USE_HIRS3OBS**, **USE_HIRS4OBS**, **USE_MHSOBS**, **USE_AIRSOBS**, **USE_EOS_AMSUAOBS**, **USE_SSMISOBS**, **USE_ATMSOBS**, **USE_IASIOBS**, and **USE_SEVIRIOBS** control whether or not the respective file is read. These are logical parameters that are assigned to `.FALSE.` by default; therefore they must be set to `.TRUE.` to read the respective observation file. Also note that these parameters only control whether the data is read, not whether the data included in the files is to be assimilated. This is controlled by other namelist parameters explained in the next section.

Sources for downloading these and other data can be found on the WRFDA website: http://www2.mmm.ucar.edu/wrf/users/wrfda/download/free_data.html.

c. Radiative Transfer Model

The core component for direct radiance assimilation is to incorporate a radiative transfer model (RTM) into the WRFDA system as one part of observation operators. Two widely used RTMs in the NWP community, RTTOV (developed by ECMWF and UKMET in Europe), and CRTM (developed by the Joint Center for Satellite Data Assimilation (JCSDA) in US), are already implemented in the WRFDA system with a flexible and consistent user interface. WRFDA is designed to be able to compile with any combination of the two RTM libraries, or without RTM libraries (for those not interested in radiance assimilation), by the definition of environment variables “CRTM” and “RTTOV” (see the “Installing WRFDA” section). Note, however, that at runtime the user must select one of the two or neither, via the namelist parameter **RTM_OPTION** (1 for RTTOV, the default, and 2 for CRTM).

Both RTMs can calculate radiances for almost all available instruments aboard the various satellite platforms in orbit. An important feature of the WRFDA design is that all data structures related to radiance assimilation are dynamically allocated during running time, according to a simple namelist setup. The instruments to be assimilated are controlled at run-time by four integer namelist parameters: **RTMINIT_NSENSOR** (the total number of sensors to be assimilated), **RTMINIT_PLATFORM** (the platforms IDs array to be assimilated),

lated with dimension `RTMINIT_NSENSOR`, e.g., 1 for NOAA, 9 for EOS, 10 for METOP and 2 for DMSP), `RTMINIT_SATID` (satellite IDs array) and `RTMINIT_SENSOR` (sensor IDs array, e.g., 0 for HIRS, 3 for AMSU-A, 4 for AMSU-B, 15 for MHS, 10 for SSMIS, 11 for AIRS, 16 for IASI). An example configuration for assimilating 14 of the sensors from 7 satellites is listed here:

```
RTMINIT_NSENSOR = 15 # 6 AMSUA; 3 AMSUB; 3 MHS; 1 AIRS; 1 SSMIS; 1 IASI
RTMINIT_PLATFORM = 1, 1, 1, 1, 9, 10, 1, 1, 1, 1, 1, 10, 9, 2, 10,
RTMINIT_SATID = 15, 16, 18, 19, 2, 2, 15, 16, 17, 18, 19, 2, 2, 16, 2
RTMINIT_SENSOR = 3, 3, 3, 3, 3, 3, 4, 4, 4, 15, 15, 15, 11, 10, 16,
```

The instrument triplets (platform, satellite, and sensor ID) in the namelist can be ranked in any order. More detail about the convention of instrument triples can be found on the web page http://nwpsaf.eu/deliverables/rtm/rttov_description.html or in tables 2 and 3 in the RTTOV v11 User's Guide (http://nwpsaf.eu/deliverables/rtm/docs_rttov11/users_guide_11_v1.3.pdf)

CRTM uses a different instrument-naming method, however, a conversion routine inside WRFDA is implemented such that the user interface remains the same for RTTOV and CRTM, using the same instrument triplet for both.

When running WRFDA with radiance assimilation switched on, a set of RTM coefficient files need to be loaded. For the RTTOV option, RTTOV coefficient files are to be copied or linked to a sub-directory `rttov_coeffs/` under the working directory. For the CRTM option, CRTM coefficient files are to be copied or linked to a sub-directory `crtm_coeffs/` under the working directory. Only coefficients listed in the namelist are needed. Potentially WRFDA can assimilate all sensors as long as the corresponding coefficient files are provided. In addition, necessary developments on the corresponding data interface, quality control, and bias correction are important to make radiance data assimilate properly; however, a modular design of radiance relevant routines already facilitates the addition of more instruments in WRFDA.

The RTTOV package is not distributed with WRFDA, due to licensing and supporting issues. Users need to follow the instructions at <http://research.metoffice.gov.uk/research/interproj/nwpsaf/rtm> to download the RTTOV source code and supplement coefficient files and the emissivity atlas dataset. Only RTTOV v11 can be used in WRFDA version 3.6.1, so if you have an older version you must upgrade.

As mentioned in a previous paragraph, the CRTM package is distributed with WRFDA, and is located in `$WRFDA_DIR/var/external/crtm_2.1.3`. The CRTM code in WRFDA is the same as the source code that users can download from <ftp://ftp.emc.ncep.noaa.gov/jcsda/CRTM>, with only minor modifications (mainly for ease of compilation).

d. Channel Selection

Channel selection in WRFDA is controlled by radiance ‘info’ files, located in the sub-directory `radiance_info`, under the working directory. These files are separated by satellites and sensors; e.g., `noaa-15-amsua.info`, `noaa-16-amsub.info`, `dmsp-16-ssmis.info` and so on. An example of 5 channels from `noaa-15-amsub.info` is shown below. The fourth column is used by WRFDA to control when to use a corresponding channel. Channels with the value “-1” in the fourth column indicate that the channel is “not assimilated,” while the value “1” means “assimilated.” The sixth column is used by WRFDA to set the observation error for each channel. Other columns are not used by WRFDA. It should be mentioned that these error values might not necessarily be optimal for your applications. It is the user’s responsibility to obtain the optimal error statistics for his/her own applications.

Sensor	channel	IR/MW	use	idum	varch	polarization(0:vertical;1:horizontal)
415	1	1	-1	0	0.5500000000E+01	0.0000000000E+00
415	2	1	-1	0	0.3750000000E+01	0.0000000000E+00
415	3	1	1	0	0.3500000000E+01	0.0000000000E+00
415	4	1	-1	0	0.3200000000E+01	0.0000000000E+00
415	5	1	1	0	0.2500000000E+01	0.0000000000E+00

e. Bias Correction

Satellite radiance is generally considered to be biased with respect to a reference (e.g., background or analysis field in NWP assimilation) due to systematic error of the observation itself, the reference field, and RTM. Bias correction is a necessary step prior to assimilating radiance data. There are two ways of performing bias correction in WRFDA. One is based on the Harris and Kelly (2001) method, and is carried out using a set of coefficient files pre-calculated with an off-line statistics package, which was applied to a training dataset for a month-long period. The other is Variational Bias Correction (VarBC). Only VarBC is introduced here, and recommended for users because of its relative simplicity in usage.

f. Variational Bias Correction

Getting started with VarBC

To use VarBC, set the namelist option **USE_VARBC** to TRUE and have the `VARBC.in` file in the working directory. `VARBC.in` is a VarBC setup file in ASCII format. A template is provided with the WRFDA package (`$WRFDA_DIR/var/run/VARBC.in`).

Input and Output files

All VarBC input is passed through a single ASCII file called `VARBC.in`. Once WRFDA has run with the VarBC option switched on, it will produce a `VARBC.out` file in a similar ASCII format. This output file will then be used as the input file for the next assimilation cycle.

Coldstart

Coldstarting means starting the VarBC from scratch; i.e. when you do not know the values of the bias parameters.

The Coldstart is a routine in WRFDA. The bias predictor statistics (mean and standard deviation) are computed automatically and will be used to normalize the bias parameters. All coldstart bias parameters are set to zero, except the first bias parameter (= simple offset), which is set to the mode (=peak) of the distribution of the (uncorrected) innovations for the given channel.

A threshold of a number of observations can be set through the namelist option **VARBC_NOBSMIN** (default = 10), under which it is considered that not enough observations are present to keep the Coldstart values (i.e. bias predictor statistics and bias parameter values) for the next cycle. In this case, the next cycle will do another Coldstart.

Background Constraint for the bias parameters

The background constraint controls the inertia you want to impose on the predictors (i.e. the smoothing in the predictor time series). It corresponds to an extra term in the WRFDA cost function.

It is defined through an integer number in the `VARBC.in` file. This number is related to a number of observations; the bigger the number, the more inertia constraint. If these numbers are set to zero, the predictors can evolve without any constraint.

Scaling factor

The VarBC uses a specific preconditioning, which can be scaled through the namelist option **VARBC_FACTOR** (default = 1.0).

Offline bias correction

The analysis of the VarBC parameters can be performed "offline" ; i.e. independently from the main WRFDA analysis. No extra code is needed. Just set the following `MAX_VERT_VAR*` namelist variables to be 0, which will disable the standard control variable and only keep the VarBC control variable.

```
MAX_VERT_VAR1=0.0
MAX_VERT_VAR2=0.0
MAX_VERT_VAR3=0.0
MAX_VERT_VAR4=0.0
MAX_VERT_VAR5=0.0
```

Freeze VarBC

In certain circumstances, you might want to keep the VarBC bias parameters constant in time ("frozen"). In this case, the bias correction is read and applied to the innovations, but it is not updated during the minimization. This can easily be achieved by setting the namelist options:

```
USE_VARBC=false  
FREEZE_VARBC=true
```

Passive observations

Some observations are useful for preprocessing (e.g. Quality Control, Cloud detection) but you might not want to assimilate them. If you still need to estimate their bias correction, these observations need to go through the VarBC code in the minimization. For this purpose, the VarBC uses a separate threshold on the QC values, called "qc_varbc_bad". This threshold is currently set to the same value as "qc_bad", but can easily be changed to any ad hoc value.

g. Other namelist variables to control radiance assimilation

RAD_MONITORING (30)

Integer array of dimension RTMINIT_NSENSOR, 0 for assimilating mode, 1 for monitoring mode (only calculates innovation).

THINNING

Logical, TRUE will perform thinning on radiance data.

THINNING_MESH (30)

Real array with dimension RTMINIT_NSENSOR, values indicate thinning mesh (in km) for different sensors.

QC_RAD

Logical, controls if quality control is performed, always set to TRUE.

WRITE_IV_RAD_ASCII

Logical, controls whether to output observation-minus-background (O-B) files, which are in ASCII format, and separated by sensors and processors.

WRITE_OA_RAD_ASCII

Logical, controls whether to output observation-minus-analysis (O-A) files (including also O-B information), which are in ASCII format, and separated by sensors and processors.

USE_ERROR_FACTOR_RAD

Logical, controls use of a radiance error tuning factor file (`radiance_error.factor`) which is created with empirical values, or generated using a variational tuning method (Desroziers and Ivanov, 2001).

ONLY_SEA_RAD

Logical, controls whether only assimilating radiance over water.

TIME_WINDOW_MIN

String, e.g., "2007-08-15_03:00:00.0000", start time of assimilation time window

TIME_WINDOW_MAX

String, e.g., "2007-08-15_09:00:00.0000", end time of assimilation time window

USE_ANTCORR (30)

Logical array with dimension RTMINIT_NSENSOR, controls if performing Antenna Correction in CRTM.

USE_CLDDET_MMR

Logical, controls whether using the MMR scheme to conduct cloud detection for infrared radiance.

USE_CLDDET_ECMWF

Logical, controls whether using the ECMWF scheme to conduct cloud detection for infrared radiance.

AIRS_WARMEST_FOV

Logical, controls whether using the observation brightness temperature for AIRS Window channel #914 as criterium for GSI thinning.

USE_CRTM_KMATRIX

Logical, controls whether using the CRTM K matrix rather than calling CRTM TL and AD routines for gradient calculation.

USE_RTTOV_KMATRIX

Logical, controls whether using the RTTOV K matrix rather than calling RTTOV TL and AD routines for gradient calculation.

RTTOV_EMIS_ATLAS_IR

Integer, controls the use of the IR emissivity atlas.

Emissivity atlas data (should be downloaded separately from the RTTOV web site) need to be copied or linked under a sub-directory of the working directory (`emis_data`) if RTTOV_EMIS_ATLAS_IR is set to 1.

RTTOV_EMIS_ATLAS_MW

Integer, controls the use of the MW emissivity atlas.

Emissivity atlas data (should be downloaded separately from the RTTOV web site) need to be copied or linked under a sub-directory of the working directory (`emis_data`) if RTTOV_EMIS_ATLAS_MW is set to 1 or 2.

h. Diagnostics and Monitoring

(1) Monitoring capability within WRFDA

Run WRFDA with the `rad_monitoring` namelist parameter in record `wrfvar14` in `namelist.input`.

0 means assimilating mode. Innovations (O minus B) are calculated and data are used in minimization.

1 means monitoring mode: innovations are calculated for diagnostics and monitoring. Data are not used in minimization.

The value of `rad_monitoring` should correspond to the value of `rtminit_nsensor`. If `rad_monitoring` is not set, then the default value of 0 will be used for all sensors.

(2) Outputting radiance diagnostics from WRFDA

Run WRFDA with the following namelist options in record `wrfvar14` in `namelist.input`.

`write_iv_rad_ascii`

Logical. TRUE to write out (observation-background, etc.) diagnostics information in plain-text files with the prefix 'inv,' followed by the instrument name and the processor id. For example, `01_inv_noaa-17-amsub.0000` (01 is outerloop index, 0000 is processor index)

`write_oa_rad_ascii`

Logical. TRUE to write out (observation-background, observation-analysis, etc.) diagnostics information in plain-text files with the prefix 'oma,' followed by the instrument name and the processor id. For example, `01_oma_noaa-18-mhs.0001`

Each processor writes out the information for one instrument in one file in the WRFDA working directory.

(3) Radiance diagnostics data processing

One of the 44 executables compiled as part of the WRFDA system is the file `da_rad_diags.exe`. This program can be used to collect the `01_inv*` or `01_oma*` files and write them out in netCDF format (one instrument in one file with prefix `diags` followed by the instrument name, analysis date, and the suffix `.nc`) for easier data viewing, handling and plotting with netCDF utilities and NCL scripts. See `WRFDA/var/da/da_monitor/README` for information on how to use this program.

(4) Radiance diagnostics plotting

Two NCL scripts (available as part of the WRFDA Tools package, which can be downloaded at <http://www2.mmm.ucar.edu/wrf/users/wrfda/download/tools.html>)

are used for plotting: `$TOOLS_DIR/var/graphics/ncl/plot_rad_diags.ncl` and `$TOOLS_DIR/var/graphics/ncl/advance_cymdh.ncl`. The NCL scripts can be run from a shell script, or run alone with an interactive `ncl` command (the NCL script and set the plot options must be edited, and the path of `advance_cymdh.ncl`, a date-advancing script loaded in the main NCL plotting script, may need to be modified).

Steps (3) and (4) can be done by running a single ksh script (also in the WRFDA Tools package: `$TOOLS_DIR/var/scripts/da_rad_diags.ksh`) with proper settings. In addition to the settings of directories and what instruments to plot, there are some useful plotting options, explained below.

<code>setenv OUT_TYPE=ncgm</code>	ncgm or pdf pdf will be much slower than ncgm and generate huge output if plots are not split. But pdf has higher resolution than ncgm.
<code>setenv PLOT_STATS_ONLY=false</code>	true or false true: only statistics of OMB/OMA vs channels and OMB/OMA vs dates will be plotted. false: data coverage, scatter plots (before and after bias correction), histograms (before and after bias correction), and statistics will be plotted.
<code>setenv PLOT_OPT=sea_only</code>	all, sea_only, land_only
<code>setenv PLOT_QCED=false</code>	true or false true: plot only quality-controlled data false: plot all data
<code>setenv PLOT_HISTO=false</code>	true or false: switch for histogram plots
<code>setenv PLOT_SCATT=true</code>	true or false: switch for scatter plots
<code>setenv PLOT_EMISS=false</code>	true or false: switch for emissivity plots
<code>setenv PLOT_SPLIT=false</code>	true or false true: one frame in each file false: all frames in one file
<code>setenv PLOT_CLOUDY=false</code>	true or false true: plot cloudy data. Cloudy data to be plotted are defined by <code>PLOT_CLOUDY_OPT</code> (si or clwp), <code>CLWP_VALUE</code> , <code>SI_VALUE</code> settings.
<code>setenv PLOT_CLOUDY_OPT=si</code>	si or clwp clwp: cloud liquid water path from model si: scatter index from obs, for amsua, amsub and mhs only
<code>setenv CLWP_VALUE=0.2</code>	only plot points with clwp \geq clwp_value (when clwp_value > 0) clwp > clwp_value (when clwp_value = 0)
<code>setenv SI_VALUE=3.0</code>	

(5) Evolution of VarBC parameters


NCL scripts (also in the WRFDA Tools package:
`$TOOLS_DIR/var/graphics/ncl/plot_rad_varbc_param.ncl` and
`$TOOLS_DIR/var/graphics/ncl/advance_cymdh.ncl`) are used for plotting the
 evolution of VarBC parameters.

Precipitation Data Assimilation in WRFDA 4D-Var

The assimilation of precipitation observations in WRFDA 4D-Var is described in this section. Currently, WRFPLUS has already included the adjoint and tangent linear codes of large-scale condensation and cumulus scheme, therefore precipitation data can be assimilated directly in 4D-Var. Users who are interested in the scientific detail of 4D-Var assimilation of precipitation should refer to related scientific papers, as this section is only a basic guide to running WRFDA Precipitation Assimilation. This section instructs users on data processing, namelist variable settings, and how to run WRFDA 4D-Var with precipitation observations.

a. Prepare precipitation observations for 4D-Var

WRFDA 4D-Var can assimilate NCEP Stage IV radar and gauge precipitation data. NCEP Stage IV archived data are available on the NCAR CODIAC web page at: <http://data.eol.ucar.edu/codiad/dss/id=21.093> (for more information, please see the NCEP Stage IV Q&A Web page at <http://www.emc.ncep.noaa.gov/mmb/ylin/pcpanl/QandA/>). The original precipitation data are at 4-km resolution on a polar-stereographic grid. Hourly, 6-hourly and 24-hourly analyses are available. The following image shows the accumulated 6-h precipitation for the tutorial case.

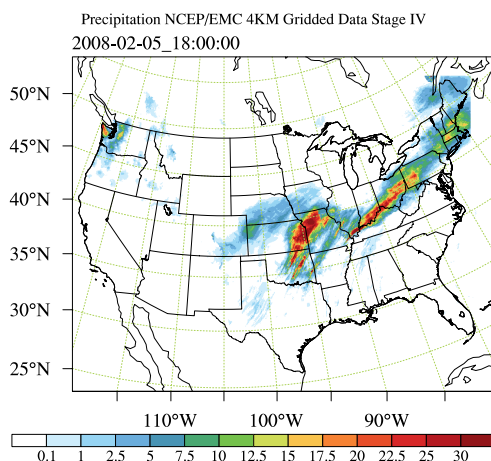

It should be mentioned that the NCEP Stage IV archived data is in GRIB1 format and it cannot be ingested into the WRFDA directly. A tool “precip_converter” is provided to reformat GRIB1 ob-

servations into the WRFDA-readable ASCII format. It can be downloaded from the WRFDA users page at http://www2.mmm.ucar.edu/wrf/users/wrfda/download/precip_converter.tar.gz. The NCEP GRIB libraries, w3 and g2 are required to compile the precip_converter utility. These libraries are available for download from NCEP at <http://www.nco.ncep.noaa.gov/pmb/codes/GRIB2/>. The output file to the precip_converter utility is named in the format `ob.rain.yyyymmddhh.xxh`; The 'yyymmddhh' in the file name is the ending hour of the accumulation period, and 'xx' (=01,06 or 24) is the accumulating time period.

For users wishing to use their own observations instead of NCEP Stage IV, it is the user's responsibility to write a Fortran main program and call subroutine `writerainobs` (in `write_rainobs.f90`) to generate their own precipitation data. For more information please refer to the README file in the `precip_converter` directory.

b. Running WRFDA 4D-Var with precipitation observations

WRFDA 4D-Var is able to assimilate hourly, 3-hourly and 6-hourly precipitation data. According to experiments and related scientific papers, 6-hour precipitation accumulations are the ideal observations to be assimilated, as this leads to better results than directly assimilating hourly data.

The tutorial example is for assimilating 6-hour accumulated precipitation. In your working directory, link all the necessary files as follows,

```
> ln -fs $WRFDA_DIR/var/da/da_wrfvar.exe .
> ln -fs $DAT_DIR/rc/2008020512/wrfinput_d01 .
> ln -fs $DAT_DIR/rc/2008020512/wrfbdy_d01 .
> ln -fs wrfinput_d01 fg
> ln -fs $DAT_DIR/be/be.dat .
> ln -fs $WRFDA_DIR/run/LANDUSE.TBL ./LANDUSE.TBL
> ln -fs $WRFDA_DIR/run/RRTM_DATA_DBL ./RRTM_DATA
> ln -fs $DAT_DIR/ob/2008020518/ob.rain.2008020518.06h ob07.rain
```

Note: The reason why the observation `ob.rain.2008020518.06h` is linked as `ob07.rain` will be explained in section d.

Edit `namelist.input` and pay special attention to `&wrfvar1` and `&wrfvar4` for precipitation-related options.

```
&wrfvar1
var4d=true,
var4d_lbc=true,
var4d_bin=3600,
var4d_bin_rain=21600,
.....
/
.....
&wrfvar4
use_rainobs=true,
thin_rainobs=true,
thin_mesh_conv=30*20.,
/
```

Then, run 4D-Var in serial or parallel mode,

```
>./da_wrfvar.exe >& wrfda.log
```

c. Namelist variables to control precipitation assimilation

var4d_bin_rain

Precipitation observation sub-window length for 4D-Var. It does not need to be consistent with var4d_bin.

thin_rainobs

Logical, TRUE will perform thinning on precipitation data.

thin_mesh_conv

Specify thinning mesh size (in km)

d. Properly linking observation files

In section b, ob.rain.2008020518.06h is linked as ob07.rain. The number 07 is assigned according to the following rule:

$$x=i*(var4d_bin_rain/var4d_bin)+1,$$

Here, i is the sequence number of the observation.

for $x < 10$, the observation file should be renamed as ob0x.rain;

for $x \geq 10$, it should be renamed as obx.rain

In the example above, 6-hour accumulated precipitation data is assimilated in 6-hour time window. In the namelist, values should be set at var4d_bin=3600 and var4d_bin_rain=21600, and there is one observation file (i.e., $i=1$) in the time window, Thus the value of x is 7. The file ob.rain.2008020518.06h should be renamed as ob07.rain.

Let us take another example for how to rename observation files for 3-hourly precipitation data in 6-hour time window. The sample namelist is as follows,

```
&wrfvar1
var4d=true,
var4d_lbc=true,
var4d_bin=3600,
var4d_bin_rain=10800,
.....
/
```

There are two observation files, ob.rain.2008020515.03h and ob.rain.2008020518.03h. For the first file ($i=1$) ob.rain.2008020515.03h, it should be renamed as ob04.rain, and the second file ($i=2$) renamed as ob07.rain.

Updating WRF Boundary Conditions

a. Lateral boundary conditions

When using WRFDA output to run a WRF forecast, it is essential that you update the WRF lateral boundary conditions (contained in the file `wrfbdy_01`, created by `real.exe`) to match your new analysis. Domain-1 (`wrfbdy_d01`) must be updated to be consistent with the new WRFDA initial condition (analysis). This is absolutely essential. For nested domains, domain-2, domain-3, etc., the lateral boundary conditions are provided by their parent domains, so no lateral boundary update is needed for these domains. The update procedure is performed by the WRFDA utility called `da_update_bc.exe`, and after compilation can be found in `$WRFDA_DIR/var/build`.

`da_update_bc.exe` requires three input files: the WRFDA analysis (`wrfvar_output`), the `wrfbdy` file from `real.exe`, and a namelist file: `parame.in`. To run `da_update_bc.exe` to update lateral boundary conditions, follow the steps below:

```
> cd $WRFDA_DIR/var/test/update_bc
> cp -p $DAT_DIR/rc/2008020512/wrfbdy_d01 .
    (IMPORTANT: make a copy of wrfbdy_d01, as the wrf_bdy_file will be over-
    written by da_update_bc.exe)
> vi parame.in
&control_param
da_file           = '../tutorial/wrfvar_output'
wrf_bdy_file      = './wrfbdy_d01'
domain_id         = 1
debug             = .true.
update_lateral_bdy = .true.
update_low_bdy    = .false.
update_lsm        = .false.
iswater           = 16
var4d_lbc         = .false.
/

> ln -sf $WRFDA_DIR/var/da/da_update_bc.exe .
> ./da_update_bc.exe
```

At this stage, you should have the files `wrfvar_output` and `wrfbdy_d01` in your WRFDA working directory. They are the WRFDA updated initial and boundary condition files for any subsequent WRF model runs. To use, link a copy of `wrfvar_output` and `wrfbdy_d01` to `wrfinput_d01` and `wrfbdy_d01`, respectively, in your WRF working directory.

You should also see two additional output files: `fort.11` and `fort.12`. These contain information about the changes made to `wrfbdy_01`.

```
&control_param
da_file           = '../tutorial/wrfvar_output'
wrf_bdy_file      = './wrfbdy_d01'
wrf_input         = '$DAT_DIR/rc/2008020512/wrfinput_d01'
domain_id         = 1
```

```

debug                = .true.
update_lateral_bdy   = .true.
update_low_bdy       = .true.
update_lsm           = .false.
var4d_lbc            = .false.
/

```

b. Cycling with WRF and WRFDA (warm-start)

In cycling mode (warm-start), the lower boundary in the first guess file also needs to be updated based on the information from the wrfinput file, generated by WPS/real.exe at analysis time. If in cycling mode (especially if you are doing radiance data assimilation and there are SEA ICE or SNOW in your domain), it is recommended that **before** you run WRFDA, you run da_update_bc.exe with the following namelist options:

```

da_file              = './fg'
wrf_input            = './wrfinput_d01'
update_lateral_bdy   = .false.
update_low_bdy       = .true.
iswater              = 16

```

Note: “iswater” (water point index) is 16 for USGS LANDUSE and 17 for MODIS LANDUSE.

This creates a lower-boundary **updated** first guess (da_file will be overwritten by da_update_bc with updated lower boundary conditions from wrf_input). Then, after WRFDA has finished, run da_update_bc.exe again with the following namelist options:

```

da_file              = './wrfvar_output'
wrf_bdy_file         = './wrfbdy_d01'
update_lateral_bdy   = .true.
update_low_bdy       = .false.

```

This updates the lateral boundary conditions (wrf_bdy_file will be overwritten by da_update_bc with lateral boundary conditions from da_file).

As mentioned previously, lateral boundary conditions for child domains (wrfinput_02, wrfinput_03, etc.) come from the respective parent domains, so update_bc is not necessary after running WRFDA. However, in a cycling procedure, the lower boundaries in each of the nested domains’ WRFDA analysis files still need to be updated. In these cases, you must set the namelist variable, domain_id > 1 (default is 1 for domain-1) and provide the appropriate wrfinput file (wrf_input = './wrfinput_d02' for domain 2, for instance).

c. WRFDA 4DVAR with lateral boundary conditions as control variables

If you activate the var4d_lbc option in a WRF 4D-Var run, in addition to the above-mentioned files you will also need the ana02 file from the WRFDA working directory. In parame.in, set var4d_lbc to TRUE and use “da_file_02” to point to the location of the ana02 file.

```
da_file_02      = './ana02'
var4d_lbc       = .true.
```

Running gen_be

Users have three choices to define the background error covariance (BE). We call them CV3, CV5, and CV6. With CV3 and CV5, the background errors are applied to the same set of the control variables, stream function, unbalanced potential velocity, unbalanced temperature, unbalanced surface pressure, and pseudo-relative-humidity. However, for CV6 the moisture control variable is the unbalanced part of pseudo-relative-humidity. With CV3, the control variables are in physical space while with CV5 and CV6, the control variables are in eigenvector space. The major difference between these two kinds of BE is the vertical covariance; CV3 uses the vertical recursive filter to model the vertical covariance but CV5 and CV6 use an empirical orthogonal function (EOF) to represent the vertical covariance. The recursive filters to model the horizontal covariance are also different with these BEs. We have not conducted the systematic comparison of the analyses based on these BEs. However, CV3 (a BE file provided with our WRFDA system) is a global BE and can be used for any regional domain, while CV5 and CV6 BE's are domain-dependent, which should be generated based on the forecast data from the same domain. At this time, it is hard to tell which BE is better; the impact on analysis may vary from case to case.

CV3 is the NCEP background error covariance. It is estimated in grid space by what has become known as the NMC method (Parrish and Derber 1992). The statistics are estimated with the differences of 24 and 48-hour GFS forecasts with T170 resolution, valid at the same time for 357 cases, distributed over a period of one year. Both the amplitudes and the scales of the background error have to be tuned to represent the forecast error in the estimated fields. The statistics that project multivariate relations among variables are also derived from the NMC method.

The variance of each variable, and the variance of its second derivative, are used to estimate its horizontal scales. For example, the horizontal scales of the stream function can be estimated from the variance of the vorticity and stream function.

The vertical scales are estimated with the vertical correlation of each variable. A table is built to cover the range of vertical scales for the variables. The table is then used to find the scales in vertical grid units. The filter profile and the vertical correlation are fitted locally. The scale of the best fit from the table is assigned as the scale of the variable at that vertical level for each latitude. Note that the vertical scales are locally defined so that the negative correlation further away, in the vertical direction, is not included.

Theoretically, CV3 BE is a generic background error statistics file, which can be used for any case. It is quite straightforward to use CV3 in your own case. To use the CV3 BE file in your case, set `cv_options=3` in `&wrfvar7` in `namelist.input` in your working directory, and use the `be.dat` is located in `WRFDA/var/run/be.dat.cv3`.

To use CV5 or CV6 background error covariance, it is necessary to generate your domain-specific background error statistics with the `gen_be` utility. The background error statistics file, supplied with the tutorial test case, can NOT be used for your applications.

The Fortran main programs for `gen_be` can be found in `WRFDA/var/gen_be`. The executables of `gen_be` should have been created when you compiled the WRFDA code (as described earlier). The scripts to run these codes are in `WRFDA/var/scripts/gen_be`.

The input data for `gen_be` are WRF forecasts, which are used to generate model perturbations, used as a proxy for estimates of forecast error. For the NMC-method, the model perturbations are differences between forecasts (e.g. T+24 minus T+12 is typical for regional applications, T+48 minus T+24 for global) valid at the same time. Climatological estimates of background error may then be obtained by averaging these forecast differences over a period of time (e.g. one month). Given input from an ensemble prediction system (EPS), the inputs are the ensemble forecasts, and the model perturbations created are the transformed ensemble perturbations. The `gen_be` code has been designed to work with either forecast difference or ensemble-based perturbations. The former is illustrated in this tutorial example.

It is important to include forecast differences, from at least 00Z and 12Z through the period, to remove the diurnal cycle (i.e. do not run `gen_be` using just 00Z or 12Z model perturbations alone).

The inputs to `gen_be` are netCDF WRF forecast output ("wrfout") files at specified forecast ranges. To avoid unnecessary large single data files, it is assumed that all forecast ranges are output to separate files. For example, if we wish to calculate BE statistics using the NMC-method with (T+24)-(T+12) forecast differences (default for regional) then by setting the WRF `namelist.input` options `history_interval=720`, and `frames_per_outfile=1` we get the necessary output datasets. Then the forecast output files should be arranged as follows: directory name is the forecast initial time, time info in the file name is the forecast valid time. `2008020512/wrfout_d01_2008-02-06_00:00:00` means a 12-hour forecast valid at `2008020600`, initialized at `2008020512`.

Example dataset for a test case (90 x 60 x 41 gridpoints) can be downloaded from <http://www2.mmm.ucar.edu/wrf/users/wrfda/download/testdata.html>. Untar the `gen_be_forecasts_20080205.tar.gz` file. You will have:

```
>ls $FC_DIR
-rw-r--r-- 1 users 11556492 2008020512/wrfout_d01_2008-02-06_00:00:00
-rw-r--r-- 1 users 11556492 2008020512/wrfout_d01_2008-02-06_12:00:00
-rw-r--r-- 1 users 11556492 2008020600/wrfout_d01_2008-02-06_12:00:00
-rw-r--r-- 1 users 11556492 2008020600/wrfout_d01_2008-02-07_00:00:00
-rw-r--r-- 1 users 11556492 2008020612/wrfout_d01_2008-02-07_00:00:00
-rw-r--r-- 1 users 11556492 2008020612/wrfout_d01_2008-02-07_12:00:00
```

In the above example, only 1 day (12Z 05 Feb to 12Z 06 Feb. 2008) of forecasts, every 12 hours is supplied to `gen_be_wrapper` to estimate forecast error covariance. It is only for demonstration. The minimum number of forecasts required depends on the applica-

tion, number of grid points, etc. Month-long (or longer) datasets are typical for the NMC-method. Generally, at least a 1-month dataset should be used.

Under `WRFDA/var/scripts/gen_be`, `gen_be_wrapper.ksh` is used to generate the BE data. The following variables need to be set to fit your case:

```
export WRFVAR_DIR=/users/noname/work/code/trunk/phoenix_g95_opt/WRFDA
export START_DATE=2008020612 # the first perturbation valid date
export END_DATE=2008020700   # the last perturbation valid date
export NUM_LEVELS=40         # e_vert - 1
export BIN_TYPE=5
export FC_DIR=/users/noname/work/exps/friendlies/expt/fc # where wrf forecasts are
export RUN_DIR=/users/noname/work/exps/friendlies/gen_be${BIN_TYPE}
```


Note: The `START_DATE` and `END_DATE` are perturbation valid dates. As shown in the forecast list above, when you have 24-hour and 12-hour forecasts initialized at 2008020512, through 2008020612, the first and final forecast difference valid dates are 2008020612 and 2008020700, respectively.

Note: The forecast dataset should be located in `$FC_DIR`. Then type:

```
> gen_be_wrapper.ksh
```

Once the `gen_be_wrapper.ksh` run is completed, the `be.dat` can be found under the `$RUN_DIR` directory.

To get a clear idea about what is included in `be.dat`, the script `gen_be_plot_wrapper.ksh` may be used. This plots various data in `be.dat`; for example:

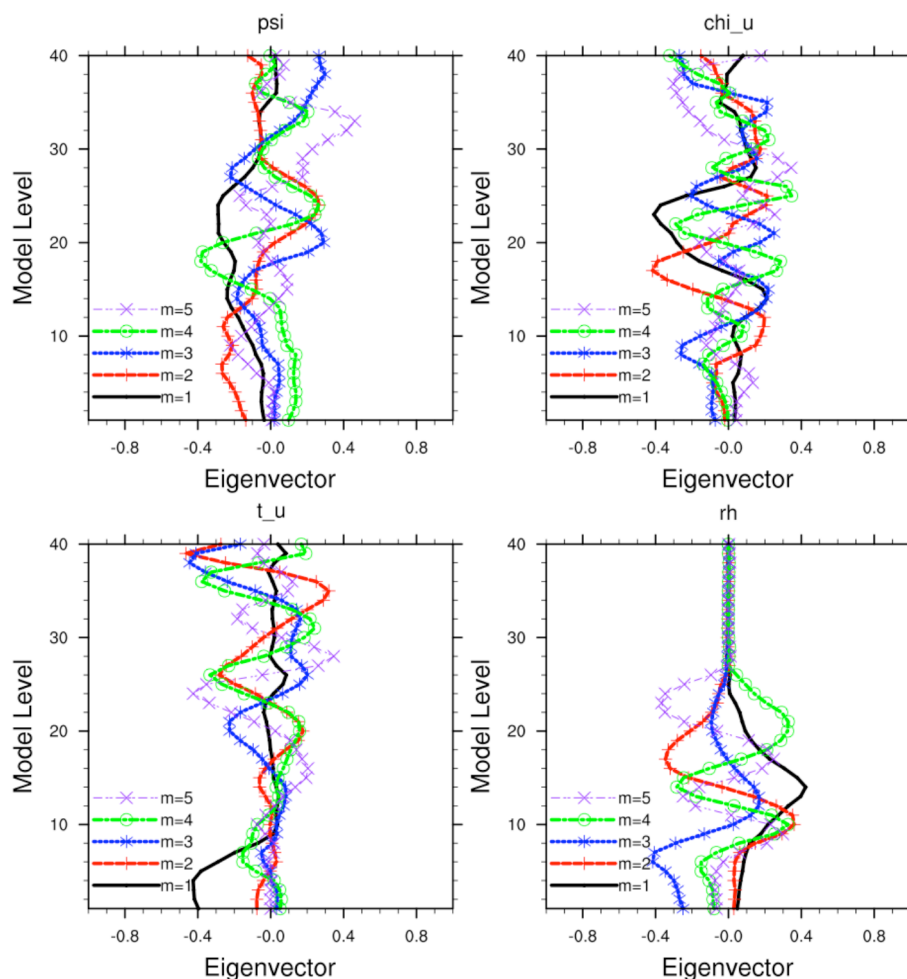

Additional WRFDA Exercises:

a. Single Observation response in WRFDA:

With the single observation test, you may get some ideas of how the background and observation error statistics work in the model variable space. A single observation test is done in WRFDA by setting `num_pseudo=1`, along with other pre-specified values in `record &wrfvar15` and `&wrfvar19` of `namelist.input`.

With the settings shown below, WRFDA generates a single observation with a pre-specified *innovation* (Observation – First Guess) value at the desired location; e.g. at (in terms of grid coordinate) 23x23, level 14 for “U” observation with error characteristics 1 m/s, and innovation size = 1.0 m/s.

```
&wrfvar15
num_pseudo = 1,
pseudo_x = 23.0,
pseudo_y = 23.0,
pseudo_z = 14.0,
```

```
pseudo_err = 1.0,  
pseudo_val = 1.0,  
/  
&wrfvar19  
pseudo_var = "u", (Note: pseudo_var can be u, v, t, p, q.  
If pseudo_var is q, then the reasonable values of pseudo_err and  
pseudo_val are 0.001)  
/  

```

Note: You may wish to repeat this exercise for other observations, like temperature “t”, pressure “p”, specific humidity “q”, and so on.

b. Response of BE length scaling parameter:

Run the single observation test with the following additional parameters in record &wrfvar7 of namelist.input.

```
&wrfvar7  
len_scaling1 = 0.5, # reduce psi length scale by 50%  
len_scaling2 = 0.5, # reduce chi_u length scale by 50%  
len_scaling3 = 0.5, # reduce T length scale by 50%  
len_scaling4 = 0.5, # reduce q length scale by 50%  
len_scaling5 = 0.5, # reduce Ps length scale by 50%  
/  

```

Note: You may wish to try the response of an individual variable by setting one parameter at a time. Note the spread of analysis increment.

c. Response of changing BE variance:

Run the single observation test with the following additional parameters in record &wrfvar7 of namelist.input.

```
&wrfvar7  
var_scaling1 = 0.25, # reduce psi variance by 75%  
var_scaling2 = 0.25, # reduce chi_u variance by 75%  
var_scaling3 = 0.25, # reduce T variance by 75%  
var_scaling4 = 0.25, # reduce q variance by 75%  
var_scaling5 = 0.25, # reduce Ps variance by 75%  
/  

```

Note: You may wish to try the response of individual variable by setting one parameter at a time. Note the magnitude of analysis increments.

d. Response of convergence criteria:

Run the tutorial case with

```
&wrfvar6  
eps = 0.0001,  
/  

```

You may wish to compare various diagnostics with an earlier run.

e. Response of outer loop on minimization:

Run the tutorial case with

```
&wrfvar6
max_ext_its = 2,
/
```

With this setting, the “outer loop” for the minimization procedure will be activated. You may wish to compare various diagnostics with an earlier run.

Note: The Maximum permissible value for “MAX_EXT_ITS” is 10.

f. Response of suppressing particular types of data in WRFDA:

The types of observations that WRFDA gets to use actually depend on what is included in the observation file and the WRFDA namelist settings. For example, if you have SYNOP data in the observation file, you can suppress its usage in WRFDA by setting `use_synopobs=false` in record `&wrfvar4` of `namelist.input`. It is OK if there are no SYNOP data in the observation file and `use_synopobs=true`.

Turning on and off certain types of observations is widely used for assessing the impact of observations on data assimilations.

Note: It is important to go through the default “use_*” settings in record `&wrfvar4` in `WRFDA/Registry/registry.var` to know what observations are activated in default.

g. Utilizing wind speed/direction assimilation:

If observations containing wind speed/direction information are provided to WRFDA, you can assimilate these observations directly, rather than converting the wind to its u- and v-components prior to assimilation.

Wind speed/direction assimilation is controlled by the following namelist options:

<code>&wrfvar2</code>	
<code>wind_sd</code>	true: wind values which are reported as speed/direction will be assimilated as such false: (default behavior) all wind obs are converted to u/v prior to assimilation
<code>qc_rej_both</code>	true: if either u or v (spd or dir) do not pass quality control, both obs are rejected false: (default behavior) qc on wind obs is handled individually
<code>&wrfvar5</code>	
<code>max_omb_spd</code>	Max absolute value of innovation for wind speed obs in m/s; greater than this and the innovation will be set to zero (default: 100.0)
<code>max_omb_dir</code>	Max absolute value of innovation for wind direction obs in degrees; greater than this and the innovation will be set to zero (default: 1000.0)

The following settings only matter if `check_max_iv=true` (if innovation is greater than observation error times the error factor listed below, the observation will be rejected):

```
&wrfvar5
max_error_spd  Speed error factor (default: 5.0)
max_error_dir  Direction error factor (default: 5.0)
```

The assimilation of wind speed/direction can also be controlled by observation type, using the following variables:

```
&wrfvar2
wind_sd_airep      Aircraft reports
wind_sd_buoy       Buoy reports
wind_sd_geoamv     Geostationary satellite atmospheric motion vectors
wind_sd_metar      METAR reports
wind_sd_mtgirs     Meteosat Third Generation
wind_sd_pilot      Pilot reports
wind_sd_polaramv   Polar satellite atmospheric motion vectors
wind_sd_profiler   Wind profiler reports
wind_sd_qscat      QuikScat reports
wind_sd_ships      Ship reports
wind_sd_sound      Sounding reports
wind_sd_synop      Synoptic reports
wind_sd_tamdar     TAMDAR reports
```

true: wind values which are reported as speed/direction will be assimilated as such
false: (default behavior) all wind obs are converted to u/v prior to assimilation

```
wind_stats_sd      Assimilate wind in u/v format, but output speed/direction statistics
```

Further detail about this method can be found in the following publication:

Huang, X.-Y., F. Gao, N. A. Jacobs, and H. Wang, 2013: Assimilation of wind speed and direction observations: a new formulation and results from idealised experiments. *Tellus A*, 65, 19936, doi:10.3402/tellusa.v65i0.19936.

WRFDA with Multivariate Background Error (MBE) Statistics

A new control variable option to implement multivariate background error (MBE) statistics in WRFDA has been introduced. It may be activated by setting the namelist variable `cv_options=6`. This option introduces six additional correlation coefficients in the definition of the balanced part of analysis control variables. Thus with this implementation, moisture analysis is multivariate, in the sense that temperature and wind may lead to moisture increments, and vice-versa. The `gen_be` utility has also been updated to compute the desired MBE statistics required for this option. The updates include basic source code, scripts, and graphics to display some important diagnostics about MBE statistics. Further details may be seen at:

http://www2.mmm.ucar.edu/wrf/users/wrfda/Docs/WRFDA_updated_for_cv6.pdf

a. How to generate multivariate background error statistics for WRFDA

Multivariate background error statistics for WRFDA is generated by executing a top-level script, `gen_be/wrapper_gen_be_gsi.ksh`, residing under `SCRIPTS_DIR` via a suitable wrapper script. The rest of the procedure remains the same as with normal running of the `gen_be` utility. A successful run will create a `be.dat` file in the `RUN_DIR` directory.

b. How to run WRFDA with multivariate background error statistics

After successfully generating the multivariate background error statistics file `be.dat`, the procedure for running WRFDA is straight-forward: Include `cv_options=6` in the `namelist.input` file under the `&wrfvar7` list of namelist options.

c. How to tune multivariate background error statistics in running WRFDA

Below is a list of nine tuning parameters available in WRFDA. Default values for these variables are set as “1.0”. Setting corresponding values > 1.0 (< 1.0) will increase (decrease) the corresponding contributions as described in the following Table:

Variable name	Description
<code>psi_chi_factor</code>	Parameter to control contribution of stream function in defining balanced part of velocity potential
<code>psi_t_factor</code>	Parameter to control contribution of stream function in defining balanced part of temperature
<code>psi_ps_factor</code>	Parameter to control contribution of stream function in defining balanced part of surface pressure
<code>psi_rh_factor</code>	Parameter to control contribution of stream function in defining balanced part of moisture
<code>chi_u_t_factor</code>	Parameter to control contribution of unbalanced part of velocity potential in defining balanced part of temperature
<code>chi_u_ps_factor</code>	Parameter to control contribution of unbalanced part of velocity potential in defining balanced part of surface pressure
<code>chi_u_rh_factor</code>	Parameter to control contribution of unbalanced part of velocity potential in defining balanced part of moisture
<code>t_u_rh_factor</code>	Parameter to control contribution of unbalanced part of temperature in defining balanced part of moisture
<code>ps_u_rh_factor</code>	Parameter to control contribution of unbalanced part of surface pressure in defining balanced part of moisture

WRFDA Diagnostics


WRFDA produces a number of diagnostic files that contain useful information on how the data assimilation has performed. This section will introduce you to some of these files, and what to look for.

After running WRFDA, it is important to check a number of output files to see if the assimilation appears sensible. The WRFDA package, which includes several useful scripts, may be downloaded from

<http://www2.mmm.ucar.edu/wrf/users/wrfda/download/tools.html>

The content of some useful diagnostic files are as follows:

`cost_fn` and `grad_fn`: These files hold (in ASCII format) WRFDA cost and gradient function values, respectively, for the first and last iterations. If you run with `PRINT_DETAIL_GRAD=true`, however, these values will be listed for each iteration; this can be helpful for visualization purposes. The NCL script `WRFDA/var/graphics/ncl/plot_cost_grad_fn.ncl` may be used to plot the content of `cost_fn` and `grad_fn`, if these files are generated with `PRINT_DETAIL_GRAD=true`.

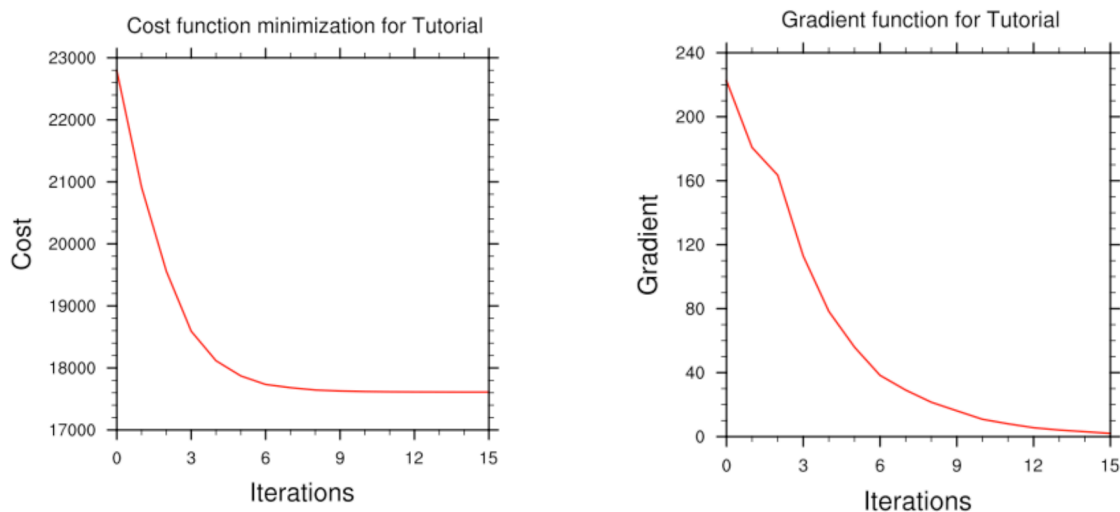

Note: Make sure that you remove the first two lines (header) in `cost_fn` and `grad_fn` before you plot. You also need to specify the directory name for these two files.

`gts_omb_oma_01`: It contains (in ASCII format) information on all of the observations used by the WRFDA run. Each observation has its observed value, quality flag, observation error, observation minus background (OMB), and observation minus analysis (OMA). This information is very useful for both analysis and forecast verification purposes.

`namelist.input`: This is the WRFDA input namelist file, which contains all the user-defined non-default options. Any namelist-defined options that do not appear in this file should have their names checked against the values in `$WRFDA_DIR/Registry/registry.var`.

`namelist.output.da`: A list of all the namelist options used. If an option was not specified in `namelist.input`, the default listed in the registry value will be used.

`rs1*`: Files containing information for standard WRFDA output from individual proces-

sors when multiple processors are used. It contains a host of information on a number of observations, minimization, timings, etc. Additional diagnostics may be printed in these files by including various “print” WRFDA namelist options. To learn more about these additional “print” options, search for the “print_” string in `$WRFDA_DIR/Registry/registry.var`.

statistics: Text file containing OMB (OI) and OMA (OA) statistics (minimum, maximum, mean and standard deviation) for each observation type and variable. This information is very useful in diagnosing how WRFDA has used different components of the observing system. Also contained are the analysis minus background (A-B) statistics, i.e. statistics of the analysis increments for each model variable at each model level. This information is very useful in checking the range of analysis increment values found in the analysis, and where they are in the WRF-model grid space.

The WRFDA analysis file is `wrfvar_output`. It is in WRF (netCDF) format. It will become the input file `wrfinput_d01` of any subsequent WRF run after lateral boundary and/or lower boundary conditions are updated by another WRFDA utility (See the section [Updating WRF boundary conditions](#)).

An NCL script, `$TOOLS_DIR/var/graphics/ncl/WRF-Var_plot.ncl`, is provided in the tools package for plotting. You need to specify the `analysis_file` name, its full path, etc. Please see the in-line comments in the script for details.


As an example, if you are aiming to display the U-component of the analysis at level 18, use the script `WRF-Var_plot.ncl`, and make sure the following pieces of codes are uncommented:

```
var = "U"
fg = first_guess->U
an = analysis->U
plot_data = an
```

When you execute the following command from `$WRFDA_DIR/var/graphics/ncl`.

```
> ncl WRF-Var_plot.ncl
```

The plot should look like:

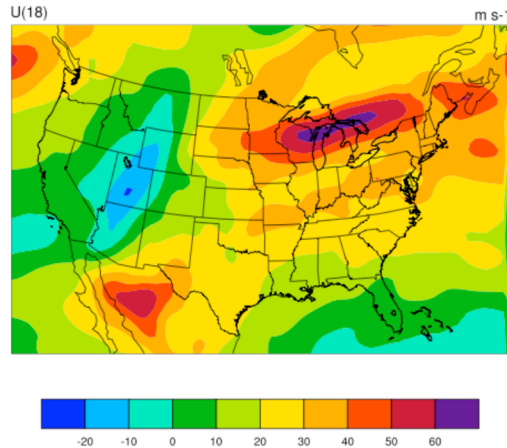

You may change the variable name, level, etc. in this script to display the variable of your choice at the desired eta level.

Take time to look through the text output files to ensure you understand how WRFDA works. For example:

How closely has WRFDA fit individual observation types? Look at the `statistics` file to compare the O-B and O-A statistics.

How big are the analysis increments? Again, look in the `statistics` file to see minimum/maximum values of A-B for each variable at various levels. It will give you a feel for the impact of the input observation data you assimilated via WRFDA by modifying the input analysis first guess.

How long did WRFDA take to converge? Does it really converge? You will get the answers of all these questions by looking into the `rs1.*` -files, as it indicates the number of iterations taken by WRFDA to converge. If this is the same as the maximum number of iterations specified in the namelist (`NTMAX`), or its default value (=200) set in `$WRFDA_DIR/Registry/registry.var`, then it means that the analysis solution did not converge. If this is the case, you may need to increase the value of “`NTMAX`” and rerun your case to ensure that the convergence is achieved. On the other hand, a normal WRFDA run should usually converge within 100 iterations. If it still doesn’t converge in 200 iterations, that means there may be a problem in the observations or first guess.

A good way to visualize the impact of assimilation of observations is to plot the analysis increments (i.e. analysis minus the first guess difference). Many different graphics packages (e.g. RIP4, NCL, GRADS etc) can do this.

You need to modify this script to fix the full path for `first_guess` and `analysis` files. You may also use it to modify the display level by setting `k1` and the name of the variable to display by setting `var`. Further details are given in this script.


If you are aiming to display the increment of potential temperature at level 18, after modifying `$WRFDA_DIR/var/graphics/ncl/WRF-Var_plot.ncl`, make sure the following pieces of code are uncommented:

```
var = "T"  
fg = first_guess->T ;Theta- 300  
an = analysis->T    ;Theta- 300  
plot_data = an - fg
```

When you execute the following command from `WRFDA_DIR/var/graphics/ncl`.

```
> ncl WRF-Var_plot.ncl
```

The plot created will look as follows:

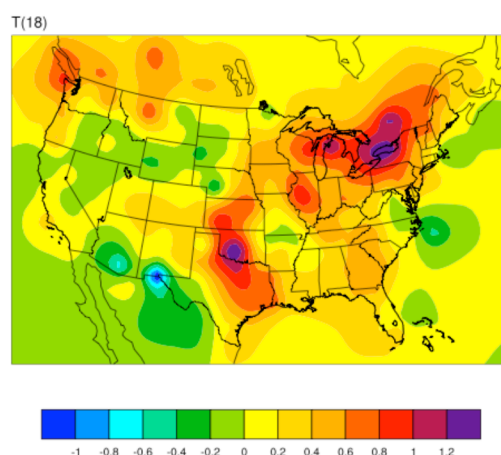

Note: Larger analysis increments indicate a larger data impact in the corresponding region of the domain.

Hybrid Data Assimilation in WRFDA

The WRFDA system also includes a hybrid data assimilation technique, which is based on the existing 3D-Var. The difference between hybrid and 3D-Var schemes is that 3D-Var relies solely on a static covariance model to specify the background errors, while the hybrid system uses a combination of 3D-Var static error covariances and ensemble-estimated error covariances to incorporate a flow-dependent estimate of the background error statistics. Please refer to Wang et al. (2008a,b) for a detailed description of the methodology used in the WRF hybrid system. The following section will give a brief introduction of some aspects of using the hybrid system.

a. Source Code

Four executables are used in the hybrid system. If you have successfully compiled the WRFDA system, you will see the following:

```
WRFDA/var/build/gen_be_ensmean.exe
WRFDA/var/build/gen_be_ep2.exe
WRFDA/var/build/da_wrfvar.exe
WRFDA/var/build/gen_be_vertloc.exe
```

`gen_be_ensmean.exe` is used to calculate the ensemble mean, while `gen_be_ep2.exe` is used to calculate the ensemble perturbations. `gen_be_vertloc.exe` is used for vertical localization. As with 3D-Var/4D-Var, `da_wrfvar.exe` is the main WRFDA program. However, in this case, `da_wrfvar.exe` will run in the hybrid mode.

b. Running The Hybrid System

The procedure is the same as running 3D-Var/4D-Var, with the exception of some extra input files and namelist settings. The basic input files for WRFDA are `LANDUSE.TBL`, `ob.ascii` or `ob.bufr` (depending on which observation format you use), and `be.dat` (static background errors). Additional input files required by the hybrid are a single ensemble mean file (used as the fg for the hybrid application) and a set of ensemble perturbation files (used to represent flow-dependent background errors).

A set of initial ensemble members must be prepared before the hybrid application can be started. The ensemble can be obtained from other ensemble model outputs, or you can generate them yourself. This can be done, for example, adding random noise to the initial conditions at a previous time and integrating each member to the desired time. A tutorial case with a test ensemble can be found at

http://www2.mmm.ucar.edu/wrf/users/wrfda/download/wrfda_hybrid_etkf_testdata.tar.gz. In this example, the ensemble forecasts were initialized at 2006102712 and valid 2006102800. A hybrid analysis at 2006102800 will be performed using the ensemble valid 2006102800 as input. Once you have the initial ensemble, the ensemble mean and perturbations can be calculated following the steps below:

- 1) Set an environment variable for your working directory and your data directory

```
> setenv WORK_DIR your_hybrid_path
> setenv DAT_DIR your_data_path
> cd $WORK_DIR
```

- 2) Calculate the ensemble mean

- a) From your working directory, copy or link the ensemble forecasts to your working directory. The ensemble members are identified by three-digit numbers following the valid time.

```
> ln -sf $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-
28_00:00:00.e* .
```

- b) Provide two template files (ensemble mean and variance files) in your working

directory. These files will be overwritten with the ensemble mean and variance as discussed below.

```
> cp $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-28_00:00:00.e001 ./wrfout_d01_2006-10-28_00:00:00.mean
> cp $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-28_00:00:00.e001 ./wrfout_d01_2006-10-28_00:00:00.vari
```

- c) Copy `gen_be_ensmean_nl.nl` (`cp $DAT_DIR/Hybrid/gen_be_ensmean_nl.nl`.) You will need to set the information in this script as follows:

```
&gen_be_ensmean_nl
directory = '.'
filename = 'wrfout_d01_2006-10-28_00:00:00'
num_members = 10
nv = 7
cv = 'U', 'V', 'W', 'PH', 'T', 'MU', 'QVAPOR' \
```

where `directory` is the folder containing the ensemble members and template files, `filename` is the name of the files before their suffixes (e.g., `.mean`, `.vari`, etc), `num_members` is the number of ensemble members you are using, `nv` is the number of variables, and `cv` is the name of variables used in the hybrid system. Be sure `nv` and `cv` are consistent!

- d) Link `gen_be_ensmean.exe` to your working directory and run it.

```
> ln -sf $WRFDA_DIR/var/build/gen_be_ensmean.exe .
> ./gen_be_ensmean.exe
```

Check the output files. `wrfout_d01_2006-10-28_00:00:00.mean` is the ensemble mean; `wrfout_d01_2006-10-28_00:00:00.vari` is the ensemble variance

3) Calculate ensemble perturbations

- a) Create a sub-directory in which you will be working to create ensemble perturbations.

```
> mkdir -p ./ep
> cd ./ep
```

- b) Run `gen_be_ep2.exe`. The executable requires four command-line arguments (DATE, NUM_MEMBER, DIRECTORY, and FILENAME) as shown below for the tutorial example:

```
> ln -sf WRFDA/var/build/gen_be_ep2.exe .
> ./gen_be_ep2.exe 2006102800 10 . ../wrfout_d01_2006-10-28_00:00:00
```

- c) Check the output files. A list of binary files should now exist. Among them, `tmp.e*` are temporary scratch files that can be removed.

- 4) Back in the working directory, create the input file for vertical localization. This program requires one command-line argument: the number of vertical levels of the model configuration (same value as `e_vert` in the namelist; for the tutorial example, this should be 42).

```
> cd $WORK_DIR
> ln -sf $WRFDA_DIR/var/build/gen_be_vertloc.exe .
> ./gen_be_vertloc.exe 42
```

The output is `./be.vertloc.dat` in your working directory.

5) Run WRFDA in hybrid mode

- a) In your hybrid working directory, link all the necessary files and directories as follows:

```
> ln -fs ./ep/* .
> ln -fs ./wrfout_d01_2006-10-28_00:00:00.mean ./fg (first
guess is the ensemble mean)
> ln -fs $WRFDA_DIR/run/LANDUSE.TBL .
> ln -fs $DAT_DIR/Hybrid/ob/2006102800/ob.ascii ./ob.ascii (or
ob.bufr)
> ln -fs $DAT_DIR/Hybrid/be/be.dat ./be.dat
> ln -fs $WRFDA_DIR/var/build/da_wrfvar.exe .
> cp $DAT_DIR/Hybrid/namelist.input .
```

- b) Edit `namelist.input`, paying special attention to the following hybrid-related settings:

```
&wrfvar7
je_factor = 2.0
/
&wrfvar16
ensdim_alpha = 10
alphacv_method = 2
alpha_corr_type=3
alpha_corr_scale = 1500.0
alpha_std_dev=1.000
alpha_vertloc = .true.
/
```

- c) Finally, execute the WRFDA file, running in hybrid mode

```
> ./da_wrfvar.exe >& wrfda.log
```

Check the output files; the output file lists are the same as when you run WRF 3D-Var.

c. Hybrid namelist options

je_factor

ensemble covariance weighting factor. This factor controls the weighting component of ensemble and static covariances. The corresponding `jb_factor` = `je_factor/(je_factor - 1)`.

ensdim_alpha

the number of ensemble members. Hybrid mode is activated when `ensdim_alpha` is larger than zero

alphacv_method

1=perturbations in control variable space ("psi","chi_u","t_u","rh","ps_u");
2=perturbations in model space ("u","v","t","q","ps"). Option 2 is extensively tested and recommended to use.

alpha_corr_type

correlation function. 1=Exponential; 2=SOAR; 3=Gaussian.

alpha_corr_scale

hybrid covariance localization scale in km unit. Default value is 1500.

alpha_std_dev

alpha standard deviation. Default value is 1.0

alpha_vertloc

for vertical localization. `.true.`=use vertical localization; `.false.`=no vertical localization

ETKF Data Assimilation

The WRFDA system also includes a ETKF assimilation technique. The ETKF system updates the ensemble perturbations. Please refer to Bishop et al. (2001) and Wang et al. (2003) for a detailed description of the methodology. The following section will give a brief introduction of some aspects of using the ETKF system.

a. Source Code

Three executables are used in the ETKF system. If you have successfully compiled the WRFDA system, you will see the following:

```
WRFDA/var/build/gen_be_etkf.exe
```

```
WRFDA/var/build/gen_be_addmean.exe
```

```
WRFDA/var/build/da_wrfvar.exe
```

The file `gen_be_etkf.exe` is used to update the ensemble perturbations, while `gen_be_addmean.exe` is used to combine the ensemble mean and the ensemble perturbations. As with 3D-Var/4D-Var, `da_wrfvar.exe` is the main WRFDA program. However, in this case, `da_wrfvar.exe` will create filtered observations and prepare formatted omb files for ETKF.

b. Running the ETKF System

The first procedure is to update the ensemble perturbations. A set of initial ensemble members must be prepared before the ETKF application can be started. The ensemble can be obtained from a previous ensemble forecast. A tutorial case with a test ensemble can be found at

http://www2.mmm.ucar.edu/wrf/users/wrfda/download/wrfda_hybrid_etkf_testdata.tar.gz

. In this example, the ensemble forecasts were initialized at 2006102712 and valid 2006102800. ETKF will be performed using the ensemble valid 2006102800 as input. Once you have the initial ensemble, the ensemble perturbations can be updated by following the steps below:

1) Set environment variables for convenience

```
> setenv WORK_DIR_ETKF your_etkf_path
> setenv DAT_DIR your_data_path
> setenv WRFDA_DIR your_WRFDA_path
> cd $WORK_DIR_ETKF
```

2) Prepare the filtered observations

- a) In your ETKF working directory, make a subdirectory to prepare the filtered observations and link all the necessary files and directories as follows:

```
> mkdir obs_filter
> cd obs_filter
> ln -fs $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-
28_00_00_00.mean ./fg (first guess is the ensemble mean)
> ln -fs $WRFDA_DIR/run/LANDUSE.TBL .
> ln -fs $DAT_DIR/Hybrid/ob/2006102800/ob.ascii ./ob.ascii (or
ob.bufr)
> ln -fs $DAT_DIR/Hybrid/be/be.dat ./be.dat
> ln -fs $WRFDA_DIR/var/build/da_wrfvar.exe .
> cp $DAT_DIR/ETKF/namelist.input .
```

- b) Edit namelist.input, paying special attention to the following 'QC-OBS'-related settings:

```
&wrfvar17
analysis_type              = 'QC-OBS',
/
```

- c) Execute the WRFDA file, running in QC-OBS mode

```
> ./da_wrfvar.exe >& wrfda.log
```

Check the output files; the output files are the same as when you run WRF 3D-Var, and the 'filtered_obs_01' file contains the filtered observations.

3) Prepare omb files for ETKF

a) In your ETKF working directory, make a subdirectory to prepare the omb files for each ensemble member and link all the necessary files and directories as follows:

```
> cd $WORK_DIR_ETKF
> mkdir -p omb/working.e001
> cd omb/working.e001
> ln -fs $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-
28_00_00_00.e001 ./fg (first guess is the ensemble member)
> ln -fs $WRFDA_DIR/run/LANDUSE.TBL .
> ln -fs $WORK_DIR_ETKF/obs_filter/filtered_obs_01 ./ob.ascii
> ln -fs $DAT_DIR/Hybrid/be/be.dat ./be.dat
> ln -fs $WRFDA_DIR/var/build/da_wrfvar.exe .
> cp $DAT_DIR/ETKF/namelist.input .
```

b) Edit namelist.input, paying special attention to the following 'VERIFY'-related settings:

```
&wrfvar17
analysis_type                = 'VERIFY',
/
```

c) Execute the WRFDA file, running in VERIFY mode

```
> ./da_wrfvar.exe >& wrfda.log
```

Check the output files. The output files are the same as when you run WRF 3D-Var (except wrfvar_output will NOT be created), and the 'ob.etkf.0*' files are omb files.

d) Combine the ob.etkf.0* files and add the observation number in the head of ob.etkf.e0*

```
> cat ob.etkf.0* > ob.all
> wc -l ob.all > ob.etkf.e001
> cat ob.all >> ob.etkf.e001
```

e) Likewise, prepare ob.etkf.e0* files for other ensemble members

4) Run ETKF

a) Copy or link the ensemble mean and forecasts and ob.etkf.e0* files to your working directory and make a parameter directory to save the parameter files.

```
> cd $WORK_DIR_ETKF
> setenv PAR_DIR_ETKF $WORK_DIR_ETKF/param
> mkdir $PAR_DIR_ETKF
> ln -sf $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-
28_00_00_00.mean ./etkf_input
> ln -sf $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-
28_00_00_00.e001 ./etkf_input.e001
...
> ln -sf $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-
28_00_00_00.e010 ./etkf_input.e010
```

```
> ln -sf omb/working.e001/ob.etkf.e001 .
...
> ln -sf omb/working.e010/ob.etkf.e010 .
```

b) Provide template files. These files will be overwritten with the ensemble perturbations.

```
> cp $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-
28_00_00_00.e001 ./etkf_output.e001
...
> cp $DAT_DIR/Hybrid/fc/2006102712/wrfout_d01_2006-10-
28_00_00_00.e010 ./etkf_output.e010
```

c) Copy `gen_be_etkf_nl.nl` (`cp $DAT_DIR/ETKF/gen_be_etkf_nl.nl .`)
 You will need to set the information in this script as follows:

```
&gen_be_etkf_nl
  num_members = 10,
  nv = 7,
  cv = 'U', 'V', 'W', 'PH', 'T', 'QVAPOR', 'MU',
  naccumt1 = 20,
  naccumt2 = 20,
  nstartaccum1 = 1,
  nstartaccum2 = 1,
  nout = 1,
  tainflatinput = 1,
  rhoinput = 1,
  infl_fac_file = '$PAR_DIR_ETKF/inflation_factor.dat',
  infl_let_file = '$PAR_DIR_ETKF/inflation_letkf.dat',
  eigen_val_file = '$PAR_DIR_ETKF/eigen_value.dat',
  inno2_val_file = '$PAR_DIR_ETKF/innovation_value.dat',
  proj2_val_file = '$PAR_DIR_ETKF/projection_value.dat',
  infl_fac_TRNK = .false.,
  infl_fac_WG03 = .false.,
  infl_fac_WG07 = .true.,
  infl_fac_BOWL = .false.,
  letkf_flg=.false.,
  rand_filt = .false.,
  rnd_seed = 2006102800,
  rnd_nobs = 5000
  etkf_erro_max = 20.
  etkf_erro_min = .00001
  etkf_inno_max = 20.
  etkf_inno_min = .00001
  etkf_erro_flg = .true.
  etkf_inno_flg = .true.
  etkf_wrfda = .false.
/
```

Important note: since environment variables are not parsed when reading namelists, you MUST manually change `$PAR_DIR_ETKF` to its actual value in the namelist

Where the various namelist parameters are as follows:

- `num_members` is the ensemble members size
- `nv` is the number of variables
- `cv` the name of variables
- `naccumt1` and `naccumt2` are number of previous cycles used to accumulate for inflation and rho factor
- `nstartaccumt1` and `nstartaccumt2` are not used for ordinary ETKF
- `nout` is the cycle index
- `tainflatinput` and `rhoinput` are prescribed factors for inflation and rho factor
- `infl_fac_file`, `eigen_val_file`, `inno2_val_file` and `proj2_val_file` are files to save template parameters
- `infl_fac_TRNK`, `infl_fac_WG03`, `infl_fac_WG07`, and `infl_fac_BOWL` are options for different adaptive inflation schemes
- `rand_filt`, `rnd_seed` and `rnd_nobs` are options for using filtered observation and random observations
- `etkf_erro_max`, `etkf_erro_min`, `etkf_inno_max`, `etkf_inno_min`, `etkf_erro_flg`, `etkf_inno_flg`, and `etkf_wrfda` are options to conduct further observation filtering.

d) Link `gen_be_etkf.exe` to your working directory and run it.

```
> ln -sf $WRFDA_DIR/var/build/gen_be_etkf.exe .
> ./gen_be_etkf.exe
```

Check the output files. `etkf_output.*` files are updated ensemble perturbations.

5) Add updated ensemble perturbations to the ensemble mean to get new ensemble members

```
> cd $WORK_DIR_ETKF
```

a) Copy `add_mean_nl.nl` (`cp $DAT_DIR/ETKF/add_mean_nl.nl .`)

You will need to set the information in this script as follows for each member:

```
&add_mean_nl
num_members = 10
cv           = 'U', 'V', 'W', 'PH', 'T', 'QVAPOR', 'MU'
nv           = 7
path         = '$WORK_DIR_ETKF'
file_mean    = 'etkf_input'
file_pert    = 'etkf_output.e001' (for each member,
etkf_output.e0*...)
/
```

Again, be sure to substitute the actual path in the place of `$WORK_DIR_ETKF`

b) Run `gen_be_addmean.exe`.

```
> ln -sf $WRFDA_DIR/var/build/gen_be_addmean.exe .
> ./gen_be_addmean.exe
```

Check the output files. etkf_output.e0* files are the new ensemble members.

Description of Namelist Variables

WRFDA namelist variables.

Variable Names	Default Value	Description
&wrfvar1		
write_increments	false	.true.: write out a binary analysis increment file
var4d	false	.true.: 4D-Var mode
var4d_lbc	true	.true.: on/off for lateral boundary control in 4D-Var
var4d_bin	3600	seconds, observation sub-window length for 4D-Var
var4d_bin_rain	3600	seconds, precipitation observation sub-window length for 4D-Var
multi_inc	0	> 0: multi-incremental run
print_detail_radar	false	print_detail_xxx: output extra (sometimes can be too many) diagnostics for debugging; not recommended to turn these on for production runs
print_detail_xa	false	
print_detail_xb	false	
print_detail_obs	false	
print_detail_grad	false	
check_max_iv_print	true	.true.: to print out a detailed gradient of each observation type at each iteration obsolete (used only by Radar)
&wrfvar2		
analysis_accu	900	in seconds, if the time difference between the namelist setting (analysis_date) and date info read-in from the first guess is larger than analysis_accu, WRFDA will issue a warning message ("=====> Wrong xb time found???"), but won't abort.
calc_w_increment	false	.true.: the increment of the vertical velocity, W, will be diagnosed based on the increments of other fields. .false.: the increment of the vertical velocity W is zero if no W information is assimilated. If there is information on the W from observations assimilated, such as radar radial velocity, the W increments are always computed, whether calc_w_increment=true. or .false.
&wrfvar3		
fg_format	1	1: fg_format_wrf_arw_regional (default) 3: fg_format_wrf_arw_global 4: fg_format_kma_global Options 3 and 4 are untested; use with caution!
ob_format	2	1: read in NCEP PREPBUFR data from ob.bufr

		2: read in data from ob.ascii (default)
ob_format_gpsro	2	1: read in GPSRO data from gpsro.bufr 2: read in GPSRO data from ob.ascii (default)
num_fgat_time	1	1: 3DVar > 1: number of time slots for FGAT and 4DVAR
&wrfvar4		
thin_conv	true	Turns on observation thinning for ob_format=1 (NCEP PREPBUFR) only. thin_conv can be set to .false., but this is not recommended.
thin_conv_ascii	false	Turns on observation thinning for ob_format=2 (ASCII from OBSPROC) only.
thin_mesh_conv	20.	km, each observation type can set its thinning mesh (max_instrument and the index/order follows the definition in WRFDA/var/da/da_control/da_control.f90 ts)
thin_rainobs	true	.true.: perform thinning on precipitation data
use_synopobs	true	use_XXXobs - .true.: assimilate XXX obs if available
use_shipsobs	true	.false.: do not assimilate XXX obs even available
use_metarobs	true	
use_soundobs	true	
use_pilotobs	true	
use_airepobs	true	
use_geoamvobs	true	
use_polaramvobs	true	
use_bogusobs	true	
use_buoyobs	true	
use_profilerobs	true	
use_satemobs	true	
use_gpsspobs	true	
use_gpsrefobs	true	
use_qscatobs	true	
use_radarobs	false	
use_radar_rv	false	
use_radar_rf	false	
use_rainobs	false	
use_airsretobs	true	
; use_hirs2obs, use_hirs3obs, use_hirs4obs, use_mhsobs		
; use_msuobs, use_amsuaobs, use_amsubobs, use_airsobs,		
; use_eos_amsuaobs, use_hsbobs, use_ssmisobs are		
; radiance-related variables that only control if		
; corresponding BUFR files are read into WRFDA or not, but		
; do not control if the data is assimilated or not.		
; Additional variables have to be set in &wrfvar14 in order		
; to assimilate radiance data.		
use_hirs2obs	false	.true.: read in data from hirs2.bufr

use_hirs3obs	false	.true.: read in data from hirs3.bufr
use_hirs4obs	false	.true.: read in data from hirs4.bufr
use_mhsobs	false	.true.: read in data from mhs.bufr
use_msuobs	false	.true.: read in data from msu.bufr
use_amsuaobs	false	.true.: read in data from amsua.bufr
use_amsubobs	false	.true.: read in data from amsub.bufr
use_airsobs	false	.true.: read in data from airs.bufr
use_eos_amsuaobs	false	.true.: read in data EOS-AMSUA data from airs.bufr
use_hsbobs	false	.true.: read in data from hsb.bufr
use_ssmisobs	false	.true.: to read in data from ssmis.bufr
use_atmsobs	false	.true.: to read in data from atms.bufr
use_iasisobs	false	.true.: to read in data from iasi.bufr
use_sevirisobs	false	.true.: to read in data from seviri.bufr
use_obs_errfac	false	.true.: apply obs error tuning factors if errfac.dat is available for conventional data only

&wrfvar5

check_max_iv	true	.true.: reject the observations whose innovations (O-B) are larger than a maximum value defined as a multiple of the observation error for each obser- vation. i.e., $inv > (obs_error * factor)$ --> fails_error_max; the default maximum value is 5 times the observation error ; the factor of 5 can be changed through max_error_* settings.
max_error_t	5.0	maximum check_max_iv error check factor for t
max_error_uv	5.0	maximum check_max_iv error check factor for u and v
max_error_pw	5.0	maximum check_max_iv error check factor for pre- cipitable water
max_error_ref	5.0	maximum check_max_iv error check factor for gps refractivity
max_error_q	5.0	maximum check_max_iv error check factor for spe- cific humidity
max_error_p	5.0	maximum check_max_iv error check factor for pressure
max_error_thickness	5.0	maximum check_max_iv error check factor for thickness
max_error_rv	5.0	maximum check_max_iv error check factor for ra- dar radial velocity
max_error_rf	5.0	maximum check_max_iv error check factor for ra- dar reflectivity
max_error_rain	5.0	maximum check_max_iv error check factor for pre- cipitation

&wrfvar6 (for minimization options)

max_ext_its	1	number of outer loops
-------------	---	-----------------------

ntmax	200	maximum number of iterations in an inner loop cri-
	(max_ext_its)	terion (uses dimension: max_ext_its)
eps	0.01	minimization convergence criterion (uses dimen-
	(max_ext_its)	sion: max_ext_its); minimization stops when the
		norm of the gradient of the cost function gradient is
		reduced by a factor of eps. inner minimization stops
		either when the criterion is met or when inner itera-
		tions reach ntmax.
orthonorm_gradient	false	.true.: the gradient vectors are stored during the
		Conjugate Gradient for each iteration and used to re-
		orthogonalize the new gradient. This requires extra
		storage of large vectors (each one being the size of
		the control variable) but results in a better conver-
		gence of the Conjugate Gradient after around 20 it-
		erations.
&wrfvar7		
cv_options	5	3: NCEP Background Error model
		5: NCAR Background Error model (default)
		6: Use of multivariate background error statistics
as1 (3)	-1.0	tuning factors for variance, horizontal and vertical
		scales for control variable 1 = stream function. For
		cv_options=3 only. The actual default values are
		0.25, 1.0, 1.5.
as2 (3)	-1.0	tuning factors for variance, horizontal and vertical
		scales for control variable 2 - unbalanced potential
		velocity. For cv_options=3 only. The actual default
		values are 0.25, 1.0, 1.5.
as3 (3)	-1.0	tuning factors for variance, horizontal and vertical
		scales for control variable 3 - unbalanced tempera-
		ture. For cv_options=3 only. The actual default val-
		ues are 0.25, 1.0, 1.5.
as4 (3)	-1.0	tuning factors for variance, horizontal and vertical
		scales for control variable 4 - pseudo relative hu-
		midity. For cv_options=3 only. The actual default
		values are 0.25, 1.0, 1.5.
as5 (3)	-1.0	tuning factors for variance, horizontal and vertical
		scales for control variable 5 - unbalanced surface
		pressure. For cv_options=3 only. The actual default
		values are 0.25, 1.0, 1.5.
rf_passes	6	number of passes of recursive filter.
var_scaling1	1.0	tuning factor of background error covariance for
		control variable 1 - stream function. For
		cv_options=5 only.
var_scaling2	1.0	tuning factor of background error covariance for
		control variable 2 - unbalanced velocity potential.
		For cv_options=5 only.

var_scaling3	1.0	tuning factor of background error covariance for control variable 3 - unbalanced temperature. For cv_options=5 only.
var_scaling4	1.0	tuning factor of background error covariance for control variable 4 - pseudo relative humidity. For cv_options=5 only.
var_scaling5	1.0	tuning factor of background error covariance for control variable 5 - unbalanced surface pressure. For cv_options=5 only.
len_scaling1	1.0	tuning factor of scale-length for stream function. For cv_options=5 only.
len_scaling2	1.0	tuning factor of scale-length for unbalanced velocity potential. For cv_options=5 only.
len_scaling3	1.0	tuning factor of scale-length for unbalanced temperature. For cv_options=5 only.
len_scaling4	1.0	tuning factor of scale-length for pseudo relative humidity. For cv_options=5 only.
len_scaling5	1.0	tuning factor of scale-length for unbalanced surface pressure. For cv_options=5 only.
je_factor	1.0	ensemble covariance weighting factor
&wrfvar8 ;not used		
&wrfvar9		for program tracing. trace_use=.true. gives additional performance diagnostics (calling tree, local routine timings, overall routine timings, & memory usage). It does not change results, but does add runtime overhead.
stdout	6	unit number for standard output
stderr	0	unit number for error output
trace_unit	7	Unit number for tracing output. Note that units 10 and 9 are reserved for reading namelist.input and writing namelist.output respectively.
trace_pe	0	Currently, statistics are always calculated for all processors, and output by processor 0.
trace_repeat_head	10	the number of times any trace statement will produce output for any particular routine. This stops overwhelming trace output when a routine is called multiple times. Once this limit is reached a 'going quiet' message is written to the trace file, and no more output is produced from the routine, though statistics are still gathered.
trace_repeat_body	10	see trace_repeat_head description
trace_max_depth	30	define the deepest level to which tracing writes output
trace_use	false	.true.: activate tracing
trace_use_frequent	false	
trace_use_dull	false	

<code>trace_memory</code>	<code>true</code>	<code>.true.:</code> calculate allocated memory using a <code>mallinfo</code> call. On some platforms (Cray and Mac), <code>mallinfo</code> is not available and no memory monitoring can be done.
<code>trace_all_pes</code>	<code>false</code>	<code>.true.:</code> tracing is output for all pes. As stated in <code>trace_pe</code> , this does not change processor statistics.
<code>trace_csv</code>	<code>true</code>	<code>.true.:</code> tracing statistics are written to a <code>xxxx.csv</code> file in CSV format
<code>use_html</code>	<code>true</code>	<code>.true.:</code> tracing and error reporting routines will include HTML tags.
<code>warnings_are_fatal</code>	<code>false</code>	<code>.true.:</code> warning messages that would normally allow the program to continue are treated as fatal errors.
&wrfvar10 (for code developer)		
<code>test_transforms</code>	<code>false</code>	<code>.true.:</code> perform adjoint tests
<code>test_gradient</code>	<code>false</code>	<code>.true.:</code> perform gradient test
&wrfvar11		
<code>cv_options_hum</code>	<code>1</code>	do not change
<code>check_rh</code>	<code>0</code>	0 --> No supersaturation check after minimization. 1 --> supersaturation ($rh > 100\%$) and minimum rh ($rh < 10\%$) check, and make the local adjustment of q . 2 --> supersaturation ($rh > 95\%$) and minimum rh ($rh < 11\%$) check and make the multi-level q adjustment under the constraint of conserved column integrated water vapor
<code>sfc_assi_options</code>	<code>1</code>	1 --> surface observations will be assimilated based on the lowest model level first guess. Observations are not used when the elevation difference between the observing site and the lowest model level is larger than 100m. 2 --> surface observations will be assimilated based on surface similarity theory in PBL. Innovations are computed based on 10-m wind, 2-m temperature and 2-m moisture.
<code>calculate_cg_cost_fn</code>	<code>false</code>	conjugate gradient algorithm does not require the computation of cost function at every iteration during minimization. <code>.true.:</code> Compute and write out cost function and gradient for each iteration into files <code>cost_fn</code> and <code>grad_fn</code> . <code>false.:</code> Only the initial and final cost functions are computed and output.
<code>lat_stats_option</code>	<code>false</code>	do not change
&wrfvar12		
<code>balance_type</code>	<code>1</code>	obsolete

&wrfvar13

vert_corr	2	do not change
vertical_ip	0	obsolete
vert_evalue	1	do not change
max_vert_var1	99.0	specify the maximum truncation value (percentage) to explain the variance of stream function in eigenvector decomposition
max_vert_var2	99.0	specify the maximum truncation value (percentage) to explain the variance of unbalanced potential velocity in eigenvector decomposition
max_vert_var3	99.0	specify the maximum truncation value (percentage) to explain the variance of the unbalanced temperature in eigenvector decomposition
max_vert_var4	99.0	specify the maximum truncation value (percentage) to explain the variance of pseudo relative humidity in eigenvector decomposition
max_vert_var5	99.0	for unbalanced surface pressure, it should be a non-zero positive number. set max_vert_var5=0.0 only for offline VarBC applications.

&wrfvar14

the following 4 variables (rtmunit_nsensor, rtmunit_platform, rtmunit_satid, rtmunit_sensor) together control what sensors to be assimilated.

rtmunit_nsensor	1	total number of sensors to be assimilated
rtmunit_platform	-1	platforms IDs array (used dimension: (max_instruments) rtmunit_nsensor); e.g., 1 for NOAA, 9 for EOS, 10 for METOP and 2 for DMSP
rtmunit_satid	-1.0	satellite IDs array (used dimension: (max_instruments) rtmunit_nsensor)
rtmunit_sensor	-1.0	sensor IDs array (used dimension: (max_instruments) rtmunit_nsensor); e.g., 0 for HIRS, 3 for AMSU-A, 4 for AMSU-B, 15 for MHS, 10 for SSMIS, 11 for AIRS
rad_monitoring	0	integer array (used dimension: rtmunit_nsensor); (max_instruments) 0: assimilating mode;
thinning_mesh	60.0	1: monitoring mode (only calculate innovations) real array (used dimension: rtmunit_nsensor); (max_instruments) specify thinning mesh size (in km) for different sensors.
thinning	false	.true.: perform thinning on radiance data
qc_rad	true	.true.: perform quality control. Do not change.
write_iv_rad_ascii	false	.true.: output radiance Observation minus Background files, which are in ASCII format and separated by sensor and processor.

<code>write_oa_rad_ascii</code>	false	.true.: output radiance Observation minus Analysis files (Observation minus Background information is also included), which are in ASCII format and separated by sensor and processor.
<code>use_error_factor_rad</code>	false	.true.: use a radiance error tuning factor file <code>radiance_error.factor</code> , which can be created with empirical values or generated using variational tuning method (Desroziers and Ivanov, 2001)
<code>use_antcorr</code>	false	.true.: perform Antenna Correction in CRTM
<code>rtm_option</code>	(max_instruments) 1	which RTM (Radiative Transfer Model) to use (WRFDA must be compiled with the desired model included, see first section for details) 1: RTTOV 2: CRTM
<code>only_sea_rad</code>	false	.true.: assimilate radiance over water only
<code>use_varbc</code>	false	.true.: perform Variational Bias Correction. A parameter file in ASCII format called <code>VARBC.in</code> (a template is provided with the source code tar ball) is required.
<code>freeze_varbc</code>	false	.true: together with <code>use_varbc=.false.</code> , keep the VarBC bias parameters constant in time. In this case, the bias correction is read and applied to the innovations, but it is not updated during the minimization.
<code>varbc_factor</code>	1.0	for scaling the VarBC preconditioning
<code>varbc_nobsmin</code>	10	defines the minimum number of observations required for the computation of the predictor statistics during the first assimilation cycle. If there are not enough data (according to "VARBC_NOBSMIN") on the first cycle, the next cycle will perform a coldstart again.
<code>use_clddet_mmr</code>	false	.true. :use the MMR scheme to conduct cloud detection for infrared radiance
<code>use_clddet_ecmwf</code>	false	.true. :use the ECMWF operational scheme to conduct cloud detection for infrared radiance.
<code>airs_warmest_fov</code>	false	.true.: uses the observation brightness temperature for AIRS Window channel #914 as criterion for GSI thinning (with a higher amplitude than the distance from the observation location to the nearest grid point).
<code>use_crtm_kmatrix</code>	true	.true. use CRTM K matrix rather than calling CRTM TL and AD routines for gradient calculation, which reduces runtime noticeably.

<code>use_rttov_kmatrix</code>	false	.true. use RTTOV K matrix rather than calling RTTOV TL and AD routines for gradient calculation, which reduces runtime noticeably.
<code>rttov_emis_atlas_ir</code>	0	0: do not use IR emissivity atlas 1: use IR emissivity atlas (recommended)
<code>rttov_emis_atlas_mw</code>	0	0: do not use MW emissivity atlas 1: use TELSEM MW emissivity atlas (recommended) 2: use CNRM MW emissivity atlas
&wrfvar15 (needs to be set together with &wrfvar19)		
<code>num_pseudo</code>	0	Set the number of pseudo observations, either 0 or 1 (single ob)
<code>pseudo_x</code>	1.0	Set the x-position (I) of the OBS in unit of grid-point.
<code>pseudo_y</code>	1.0	Set the y-position (J) of the OBS in unit of grid-point.
<code>pseudo_z</code>	1.0	Set the z-position (K) of OBS with the vertical level index, in bottom-up order.
<code>pseudo_val</code>	1.0	Set the innovation of the ob; wind in m/s, pressure in Pa, temperature in K, specific humidity in kg/kg
<code>pseudo_err</code>	1.0	set the error of the pseudo ob. Unit the same as <code>pseudo_val</code> ; if <code>pseudo_var="q"</code> , <code>pseudo_err=0.001</code> is more reasonable.
&wrfvar16 (for hybrid WRFDA/ensemble)		
<code>alphacv_method</code>	2	1: ensemble perturbations in control variable space 2: ensemble perturbations in model variable space
<code>ensdim_alpha</code>	0	ensemble size
<code>alpha_corr_type</code>	3	1: <code>alpha_corr_type_exp</code> 2: <code>alpha_corr_type_soar</code> 3: <code>alpha_corr_type_gaussian</code> (default)
<code>alpha_corr_scale</code>	1500.0	km
&wrfvar17		
<code>analysis_type</code>	"3D-VAR"	"3D-VAR": 3D-VAR mode (default); "QC-OBS": 3D-VAR mode plus extra filtered_obs output; "VERIFY": verification mode. WRFDA resets <code>check_max_iv=.false.</code> and <code>ntmax=0</code> ; "RANDOMCV": for creating ensemble perturbations
<code>adj_sens</code>	false	.true.: write out gradient of Jo for adjoint sensitivity
&wrfvar18 (needs to set &wrfvar21 and &wrfvar22 as well if ob_format=1 and/or radiances are used)		
<code>analysis_date</code>	"2002-08-03_00:00:00.00"	specify the analysis time. It should be consistent with the first guess time; however, if time difference between <code>analysis_date</code> and date info read in from

first guess is larger than analysis_accu, WRFDA will issue a warning message ("=====> Wrong xb time found???"), but won't abort.

&wrfvar19 (needs to be set together with &wrfvar15)

pseudo_var "t"

Set the name of the OBS variable:
'u' = X-direction component of wind,
'v' = Y-direction component of wind,
't' = Temperature,
'p' = Pressure,
'q' = Specific humidity
"pw": total precipitable water
"ref": refractivity
"ztd": zenith total delay

&wrfvar20

documentation_url "http://www.mm.ucar.edu/people/wrfhelp/wrfvar/code/trunk"

&wrfvar21

time_window_min "2002-08-02_21:00:00.00" start time of assimilation time window used for ob_format=1 and radiances to select observations inside the defined time_window. Note: Start from V3.1, this variable is also used for ob_format=2 to double-check if the obs are within the specified time window.

&wrfvar22

time_window_max "2002-08-03_03:00:00.00" end time of assimilation time window used for ob_format=1 and radiances to select observations inside the defined time_window. Note: this variable is also used for ob_format=2 to double-check if the obs are within the specified time window.

&perturbation (settings related to the 4D-Var)

jcdfi_use	false	.true.: Include JcDF term in cost function. .false.: Ignore JcDF term in cost function.
jcdfi_diag	1	0: Doesn't print out the value of Jc. 1: Print out the value of Jc.
jcdfi_penalty	10	The weight to Jc term.
enable_identity	.false.	.true.: use identity adjoint and tangent linear model in 4D-Var. .false.: use full adjoint and tangent linear model in 4D-Var.
trajectory_io	.true.	.true.: use memory I/O in 4D-Var for data exchange .false.: use disk I/O in 4D-Var for data exchange
var4d_detail_out	false	.true.: output extra diagnostics for debugging 4D-Var

OBSPROC namelist variables.

Variable Names	Description
&record1	
obs_gts_filename	name and path of decoded observation file
fg_format	'MM5' for MM5 application, 'WRF' for WRF application
obserr.txt	name and path of observational error file
first_guess_file	name and path of the first guess file
&record2	
time_window_min	The earliest time edge as ccyy-mm-dd_hh:mn:ss
time_analysis	The analysis time as ccyy-mm-dd_hh:mn:ss
time_window_max	The latest time edge as ccyy-mm-dd_hh:mn:ss
	** Note : Only observations between [time_window_min, time_window_max] will kept.
&record3	
max_number_of_obs	Maximum number of observations to be loaded, i.e. in domain and time window, this is independent of the number of obs actually read.
fa-	.TRUE.: will stop when more than max_number_of_obs are loaded
tal_if_exceed_max_obs	.FALSE.: will process the first max_number_of_obs loaded observations.
&record4	
qc_test_vert_consistency	.TRUE. will perform a vertical consistency quality control check on sounding
qc_test_convective_adj	.TRUE. will perform a convective adjustment quality control check on sounding
qc_test_above_lid	.TRUE. will flag the observation above model lid
remove_above_lid	.TRUE. will remove the observation above model lid
domain_check_h	.TRUE. will discard the observations outside the domain
Thining_SATOB	.FALSE.: no thinning for SATOB data.
	.TRUE.: thinning procedure applied to SATOB data.
Thining_SSMI	.FALSE.: no thinning for SSMI data.
	.TRUE.: thinning procedure applied to SSMI data.
Thining_QSCAT	.FALSE.: no thinning for SATOB data.
	.TRUE.: thinning procedure applied to SSMI data.
&record5	
print_gts_read	TRUE. will write diagnostic on the decoded obs reading in file obs_gts_read.diag
print_gpspw_read	.TRUE. will write diagnostic on the gpsppw obs reading in file obs_gpspw_read.diag
print_recoverp	.TRUE. will write diagnostic on the obs pressure recovery in file obs_recover_pressure.diag
print_duplicate_loc	.TRUE. will write diagnostic on space duplicate removal in file

<code>print_duplicate_time</code>	<code>obs_duplicate_loc.diag</code> .TRUE. will write diagnostic on time duplicate removal in file <code>obs_duplicate_time.diag</code>
<code>print_recoverh</code>	.TRUE will write diagnostic on the obs height recovery in file <code>obs_recover_height.diag</code>
<code>print_qc_vert</code>	.TRUE will write diagnostic on the vertical consistency check in file <code>obs_qc1.diag</code>
<code>print_qc_conv</code>	.TRUE will write diagnostic on the convective adjustment check in file <code>obs_qc1.diag</code>
<code>print_qc_lid</code>	.TRUE. will write diagnostic on the above model lid height check in file <code>obs_qc2.diag</code>
<code>print_uncomplete</code>	.TRUE. will write diagnostic on the uncompleted obs removal in file <code>obs_uncomplete.diag</code>
<code>user_defined_area</code>	.TRUE.: read in the record6: <code>x_left</code> , <code>x_right</code> , <code>y_top</code> , <code>y_bottom</code> , .FALSE.: not read in the record6.

&record6

<code>x_left</code>	West border of sub-domain, not used
<code>x_right</code>	East border of sub-domain, not used
<code>y_bottom</code>	South border of sub-domain, not used
<code>y_top</code>	North border of sub-domain, not used
<code>ptop</code>	Reference pressure at model top
<code>ps0</code>	Reference sea level pressure
<code>base_pres</code>	Same as <code>ps0</code> . User must set either <code>ps0</code> or <code>base_pres</code> .
<code>ts0</code>	Mean sea level temperature
<code>base_temp</code>	Same as <code>ts0</code> . User must set either <code>ts0</code> or <code>base_temp</code> .
<code>tlp</code>	Temperature lapse rate
<code>base_lapse</code>	Same as <code>tlp</code> . User must set either <code>tlp</code> or <code>base_lapse</code> .
<code>pis0</code>	Tropopause pressure, the default = 20000.0 Pa
<code>base_tropo_pres</code>	Same as <code>pis0</code> . User must set either <code>pis0</code> or <code>base_tropo_pres</code>
<code>tis0</code>	Isothermal temperature above tropopause (K), the default = 215 K.
<code>base_start_temp</code>	Same as <code>tis0</code> . User must set either <code>tis0</code> or <code>base_start_temp</code> .

&record7

<code>I PROJ</code>	Map projection (0 = Cylindrical Equidistance, 1 = Lambert Conformal, 2 = Polar stereographic, 3 = Mercator)
<code>PHIC</code>	Central latitude of the domain
<code>XLONC</code>	Central longitude of the domain
<code>TRUELAT1</code>	True latitude 1
<code>TRUELAT2</code>	True latitude 2
<code>MOAD_CEN_LAT</code>	The central latitude for the Mother Of All Domains
<code>STANDARD_LON</code>	The standard longitude (Y-direction) of the working domain.

&record8

<code>IDD</code>	Domain ID (1=< ID =< MAXNES), Only the observations geographically located on that domain will be processed. For WRF application with <code>XLONC</code> /= <code>STANDARD_LON</code> , set <code>IDD</code> =2, otherwise set 1.
------------------	---

MAXNES	Maximum number of domains as needed.
NESTIX	The I(y)-direction dimension for each of the domains
NESTJX	The J(x)-direction dimension for each of the domains
DIS	The resolution (in kilometers) for each of the domains. For WRF application, always set NESTIX(1),NESTJX(1), and DIS(1) based on the information in wrfinput.
NUMC	The mother domain ID number for each of the domains
NESTI	The I location in its mother domain of the nest domain's low left corner -- point (1,1)
NESTJ	The J location in its mother domain of the nest domain's low left corner -- point (1,1). For WRF application, NUMC(1), NESTI(1), and NESTJ(1) are always set to be 1.
&record9	
prep-	Name of the PREPBUFR OBS file.
bufr_output_filename	
prep-	'prepbufr_table_filename' ; do not change
bufr_table_filename	
output_ob_format	output 1, PREPBUFR OBS file only; 2, ASCII OBS file only; 3, Both PREPBUFR and ASCII OBS files.
use_for	'3DVAR' obs file, same as before, default 'FGAT' obs files for FGAT '4DVAR' obs files for 4DVAR
num_slots_past	the number of time slots before time_analysis
num_slots_ahead	the number of time slots after time_analysis
write_synop	If keep synop obs in obs_gts (ASCII) files.
write_ship	If keep ship obs in obs_gts (ASCII) files.
write_metar	If keep metar obs in obs_gts (ASCII) files.
write_buoy	If keep buoy obs in obs_gts (ASCII) files.
write_pilot	If keep pilot obs in obs_gts (ASCII) files.
write_sound	If keep sound obs in obs_gts (ASCII) files.
write_amdar	If keep amdar obs in obs_gts (ASCII) files.
write_satem	If keep satem obs in obs_gts (ASCII) files.
write_satob	If keep satob obs in obs_gts (ASCII) files.
write_airep	If keep airep obs in obs_gts (ASCII) files.
write_gpspw	If keep gpspw obs in obs_gts (ASCII) files.
write_gpsztd	If keep gpsztd obs in obs_gts (ASCII) files.
write_gpsref	If keep gpsref obs in obs_gts (ASCII) files.
write_gpseph	If keep gpseph obs in obs_gts (ASCII) files.
write_ssmt1	If keep ssmt1 obs in obs_gts (ASCII) files.
write_ssmt2	If keep ssmt2 obs in obs_gts (ASCII) files.
write_ssmi	If keep ssmi obs in obs_gts (ASCII) files.
write_tovs	If keep tovs obs in obs_gts (ASCII) files.
write_qscat	If keep qscat obs in obs_gts (ASCII) files.
write_prof1	If keep profile obs in obs_gts (ASCII) files.
write_bogus	If keep bogus obs in obs_gts (ASCII) files.
write_airs	If keep airs obs in obs_gts (ASCII) files.

Chapter 7: Objective Analysis (OBSGRID)

Table of Contents

- [Introduction](#)
- [Program Flow](#)
- [Source of Observations](#)
- [Objective Analysis techniques in OBSGRID](#)
- [Quality Control for Observations](#)
- [Additional Observations](#)
- [Surface FDDA option](#)
- [Objective Analysis on Model Nests](#)
- [How to run OBSGRID](#)
- [Output Files](#)
- [Plot Utilities](#)
- [Observations Format](#)
- [OBSGRID Namelist](#)

Introduction

The goal of objective analysis in meteorological modeling is to improve meteorological analyses (the *first guess*) on the mesoscale grid by incorporating information from observations. Traditionally, these observations have been "direct" observations of temperature, humidity, and wind from surface and radiosonde reports. As remote sensing techniques come of age, more and more "indirect" observations are available for researchers and operational modelers. Effective use of these indirect observations for objective analysis is not a trivial task. Methods commonly employed for indirect observations include three-dimensional or four-dimensional variational techniques ("3DVAR" and "4DVAR", respectively), which can be used for direct observations as well.

This chapter discusses the objective analysis program, OBSGRID. Discussion of variational techniques (*WRFDA*) can be found in Chapter 6 of this User's Guide.


The analyses input to OBSGRID as the first guess are analyses output from the METGRID part of the WPS package (*see Chapter 3 of this User's Guide for details regarding the WPS package*).

OBSGRID capabilities include:

- Choice of Cressman-style or Multiquadric objective analysis.
- Various tests to screen the data for suspect observations.
- Procedures to input bogus data.
- Expanded Grid: OBSGRID has the capability to cut the input model domain down on output. This feature allows you to incorporate data from outside your intended grid to improve analyses near the boundaries. To use this feature, a user must create a larger domain than the final intended domain when running WPS.

Program Flow

OBSGRID is run directly after `metgrid.exe`, and uses the `met_em*` output files from `metgrid.exe` as input. OBSGRID also requires additional observations (A) as input. The format of these observational files is described in the [Observations Format](#) section of this chapter.

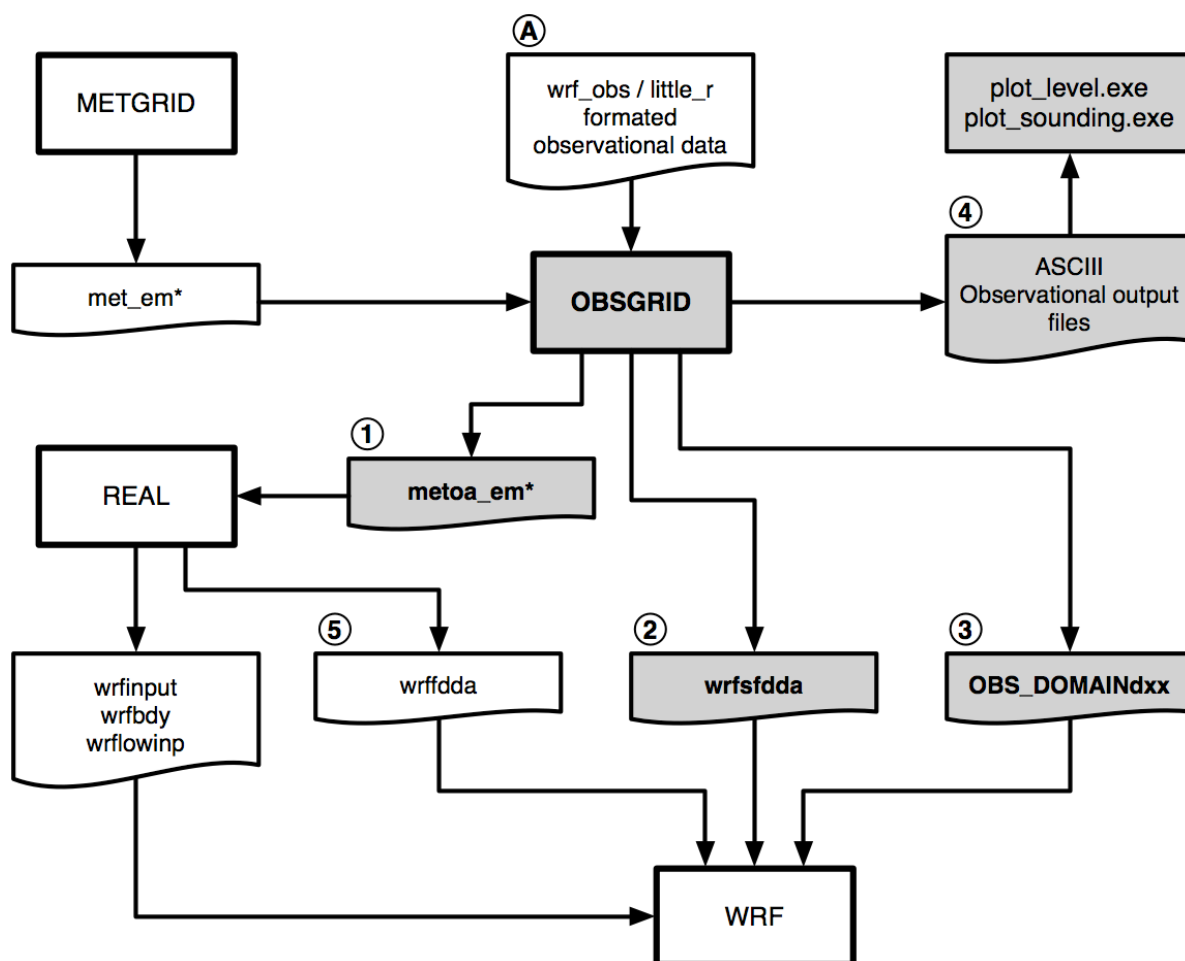

Output from the objective analysis programs can be used to:

- Provide fields for Initial and Boundary conditions (1). Note that the files *metoa_em** are formatted identically to the *met_em** files from `metgrid.exe`. The only difference is that the fields in these files now incorporate observational information.
- Provide surface fields for surface-analysis-nudging *FDDA* (2). Note, when using the *wrfsfdda* file as input to WRF, it is also recommended to use the 3-D *fd* file (*wrffdda* (5) – which is an optional output created when running *real.exe*) as input to WRF.
- Provide data for observational nudging (3). Note: since version 3.1.1 of OBSGRID this file can be read directly by the observational nudging code and no longer needs to pass through an additional perl script.
- Provide ASCII and netCDF output (4). These files provide information regarding the observations used and the quality control flags assigned. The information in these files can also be plotted with the provided plotting utilities.

Source of Observations

OBSGRID reads observations provided by the user in formatted ASCII text files. This allows users to adapt their own data to use as input to the OBSGRID program. This format ([wrf_obs / little_r format](#)) is the same format used in the MM5 objective analysis program LITTLE_R (hence the name).

Programs are available to convert NMC ON29 and NCEP BUFR formatted files (*see below*) into the `wrf_obs / little_r` format. Users are responsible for converting other observations they may want to provide to OBSGRID into this format. A user-contributed (*i.e., unsupported*) program is available in the `utils/` directory for converting observation files from the GTS to `wrf_obs / little_r` format.

NCEP operational global surface and upper-air observation subsets, as archived by the Data Support Section (DSS) at NCAR.

- Upper-air data in NMC ON29 format (*from early 1970s to early 2000*)
<http://rda.ucar.edu/datasets/ds353.4/>
- Surface data in NMC ON29 format (*from early 1970s to early 2000*)
<http://rda.ucar.edu/datasets/ds464.0/>
- Upper-air data in NCEP BUFR format (*from 1999 to present*)
<http://rda.ucar.edu/datasets/ds351.0/>
- Surface data in NCEP BUFR format (*from 1999 to present*)
<http://rda.ucar.edu/datasets/ds461.0/>

The newer data (*ds351.0* and *ds461.0*) is also available in the `little_r` format. From outside NCAR, this data can be download from the web, while it is available on the NCAR /glade system for NCAR supercomputer users. This data is sorted into 6-hourly windows, which are typically too large for use in OBSGRID. To reorder this into 3-hourly windows:

- Get the little_r 6-hourly data
 - Non-NCAR super-computer users. Get the data directly from the above web sites. Combine (by using the Unix 'cat' command) all the surface and upper-air data into one large file called `rda_obs`.
 - NCAR super-computer users. Use the script `util/get_rda_data.csh`, to get the data and create the file `rda_obs`. You will need to edit this script to supply the date range that you are interested in.
- Compile the Fortran program `util/get_rda_data.f`. Place `rda_obs` file the in the top OBSGRID directory. Run the `util/get_rda_data.exe` executable. This executable will use the date range from `namelist.oa`, and create 3-hourly OBS:<date> files which are ready to use in OBSGRID.

NMC Office Note 29 can be found in many places on the World Wide Web, including:
http://www.emc.ncep.noaa.gov/mmb/data_processing/on29.htm


Objective Analysis techniques in OBSGRID

Cressman Scheme

Three of the four objective analysis techniques used in OBSGRID are based on the Cressman scheme, in which several successive scans nudge a first-guess field toward the neighboring observed values.

The standard Cressman scheme assigns to each observation a circular radius of influence, R . The first-guess field at each grid point, P , is adjusted by taking into account all the observations that influence P .


The differences between the first-guess field and the observations are calculated, and a distance-weighted average of these difference values is added to the value of the first-guess at P . Once all grid points have been adjusted, the adjusted field is used as the first guess for another adjustment cycle. Subsequent passes each use a smaller radius of influence.

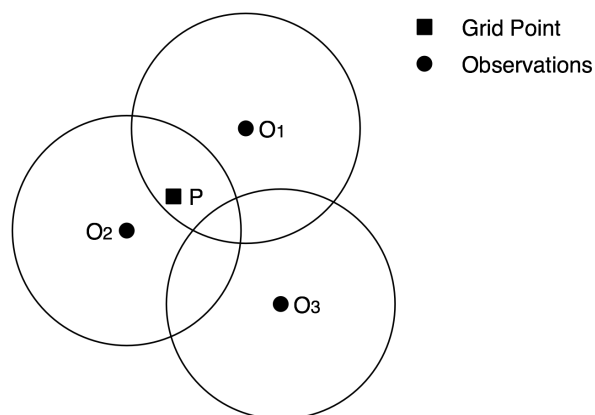

Observations O1 and O2 influence grid point P,
O3 does not.


Ellipse Scheme

In analyses of wind and relative humidity (fields strongly deformed by the wind) at pressure levels, the circles from the standard Cressman scheme are elongated into ellipses, oriented along the flow. The stronger the wind, the greater the eccentricity of the ellipses. This scheme reduces to the circular Cressman scheme under low-wind conditions.

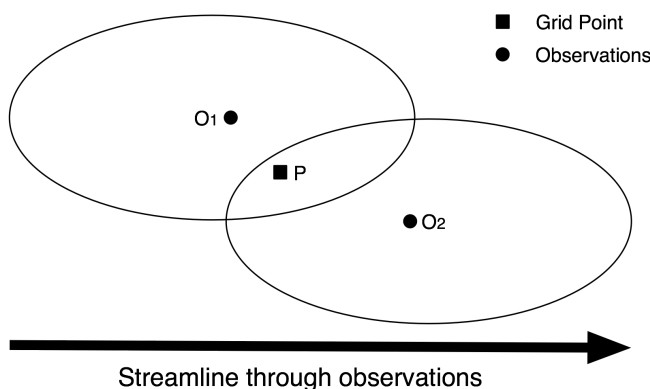

Banana Scheme

In analyses of wind and relative humidity at pressure levels, the circles from the standard Cressman scheme are elongated in the direction of the flow, and curved along the streamlines. The result is a banana shape. This scheme reduces to the Ellipse scheme under straight-flow conditions, and the standard Cressman scheme under low-wind conditions.

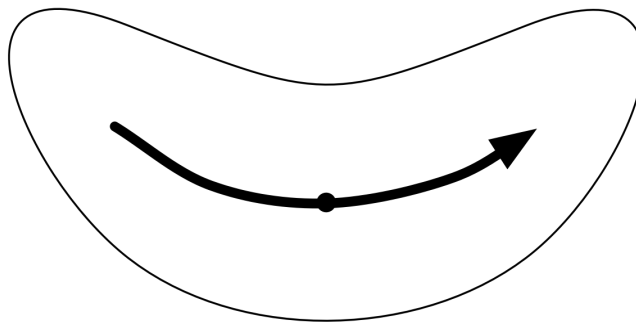

Multiquadric scheme

The Multiquadric scheme uses hyperboloid radial basis functions to perform the objective analysis. Details of the multiquadric technique may be found in Nuss and Titley, 1994: "Use of multiquadric interpolation for meteorological objective analysis." *Mon . Wea . Rev .*, 122, 1611-1631. Use this scheme with caution, as it can produce some odd results in areas where only a few observations are available.

Quality Control for Observations

A critical component of OBSGRID is the screening for bad observations. Many of these QC checks are optional in OBSGRID.

Quality Control on Individual Reports

- Gross Error Checks (same values, pressure decreases with height, etc.)
- Remove spikes from temperature and wind profiles.
- Adjust temperature profiles to remove superadiabatic layers.
- No comparisons to other reports or to the first-guess field.

The ERRMAX test

The ERRMAX quality-control check is optional, but highly recommended.

- Limited user control over data removal. The user may set thresholds, which vary the tolerance of the error check.
- Observations are compared to the first-guess field.
- If the difference value (obs - first-guess) exceeds a certain threshold, the observation is discarded.
- Threshold varies depending on the field, level, and time of day.
- Works well with a good first-guess field.

The Buddy test

The Buddy check is optional, but highly recommended.

- Limited user control over data removal. The user may set weighting factors, which vary the tolerance of the error check.
- Observations are compared to both the first guess and neighboring observations.
- If the difference value of an observation (obs - first-guess) varies significantly from the distance-weighted average of the difference values of neighboring observations, the observation is discarded.
- Works well in regions with good data density.

Additional Observations

Input of additional observations, or modification of existing (*and erroneous*) observations, can be a useful tool at the objective analysis stage.

In OBSGRID, additional observations are provided to the program the same way (*in the same wrf_obs / little_r format*) as standard observations. Additional observations must be in the same file as the rest of the observations. Existing (*erroneous*) observations can be modified easily, as the observations input format is ASCII text. Identifying an observation report as "bogus" simply means that it is assumed to be good data, but no quality control is performed for that report.

Surface FDDA option

The surface FDDA option creates additional analysis files for the surface only, usually with a smaller time interval between analyses (*i.e., more frequently*) than the full upper-air analyses. The purpose of these surface analysis files is for later use in WRF with the surface analysis nudging option.

The LAGTEM option controls how the first-guess field is created for surface analysis files. Typically, the surface and upper-air first-guess (*analysis times*) is available at twelve-hour or six-hour intervals, while the surface analysis interval may be 3 hours (*10800 seconds*). So at analysis times, the available surface first-guess is used. If LAGTEM is set to **.FALSE.**, the surface first-guess at other times will be temporally interpolated from the first-guess at the analysis times. If LAGTEM is set to **.TRUE.**, the surface first guess at other times is the objective analysis from the previous time.

Objective Analysis on Model Nests

OBSGRID has the capability to perform the objective analysis on a nest. This is done manually with a separate OBSGRID process, performed on `met_em_d0x` files for the particular nest. Often, however, such a step is unnecessary; it complicates matters for the user and may introduce errors into the forecast. At other times, extra information available to the user, or extra detail that objective analysis may provide on a nest, makes objective analysis on a nest a good option.

The main reason to do objective analysis on a nest is if you have observations available with horizontal resolution somewhat greater than the resolution of your coarse domain. There may also be circumstances in which the representation of terrain on a nest allows for better use of surface observations (*i.e., the model terrain better matches the real terrain elevation of the observation*).

The main problem introduced by doing objective analysis on a nest is inconsistency in initial conditions between the coarse domain and the nest. Observations that fall just outside a nest will be used in the analysis of the coarse domain, but discarded in the analysis of the nest. With different observations used right at a nest boundary, one can get very different analyses.

How to run OBSGRID

Get the source code

The source code can be downloaded from:
http://www.mmm.ucar.edu/wrf/users/download/get_source.html. Once the tar file is gunzipped (gunzip OBSGRID.TAR.gz), and untared (untar OBSGRID.TAR), it will create an OBSGRID/ directory.

```
cd OBSGRID
```

Generate the executable

The only library that is required to build the WRF model is netCDF. The user can find the source code, precompiled binaries, and documentation at the UNIDATA home page (<http://www.unidata.ucar.edu/software/netcdf/>).

To successfully compile the utilities `plot_level.exe` and `plot_sounding.exe`, NCAR Graphics needs to be installed on your system. These routines are not necessary to run OBSGRID, but are useful for displaying observations. Since version 3.7.0 NCL scripts are available and therefore these two utilities are no longer needed to plot the data.

To configure, type:

```
./configure
```

Choose one of the configure options, then compile.

```
./compile
```

If successful, this will create the executable `obsgrid.exe`. Executables `plot_level.exe` and `plot_sounding.exe`, will be created if NCAR Graphics is installed.

Prepare the observations files

Preparing observational files is a user responsibility. Some data are available from NCAR's RDA web site. Data from the early 1970's are in ON29 format, while data from 1999 to present are in NCEP BUFR format. Help using these datasets are available. For more information see the section **Source of Observations** on page 7-3 of this Users' Guide.

A program is also available for reformatting observations from the GTS stream (*unsupported*). This can be found in OBSGRID/util, and is called *gts_cleaner.f*. The code expects to find one observational input file per analysis time. Each file should contain both surface and upper-air data (*if available*).

Edit the namelist for your specific case

The most critical information you'll be changing most often is the start date, end date, and file names.

Pay particularly careful attention to the file name settings. Mistakes in observation file names can go unnoticed because OBSGRID will happily process the wrong files, and if there are no data in the (*wrongly-specified*) file for a particular time, OBSGRID will happily provide you with an analysis of no observations.

Run the program

Run the program by invoking the command:

```
./obsgrid.exe >& obsgrid.out
```

Check the `obsgrid.out` file for information and runtime errors.

Check your output

Examine the `obsgrid.out` file for error messages or warning messages. The program should have created the files called `metoa_em*`. Additional output files containing information about observations found, used and discarded will probably be created, as well.

Important things to check include the number of observations found for your objective analysis, and the number of observations used at various levels. This can alert you to possible problems in specifying observation files or time intervals. This information is included in the `printout` file.

You may also want to experiment with a couple of simple plot utility programs, discussed below.

There are a number of additional output files, which you might find useful. These are discussed below.

Output Files

The OBSGRID program generates some ASCII/netCDF files to detail the actions taken on observations through a time cycle of the program. In support of users wishing to plot the observations used for each variable (at each level, at each time), a file is created with this information. Primarily, the ASCII/netCDF files are for consumption by the developers for diagnostic purposes. The main output of the OBSGRID program is the gridded, pressure-level data set to be passed to the `real.exe` program (files `metoa_em*`).

In each of the files listed below, the text `".dn.YYYY-MM-DD_HH:mm:ss.tttt"` allows each time period that is processed by OBSGRID to output a separate file. The only unusual information in the date string is the final four letters `"tttt"` which is the decimal time to ten thousandths of a second. These files will be dependant on the domain being processed.

`metoa_em*`

These are the final analysis files at surface and pressure levels. Generating this file is the primary goal of running OBSGRID.

These files can now be used in place of the `met_em*` files from WPS to generate initial and boundary conditions for WRF. To use these files when running `real.exe` you can do one of two things:

1. Rename or link the `metoa_em*` files back to `met_em*`. This way `real.exe` will read the files automatically.
2. Use the `auxinput1_inname` namelist option in WRF's `namelist.input` file to overwrite the default filename `real.exe` uses. To do this, add the following to the

&time_control section of the WRF `namelist.input` file before running `real.exe` (use the exact syntax as below – do not substitute the `<domain>` and `<date>` for actual numbers):

```
auxinput1_inname = "metoa_em.d<domain>.<date>"
```

wrfsfdda_dn

Use of the surface FDDA option in OBSGRID creates a file called `wrfsfdda_dn`. This file contains the surface analyses at INTF4D intervals, analyses of T, TH, U, V, RH, QV, PSFC, PMSL, and a count of observations within 250 km of each grid point.

Due to the input requirements of the WRF model, data at the current time (`_OLD`) and data for the next time (`_NEW`) are supplied at each time interval. *Due to this requirement, users must take care to specify the same interval in the WRF `fdda` section for surface nudging as the interval used in OBSGRID to create the `wrfsfdda_dn` file.*

OBS_DOMAINdxx

These files can be used in WRF for observational nudging. The format of this file is slightly different from the standard `wrf_obs / little_r` format. *See Chapter 5 of this User's Guide for details on observational nudging.*

The “*d*” in the file name represents the domain number. The “*xx*” is just a sequential number.

These files contain a list of all of the observations available for use by the OBSGRID program.

- The observations have been sorted and the duplicates have been removed.
- Observations outside of the analysis region have been removed.
- Observations with no information have been removed.
- All reports for each separate location (*different levels, but at the same time*) have been combined to form a single report.
- Data that has had the "discard" flag internally set (*data which will not be sent to the quality control or objective analysis portions of the code*) are not listed in this output.
- The data have gone through an expensive test to determine if the report is within the analysis region, and the data have been given various quality control flags. Unless a blatant error in the data is detected (*such as a negative sea-level pressure*), the observation data are not typically modified, but only assigned quality control flags.
- Data with qc flags higher than a specified value (*user controlled, via the namelist*), will be set to missing data.

The WRF observational nudging code requires that all observational data are available in a single file called OBS_DOMAINd01 (*where d is the domain number*), whereas OBSGRID creates one file per time. Therefore, to use these files in WRF, they should first be concatenated to a single file. A script (*run_cat_obs_files.csh*) is provided for this purpose. By running this script, the original OBS_DOMAINd01 files will be moved to OBS_DOMAINd01_sav, and a new OBS_DOMAINd01 file (containing all the observations for all times) will be created. This new file can be used directly in the WRF observational nudging code.

qc_obs_raw.dn.YYYY-MM-DD_HH:mm:ss.tttt(.nc)

This file contains a listing of all of the observations available for use by the OBSGRID program.

- The observations have been sorted and the duplicates have been removed.
- Observations outside of the analysis region have been removed.
- Observations with no information have been removed.
- All reports for each separate location (*different levels, but at the same time*) have been combined to form a single report.
- Data that has had the "discard" flag internally set (*data which will not be sent to the quality control or objective analysis portions of the code*) are not listed in this output.
- The data have gone through an expensive test to determine if the report is within the analysis region, and the data have been given various quality control flags. Unless a blatant error in the data is detected (*such as a negative sea-level pressure*), the observation data are not typically modified, but only assigned quality control flags.
- Two files are available, both containing identical information. One is the older ASCII format, while the other is in netCDF format.
- *The data in the ASCII file can be used as input to the plotting utility plot_sounding.exe*
- *The netCDF file can be used to plot both station data (util/station.ncl) and sounding data (util/sounding.ncl). This is available since version 3.7 and is the recommended option.*

qc_obs_used.dn.YYYY-MM-DD_HH:mm:ss.tttt(.nc)

These files are similar to the above "raw" files, and can be used in the same way. But in this case it contains the data used by the OBSGRID program, which are also the data saved to the OBS_DOMAINdxx files.

plotobs_out.dn.YYYY-MM-DD_HH:mm:ss.tttt

This file lists data by variable and by level, where each observation that has gone into the objective analysis is grouped with all of the associated observations for plotting or some other diagnostic purpose. The first line of this file is the necessary FORTRAN format required to input the data. There are titles over the data columns to aid in the information identification. Below are

a few lines from a typical file. *This data can be used as input to the plotting utility `plot_level.exe`. But since version 3.7, it is recommended to use the `station.ncl` script that uses the data in the new netCDF data files.*

```
( 3x,a8,3x,i6,3x,i5,3x,a8,3x,2(g13.6,3x),2(f7.2,3x),i7 )
Number of Observations 00001214
Variable Press Obs Station Obs Obs-1st X Y QC
Name Level Number ID Value Guess Location Location Value
U 1001 1 CYYT 6.39806 4.67690 161.51 122.96 0
U 1001 2 CWRA 2.04794 0.891641 162.04 120.03 0
U 1001 3 CWVA 1.30433 -1.80660 159.54 125.52 0
U 1001 4 CWAR 1.20569 1.07567 159.53 121.07 0
U 1001 5 CYQX 0.470500 -2.10306 156.58 125.17 0
U 1001 6 CWDO 0.789376 -3.03728 155.34 127.02 0
U 1001 7 CWDS 0.846182 2.14755 157.37 118.95 0
```

Plot Utilities

The OBSGRID package provides two utility programs for plotting observations. These programs are called `plot_soundings.exe` and `plot_levels.exe`. These optional programs use NCAR Graphics to build, which is often problematic. Two new NCL scripts are provided instead, `sounding.ncl` and `station.ncl`. Using these as oppose to the Fortran code are recommended.

sounding.ncl / plot_soundings.exe

The script `util/sounding.ncl` plots soundings. This script generates soundings from the netCDF files `qc_obs_raw.dn.YYYY-MM-DD_HH:mm:ss.ttt.nc` and `qc_obs_used.dn.YYYY-MM-DD_HH:mm:ss.ttt.nc`. Only data that are on the requested analysis levels are processed.

By default the script will plot the data from **all** the “qc_obs_used” files in the directory. This can be customized through the use of command line setting. For example:

```
ncl ./util/sounding.ncl 'qcOBS="raw"'
    will plot data from the “qc_obs_raw” files
ncl util/sounding.ncl YYYY=2010 MM=6
    will plot data from the “qc_obs_used” files for June 2010
```

Available command line options are:

qcOBS	Dataset to use. Options are “raw” or “used”. Default is “used”
YYYY	Integer year to plot. Default is all available years.
MM	Integer month to plot. Default is all available months.
DD	Integer day to plot. Default is all available days.
HH	Integer hour to plot. Default is all available hours.

outTYPE	Output type. Default is plotting to the screen, i.e., “x11”. Other options are “pdf” or “ps”. The script creates the following output files(s): qc_obs_<qcOBS>.sounding.<date>.<outTYPE> for instance: qc_obs_used.sounding.2010-03-06_09.pdf
---------	--

The older program `plot_soundings.exe` also plots soundings. This program generates soundings from the `qc_obs_raw.dn.YYYY-MM-DD_HH:mm:ss.tttt` and `qc_obs_used.dn.YYYY-MM-DD_HH:mm:ss.tttt` data files. Only data that are on the requested analysis levels are processed. The program uses information from `&record1`, `&record2` and `&plot_souding` in the `namelist.oa` file to generate the required output. The program creates output file(s): `sounding_<file_type>_<date>.cgm`

plot_level.exe

The script `util/station.ncl` creates station plots for each analysis level. These plots contain both observations that have passed all QC tests and observations that have failed the QC tests. Observations that have failed the QC tests are plotted in various colors according to which test failed. This script generates soundings from the netCDF files `qc_obs_raw.dn.YYYY-MM-DD_HH:mm:ss.tttt.nc` and `qc_obs_used.dn.YYYY-MM-DD_HH:mm:ss.tttt.nc`.

By default the script will plot the data from **all** the “qc_obs_used” files in the directory. This can be customized through the use of command line setting. For example:

```
ncl ./util/station.ncl 'qcOBS="raw"'
    will plot data from the “qc_obs_raw” files
ncl util/station.ncl YYYY=2010 MM=6
    will plot data from the “qc_obs_used” files for June 2010
```

Available command line options are:

qcOBS	Dataset to use. Options are “raw” or “used”. Default is “used”
YYYY	Integer year to plot. Default is all available years.
MM	Integer month to plot. Default is all available months.
DD	Integer day to plot. Default is all available days.
HH	Integer hour to plot. Default is all available hours.
outTYPE	Output type. Default is plotting to the screen, i.e., “x11”. Other options are “pdf” or “ps”. The script creates the following output files(s): qc_obs_<qcOBS>.station.<date>.<outTYPE> for instance: qc_obs_used.station.2010-03-06_09.pdf

The older program `plot_level.exe` creates station plots for each analysis level. These plots contain both observations that have passed all QC tests and observations that have failed the QC tests. Observations that have failed the QC tests are plotted in various colors according to which test failed. The program uses information from `&record1` and `&record2` in the `namelist.oa` file to generate plots from the observations in the file `plotobs_out.dn.YYYY-MM-DD_HH:mm:ss.tttt`. The program creates the file(s): `levels_<date>.cgm`.

Observations Format

To make the best use of the OBSGRID program, it is important for users to understand the *wrf_obs/little_r* Observations Format.

Observations are conceptually organized in terms of reports. A report consists of a single observation or set of observations associated with a single latitude/longitude coordinate.

Examples

- a surface station report including observations of temperature, pressure, humidity, and winds.
- an upper-air station's sounding report with temperature, humidity, and wind observations at many height or pressure levels.
- an aircraft report of temperature at a specific lat/lon/height.
- a satellite-derived wind observation at a specific lat/lon/height.

Each report in the *wrf_obs/little_r* Observations Format consists of at least four records:

- *A report header record*
- *one or more data records*
- *an end data record*
- *an end report record*.

The *report header record* is a 600-character-long record (*much of which is unused and needs only dummy values*) that contains certain information about the station and the report as a whole (location, station id, station type, station elevation, etc.). The report header record is described fully in the following table. Shaded items in the table are unused:

Report header format		
Variable	Fortran I/O Format	Description
latitude	F20.5	station latitude (north positive)
longitude	F20.5	station longitude (east positive)

id	A40	ID of station
name	A40	Name of station
platform	A40	Description of the measurement device
source	A40	GTS, NCAR/ADP, BOGUS, etc.
elevation	F20.5	station elevation (m)
num_vld_fld	I10	Number of valid fields in the report
num_error	I10	Number of errors encountered during the decoding of this observation
num_warning	I10	Number of warnings encountered during decoding of this observation.
seq_num	I10	Sequence number of this observation
num_dups	I10	Number of duplicates found for this observation
is_sound	L10	T/F Multiple levels or a single level
bogus	L10	T/F bogus report or normal one
discard	L10	T/F Duplicate and discarded (or merged) report.
sut	I10	Seconds since 0000 UTC 1 January 1970
julian	I10	Day of the year
date_char	A20	YYYYMMDDHHmmss
slp, qc	F13.5, I7	Sea-level pressure (Pa) and a QC flag
ref_pres, qc	F13.5, I7	Reference pressure level (for thickness) (Pa) and a QC flag
ground_t, qc	F13.5, I7	Ground Temperature (T) and QC flag
sst, qc	F13.5, I7	Sea-Surface Temperature (K) and QC
psfc, qc	F13.5, I7	Surface pressure (Pa) and QC
precip, qc	F13.5, I7	Precipitation Accumulation and QC
t_max, qc	F13.5, I7	Daily maximum T (K) and QC
t_min, qc	F13.5, I7	Daily minimum T (K) and QC
t_min_night, qc	F13.5, I7	Overnight minimum T (K) and QC
p_tend03, qc	F13.5, I7	3-hour pressure change (Pa) and QC
p_tend24, qc	F13.5, I7	24-hour pressure change (Pa) and QC
cloud_cvr, qc	F13.5, I7	Total cloud cover (oktas) and QC
ceiling, qc	F13.5, I7	Height (m) of cloud base and QC

Following the report header record are the *data records*. These data records contain the observations of pressure, height, temperature, dewpoint, wind speed, and wind direction. There are a number of other fields in the data record that are not used on input. Each data record contains data for a single level of the report. For report types that have multiple levels (e.g., *upper-air station sounding reports*), each pressure or height level has its own data record. For report types with a single level (*such as surface station reports or a satellite wind observation*), the report will have a single data record. The data record contents and format are summarized in the following table

Format of data records		
Variable	Fortran I/O Format	Description
pressure, qc	F13.5, I7	Pressure (Pa) of observation, and QC
height, qc	F13.5, I7	Height (m MSL) of observation, and QC
temperature, qc	F13.5, I7	Temperature (K) and QC
dew_point, qc	F13.5, I7	Dewpoint (K) and QC
speed, qc	F13.5, I7	Wind speed (m/s) and QC
direction, qc	F13.5, I7	Wind direction (degrees) and QC
u, qc	F13.5, I7	u component of wind (m/s), and QC
v, qc	F13.5, I7	v component of wind (m/s), and QC
rh, qc	F13.5, I7	Relative Humidity (%) and QC
thickness, qc	F13.5, I7	Thickness (m), and QC

The *end data record* is simply a data record with pressure and height fields both set to -777777.

After all the data records and the end data record, an *end report record* must appear. The end report record is simply three integers, which really aren't all that important.

Format of end_report records		
Variable	Fortran I/O Format	Description
num_vld_fld	I7	Number of valid fields in the report
num_error	I7	Number of errors encountered during the decoding of the report
num_warning	I7	Number of warnings encountered during the decoding the report

QCFlags

In the observation files, most of the meteorological data fields also have space for an additional integer quality-control flag. The quality-control values are of the form 2n, where n takes on positive integer values. This allows the various quality control flags to be additive, yet permits the decomposition of the total sum into constituent components. Following are the current quality control flags that are applied to observations:

pressure interpolated from first-guess height	= 2 ** 1 =	2
temperature and dew point both = 0	= 2 ** 4 =	16
wind speed and direction both = 0	= 2 ** 5 =	32
wind speed negative	= 2 ** 6 =	64
wind direction < 0 or > 360	= 2 ** 7 =	128
level vertically interpolated	= 2 ** 8 =	256
value vertically extrapolated from single level	= 2 ** 9 =	512
sign of temperature reversed	= 2 ** 10 =	1024
superadiabatic level detected	= 2 ** 11 =	2048
vertical spike in wind speed or direction	= 2 ** 12 =	4096
convective adjustment applied to temperature field	= 2 ** 13 =	8192
no neighboring observations for buddy check	= 2 ** 14 =	16384

data outside normal analysis time and not QC-ed	= 2 ** 15 =	32768

fails error maximum test	= 2 ** 16 =	65536
fails buddy test	= 2 ** 17 =	131072
observation outside of domain detected by QC	= 2 ** 18 =	262144

OBSGRID Namelist

The OBSGRID namelist file is called "namelist.oa", and must be in the directory from which OBSGRID is run. The namelist consists of nine namelist records, named "record1" through "record9", each having a loosely related area of content. Each namelist record, which extends over several lines in the namelist.oa file, begins with "&record<#>" (where <#> is the namelist record number) and ends with a slash "/".

The namelist record &plot_sounding is only used by the corresponding utility.

Namelist record1

The data in namelist record1 define the analysis times to process:

Namelist Variable	Value	Description
start_year	2000	4-digit year of the starting time to process
start_month	01	2-digit month of the starting time to process

start_day	24	2-digit day of the starting time to process
start_hour	12	2-digit hour of the starting time to process
end_year	2000	4-digit year of the ending time to process
end_month	01	2-digit month of the ending time to process
end_day	25	2-digit day of the ending time to process
end_hour	12	2-digit hour of the ending time to process
interval	21600	Time interval (s) between consecutive times to process

Namelist record2

The data in record2 define the model grid and names of the input files:

Namelist Variable	Value	Description
grid_id	1	ID of domain to process
obs_filename	CHARACTER	<p>Root file name (<i>may include directory information</i>) of the observational files. All input files must have the format obs_filename:<YYYY-MM-DD_HH>.</p> <p>One file required for each time period.</p> <p>If a wrfsfdca is being created, then similar input data files are required for each surface fdca time.</p>
remove_data_above_qc_flag	200000	<p>Data with qc flags higher than this will not be output to the OBS_DOMAINdxx files. Default is to output all data. Use 65536 to remove data that failed the buddy and error max tests. To also exclude data outside analysis times that could not be QC-ed use 32768 (<i>recommended</i>).</p> <p>This does not affect the data used in the OA process.</p>

remove_unverified_data	.FALSE.	When input data is not on an analysis level, the data cannot be QC-ed. This data is never used in the OA process, but may make its way into the ASCII output files. By setting this parameter to .TRUE. (recommended) these observations will be removed from the <i>OBS_DOMAINdxx</i> files.
trim_domain	.FALSE.	Set to .TRUE. if this domain must be cut down on output
trim_value	5	Value by which the domain will be cut down in each direction

The *met_em** files which are being processed must be available in the OBSGRID/ directory.

The *obs_filename* and interval settings can get confusing, and deserve some additional explanation. Use of the *obs_filename* files is related to the times and time interval set in namelist &record1, and to the F4D options set in namelist &record8. The *obs_filename* files are used for the analyses of the full 3D dataset, both at upper levels and the surface. They are also used when F4D=.TRUE.; that is, if surface analyses are being created for surface FDDA nudging. The *obs_filename* files should contain all observations (upper-air and surface) to be used for a particular analysis at a particular time.


Ideally there should be an *obs_filename* for each time period for which an objective analysis is desired. Time periods are processed sequentially from the starting date to the ending date by the time interval, all specified in namelist &record1. All observational files must have a date associated with them. If a file is not found, the code will process as if this file contains zero observations, and then continue to the next time period.

If the F4D option is selected, the *obs_filename* files are similarly processed for surface analyses, this time with the time interval as specified by INTF4D.

If a user wishes to include observations from outside the model domain of interest, geogrid.exe (WPS) needs to be run over a slightly larger domain than the domain of interest. Setting trim_domain to .TRUE. will cut all 4 directions of the input domain down by the number of grid points set in trim_value.

In the example below, the domain of interest is the inner white domain with a total of 100x100 grid points. geogrid.exe has been run for the outer domain (110x110 grid points). By setting

the `trim_value` to 5, the output domain will be trimmed by 5 grid points in each direction, resulting in the white 100x100 grid point domain.

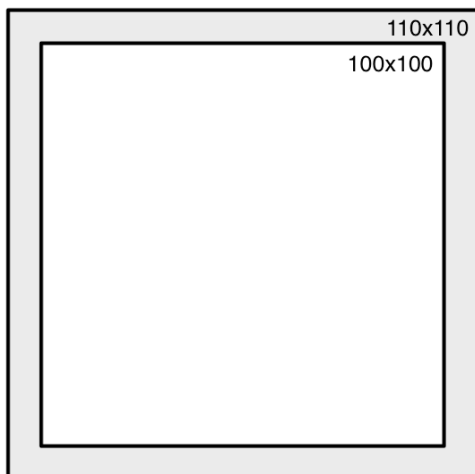

Namelist record3

The data in the `&record3` concern space allocated within the program for observations. These are values that should not frequently need to be modified:

Namelist Variable	Value	Description
<code>max_number_of_obs</code>	10000	Anticipated maximum number of reports per time period
<code>fatal_if_exceed_max_obs</code>	.TRUE.	T/F flag allows the user to decide the severity of not having enough space to store all of the available observation

Namelist record4

The data in `&record4` set the quality control options. There are four specific tests that may be activated by the user: An error max test; a buddy test; removal of spike, and; the removal of super-adiabatic lapse rates. For some of these tests, a user has control over the tolerances, as well.

Namelist Variable	Value	Description
Error Max Test: For this test there is a threshold for each variable. These values are scaled for time of day, surface characteristics and vertical level.		

qc_test_error_max	.TRUE.	Check the difference between the first-guess and the observation
max_error_t	10	Maximum allowable temperature difference (K)
max_error_uv	13	Maximum allowable horizontal wind component difference (m/s)
max_error_z	8	<i>Not used</i>
max_error_rh	50	Maximum allowable relative humidity difference (%)
max_error_p	600	Maximum allowable sea-level pressure difference (Pa)

Buddy Check Test: For this test there is a threshold for each variable. These values are similar to standard deviations.

qc_test_buddy	.TRUE.	Check the difference between a single observation and neighboring observations
max_buddy_t	8	Maximum allowable temperature difference (K)
max_buddy_uv	8	Maximum allowable horizontal wind component difference (m/s)
max_buddy_z	8	<i>Not used</i>
max_buddy_rh	40	Maximum allowable relative humidity difference (%)
max_buddy_p	800	Maximum allowable sea-level pressure difference (Pa)
buddy_weight	1.0	Value by which the buddy thresholds are scale

Spike removal

qc_test_vert_consistency	.FALSE.	Check for vertical spikes in temperature, dew point, wind speed and wind direction
--------------------------	---------	--

Removal of super-adiabatic lapse rates

qc_test_convective_adj	.FALSE.	Remove any super-adiabatic lapse rate in a sounding by conservation of dry static energy
------------------------	---------	--

For satellite and aircraft observations, data are often horizontally spaced with only a single vertical level. The following two entries describe how far the user assumes that the data are valid in pressure space.

max_p_extend_t	1300	Pressure difference (Pa) through which a single temperature report may be extended
max_p_extend_w	1300	Pressure difference (Pa) through which a single wind report may be extended

Namelist record5

The data in &record5 control the enormous amount of printout that may be produced by the OBSGRID program. These values are all logical flags, where TRUE will generate output and FALSE will turn off output.

```
print_obs_files ; print_found_obs ; print_header ;
print_analysis ;print_qc_vert ; print_qc_dry ;
print_error_max ; print_buddy ;print_oa
```

Namelist record7

The data in &record7 concern the use of the first-guess fields and surface FDDA analysis options. Always use the first guess.

Namelist Variable	Value	Description
use_first_guess	.TRUE.	Always use first guess (use_first_guess=.TRUE.)
f4d	.TRUE.	Turns on (.TRUE.) or off (.FALSE.) the creation of surface analysis files.
intf4d	10800	Time interval in seconds between surface analysis times
lagtem	.FALSE.	Use the previous time-period's final surface analysis for this time-period's first guess (lagtem=.TRUE.); or Use a temporal interpolation between upper-air times as the first guess for this surface analysis (lagtem = .FALSE.)

Namelist record8

The data in &record8 concern the smoothing of the data after the objective analysis. Note, only the the differences fields (*observation minus first-guess*) of the analyzed are smoothed, not the full fields.

Namelist Variable	Value	Description
smooth_type	1	1 = five point stencil of 1-2-1 smoothing; 2 = smoother-desmoothing
smooth_sfc_wind	0	Number of smoothing passes for surface winds
smooth_sfc_temp	0	Number of smoothing passes for surface temperature
smooth_sfc_rh	0	Number of smoothing passes for surface relative humidity
smooth_sfc_slp	0	Number of smoothing passes for sea-level pressure
smooth_upper_wind	0	Number of smoothing passes for upper-air winds
smooth_upper_temp	0	Number of smoothing passes for upper-air temperature
smooth_upper_rh	0	Number of smoothing passes for upper-air relative humidity

Namelist record9

The data in &record9 concern the objective analysis options. There is no user control to select the various Cressman extensions for the radius of influence (*circular, elliptical or banana*). If the Cressman option is selected, ellipse or banana extensions will be applied as the wind conditions warrant.

Namelist Variable	Value	Description
oa_type	"Cressman"	"MQD" for multiquadric; "Cressman" for the Cressman-type scheme, this string is case sensitive
oa_3D_type	"Cressman"	Set upper-air scheme to "Cressman", regardless of the scheme used at the surface
oa_3D_option	0	How to switch between "MQD" and "Cressman" if not enough observations are available to perform "MQD"
mqd_minimum_num_obs	30	Minimum number of observations for MQD
mqd_maximum_num_obs	1000	Maximum number of observations for MQD

radius_influence	5,4,3,2	Radius of influence in grid units for Cressman scheme
oa_min_switch	.TRUE.	T = switch to Cressman if too few observations for MQD; F = no analysis if too few observations
oa_max_switch	.TRUE.	T = switch to Cressman if too many observations for MQD; F = no analysis if too many observation

When `oa_type` is set to *Cressman*, then the *Cressman* scheme will be performed on all data.

When `oa_type` is set to *MQD*, there are a wide variety of options available that control when the code will revert back to the *Cressman* scheme.

- `oa_max_switch ; mqd_maximum_num_obs`
The code will revert back to *Cressman* if the switch is set to true and the maximum number of observations is exceeded.
This is to reduce the time the code runs and not for physical reasons.
Recommended to leave switch set to true and just set the maximum number large.
- `oa_min_switch ; mqd_minimum_num_obs`
The code will revert back to *Cressman* if the switch is set to true and there are too few observations. How and when the code reverts back to Cressman under these conditions are controlled by the `oa_3D_option` parameter.
Recommended to leave switch set to true and start with the default minimum settings.
- `oa_3D_type="Cressman"`
All upper-air levels will use the *Cressman* scheme, regardless of other settings.

The surface will use *MQD* as long as there are enough observations to do so (`mqd_maximum_num_obs ; mqd_minimum_num_obs`), otherwise it will revert to the *Cressman* scheme.

Note that if some time periods have enough observations and others do not, the code will only revert to *Cressman* for the times without sufficient observations.

- `oa_3D_option`
There are three options (0,1,2). For all these options the surface will use *MQD* as long as there are enough observations to do so (`mqd_maximum_num_obs ; mqd_minimum_num_obs`), otherwise it will revert to the *Cressman* scheme.
Note that if some time periods have enough observations and others do not, the code will only revert to *Cressman* for the times without sufficient observations.

The upper-air will react as follows:

0 (default): MQD is performed in the upper-air as long as there are enough observations

to do so (`mqd_maximum_num_obs ; mqd_minimum_num_obs`). As soon as this is no longer the case, the code will STOP, with suggestions as to which parameters to set to run the code correctly.

1: The code will first check to see if, for a given time, all levels and variables in the upper-air have sufficient observations for the *MQD* scheme. If not, the code will revert to *Cressman* for that time period. Note that if some time periods have enough observations and others do not, the code will only revert to *Cressman* for the times without sufficient observations.

2: The code will check if sufficient observations are available per time, level, and variable for the *MQD* scheme. If not, the code will revert to the *Cressman* scheme for that particular time, level and variable. Note this can result in uncontrolled switching between *MQD* and *Cressman*. Therefore this option is not recommended.

`radius_influence`

There are three ways to set the radius of influence (RIN) for the *Cressman* scheme:

- Manually: Set the RIN and number of scans directly. E.g., 5,4,3,2, will result in 4 scans. The first will use 5 grid points for the RIN and the last, 2 points.
- Automatically 1: Set RIN to 0 and the code will calculate the RIN based on the domain size and an estimated observation density of 325 km. By default there will be 4 scans.
- Automatically 2: Set RIN to a negative number and the code will calculate the RIN based on the domain size and an estimated observation density of 325 km. The number of scans is controlled by the value of the set number. E.g, -5 will result in 5 scans.

Namelist `plot_sounding`

Only used for the utility `plot_sounding.exe`

Namelist Variable	Value	Description
<code>file_type</code>	"raw"	File to read to produce the plots. Options are "raw" or "used"
<code>read_metoa</code>	.TRUE.	If set to .TRUE., the model domain information in the <code>metoa_em</code> files will be used to add location information on the plot.

Chapter 8: WRF Software

Table of Contents

- [WRF Build Mechanism](#)
- [Registry](#)
- [I/O Applications Program Interface \(I/O API\)](#)
- [Timekeeping](#)
- [Software Documentation](#)
- [Performance](#)

WRF Build Mechanism

The WRF build mechanism provides a uniform apparatus for configuring and compiling the WRF model, WRF-Var system and the WRF pre-processors over a range of platforms, with a variety of options. This section describes the components and functioning of the build mechanism. For information on building the WRF code, see the chapter on Software Installation.

Required software:

The WRF build relies on Perl (version 5 or later) and a number of UNIX utilities: csh and Bourne shell, make, M4, sed, awk, and the uname command. A C compiler is needed to compile programs and libraries in the tools and external directories. The WRF code, itself, is mostly standard Fortran (and uses a few 2003 capabilities). For distributed-memory processing, MPI and related tools and libraries should be installed.

Build Mechanism Components:

Directory structure: The directory structure of WRF consists of the top-level directory, plus directories containing files related to the WRF software framework (**frame**), the WRF model (**dyn_em**, **phys**, **chem**, **share**), WRF-Var (**da**), configuration files (**arch**, **Registry**), helper and utility programs (**tools**), and packages that are distributed with the WRF code (**external**).

Scripts: The top-level directory contains three user-executable scripts: **configure**, **compile**, and **clean**. The configure script relies on the Perl script in **arch/Config_new.pl**.

Programs: A significant number of WRF lines of code are automatically generated at compile time. The program that does this is **tools/registry** and it is distributed as part of the source code with the WRF model.

Makefiles: The main **Makefile** (input to the UNIX make utility) is in the top-level directory. There are also makefiles in most of the subdirectories that come with WRF. Make is called recursively over the directory structure. Make is not directly invoked by the user to compile WRF; the **compile** script is provided for this purpose. The WRF build has been structured to allow “parallel make”. Before the compile command, the user sets an environment variable, **J**, to the number of processors to use. For example, to use two processors (in csh syntax):

```
setenv J "-j 2"
```

On some machines, this parallel **make** causes troubles (a typical symptom is a missing **mpif.h** file in the frame directory). The user can force that only a single processor to be used with the command:

```
setenv J "-j 1"
```

Configuration files: The **configure.wrf** contains compiler, linker, and other build settings, as well as rules and macro definitions used by the make utility. The **configure.wrf** file is included by the Makefiles in most of the WRF source distribution (Makefiles in tools and external directories do not include **configure.wrf**). The **configure.wrf** file, in the top-level directory, is generated each time the configure script is invoked. It is also deleted by **clean -a**. Thus, **configure.wrf** is the place to make temporary changes, such as optimization levels and compiling with debugging, but permanent changes should be made in the file **arch/configure_new.defaults**. The **configure.wrf** file is composed of three files: **arch/preamble_new**, **arch/postamble_new** and **arch/configure_new.defaults**.

The **arch/configure_new.defaults** file contains lists of compiler options for all the supported platforms and configurations. Changes made to this file will be permanent. This file is used by the **configure** script to generate a temporary **configure.wrf** file in the top-level directory. The **arch** directory also contains the files **preamble_new** and **postamble_new**, which constitute the generic parts (non-architecture specific) of the **configure.wrf** file that is generated by the **configure** script.

The **Registry** directory contains files that control many compile-time aspects of the WRF code. The files are named **Registry.core** (where **core** is, for example, **EM**). The **configure** script copies one of these to **Registry/Registry**, which is the file that **tools/registry** will use as input. The choice of **core** depends on settings to the **configure** script. Changes to **Registry/Registry** will be lost; permanent changes should be made to **Registry.core**. For the WRF ARW model, the file is typically **Registry.EM**. One of the keywords that the registry program understands is **include**. The ARW Registry files make use of the **REGISTRY.EM_COMMON** file.

This reduces the amount of replicated registry information. When searching for variables previously located in a **Registry.EM*** file, now look in **Registry.EM_COMMON**.

Environment variables: Certain aspects of the configuration and build are controlled by environment variables: the non-standard locations of NetCDF libraries or the Perl command, which dynamic core to compile, machine-specific features, and optional build libraries (such as Grib Edition 2, HDF, and parallel netCDF).

In addition to WRF-related environment settings, there may also be settings specific to particular compilers or libraries. For example, local installations may require setting a variable like **MPICH_F90** to make sure the correct instance of the Fortran 90 compiler is used by the **mpif90** command.

How the WRF build works:

There are two steps in building WRF: configuration and compilation.

Configuration: The **configure** script configures the model for compilation on your system. The configuration first attempts to locate needed libraries, such as netCDF or HDF, and tools, such as Perl. It will check for these in normal places, or will use settings from the user's shell environment. The **configure** file then calls the UNIX **uname** command to discover what platform you are compiling on. It then calls the Perl script **arch/Config_new.pl**, which traverses the list of known machine configurations and displays a list of available options to the user. The selected set of options is then used to create the **configure.wrf** file in the top-level directory. This file may be edited but changes are temporary, since the file will be deleted by **clean -a**, or overwritten by the next invocation of the **configure** script. About the only typical option that is included on the **configure** command is “-d” (for debug). The code builds relatively quickly and has the debugging switches enabled, but the model will run very slowly since all of the optimization has been deactivated. This script takes only a few seconds to run.

Compilation: The **compile** script is used to compile the WRF code after it has been configured using the **configure** script. This csh script performs a number of checks, constructs an argument list, copies to **Registry/Registry** the correct **Registry.core** file for the core being compiled, and then invokes the UNIX **make** command in the top-level directory. The core to be compiled is determined from the user's environment; if no core is specified in the environment (by setting **WRF_core_CORE** to 1) the default core is selected (currently the Eulerian Mass core for ARW). The **Makefile**, in the top-level directory, directs the rest of the build, accomplished as a set of recursive invocations of **make** in the subdirectories of WRF. Most of these makefiles include the **configure.wrf** file from the top-level directory. The order of a complete build is as follows:

1. Make in **external** directory
 - a. make in **external/io_{grib1,grib_share,int,netcdf}** for Grib Edition 1, binary, and netCDF implementations of I/O API
 - b. make in **RSL_LITE** directory to build communications layer (DM_PARALLEL only)
 - c. make in **external/esmf_time_f90** directory to build ESMF time manager library
 - d. make in **external/fftpack** directory to build FFT library for the global filters
 - e. make in other external directories, as specified by “**external:**” target in the **configure.wrf** file
2. Make in the **tools** directory to build the program that reads the **Registry/Registry** file and auto-generates files in the **inc** directory
3. Make in the **frame** directory to build the WRF framework specific modules
4. Make in the **share** directory to build the non-core-specific mediation layer routines, including WRF I/O modules that call the I/O API
5. Make in the **phys** directory to build the WRF model layer routines for physics (non core-specific)
6. Make in the **dyn_core** directory for core-specific mediation-layer and model-layer subroutines
7. Make in the **main** directory to build the main programs for WRF, symbolic link to create executable files (location depending on the build case that was selected as the argument to the compile script)

Source files (**.F** and, in some of the external directories, **.F90**) are preprocessed to produce **.f90** files, which are input to the compiler. As part of the preprocessing, Registry-generated files from the **inc** directory may be included. Compiling the **.f90** files results in the creation of object (**.o**) files that are added to the library **main/libwrf.a**. Most of the **external** directories generate their own library file. The linking step produces the **wrf.exe** executable and other executables, depending on the case argument to the compile command: **real.exe** (a preprocessor for real-data cases) or **ideal.exe** (a preprocessor for idealized cases), and the **ndown.exe** program, for one-way nesting of real-data cases.

The `.o` files and `.f90` files from a compile are retained until the next invocation of the `clean` script. The `.f90` files provide the true reference for tracking down run time errors that refer to line numbers or for sessions using interactive debugging tools such as `dbx` or `gdb`.

Registry

Tools for automatic generation of application code from user-specified tables provide significant software productivity benefits in development and maintenance of large applications, such as WRF. Just for the WRF model, hundreds of thousands of lines of WRF code are automatically generated from a user-edited table, called the Registry. The Registry provides a high-level single-point-of-control over the fundamental structure of the model data, and thus provides considerable utility for developers and maintainers. It contains lists describing state data fields and their attributes: dimensionality, binding to particular solvers, association with WRF I/O streams, communication operations, and run time configuration options (namelist elements and their bindings to model control structures). Adding or modifying a state variable to WRF involves modifying a single line of a single file; this single change is then automatically propagated to scores of locations in the source code the next time the code is compiled.

The WRF Registry has two components: the Registry file (which the user may edit), and the Registry program.

The Registry file is located in the **Registry** directory and contains the entries that direct the auto-generation of WRF code by the Registry program. There is more than one Registry in this directory, with filenames such as **Registry.EM_COMMON** (for builds using the Eulerian Mass/ARW core) and **Registry.NMM** (for builds using the NMM core). The [WRF Build Mechanism](#) copies one of these to the file **Registry/Registry** and this file is used to direct the Registry program. The syntax and semantics for entries in the Registry are described in detail in [“WRF Tiger Team Documentation: The Registry”](#) on <http://www2.mmm.ucar.edu/wrf/WG2/Tigers/Registry/>. The use of the keyword `include` has greatly reduced the replicated information that was inside the **Registry.EM_COMMON** file. The Registry program is distributed as part of WRF in the **tools** directory. It is built automatically (if necessary) when WRF is compiled. The executable file is **tools/registry**. This program reads the contents of the Registry file, **Registry/Registry**, and generates files in the **inc** directory. These include files are inserted (with `cpp #include` commands) into WRF Fortran source files prior to compilation. Additional information on these is provided as an appendix to [“WRF Tiger Team Documentation: The Registry \(DRAFT\)”](#). The Registry program itself is written in C. The source files and **makefile** are in the **tools** directory.

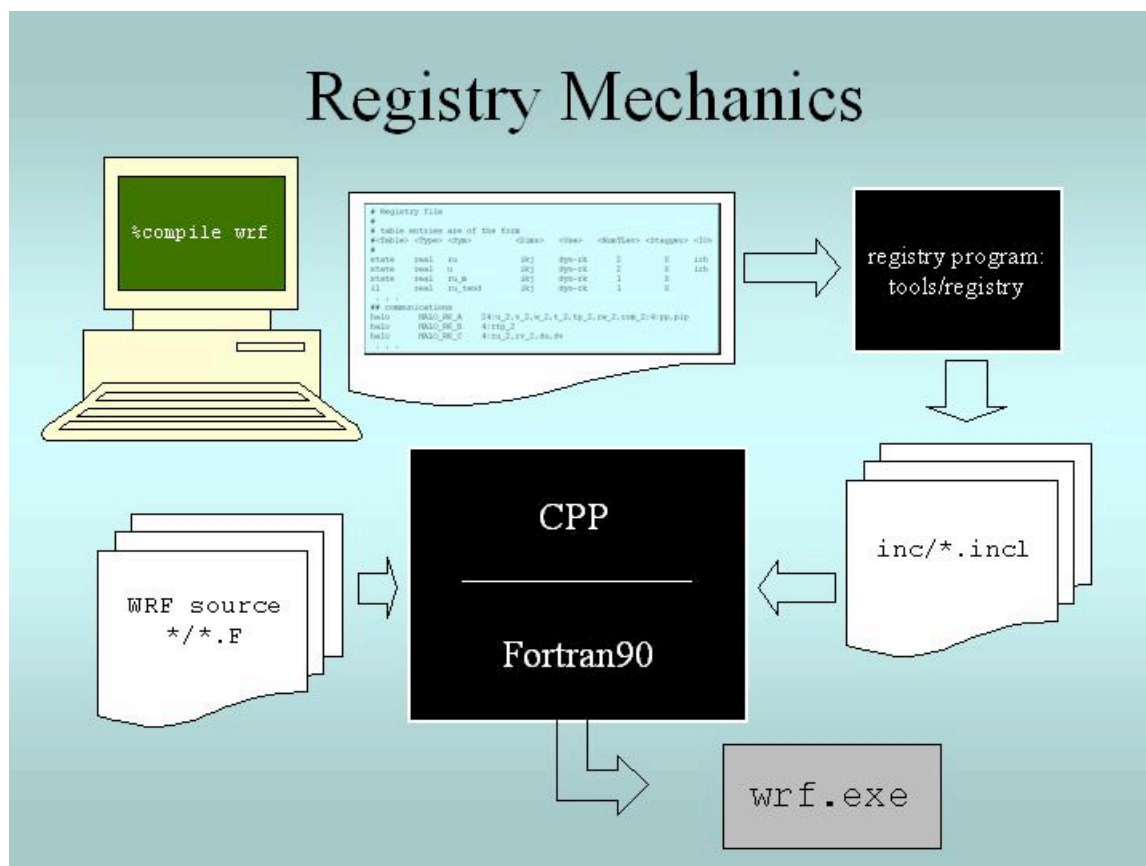


Figure 8.1. When the user compiles WRF, the Registry Program reads Registry/Registry, producing auto-generated sections of code that are stored in files in the `inc` directory. These are included into WRF using the CPP preprocessor and the Fortran compiler.

In addition to the WRF model itself, the **Registry/Registry** file is used to build the accompanying preprocessors such as **real.exe** (for real data) or **ideal.exe** (for ideal simulations), and the **ndown.exe** program (used for one-way, off-line nesting).

Every variable that is an input or an output field is described in the Registry. Additionally, every variable that is required for parallel communication, specifically associated with a physics package, or needs to provide a tendency to multiple physics or dynamics routines is contained in the Registry. For each of these variables, the index ordering, horizontal and vertical staggering, feedback and nesting interpolation requirements, and the associated IO are defined. For most users, to add a variable into the model requires, regardless of dimensionality, only the addition of a single line to the Registry (make sure that changes are made to the correct **Registry.core** file, as changes to the **Registry** file itself are overwritten). Since the Registry modifies code for compile-time options, any change to the Registry REQUIRES that the code be returned to the original unbuilt status with the **clean -a** command.

The other very typical activity for users is to define new run-time options, which are handled via a Fortran namelist file **namelist.input** in WRF. As with the model

state arrays and variables, the entire model configuration is described in the Registry. As with the model arrays, adding a new namelist entry is as easy as adding a new line in the Registry.

While the model state and configuration are, by far, the most commonly used features in the Registry, the data dictionary has several other powerful uses. The Registry file provides input to generate all of the communications for the distributed memory processing (halo interchanges between patches, support for periodic lateral boundaries, and array transposes for FFTs to be run in the X, Y, or Z directions). The Registry associates various fields with particular physics packages so that the memory footprint reflects the actual selection of the options, not a maximal value.

Together, these capabilities allow a large portion of the WRF code to be automatically generated. Any code that is automatically generated relieves the developer of the effort of coding and debugging that portion of software. Usually, the pieces of code that are suitable candidates for automation are precisely those that are fraught with “hard to detect” errors, such as communications, indexing, and IO, which must be replicated for hundreds of variables.

Registry Syntax:

Each entry in the Registry is for a specific variable, whether it is for a new dimension in the model, a new field, a new namelist value, or even a new communication. For readability, a single entry may be spread across several lines with the traditional “\” at the end of a line to denote that the entry is continuing. When adding to the Registry, most users find that it is helpful to copy an entry that is similar to the anticipated new entry, and then modify that Registry entry. The Registry is not sensitive to spatial formatting. White space separates identifiers in each entry.

Note: Do not simply remove an identifier and leave a supposed token blank, use the appropriate default value (currently a dash character “-”).

Registry Entries:

The WRF Registry has the following types of entries (not case dependent):

- Dimspec*** – Describes dimensions that are used to define arrays in the model
- State*** – Describes state variables and arrays in the domain structure
- II*** – Describes local variables and arrays in solve
- Typedef*** – Describes derived types that are subtypes of the domain structure
- Rconfig*** – Describes a configuration (e.g. namelist) variable or array
- Package*** – Describes attributes of a package (e.g. physics)
- Halo*** – Describes halo update interprocessor communications
- Period*** – Describes communications for periodic boundary updates
- Xpose*** – Describes communications for parallel matrix transposes
- include*** – Similar to a CPP #include file

These *keywords* appear as the first word in a line of the file **Registry** to define which type of information is being provided. Following are examples of the more likely Registry types that users will need to understand.

Registry Dimspec:

The first set of entries in the Registry is the specifications of the dimensions for the fields to be defined. To keep the WRF system consistent between the dynamical cores and Chemistry, a unified **registry.dimspec** file is used (located in the **Registry** directory). This single file is included into each Registry file, with the keyword **include**. In the example below, three dimensions are defined: i, j, and k. If you do an “**ncdump -h**” on a WRF file, you will notice that the three primary dimensions are named as “**west_east**”, “**south_north**”, and “**bottom_top**”. That information is contained in this example (the example is broken across two lines, but interleaved).

```
#<Table>  <Dim>  <Order>  <How defined>
dimspec   i      1      standard_domain
dimspec   j      3      standard_domain
dimspec   k      2      standard_domain
```

```
<Coord-axis>  <Dimname in Datasets>
x           west_east
y           south_north
z           bottom_top
```

The WRF system has a notion of horizontal and vertical staggering, so the dimension names are extended with a “**_stag**” suffix for the staggered sizes. The list of names in the <Dim> column may either be a single unique character (for release 3.0.1.1 and prior), or the <Dim> column may be a string with no embedded spaces (such as **my_dim**). When this dimension is used later to dimension-size a **state** or **il** variable, it must be surrounded by curly braces (such as **{my_dim}**). This <Dim> variable is not case specific, so for example “**i**” is the same as an entry for “**I**”.

Registry State and I1:

A **state** variable in WRF is a field that is eligible for IO and communications, and exists for the duration of the model forecast. The **I1** variables (intermediate level one) are typically thought of as tendency terms, computed during a single model time-step, and then discarded prior to the next time-step. The space allocation and de-allocation for these **I1** variables is automatic (on the stack for the model solver). In this example, for readability, the column titles and the entries are broken into multiple interleaved lines, with the user entries in a **bold font**.

Some fields have simple entries in the **Registry** file. The following is a **state** variable that is a Fortran type **real**. The name of the field inside the WRF model is

u_gc. It is a three dimension array (**igj**). This particular field is only for the ARW core (**dyn_em**). It has a single time level, and is staggered in the **x** and **z** directions. This field is input only to the real program (**i1**). On output, the netCDF name is **UU**, with the accompanying description and units provided.

```
#<Table> <Type> <Sym> <Dims>
state      real    u_gc    igj

<Use>      <NumTLev> <Stagger> <IO>
dyn_em      1          xz      i1

<DNAME>      <DESCRIP>                <UNITS>
"UU"          "x-wind component"        "m s-1"
```

If a variable is not staggered, a “-” (dash) is inserted instead of leaving a blank space. The same dash character is required to fill in a location when a field has no IO specification. The variable description and units columns are used for post-processing purposes only; this information is not directly utilized by the model.

When adding new variables to the **Registry** file, users are warned to make sure that variable names are unique. The **<Sym>** refers to the variable name inside the WRF model, and it is not case sensitive. The **<DNAME>** is quoted, and appears exactly as typed. Do not use imbedded spaces. While it is not required that the **<Sym>** and **<DNAME>** use the same character string, it is highly recommended. The **<DESCRIP>** and the **<UNITS>** are optional, however they are a good way to supply self-documentation to the Registry. Since the **<DESCRIP>** value is used in the automatic code generation, restrict the variable description to 40 characters or less.

From this example, we can add new requirements for a variable. Suppose that the variable to be added is not specific to any dynamical core. We would change the **<Use>** column entry of **dyn_em** to **misc** (for miscellaneous). The **misc** entry is typical of fields used in physics packages. Only dynamics variables have more than a single time level, and this introductory material is not suitable for describing the impact of multiple time periods on the registry program. For the **<Stagger>** option, users may select any subset from {**x**, **y**, **z**} or {-}, where the dash character “-” signifies “no staggering”. For example, in the ARW model, the x-direction wind component, **u**, is staggered in the **x** direction, and the y-direction wind component, **v**, is staggered in the **y** direction.

The **<IO>** column handles file input and output, and it handles the nesting specification for the field. The file input and output uses three letters: **i** (input), **r** (restart), and **h** (history). If the field is to be in the input file to the model, the restart file from the model, and the history file from the model, the entry would be **irh**. To allow more flexibility, the input and history fields are associated with streams. The user may specify a digit after the **i** or the **h** token, stating that this variable is associated with a specified stream (1 through 9) instead of the default (0). A single variable may be associated with

multiple streams. Once any digit is used with the **i** or **h** tokens, the default **0** stream must be explicitly stated. For example, <IO> entry **i** and <IO> entry **i0** are the same. However, <IO> entry **h1** outputs the field to the first auxiliary stream, but does not output the field to the default history stream. The <IO> entry **h01** outputs the field to both the default history stream and the first auxiliary stream. For streams larger than a single digit, such as stream number thirteen, the multi-digit numerical value is enclosed inside braces: **i{13}**. The maximum stream is currently 24 for both input and history.

Nesting support for the model is also handled by the <IO> column. The letters that are parsed for nesting are: **u** (*up* as in feedback up), **d** (*down*, as in downscale from coarse to fine grid), **f** (*forcing*, how the lateral boundaries are processed), and **s** (*smoothing*). As with other entries, the best course of action is to find a field nearly identical to the one that you are inserting into the **Registry** file, and copy that line. The user needs to make the determination whether or not it is reasonable to smooth the field in the area of the coarse grid, where the fine-grid feeds back to the coarse grid. Variables that are defined over land and water, non-masked, are usually smoothed. The lateral boundary forcing is primarily for dynamics variables, and is ignored in this overview presentation. For non-masked fields (such as wind, temperature, & pressure), the downward interpolation (controlled by **d**) and the feedback (controlled by **u**) use default routines. Variables that are land fields (such as soil temperature **TSLB**) or water fields (such as sea ice **XICE**) have special interpolators, as shown in the examples below (again, interleaved for readability):

```
#<Table> <Type> <Sym> <Dims>
state    real    TSLB    ilj
state    real    XICE    ij
```

```
<Use>    <NumTLev> <Stagger>
misc      1          Z
misc      1          -
```

```
<IO>
i02rhd=(interp_mask_land_field:lu_index)u=(copy_fcnm)
i0124rhd=(interp_mask_water_field:lu_index)u=(copy_fcnm)
```

```
<DNAME>   <DESCRIP>                <UNITS>
"TSLB"    "SOIL TEMPERATURE"        "K"
"SEAICE"  "SEA ICE FLAG"             ""
```

Note that the **d** and **u** entries in the <IO> section are followed by an “=” then a parenthesis-enclosed subroutine, and a colon-separated list of additional variables to pass to the routine. It is recommended that users follow the existing pattern: **du** for non-masked variables, and the above syntax for the existing interpolators for masked variables.

Registry Rconfig:

The **Registry** file is the location where the run-time options to configure the model are defined. Every variable in the ARW namelist is described by an entry in the **Registry** file. The default value for each of the namelist variables is as assigned in the Registry. The standard form for the entry for two namelist variables is given (broken across lines and interleaved):

```
#<Table>  <Type>      <Sym>
rconfig integer run_days
rconfig integer start_year

      <How set>          <Nentries>    <Default>
namelist,time_control      1           0
namelist,time_control max_domains 1993
```

The keyword for this type of entry in the **Registry** file is **rconfig** (run-time configuration). As with the other model fields (such as **state** and **il**), the <Type> column assigns the Fortran kind of the variable: **integer**, **real**, or **logical**. The name of the variable in ARW is given in the <Sym> column, and is part of the derived data type structure, as are the **state** fields. There are a number of Fortran namelist records in the file **namelist.input**. Each namelist variable is a member of one of the specific namelist records. The previous example shows that **run_days** and **start_year** are both members of the **time_control** record. The <Nentries> column refers to the dimensionality of the namelist variable (number of entries). For most variables, the <Nentries> column has two eligible values, either **1** (signifying that the scalar entry is valid for all domains) or **max_domains** (signifying that the variable is an array, with a value specified for each domain). Finally, a default value is given. This permits a namelist entry to be removed from the **namelist.input** file if the default value is acceptable.

The registry program constructs two subroutines for each namelist variable: one to retrieve the value of the namelist variable, and the other to set the value. For an integer variable named **my_nml_var**, the following code snippet provides an example of the easy access to the namelist variables.

```
INTEGER :: my_nml_var, dom_id
CALL nl_get_my_nml_var ( dom_id , my_nml_var )
```

The subroutine takes two arguments. The first is the input integer domain identifier (for example, **1** for the most coarse grid, **2** for the second domain), and the second argument is the returned value of the namelist variable. The associated subroutine to set the namelist variable, with the same argument list, is **nl_set_my_nml_var**. For namelist variables that are scalars, the grid identifier should be set to **1**.

The **rconfig** line may also be used to define variables that are convenient to pass around in the model, usually part of a derived configuration (such as the number of microphysics species associated with a physics package). In this case, the `<How set>` column entry is **derived**. This variable does not appear in the namelist, but is accessible with the same generated **nl_set** and **nl_get** subroutines.

Registry Halo, Period, and Xpose:

The distributed memory, inter-processor communications are fully described in the **Registry** file. An entry in the Registry constructs a code segment which is included (with **cpp**) in the source code. Following is an example of a **halo** communication (split across two lines and interleaved for readability).

```
#<Table>  <CommName>    <Core>
halo      HALO_EM_D2_3  dyn_em

<Stencil:varlist>
24:u_2,v_2,w_2,t_2,ph_2;24:moist,chem,scalar;4:mu_2,al
```

The keyword is **halo**. The communication is named in the `<CommName>` column, so that it can be referenced in the source code. The entry in the `<CommName>` column is case sensitive (the convention is to start the name with **HALO_EM**). The selected dynamical core is defined in the `<Core>` column. There is no ambiguity, as every communication in each **Registry** file will have the exact same `<Core>` column option. The last set of information is the `<Stencil:varlist>`. The portion in front of the “:” is the stencil size, and the comma-separated list afterwards defines the variables that are communicated with that stencil size. Different stencil sizes are available, and are “;”-separated in the same `<Stencil:varlist>` column. The stencil sizes **8**, **24**, **48** all refer to a square with an odd number of grid cells on a side, with the center grid cell removed (**8** = 3x3-1, **24** = 5x5-1, **48** = 7x7-1). The special small stencil **4** is just a simple north, south, east, west communication pattern.

The convention in the WRF model is to provide a communication immediately after a variable has been updated. The communications are restricted to the mediation layer (an intermediate layer of the software that is placed between the framework level and the model level). The model level is where developers spend most of their time. The majority of users will insert communications into the **dyn_em/solve_em.F** subroutine. The **HALO_EM_D2_3** communication, defined in the **Registry** file in the example above, is activated by inserting a small section of code that includes an automatically generated code segment into the solve routine, via standard **cpp** directives.

```
#ifdef DM_PARALLEL
#   include "HALO_EM_D2_3.inc"
#endif
```


The parallel communications are only required when the ARW code is built for distributed-memory parallel processing, which accounts for the surrounding **#ifdef**.

The **period** communications are required when periodic lateral boundary conditions are selected. The Registry syntax is very similar for **period** and **halo** communications, but the stencil size refers to how many grid cells to communicate, in a direction that is normal to the periodic boundary.

```
#<Table>      <CommName>      <Core>      <Stencil:varlist>
period      PERIOD_EM_COUPLE_A      dyn_em      2:mub,mu_1,mu_2
```

The **xpose** (a data transpose) entry is used when decomposed data is to be re-decomposed. This is required when doing FFTs in the x-direction for polar filtering, for example. No stencil size is necessary.

```
#<Table>      <CommName>      <Core>      <Varlist>
xpose      XPOSE_POLAR_FILTER_T      dyn_em      t_2,t_xxx,dum_yyy
```

It is anticipated that many users will add to the the parallel communications portion of the Registry file (**halo** and **period**). It is unlikely that users will add **xpose** fields.

Registry Package:

The **package** option in the **Registry** file associates fields with particular physics packages. Presently, it is mandatory that all 4-D arrays be assigned. Any 4-D array that is not associated with the selected physics option at run-time is neither allocated, used for IO, nor communicated. All other 2-D and 3-D arrays are eligible for use with a **package** assignment, but that is not required.

The purpose of the **package** option is to allow users to reduce the memory used by the model, since only “necessary” fields are processed. An example for a microphysics scheme is given below.

```
#<Table>      <PackageName>      <NMLAssociated>      <Variables>
package      kesslerscheme      mp_physics==1      - moist:qv,qc,qr
```

The entry keyword is **package**, and is associated with the single physics option listed under <NMLAssociated>. The package is referenced in the code in Fortran **IF** and **CASE** statements by the name given in the <PackageName> column, instead of the more confusing and typical **IF (mp_physics == 1)** approach. The <Variables> column must start with a dash character and then a blank “- ” (for historical reasons of backward compatibility). The syntax of the <Variables> column then is a 4-D array name, followed by a colon, and then a comma-separated list of the 3-D arrays constituting that 4-D amalgamation. In the example above, the 4-D array is

moist, and the selected 3-D arrays are **qv**, **qc**, and **qr**. If more than one 4-D array is required, a “;” separates those sections from each other in the <Variables> column.

In addition to handling 4-D arrays and their underlying component, 3-D arrays, the **package** entry is able to associate generic **state** variables, as shown in the example following. If the namelist variable **use_wps_input** is set to **1**, then the variables **u_gc** and **v_gc** are available to be processed.

```
#<Table>   <PackageName> <NMLAssociated>      <Variables>
package      realonly    use_wps_input==1  - state:u_gc,v_gc
```

I/O Applications Program Interface (I/O API)

The software that implements WRF I/O, like the software that implements the model in general, is organized hierarchically, as a “[software stack](http://www2.mmm.ucar.edu/wrf/WG2/Tigers/IOAPI/IOWstack.html)” (<http://www2.mmm.ucar.edu/wrf/WG2/Tigers/IOAPI/IOWstack.html>). From top (closest to the model code itself) to bottom (closest to the external package implementing the I/O), the I/O stack looks like this:

- Domain I/O (operations on an entire domain)
- Field I/O (operations on individual fields)
- Package-neutral I/O API
- Package-dependent I/O API (external package)

The lower-levels of the stack, associated with the interface between the model and the external packages, are described in the [I/O and Model Coupling API specification document](http://www2.mmm.ucar.edu/wrf/WG2/Tigers/IOAPI/index.html) on <http://www2.mmm.ucar.edu/wrf/WG2/Tigers/IOAPI/index.html>.

Timekeeping

Starting times, stopping times, and time intervals in WRF are stored and manipulated as Earth System Modeling Framework (ESMF, <http://www.cisl.ucar.edu/research/2005/esmf.jsp>) time manager objects. This allows exact representation of time instants and intervals as integer numbers of years, months, hours, days, minutes, seconds, and fractions of a second (numerator and denominator are specified separately as integers). All time computations involving these objects are performed exactly by using integer arithmetic, with the result that there is no accumulated time step drift or rounding, even for fractions of a second.

The WRF implementation of the ESMF Time Manger is distributed with WRF in the **external/esmf_time_f90** directory. This implementation is entirely Fortran90 (as opposed to the ESMF implementation in C++) and it is conformant to the version of the ESMF Time Manager API that was available in 2009.

WRF source modules and subroutines that use the ESMF routines do so by use-association of the top-level ESMF Time Manager module, `esmf_mod`:

```
USE esmf_mod
```

The code is linked to the library file **libesmf_time.a** in the **external/esmf_time_f90** directory.

ESMF timekeeping is set up on a domain-by-domain basis in the routine `setup_timekeeping` (**share/set_timekeeping.F**). Each domain keeps track of its own clocks and alarms. Since the time arithmetic is exact there is no problem with clocks on separate domains getting out of synchronization.

Software Documentation

Detailed and comprehensive documentation aimed at WRF software is available at http://www2.mmm.ucar.edu/wrf/WG2/software_2.0.

Performance

Benchmark information is available at <http://www2.mmm.ucar.edu/wrf/bench>

Chapter 9: Post-Processing Utilities

Table of Contents

- [Introduction](#)
- [NCL](#)
- [RIP4](#)
- [ARWpost](#)
- [UPP](#)
- [VAPOR](#)

Introduction

There are a number of visualization tools available to display WRF-ARW (<http://www.mmm.ucar.edu/wrf/users>) model data. Model data in netCDF format can essentially be displayed using any tool capable of displaying this data format.

Currently the following post-processing utilities are supported: NCL, RIP4, ARWpost (*converter to GrADS*), UPP, and VAPOR.

NCL, RIP4, ARWpost and VAPOR can currently only read data in netCDF format, while UPP can read data in netCDF and binary format.

Required software

The only library that is always required is the netCDF package from Unidata (<http://www.unidata.ucar.edu/>: login > Downloads > NetCDF - *registration login required*).

netCDF stands for **Network Common Data Form**. This format is platform independent, i.e., data files can be read on both big-endian and little-endian computers, regardless of where the file was created. To use the netCDF libraries, ensure that the paths to these libraries are set correct in your login scripts as well as all Makefiles.

Additional libraries required by each of the supported post-processing packages:

- NCL (<http://www.ncl.ucar.edu>)
- GrADS (<http://grads.iges.org/home.html>)
- GEMPAK (<http://www.unidata.ucar.edu/software/gempak/>)
- VAPOR (<http://www.vapor.ucar.edu>)

NCL

With the use of **NCL Libraries** (<http://www.ncl.ucar.edu>), WRF-ARW data can easily be displayed.

The information on these pages has been put together to help users generate NCL scripts to display their WRF-ARW model data.

Some example scripts are available online (http://www.mmm.ucar.edu/wrf/OnLineTutorial/Graphics/NCL/NCL_examples.htm), but in order to fully utilize the functionality of the NCL Libraries, users should adapt these for their own needs, or write their own scripts.

NCL can process WRF-ARW static, input and output files, as well as WRFDA output data. Both single and double precision data can be processed.

WRF and NCL

In July 2007, the **WRF-NCL** processing scripts have been incorporated into the **NCL Libraries**, thus only the **NCL Libraries** are now needed.

Major WRF-ARW-related upgrades have been added to the NCL libraries in version 6.1.0; therefore, in order to use many of the functions, NCL version 6.1.0 or higher is required.

Special **functions** are provided to simplify the plotting of WRF-ARW data. These functions are located in:

"\$NCARG_ROOT/lib/ncarg/nclscripts/wrf/WRFUserARW.ncl".

Users are encouraged to view and edit this file for their own needs. If users wish to edit this file, but do not have write permission, they should simply copy the file to a local directory, edit and load the new version, when running NCL scripts.

Special **NCL built-in functions** have been added to the NCL libraries to help users calculate basic diagnostics for WRF-ARW data.

All the **FORTRAN subroutines** used for diagnostics and interpolation (*previously located in wrf_user_fortran_util_0.f*) has been re-coded into NCL in-line functions. This means users no longer need to compile these routines.

What is NCL

The NCAR Command Language (NCL) is a free, interpreted language designed specifically for scientific data processing and visualization. NCL has robust file input and output. It can read in netCDF, HDF4, HDF4-EOS, GRIB, binary and ASCII data. The graphics are world-class and highly customizable.

It runs on many different operating systems including Solaris, AIX, IRIX, Linux, MacOSX, Dec Alpha, and Cygwin/X running on Windows. The NCL binaries are freely available at: <http://www.ncl.ucar.edu/Download/>

To read more about NCL, visit: <http://www.ncl.ucar.edu/overview.shtml>

Necessary software

NCL libraries, *version 6.1.0 or higher*.

Environment Variable

Set the environment variable NCARG_ROOT to the location where you installed the NCL libraries. Typically (*for cshrc shell*):

```
setenv NCARG_ROOT /usr/local/ncl
```

.hluresfile

Create a file called **.hluresfile** in your \$HOME directory. This file controls the color, background, fonts, and basic size of your plot. For more information regarding this file, see: <http://www.ncl.ucar.edu/Document/Graphics/hlures.shtml>.

NOTE: *This file must reside in your \$HOME directory and not where you plan on running NCL.*

Below is the **.hluresfile** used in the example scripts posted on the web (*scripts are available at: <http://www.mmm.ucar.edu/wrf/users/graphics/NCL/NCL.htm>*). If a different color table is used, the plots will appear different. Copy the following to your **~/.hluresfile**. (*A copy of this file is available at: http://www.mmm.ucar.edu/wrf/OnLineTutorial/Graphics/NCL/NCL_basics.htm*)

```
*wkColorMap : BlAqGrYeOrReVi200
*wkBackgroundColor : white
*wkForegroundColor : black
*FuncCode : ~
*TextFuncCode : ~
```

```
*Font : helvetica
*wkWidth : 900
*wkHeight : 900
```

NOTE:

*If your image has a black background with white lettering, your **.hluresfile** has not been created correctly, or it is in the wrong location.*

***wkColorMap**, as set in your **.hluresfile** can be overwritten in any NCL script with the use of the function “**gsn_define_colormap**”, so you do not need to change your **.hluresfile** if you just want to change the color map for a single plot.*


Create NCL scripts

The basic outline of any NCL script will look as follows:

```
load external functions and procedures

begin
    ; Open input file(s)
    ; Open graphical output
    ; Read variables
    ; Set up plot resources & Create plots
    ; Output graphics
end
```

For example, let’s create a script to plot Surface Temperature, Sea Level Pressure and Wind as shown in the picture below.

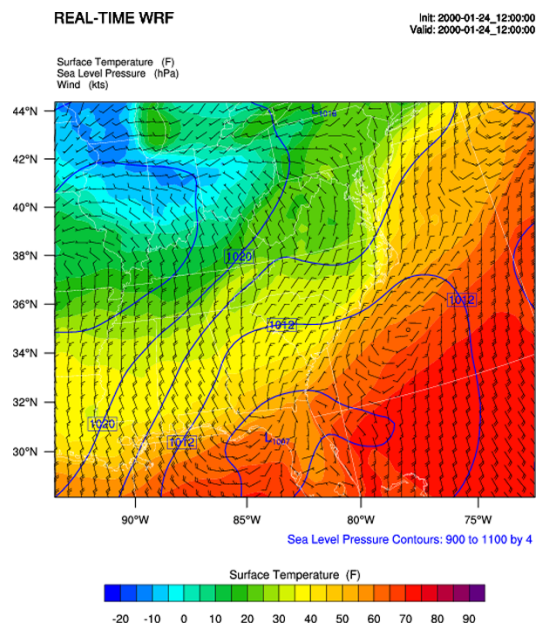


```

; load functions and procedures
load "$NCARG_ROOT/lib/ncarg/nclscripts/csm/gsn_code.ncl"
load "$NCARG_ROOT/lib/ncarg/nclscripts/wrf/WRFUserARW.ncl"

begin

; WRF ARW input file (NOTE, your wrfout file does not need
; the .nc, but NCL needs it so make sure to add it in the
; line below)
a = addfile("../wrfout_d01_2000-01-24_12:00:00.nc","r")

; Output on screen. Output will be called "plt_Surface1"
type = "x11"
wks = gsn_open_wks(type,"plt_Surface1")

; Set basic resources
res = True
res@MainTitle = "REAL-TIME WRF"           ; Give plot a main title
res@Footer = False                       ; Set Footers off
pltres = True                            ; Plotting resources
mpres = True                             ; Map resources

;-----
times = wrf_user_getvar(a,"times",-1)    ; get times in the file
it = 0                                   ; only interested in first time
res@TimeLabel = times(it)                ; keep some time information

;-----
; Get variables

slp = wrf_user_getvar(a,"slp",it)         Get slp
      wrf_smooth_2d( slp, 3 )             ; Smooth slp

t2 = wrf_user_getvar(a,"T2",it)           ; Get T2 (deg K)
tc2 = t2-273.16                          ; Convert to deg C
tf2 = 1.8*tc2+32.                        ; Convert to deg F
tf2@description = "Surface Temperature"
tf2@units = "F"

u10 = wrf_user_getvar(a,"U10",it)         ; Get U10
v10 = wrf_user_getvar(a,"V10",it)        ; Get V10
u10 = u10*1.94386                        ; Convert to knots
v10 = v10*1.94386
u10@units = "kts"
v10@units = "kts"

;-----

```

```

; Plotting options for T
opts = res                                ; Add basic resources
opts@cnFillOn = True                      ; Shaded plot
opts@ContourParameters = (/ -20., 90., 5./) ; Contour intervals
opts@gsnSpreadColorEnd = -3
contour_tc = wrf_contour(a,wks,tf2,opts)   ; Create plot
delete(opts)

; Plotting options for SLP
opts = res                                ; Add basic resources
opts@cnLineColor = "Blue"                ; Set line color
opts@cnHighLabelsOn = True                ; Set labels
opts@cnLowLabelsOn = True
opts@ContourParameters = (/ 900.,1100.,4./) ; Contour intervals
contour_psl = wrf_contour(a,wks,slp,opts)  ; Create plot
delete(opts)

; Plotting options for Wind Vectors
opts = res                                ; Add basic resources
opts@FieldTitle = "Winds"                 ; Overwrite the field title
opts@NumVectors = 47                      ; Density of wind barbs
vector = wrf_vector(a,wks,u10,v10,opts)    ; Create plot
delete(opts)

; MAKE PLOTS
plot = wrf_map_overlays(a,wks, \
    (/contour_tc,contour_psl,vector/),pltres,mpres)

;-----

end

```

Extra sample scripts are available at:

http://www.mmm.ucar.edu/wrf/OnLineTutorial/Graphics/NCL/NCL_examples.htm

Run NCL scripts

1. Ensure NCL is successfully installed on your computer.
2. Ensure that the environment variable NCARG_ROOT is set to the location where NCL is installed on your computer. Typically (*for cshrc shell*), the command will

look as follows:

```
setenv NCARG_ROOT /usr/local/ncl
```

3. Create an NCL plotting script.

4. Run the NCL script you created:

```
ncl NCL_script
```

The output type created with this command is controlled by the line:

`wks = gsn_open_wk (type, "Output")` ; inside the NCL script
where *type* can be *x11*, *pdf*, *ncgm*, *ps*, or *eps*

For high quality images, create pdf , ps, or eps images directly via the ncl scripts (***type = pdf / ps / eps***)

See the **Tools** section in Chapter 10 of this User's Guide for more information concerning other types of graphical formats and conversions between graphical formats.

Functions / Procedures under "\$NCARG_ROOT/lib/ncarg/nclscripts/wrf/" (*WRFUserARW.ncl*)

wrf_user_getvar (*nc_file*, *fld*, *it*)

Usage: *ter* = *wrf_user_getvar* (*a*, "HGT", 0)

Get fields from a netCDF file for:

- Any given time by setting **it** to the time required.
- For all times in the input file(s), by setting **it** = **-1**
- A list of times from the input file(s), by setting **it** to *(/start_time,end_time,interval/)* (e.g. *(/0,10,2/)*).
- A list of times from the input file(s), by setting **it** to the list required (e.g. *(/1,3,7,10/)*).

Any field available in the netCDF file can be extracted.

fld is case sensitive. The policy adapted during development was to set all diagnostic variables, calculated by NCL, to lower-case to distinguish them from fields directly available from the netCDF files.

List of available diagnostics:

avo	Absolute Vorticity [10^{-5} s^{-1}]
pvo	Potential Vorticity [PVU]
eth	Equivalent Potential Temperature [K]
cape_2d	Returns 2D fields mcape/mcin/lcl/lfc
cape_3d	Returns 3D fields cape/cin
dbz	Reflectivity [dBZ]
mdbz	Maximum Reflectivity [dBZ]
geopt/geopotential	Full Model Geopotential [$\text{m}^2 \text{ s}^{-2}$]
helicity	Storm Relative Helicity [$\text{m}^{-2} \text{ s}^{-2}$]
updraft_helicity	Updraft Helicity [$\text{m}^{-2} \text{ s}^{-2}$]
lat	Latitude (will return either XLAT or XLAT_M, depending on which is available)
lon	Longitude (will return either XLONG or XLONG_M, depending on which is available)
omg	Omega
p/pres	Full Model Pressure [Pa]
pressure	Full Model Pressure [hPa]
pw	Precipitable Water
rh2	2m Relative Humidity [%]
rh	Relative Humidity [%]
slp	Sea Level Pressure [hPa]
ter	Model Terrain Height [m] (will return either HGT or HGT_M, depending on which is available)
td2	2m Dew Point Temperature [C]
td	Dew Point Temperature [C]
tc	Temperature [C]
tk	Temperature [K]
th/theta	Potential Temperature [K]
tv	Virtual Temperature
twb	Wetbulb Temperature
times	Times in file (<i>note this return strings - recommended</i>)
Times	Times in file (<i>note this return characters</i>)
ua	U component of wind on mass points
va	V component of wind on mass points
wa	W component of wind on mass points
uvm10	10m U and V components of wind rotated to earth coordinates
uvm	U and V components of wind rotated to earth coordinates
z/height	Full Model Height [m]

wrf_user_list_times (nc_file)

Usage: *times* = wrf_user_list_times (*a*)

Obtain a list of times available in the input file. The function returns a 1D array containing the times (*type: character*) in the input file.

This is an outdated function – best to use *wrf_user_getvar(nc_file,"times",it)*

wrf_contour (nc_file, wks, data, res)

Usage: *contour* = wrf_contour (*a, wks, ter, opts*)

Returns a graphic (contour), of the data to be contoured. This graphic is only created, but not plotted to a wks. This enables a user to generate many such graphics and overlay them, before plotting the resulting picture to the wks.

The returned graphic (*contour*) does not contain map information, and can therefore be used for both real and idealized data cases.

This function can plot both line contours and shaded contours. *Default is line contours.*

Many resources are set for a user, and most can be overwritten. Below is a list of resources you may want to consider changing before generating your own graphics:

Resources unique to ARW WRF Model data

opts@MainTitle : Controls main title on the plot.

opts@MainTitlePos : Main title position – Left/Right/Center. Default is Left.

opts@NoHeaderFooter : Switch off all Headers and Footers.

opts@Footer : Add some model information to the plot as a footer. Default is True.

opts@InitTime : Plot initial time on graphic. Default is True. If True, the initial time will be extracted from the input file.

opts@ValidTime : Plot valid time on graphic. Default is True. A user must set *opts@TimeLabel* to the correct time.

opts@TimeLabel : Time to plot as valid time.

opts@TimePos : Time position – Left/Right. Default is “Right”.

opts@ContourParameters : A single value is treated as an interval. Three values represent: Start, End, and Interval.

opts@FieldTitle : Overwrite the field title - if not set the field description is used for the title.

opts@UnitLabel : Overwrite the field units - seldom needed as the units associated with the field will be used.

opts@PlotLevelID : Use to add level information to the field title.

General NCL resources (*most standard NCL options for **cn** and **lb** can be set by the user to overwrite the default values*)

opts@cnFillOn : Set to True for shaded plots. Default is False.

opts@cnLineColor : Color of line plot.

opts@lbTitleOn : Set to False to switch the title on the label bar off. Default is True.
opts@cnLevelSelectionMode ; *opts @cnLevels* ; *opts@cnFillColors* ;
optr@cnConstFLabelOn : Can be used to set contour levels and colors manually.

wrf_vector (nc_file, wks, data_u, data_v, res)

Usage: *vector* = wrf_vector (*a*, *wks*, *ua*, *va*, *opts*)

Returns a graphic (*vector*) of the data. This graphic is only created, but not plotted to a wks. This enables a user to generate many graphics, and overlay them, before plotting the resulting picture to the wks.

The returned graphic (*vector*) does not contain map information, and can therefore be used for both real and idealized data cases.

Many resources are set for a user, and most can be overwritten. Below is a list of resources you may want to consider changing before generating your own graphics:

Resources unique to ARW WRF Model data

opts@MainTitle : Controls main title on the plot.
opts@MainTitlePos : Main title position – Left/Right/Center. Default is Left.
opts@NoHeaderFooter : Switch off all Headers and Footers.
opts@Footer : Add some model information to the plot as a footer. Default is True.
opts@InitTime : Plot initial time on graphic. Default is True. If True, the initial time will be extracted from the input file.
opts@ValidTime : Plot valid time on graphic. Default is True. A user must set *opts@TimeLabel* to the correct time.
opts@TimeLabel : Time to plot as valid time.
opts@TimePos : Time position – Left/Right. Default is “Right”.
opts@ContourParameters : A single value is treated as an interval. Three values represent: Start, End, and Interval.
opts@FieldTitle : Overwrite the field title - if not set the field description is used for the title.
opts@UnitLabel : Overwrite the field units - seldom needed as the units associated with the field will be used.
opts@PlotLevelID : Use to add level information to the field title.
opts@NumVectors : Density of wind vectors.

General NCL resources (*most standard NCL options for vc can be set by the user to overwrite the default values*)

opts@vcGlyphStyle : Wind style. “WindBarb” is default.

wrf_map_overlays (nc_file, wks, (/graphics/), pltres, mpres)

Usage: *plot = wrf_map_overlays (a, wks, (/contour,vector/), pltres, mpres)*

Overlay contour and vector plots generated with *wrf_contour* and *wrf_vector*. Can overlay any number of graphics. Overlays will be done in the order given, so always list shaded plots before line or vector plots, to ensure the lines and vectors are visible and not hidden behind the shaded plot.

A map background will automatically be added to the plot. Map details are controlled with the *mpres* resource. Common map resources you may want to set are:

mpres@mpGeophysicalLineColor ; *mpres@mpNationalLineColor* ;
mpres@mpUSStateLineColor ; *mpres@mpGridLineColor* ;
mpres@mpLimbLineColor ; *mpres@mpPerimLineColor*

If you want to zoom into the plot, set *mpres@ZoomIn* to True, and *mpres@Xstart*, *mpres@Xend*, *mpres@Ystart*, and *mpres@Yend* to the corner x/y positions of the zoomed plot.

pltres@NoTitles : Set to True to remove all field titles on a plot.

pltres@CommonTitle : Overwrite field titles with a common title for the overlaid plots.

Must set *pltres@PlotTitle* to desired new plot title.

If you want to generate images for a panel plot, set *pltres@PanelPot* to True.

If you want to add text/lines to the plot before advancing the frame, set *pltres@FramePlot* to False. Add your text/lines directly after the call to the *wrf_map_overlays* function. Once you are done adding text/lines, advance the frame with the command “**frame (wks)**”.

wrf_overlays (nc_file, wks, (/graphics/), pltres)

Usage: *plot = wrf_overlays (a, wks, (/contour,vector/), pltres)*

Overlay contour and vector plots generated with *wrf_contour* and *wrf_vector*. Can overlay any number of graphics. Overlays will be done in the order given, so always list shaded plots before line or vector plots, to ensure the lines and vectors are visible and not hidden behind the shaded plot.

Typically used for idealized data or cross-sections, which does not have map background information.

pltres@NoTitles : Set to True to remove all field titles on a plot.

pltres@CommonTitle : Overwrite field titles with a common title for the overlaid plots.

Must set *pltres@PlotTitle* to desired new plot title.

If you want to generate images for a panel plot, set *pltres@PanelPot* to True.

If you want to add text/lines to the plot before advancing the frame, set `pltres@FramePlot` to False. Add your text/lines directly after the call to the `wrf_overlays` function. Once you are done adding text/lines, advance the frame with the command “*frame (wks)*”.

wrf_map (nc_file, wks, res)

Usage: `map = wrf_map (a, wks, opts)`

Create a map background.

As maps are added to plots automatically via the `wrf_map_overlays` function, this function is seldom needed as a stand-alone.

wrf_user_intrp3d (var3d, H, plot_type, loc_param, angle, res)

This function is used for both horizontal and vertical interpolation.

var3d: The variable to interpolate. This can be an array of up to 5 dimensions. The 3 right-most dimensions must be *bottom_top* x *south_north* x *west_east*.

H: The field to interpolate to. Either pressure (*hPa* or *Pa*), or *z (m)*. Dimensionality must match **var3d**.

plot_type: “h” for horizontally- and “v” for vertically-interpolated plots.

loc_param: Can be a scalar, or an array, holding either 2 or 4 values.

For *plot_type* = “h”:

This is a scalar representing the level to interpolate to.

Must match the field to interpolate to (H).

When interpolating to pressure, this can be in hPa or Pa (*e.g. 500., to interpolate to 500 hPa*). When interpolating to height this must be in *m* (*e.g. 2000., to interpolate to 2 km*).

For *plot_type* = “v”:

This can be a pivot point through which a line is drawn – in this case a single x/y point (*2 values*) is required. Or this can be a set of x/y points (*4 values*), indicating start x/y and end x/y locations for the cross-section.

angle:

Set to 0., for *plot_type* = “h”, or for *plot_type* = “v” when start and end locations of cross-section are supplied in *loc_param*.

If a single pivot point was supplied in *loc_param*, angle is the angle of the line that will pass through the pivot point. Where: 0. is SN, and 90. is WE.

res:

Set to False for *plot_type* = “h”, or for *plot_type* = “v” when a single pivot point is supplied. Set to True if start and end locations are supplied.

wrf_user_intrp2d (var2d, loc_param, angle, res)

This function interpolates a 2D field along a given line.

var2d: The 2D field to interpolate. This can be an array of up to 3 dimensions. The 2 right-most dimensions must be *south_north* x *west_east*.

loc_param:

An array holding either 2 or 4 values.

This can be a pivot point though which a line is drawn - in this case a single x/y point (*2 values*) is required. Or this can be a set of x/y points (*4 values*), indicating start x/y and end x/y locations for the cross-section.

angle:

Set to 0 when start and end locations of the line are supplied in *loc_param*.

If a single pivot point is supplied in *loc_param*, angle is the angle of the line that will pass through the pivot point. Where: 0. is SN, and 90. is WE.

res:

Set to False when a single pivot point is supplied. Set to True if start and end locations are supplied.

wrf_user_ll_to_ij (nc_file, lons, lats, res)

Usage: *loc* = wrf_user_latlon_to_ij (*a*, 100., 40., *res*)

Usage: *loc* = wrf_user_latlon_to_ij (*a*, (/100., 120./), (/40., 50./), *res*)

Converts a lon/lat location to the nearest x/y location. This function makes use of map information to find the closest point; therefore this returned value may potentially be outside the model domain.

lons/lats can be scalars or arrays.

Optional resources:

res@returnInt - If set to False, the return values will be real (default is True with integer return values)

res@useTime - Default is 0. Set if you want the reference longitude/latitudes to come from a specific time - one will only use this for moving nest output, which has been stored in a single file.

loc(0,:) is the x (WE) locations, and *loc*(1,:) the y (SN) locations.

wrf_user_ij_to_ll (nc_file, i, j, res)

Usage: *loc* = wrf_user_latlon_to_ij (*a*, 10, 40, *res*)

Usage: *loc* = wrf_user_latlon_to_ij (*a*, (/10, 12/), (/40, 50/), *res*)

Convert an i/j location to a lon/lat location. This function makes use of map information to find the closest point, so this returned value may potentially be outside the model domain.

i/j can be scalars or arrays.

Optional resources:

res@useTime - Default is 0. Set if you want the reference longitude/latitudes to come from a specific time - one will only use this for moving nest output, which has been stored in a single file.

loc(0,:) is the lons locations, and **loc(1,:)** the lats locations.

wrf_user_unstagger (varin, unstagDim)

This function unstaggers an array, and returns an array on ARW WRF mass points.

varin: Array to be unstaggered.

unstagDim: Dimension to unstagger. Must be either "X", "Y", or "Z". This is case sensitive. If you do not use one of these strings, the returning array will be unchanged.

wrf_wps_dom (wks, mpres, lnres, txres)

A function has been built into NCL to preview where a potential domain will be placed (*similar to plotgrids.exe from WPS*).

The **lnres** and **txres** resources are standard NCL Line and Text resources. These are used to add nests to the preview.

The **mpres** are used for standard map background resources like:

```
mpres@mpFillOn ; mpres@mpFillColor ; mpres@mpGeophysicalLineColor ;  
mpres@mpNationalLineColor ; mpres@mpUSStateLineColor ;  
mpres@mpGridLineColor ; mpres@mpLimbLineColor ;  
mpres@mpPerimLineColor
```


Its main function, however, is to set map resources to preview a domain. These resources are similar to the resources set in WPS. Below is an example of how to display 3 nested domains on a Lambert projection. (*The output is shown below*).

```
mpres@max_dom          = 3  
mpres@parent_id        = (/ 1,    1,    2 /)  
mpres@parent_grid_ratio = (/ 1,    3,    3 /)  
mpres@i_parent_start    = (/ 1,    31,   15 /)  
mpres@j_parent_start    = (/ 1,    17,   20 /)
```

```

mpres@e_we      = (/ 74, 112, 133/)
mpres@e_sn      = (/ 61, 97, 133 /)
mpres@dx        = 30000.
mpres@dy        = 30000.
mpres@map_proj   = "lambert"
mpres@ref_lat   = 34.83
mpres@ref_lon    = -81.03
mpres@truelat1   = 30.0
mpres@truelat2   = 60.0
mpres@stand_lon  = -98.0

```

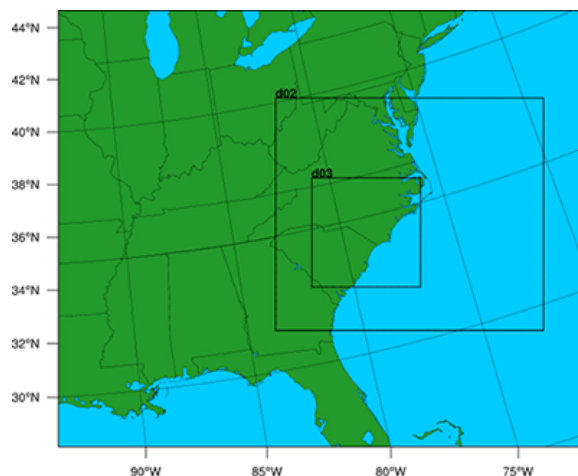

NCL built-in Functions

A number of NCL built-in functions have been created to help users calculate simple diagnostics. Full descriptions of these functions are available on the NCL web site (<http://www.ncl.ucar.edu/Document/Functions/wrf.shtml>).

wrf_avo	Calculates absolute vorticity.
wrf_cape_2d	Computes convective available potential energy (CAPE), convective inhibition (CIN), lifted condensation level (LCL), and level of free convection (LFC).
wrf_cape_3d	Computes convective available potential energy (CAPE) and convective inhibition (CIN).
wrf_dbz	Calculates the equivalent reflectivity factor.
wrf_eth	Calculates equivalent potential temperature
wrf_helicity	Calculates storm relative helicity
wrf_ij_to_ll	Finds the longitude, latitude locations to the specified model grid indices (i,j).

wrf_ll_to_ij	Finds the model grid indices (i,j) to the specified location(s) in longitude and latitude.
wrf_omega	Calculates omega
wrf_pvo	Calculates potential vorticity.
wrf_rh	Calculates relative humidity.
wrf_slp	Calculates sea level pressure.
wrf_smooth_2d	Smooth a given field.
wrf_td	Calculates dewpoint temperature in [C].
wrf_tk	Calculates temperature in [K].
wrf_updraft_helicity	Calculates updraft helicity
wrf_uvmet	Rotates u,v components of the wind to earth coordinates.
wrf_virtual_temp	Calculates virtual temperature
wrf_wetbulb	Calculates wetbulb temperature

Adding diagnostics using FORTRAN code

It is possible to link your favorite FORTRAN diagnostics routines to NCL. It is easier to use FORTRAN 77 code, but NCL also recognizes basic FORTRAN 90 code.

Let's use a routine that calculates temperature (K) from theta and pressure.

FORTRAN 90 routine called myTK.f90

```

subroutine compute_tk (tk, pressure, theta, nx, ny, nz)
implicit none

!! Variables
integer :: nx, ny, nz
real, dimension (nx,ny,nz) :: tk, pressure, theta

!! Local Variables
integer :: i, j, k
real, dimension (nx,ny,nz):: pi

pi(:,:,) = (pressure(:,:,) / 1000.)**(287./1004.)
tk(:,:,) = pi(:,:,)*theta(:,:,)

return
end subroutine compute_tk

```

For simple routines like this, it is easiest to re-write the routine into a FORTRAN 77 routine.

FORTRAN 77 routine called myTK.f

```

subroutine compute_tk (tk, pressure, theta, nx, ny, nz)
implicit none

C  Variables
integer nx, ny, nz
real tk(nx,ny,nz) , pressure(nx,ny,nz), theta(nx,ny,nz)

C  Local Variables
integer i, j, k
real pi

DO k=1,nz
DO j=1,ny
DO i=1,nx
pi=(pressure(i,j,k) / 1000.)*(287./1004.)
tk(i,j,k) = pi*theta(i,j,k)
ENDDO
ENDDO
ENDDO

return
end

```

Add the markers **NCLFORTSTART** and **NCLEND** to the subroutine as indicated below. Note, that local variables are outside these block markers.

FORTRAN 77 routine called myTK.f, with NCL markers added

```

C NCLFORTSTART
subroutine compute_tk (tk, pressure, theta, nx, ny, nz)
implicit none

C  Variables
integer nx, ny, nz
real tk(nx,ny,nz) , pressure(nx,ny,nz), theta(nx,ny,nz)

C NCLEND

C  Local Variables
integer i, j, k
real pi

DO k=1,nz
DO j=1,ny
DO i=1,nx
pi=(pressure(i,j,k) / 1000.)*(287./1004.)
tk(i,j,k) = pi*theta(i,j,k)
ENDDO
ENDDO
ENDDO

return
end

```

Now compile this code using the NCL script WRAPIT.

```
WRAPIT myTK.f
```

NOTE: If WRAPIT cannot be found, make sure the environment variable *NCARG_ROOT* has been set correctly.

If the subroutine compiles successfully, a new library will be created, called **myTK.so**. This library can be linked to an NCL script to calculate TK. See how this is done in the example below:

```
load "$NCARG_ROOT/lib/ncarg/nclscripts/csm/gsn_code.ncl"
load "$NCARG_ROOT/lib/ncarg/nclscripts/wrf/WRFUserARW.ncl"
external myTK "./myTK.so"

begin

    t = wrf_user_getvar (a,"T",5)
    theta = t + 300
    p = wrf_user_getvar (a,"pressure",5)

    dim = dimsizes(t)
    tk = new( (/ dim(0), dim(1), dim(2) /), float)

    myTK :: compute_tk (tk, p, theta, dim(2), dim(1), dim(0))

end
```

Want to use the FORTRAN 90 program? It is possible to do so by providing an interface block for your FORTRAN 90 program. Your FORTRAN 90 program may also not contain any of the following features:

- pointers or structures as arguments,
- missing/optional arguments,
- keyword arguments, or
- if the procedure is recursive.

Interface block for FORTRAN 90 code, called myTK90.stub

```
C NCLFORTSTART
  subroutine compute_tk (tk, pressure, theta, nx, ny, nz)

  integer nx, ny, nz
  real tk(nx,ny,nz), pressure(nx,ny,nz), theta(nx,ny,nz)

C NCLEND
```

Now compile this code using the NCL script WRAPIT.

```
WRAPIT myTK90.stub myTK.f90
```

NOTE: You may need to copy the WRAPIT script to a locate location and edit it to point to a FORTRAN 90 compiler.

If the subroutine compiles successfully, a new library will be created, called **myTK90.so** (*note the change in name from the FORTRAN 77 library*). This library can similarly be linked to an NCL script to calculate TK. See how this is done in the example below:

```
load "$NCARG_ROOT/lib/ncarg/nclscripts/csm/gsn_code.ncl"
load "$NCARG_ROOT/lib/ncarg/nclscripts/wrf/WRFUserARW.ncl"
external myTK90 "./myTK90.so"

begin
  t = wrf_user_getvar (a,"T",5)
  theta = t + 300
  p = wrf_user_getvar (a,"pressure",5)

  dim = dimsizes(t)
  tk = new( (/ dim(0), dim(1), dim(2) /), float)

  myTK90 :: compute_tk (tk, p, theta, dim(2), dim(1), dim(0))

end
```

RIP4

RIP (which stands for Read/Interpolate/Plot) is a Fortran program that invokes NCAR Graphics routines for the purpose of visualizing output from gridded meteorological data sets, primarily from mesoscale numerical models. It was originally designed for sigma-coordinate-level output from the PSU/NCAR Mesoscale Model (MM4/MM5), but was generalized in April 2003 to handle data sets with any vertical coordinate, and in particular, output from the Weather Research and Forecast (WRF) modeling system. It can also be used to visualize model input or analyses on model grids. It has been under continuous development since 1991, *primarily by Mark Stoelinga at both NCAR and the University of Washington.*

The RIP **users' guide** (<http://www.mmm.ucar.edu/wrf/users/docs/ripug.htm>) is essential reading.

Code history

Version 4.0: reads WRF-ARW real output files

Version 4.1: reads idealized WRF-ARW datasets

Version 4.2: reads all the files produced by WPS

Version 4.3: reads files produced by WRF-NMM model

Version 4.4: add ability to output different graphical types

Version 4.5: add configure/compiler capabilities

Version 4.6: current version – only bug fix changes between 4.5 and 4.6

(This document will only concentrate on running RIP4 for WRF-ARW. For details on running RIP4 for WRF-NMM, see the WRF-NMM User's Guide:

<http://www.dtccenter.org/wrf-nmm/users/docs/overview.php>)

Necessary software

RIP4 only requires low-level NCAR Graphics libraries. These libraries have been merged with the NCL libraries since the release of NCL version 5 (<http://www.ncl.ucar.edu/>), so if you don't already have NCAR Graphics installed on your computer, install NCL version 5.

Obtain the code from the WRF-ARW user's web site:

http://www.mmm.ucar.edu/wrf/users/download/get_source.html

Unzip and untar the RIP4 tar file. The tar file contains the following directories and files:

- *CHANGES*, a text file that logs changes to the RIP tar file.
- *Doc/*, a directory that contains documentation of RIP, most notably the Users' Guide (*ripug*).

- *README*, a text file containing basic information on running RIP.
- *arch/*, directory containing the default compiler flags for different machines.
- *clean*, script to clean compiled code.
- *compile*, script to compile code.
- *configure*, script to create a configure file for your machine.
- *color.tbl*, a file that contains a table, defining the colors you want to have available for RIP plots.
- *eta_micro_lookup.dat*, a file that contains "look-up" table data for the Ferrier microphysics scheme.
- *psadillookup.dat*, a file that contains "look-up" table data for obtaining temperature on a pseudoadiabatic.
- *sample_infiles/*, a directory that contains sample user input files for RIP and related programs.
- *src/*, a directory that contains all of the source code files for RIP, RIPDP, and several other utility programs.
- *stationlist*, a file containing observing station location information.

Environment Variables

An important environment variable for the RIP system is **RIP_ROOT**. RIP_ROOT should be assigned the path name of the directory where all your RIP program and utility files (*color.tbl*, *stationlist*, lookup tables, etc.) reside. Typically (*for cshrc shell*):

```
setenv RIP_ROOT /my-path/RIP4
```

The RIP_ROOT environment variable can also be overwritten with the variable *rip_root* in the RIP user input file (UIF).

A second environment variable you need to set is **NCARG_ROOT**. Typically (*for cshrc shell*):

```
setenv NCARG_ROOT /usr/local/ncarg      ! for NCARG V4
setenv NCARG_ROOT /usr/local/ncl       ! for NCL V5
```

Compiling RIP and associated programs

Since the release of version 4.5, the same configure/compile scripts available in all other WRF programs have been added to RIP4. To compile the code, first configure for your machine by typing:

```
./configure
```

You will see a list of options for your computer (*below is an example for a Linux machine*):

Will use NETCDF in dir: /usr/local/netcdf-pgi

Please select from among the following supported platforms.

1. PC Linux i486 i586 i686 x86_64, PGI compiler
2. PC Linux i486 i586 i686 x86_64, g95 compiler
3. PC Linux i486 i586 i686 x86_64, gfortran compiler
4. PC Linux i486 i586 i686 x86_64, Intel compiler

Enter selection [1-4]

Make sure the netCDF path is correct.

Pick compile options for your machine.

This will create a file called `configure.rip`. Edit compile options/paths, if necessary.

To compile the code, type:

```
./compile
```

After a successful compilation, the following new files should be created.

rip	RIP post-processing program. Before using this program, first convert the input data to the correct format expected by this program, using the program ripdp
ripcomp	This program reads-in two rip data files and compares their content.
ripdp_mm5	RIP Data Preparation program for MM5 data
ripdp_wrfarw ripdp_wrfnmm	RIP Data Preparation program for WRF data
ripinterp	This program reads-in model output (in rip-format files) from a coarse domain and from a fine domain, and creates a new file which has the data from the coarse domain file interpolated (bi-linearly) to the fine domain. The header and data dimensions of the new file will be that of the fine domain, and the case name used in the file name will be the same as that of the fine domain file that was read-in.
ripshow	This program reads-in a rip data file and prints out the contents of the header record.
showtraj	Sometimes, you may want to examine the contents of a trajectory position file. Since it is a binary file, the trajectory position file cannot simply be printed out. showtraj, reads the trajectory position file and prints out its contents in a readable form. When you run showtraj, it prompts you for the name of the trajectory position file to be printed out.

tabdiag	If fields are specified in the plot specification table for a trajectory calculation run, then RIP produces a .diag file that contains values of those fields along the trajectories. This file is an unformatted Fortran file; so another program is required to view the diagnostics. tabdiag serves this purpose.
upscale	This program reads-in model output (in rip-format files) from a coarse domain and from a fine domain, and replaces the coarse data with fine data at overlapping points. Any refinement ratio is allowed, and the fine domain borders do not have to coincide with coarse domain grid points.

Preparing data with RIPDP

RIP does not ingest model output files directly. First, a preprocessing step must be executed that converts the model output data files to RIP-format data files. The primary difference between these two types of files is that model output data files typically contain all times and all variables in a single file (or a few files), whereas RIP data has each variable at each time in a separate file. The preprocessing step involves use of the program RIPDP (which stands for RIP Data Preparation). RIPDP reads-in a model output file (or files), and separates out each variable at each time.

Running RIPDP

The program has the following usage:

```
ripdp_XXX [-n namelist_file] model-data-set-name [basic|all]
data_file_1 data_file_2 data_file_3 ...
```

Above, the "XXX" refers to "mm5", "wrfarw", or "wrfnmm".

The argument model-data-set-name can be any string you choose, that uniquely defines this model output data set.

The use of the namelist file is optional. The most important information in the namelist is the times you want to process.

As this step will create a large number of extra files, creating a new directory to place these files in will enable you to manage the files easier (*mkdir RIPDP*).

e.g. `ripdp_wrfarw RIPDP/arw all wrfout_d01_*`

The RIP user input file

Once the RIP data has been created with RIPDP, the next step is to prepare the user input file (UIF) for RIP (*see Chapter 4 of the RIP users' guide for details*). This file is a text file, which tells RIP what plots you want, and how they should be plotted. A sample UIF, called *rip_sample.in*, is provided in the RIP tar file. This sample can serve as a template for the many UIFs that you will eventually create.

A UIF is divided into two main sections. The first section specifies various general parameters about the set-up of RIP, in a namelist format (***userin** - which controls the general input specifications; and **trajcalc** - which controls the creation of trajectories*). The second section is the plot specification section, which is used to specify which plots will be generated.

namelist: userin

Variable	Value	Description
<i>idotitle</i>	1	Controls first part of title.
<i>title</i>	'auto'	Defines your own title, or allow RIP to generate one.
<i>titlecolor</i>	'def.foreground'	Controls color of the title.
<i>iinittime</i>	1	Prints initial date and time (<i>in UTC</i>) on plot.
<i>ifsttime</i>	1	Prints forecast lead-time (<i>in hours</i>) on plot.
<i>ivalidtime</i>	1	Prints valid date and time (<i>in both UTC and local time</i>) on plot.
<i>inearesth</i>	0	This allows you to have the hour portion of the initial and valid time be specified with two digits, rounded to the nearest hour, rather than the standard 4-digit HHMM specification.
<i>timezone</i>	-7.0	Specifies the offset from Greenwich time.
<i>iusdaylightrule</i>	1	Flag to determine if US daylight saving should be applied.
<i>ptimes</i>	9.0E+09	Times to process. This can be a string of times (<i>e.g. 0,3,6,9,12,</i>) or a series in the form of <i>A,-B,C</i> , which means "times from hour <i>A</i> , to hour <i>B</i> , every <i>C</i> hours" (<i>e.g. 0,-12,3,</i>). Either <i>ptimes</i> or <i>iptimes</i> can be used, but not both. <i>You can plot all available times, by omitting both ptimes and iptimes from the namelist, or by setting the first value negative.</i>
<i>ptimeunits</i>	'h'	Time units. This can be 'h' (<i>hours</i>), 'm' (<i>minutes</i>), or 's' (<i>seconds</i>). <i>Only valid with ptimes.</i>

<i>iptimes</i>	99999999	Times to process. This is an integer array that specifies desired times for RIP to plot, but in the form of 8-digit "mdate" times (<i>i.e.</i> YYMMDDHH). Either <i>ptimes</i> or <i>iptimes</i> can be used, but not both. <i>You can plot all available times by omitting both ptimes and iptimes from the namelist, or by setting the first value negative.</i>
<i>tacc</i>	1.0	Time tolerance in seconds. Any time in the model output that is within <i>tacc</i> seconds of the time specified in <i>ptimes/iptimes</i> will be processed.
<i>flmin, flmax, fbmin, fbmax</i>	.05, .95, .10, .90	Left, right, bottom and top frame limit
<i>ntextq</i>	0	Text quality specifier (0=high; 1=medium; 2=low).
<i>ntextcd</i>	0	Text font specifier [0=complex (Times); 1=duplex (Helvetica)].
<i>fcoffset</i>	0.0	This is an optional parameter you can use to "tell" RIP that you consider the start of the forecast to be different from what is indicated by the forecast time recorded in the model output. Examples: <i>fcoffset</i> =12 means you consider hour 12 in the model output to be the beginning of the true forecast.
<i>idotser</i>	0	Generates time-series output files (<i>no plots</i>); only an ASCII file that can be used as input to a plotting program.
<i>idescriptive</i>	1	Uses more descriptive plot titles.
<i>icgmsplit</i>	0	Splits metacode into several files.
<i>maxfld</i>	10	Reserves memory for RIP.
<i>ittrajcalc</i>	0	Generates trajectory output files (use namelist <i>trajcalc</i> when this is set).
<i>imakev5d</i>	0	Generate output for Vis5D
<i>ncarg_type</i>	'cgm'	Outputs type required. Options are 'cgm' (<i>default</i>), 'ps', 'pdf', 'pdfL', 'x11'. Where 'pdf' is portrait and 'pdfL' is landscape.
<i>istopmiss</i>	1	This switch determines the behavior for RIP when a user-requested field is not available. <i>The default is to stop.</i> Setting the switch to 0 tells RIP to ignore the missing field and to continue plotting.
<i>rip_root</i>	'/dev/null'	Overwrites the environment variable RIP_ROOT.

Plot Specification Table

The second part of the RIP UIF consists of the Plot Specification Table. The PST provides all of the user control over particular aspects of individual frames and overlays.

The basic structure of the PST is as follows:

- The first line of the PST is a line of consecutive equal signs. This line, as well as the next two lines, is ignored by RIP. It is simply a banner that says this is the start of the PST section.
- After that, there are several groups of one or more lines, separated by a full line of equal signs. Each group of lines is a frame specification group (FSG), and it describes what will be plotted in a single frame of metacode. Each FSG must end with a full line of equal signs, so that RIP can determine where individual frames start and end.
- Each line within a FGS is referred to as a plot specification line (PSL). An FSG that consists of three PSL lines will result in a single metacode frame with three over-laid plots.


Example of a frame specification groups (FSG's):

```
=====
feld=tmc; ptyp=hc; vcor=p; levs=850; >
  cint=2; cmth=fill; cosq=-32,light.violet,-24,
  violet,-16,blue,-8,green,0,yellow,8,red,>
  16,orange,24,brown,32,light.gray
feld=ght; ptyp=hc; cint=30; linw=2
feld=uuu,vvv; ptyp=hv; vcmx=-1; colr=white; intv=5
feld=map; ptyp=hb
feld=tic; ptyp=hb
=====
```

This **FSG** will generate 5 frames to create a single plot (as shown below):

- Temperature in degrees C (*feld=tmc*). This will be plotted as a horizontal contour plot (*ptyp=hc*), on pressure levels (*vcor=p*). The data will be interpolated to 850 hPa. The contour intervals are set to 2 (*cint=2*), and shaded plots (*cmth=fill*) will be generated with a color range from light violet to light gray.
- Geopotential heights (*feld=ght*) will also be plotted as a horizontal contour plot. This time the contour intervals will be 30 (*cint=30*), and contour lines with a line width of 2 (*linw=2*) will be used.
- Wind vectors (*feld=uuu,vvv*), plotted as barbs (*vcmx=-1*).
- A map background will be displayed (*feld=map*), and
- Tic marks will be placed on the plot (*feld=tic*).

Dataset: real RIP: rip sample Init: 1200 UTC Mon 24 Jan 00
 Fcst: 0.00 Valid: 1200 UTC Mon 24 Jan 00 (0500 MST Mon 24 Jan 00)
 Temperature at pressure = 850 hPa
 Geopotential height at pressure = 850 hPa
 Horizontal wind vectors at pressure = 850 hPa

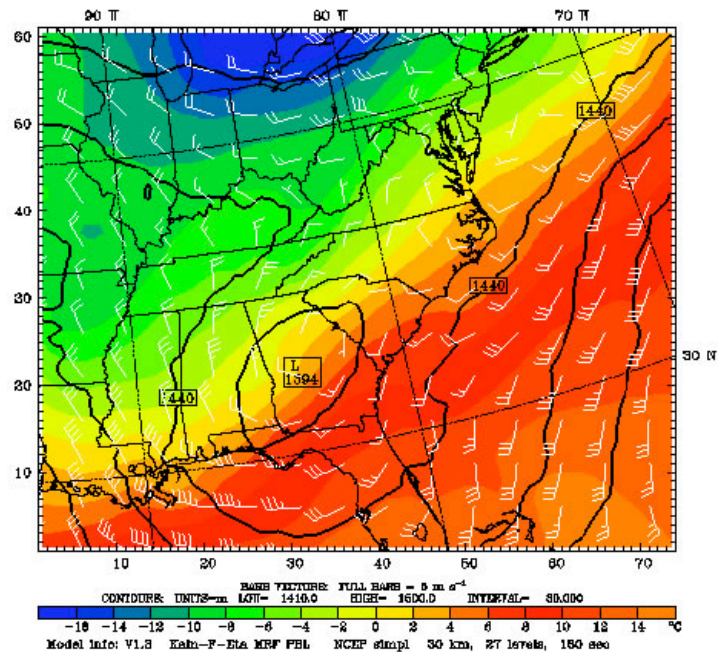

Running RIP

Each execution of RIP requires three basic things: a RIP executable, a model data set and a user input file (UIF). The syntax for the executable, *rip*, is as follows:

```
rip [-f] model-data-set-name rip-execution-name
```

In the above, model-data-set-name is the same model-data-set-name that was used in creating the RIP data set with the program *ripdp*.

rip-execution-name is the unique name for this RIP execution, and it also defines the name of the UIF that RIP will look for.

The *-f* option causes the standard output (*i.e.*, the textual print out) from RIP to be written to a file called rip-execution-name.out. Without the *-f* option, the standard output is sent to the screen.

e.g. `rip -f RIPDP/arw rip_sample`

If this is successful, the following files will be created:

<code>rip_sample.TYPE</code>	- metacode file with requested plots
<code>rip_sample.out</code>	- log file (<i>if -f used</i>) ; view this file if a problem occurred

The default output *TYPE* is a ‘cgm’, metacode file. To view these, use the command ‘idt’.

e.g. `idt rip_sample.cgm`

For high quality images, create pdf or ps images directly (**ncarg_type = pdf/ps**).

See the **Tools** section in Chapter 10 of this User’s Guide for more information concerning other types of graphical formats and conversions between graphical formats.

Examples of plots created for both idealized and real cases are available from:

<http://www.mmm.ucar.edu/wrf/users/graphics/RIP4/RIP4.htm>

ARWpost

The ARWpost package reads-in WRF-ARW model data and creates GrADS output files. *Since version 3.0 (released December 2010), vis5D output is no longer supported. More advanced 3D visualization tools, like VAPOR and IDV, have been developed over the last couple of years, and users are encouraged to explore those for their 3D visualization needs.*

The converter can read-in WPS geogrid and metgrid data, and WRF-ARW input and output files in netCDF format. *Since version 3.0 the ARWpost code is no longer dependant on the WRF IO API. The advantage of this is that the ARWpost code can now be compiled and executed anywhere without the need to first install WRF. The disadvantage is that GRIB1 formatted WRF output files are no longer supported.*

Necessary software

GrADS software - you can download and install GrADS from <http://grads.iges.org/>. The GrADS software is not needed to compile and run ARWpost, but is needed to display the output files.

Obtain the ARWpost TAR file from the WRF Download page
(http://www.mmm.ucar.edu/wrf/users/download/get_source.html)

Unzip and untar the ARWpost tar file.

The tar file contains the following directories and files:

- *README*, a text file containing basic information on running ARWpost.
- *arch/*, directory containing configure and compilation control.
- *clean*, a script to clean compiled code.
- *compile*, a script to compile the code.
- *configure*, a script to configure the compilation for your system.
- *namelist.ARWpost*, namelist to control the running of the code.
- *src/*, directory containing all source code.
- *scripts/*, directory containing some grads sample scripts.
- *util/*, a directory containing some utilities.

Environment Variables

Set the environment variable NETCDF to the location where your netCDF libraries are installed. Typically *(for cshrc shell)*:

```
setenv NETCDF /usr/local/netcdf
```

Configure and Compile ARWpost

To configure - Type:

```
./configure
```

You will see a list of options for your computer *(below is an example for a Linux machine)*:

```
Will use NETCDF in dir: /usr/local/netcdf-pgi
```

```
-----  
Please select from among the following supported platforms.
```

1. PC Linux i486 i586 i686, PGI compiler
2. PC Linux i486 i586 i686, Intel compiler

```
Enter selection [1-2]
```

Make sure the netCDF path is correct.
Pick the compile option for your machine

To compile - Type:

```
./compile
```

If successful, the executable ARWpost.exe will be created.

Edit the namelist.ARWpost file

Set input and output file names and fields to process (**&io**)

Variable	Value	Description
<i>&datetime</i>		
<i>start_date;</i> <i>end_date</i>		Start and end dates to process. Format: YYYY-MM-DD HH:00:00
<i>interval_seconds</i>	0	Interval in seconds between data to process. If data is available every hour, and this is set to every 3 hours, the code will skip past data not required.
<i>tacc</i>	0	Time tolerance in seconds. Any time in the model output that is within <i>tacc</i> seconds of the time specified will be processed.
<i>debug_level</i>	0	Set this higher for more print-outs that can be useful for debugging later.
<i>&io</i>		
<i>input_root_name</i>	./	Path and root name of files to use as input. All files starting with the root name will be processed. Wild characters are allowed.
<i>output_root_name</i>	./	Output root name. When converting data to GrADS, <i>output_root_name</i> .ctl and <i>output_root_name</i> .dat will be created.
<i>output_title</i>	Title as in WRF file	Use to overwrite title used in GrADS .ctl file.
<i>mercator_defs</i>	.False.	Set to true if mercator plots are distorted.
<i>split_output</i>	.False.	Use if you want to split our GrADS output files into a number of smaller files (<i>a common .ctl file will be used for all .dat files</i>).
<i>frames_per_outfile</i>	1	If <i>split_output</i> is .True., how many time periods are required per output (.dat) file.

<i>plot</i>	'all'	Which fields to process. 'all' – all fields in WRF file 'list' – only fields as listed in the <i>'fields'</i> variable. 'all_list' – all fields in WRF file and all fields listed in the <i>'fields'</i> variable. Order has no effect, i.e., <i>'all_list'</i> and <i>'list_all'</i> are similar. If <i>'list'</i> is used, a list of variables must be supplied under <i>'fields'</i> . Use <i>'list'</i> to calculate diagnostics.
<i>fields</i>		Fields to plot. Only used if <i>'list'</i> was used in the <i>'plot'</i> variable.
<i>&interp</i>		
<i>interp_method</i>	0	0 - sigma levels, -1 - code-defined "nice" height levels, 1 - user-defined height or pressure levels
<i>interp_levels</i>		Only used if <i>interp_method</i> =1 Supply levels to interpolate to, in hPa (pressure) or km (height). Supply levels bottom to top.
<i>extrapolate</i>	.false.	Extrapolate the data below the ground if interpolating to either pressure or height.

Available diagnostics:

cape - 3d cape
cin - 3d cin
mcap - maximum cape
mcin - maximum cin
clfr - low/middle and high cloud fraction
dbz - 3d reflectivity
max_dbz - maximum reflectivity
geopt - geopotential
height - model height in km
lcl - lifting condensation level
lfc - level of free convection
pressure - full model pressure in hPa
rh - relative humidity
rh2 - 2m relative humidity
theta - potential temperature
tc - temperature in degrees C
tk - temperature in degrees K
td - dew point temperature in degrees C
td2 - 2m dew point temperature in degrees C

slp - sea level pressure
umet and **vmet** - winds rotated to earth coordinates
u10m and **v10m** - 10m winds rotated to earth coordinates
wdir - wind direction
wspd - wind speed coordinates
wd10 - 10m wind direction
ws10 - 10m wind speed

Run ARWpost

Type:
 `./ARWpost.exe`

This will create the *output_root_name.dat* and *output_root_name.ctl* files required as input by the GrADS visualization software.

NOW YOU ARE READY TO VIEW THE OUTPUT

For general information about working with GrADS, view the GrADS home page: <http://grads.iges.org/grads/>

To help users get started, a number of GrADS scripts have been provided:

- The scripts are all available in the *scripts/* directory.
- The scripts provided are only examples of the type of plots one can generate with GrADS data.
- The user will need to modify these scripts to suit their data (e.g., if you do not specify 0.25 km and 2 km as levels to interpolate to when you run the "bwave" data through the converter, the "bwave.gs" script will not display any plots, since it will specifically look for these levels).
- Scripts must be copied to the location of the input data.

GENERAL SCRIPTS

cbar.gs	Plot color bar on shaded plots (from GrADS home page)
rgbset.gs	Some extra colors (<i>Users can add/change colors from color number 20 to 99</i>)

skew.gs Program to plot a skewT

TO RUN TYPE: run skew.gs (needs pressure level TC,TD,U,V as input)
User will be prompted if a hardcopy of the plot must be created (- 1 for yes and 0 for no).
If 1 is entered, a GIF image will be created.
Need to enter lon/lat of point you are interested in
Need to enter time you are interested in
Can overlay 2 different times

plot_all.gs Once you have opened a GrADS window, all one needs to do is run this script.
It will automatically find all .ctl files in the current directory and list them so one can pick which file to open.
Then the script will loop through all available fields and plot the ones a user requests.

SCRIPTS FOR REAL DATA

real_surf.gs Plot some surface data
Need input data on model levels

plevels.gs Plot some pressure level fields
Need model output on pressure levels

rain.gs Plot total rainfall
Need a model output data set (any vertical coordinate), that contain fields "RAINC" and "RAINNC"

cross_z.gs Need z level data as input
Will plot a NS and EW cross section of RH and T (C)
Plots will run through middle of the domain

zlevels.gs Plot some height level fields
Need input data on height levels
Will plot data on 2, 5, 10 and 16km levels

input.gs Need WRF INPUT data on height levels

SCRIPTS FOR IDEALIZED DATA

bwave.gs Need height level data as input
Will look for 0.25 and 2 km data to plot

grav2d.gs Need normal model level data

hill2d.gs Need normal model level data

qss.gs Need height level data as input.
Will look for heights 0.75, 1.5, 4 and 8 km to plot

sqx.gs Need normal model level data a input

sqy.gs Need normal model level data a input

Examples of plots created for both idealized and real cases are available from:

<http://www.mmm.ucar.edu/wrf/OnLineTutorial/Graphics/ARWpost/>

Trouble Shooting

The code executes correctly, but you get "NaN" or "Undefined Grid" for all fields when displaying the data.

Look in the .ctl file.

a) If the second line is:

options byteswapped

Remove this line from your .ctl file and try to display the data again.
If this SOLVES the problem, you need to remove the **-Dbytesw** option from *configure.arwp*

b) If the line below does NOT appear in your .ctl file:

options byteswapped

ADD this line as the second line in the .ctl file.
Try to display the data again.
If this SOLVES the problem, you need to ADD the **-Dbytesw** option for *configure.arwp*

The line "options byteswapped" is often needed on some computers (DEC alpha as an example). It is also often needed if you run the converter on one computer and use another to display the data.

NCEP Unified Post Processor (UPP)

UPP Introduction

The NCEP Unified Post Processor has replaced the WRF Post Processor (WPP). The UPP software package is based on WPP but has enhanced capabilities to post-process output from a variety of NWP models, including WRF-NMM, WRF-ARW, Non-hydrostatic Multi-scale Model on the B grid (NMMB), Global Forecast System (GFS), and Climate Forecast System (CFS). At this time, community user support is provided for the WRF-based systems only. UPP interpolates output from the model's native grids to National Weather Service (NWS) standard levels (pressure, height, etc.) and standard output grids (AWIPS, Lambert Conformal, polar-stereographic, etc.) in NWS and World Meteorological Organization (WMO) GRIB format. There is also an option to output fields on the model's native vertical levels. In addition, UPP incorporates the Joint Center for Satellite Data Assimilation (JCSDA) Community Radiative Transfer Model (CRTM) to compute model derived brightness temperature (TB) for various instruments and channels. This additional feature enables the generation of simulated GOES and AMSRE products for WRF-NMM, Hurricane WRF (HWRF), WRF-ARW and GFS. For CRTM documentation, refer to <http://www.orbit.nesdis.noaa.gov/smcd/spb/CRTM>.

The adaptation of the original WRF Post Processor package and User's Guide (by Mike Baldwin of NSSL/CIMMS and Hui-Ya Chuang of NCEP/EMC) was done by Lígia Bernardet (NOAA/ESRL/DTC) in collaboration with Dusan Jovic (NCEP/EMC), Robert Rozumalski (COMET), Wesley Ebisuzaki (NWS/HQTR), and Louisa Nance (NCAR/RAL/DTC). Upgrades to WRF Post Processor versions 2.2 and higher were performed by Hui-Ya Chuang, Dusan Jovic and Mathew Pyle (NCEP/EMC). Transitioning of the documentation from the WRF Post Processor to the Unified Post Processor was performed by Nicole McKee (NCEP/EMC), Hui-ya Chuang (NCEP/EMC), and Jamie Wolff (NCAR/RAL/DTC). Implementation of the Community Unified Post Processor was performed by Tricia Slovacek (NCAR/RAL/DTC).

UPP Software Requirements

The Community Unified Post Processor requires the same Fortran and C compilers used to build the WRF model. In addition, the netCDF library and the WRF I/O API libraries, which are included in the WRF model tar file, are also required.

The UPP has some sample visualization scripts included to create graphics using either GrADS (<http://grads.iges.org/grads/grads.html>) or GEMPAK (<http://www.unidata.ucar.edu/software/gempak/index.html>). These are not part of the UPP installation and need to be installed separately if one would like to use either plotting package.

The Unified Post Processor has been tested on IBM (with XLF compiler) and LINUX platforms (with PGI, Intel and GFORTRAN compilers).

Obtaining the UPP Code

The Unified Post Processor package can be downloaded from:
<http://www.dtcenter.org/wrf-nmm/users/downloads/>.

Note: Always obtain the latest version of the code if you are not trying to continue a pre-existing project. UPPV2.2 is just used as an example here.

Once the *tar* file is obtained, *gunzip* and *untar* the file.

```
tar -zxvf UPPV2.2.tar.gz
```

This command will create a directory called *UPPV2.2*.

UPP Directory Structure

Under the main directory of *UPPV2.2* reside seven subdirectories (* indicates directories that are created after the configuration step):

arch: Machine dependent configuration build scripts used to construct *configure.upp*

bin*: Location of executables after compilation.

scripts: contains sample running scripts

run_unipost: run *unipost*, *ndate* and *copygb*.

run_unipost andgempak: run *unipost*, *copygb*, and GEMPAK to plot various fields.

run_unipost andgrads: run *unipost*, *ndate*, *copygb*, and GrADS to plot various fields.

run_unipost _frames: run *unipost*, *ndate* and *copygb* on a single *wrfout* file containing multiple forecast times.

run_unipost _gracet: run *unipost*, *ndate* and *copygb* on *wrfout* files with non-zero minutes/seconds.

run_unipost _minute: run *unipost*, *ndate* and *copygb* for sub-hourly *wrfout* files.

include*: Source include modules built/used during compilation of UPP

lib*: Archived libraries built/used by UPP

parm: Contains the parameter files, which can be modified by the user to control how the post processing is performed.

src: Contains source codes for:

copygb: Source code for *copygb*

ndate: Source code for *ndate*

unipost: Source code for *unipost*

lib: Contains source code subdirectories for the UPP libraries

bacio: Binary I/O library

crtm2: Community Radiative Transfer Model library

g2: GRIB2 support library

g2tmpl: GRIB2 table support library

gfsio: GFS I/O routines

ip: General interpolation library (see *lib/iplib/iplib.doc*)

nemsio: NEMS I/O routines

sfcio: API for performing I/O on the surface restart file of the global spectral model

sigio: API for performing I/O on the sigma restart file of the global spectral model

sp: Spectral transform library (see *lib/splib/splib.doc*)

w3emc: Library for coding and decoding data in GRIB1 format

w3nco: Library for coding and decoding data in GRIB1 format

wrfmpi_stubs: Contains some *C* and *FORTRAN* codes to generate *libmpi.a* library used to replace MPI calls for serial compilation.

xml: XML support – GRIB2 parameter file

Installing the UPP Code

UPP uses a build mechanism similar to that used by the WRF model. There are two environment variables that must be set before beginning the installation: a variable to define the path to a similarly compiled version of WRF and a variable to a compatible version of netCDF. If the environment variable **WRF_DIR** is set by (for example),

```
setenv WRF_DIR /home/user/WRFV3
```

this path will be used to reference WRF libraries and modules. Otherwise, the path

```
../WRFV3
```

will be used.

In the case neither method is set, the configure script will automatically prompt you for a pathname.

To reference the netCDF libraries, the configure script checks for an environment variable (**NETCDF**) first, then the system default (**/user/local/netcdf**), and then a user supplied link (**./netcdf_links**). If none of these resolve a path, the user will be prompted by the configure script to supply a path.

If WRF was compiled with the environment variable:

setenv HWRF 1

This must also be set when compiling UPP.

Type ***configure***, and provide the required info. For example:

./configure

You will be given a list of choices for your computer.

Choices for LINUX operating systems are as follows:

1. Linux x86_64, PGI compiler (serial)
2. Linux x86_64, PGI compiler (dmpar)
3. Linux x86_64, Intel compiler (serial)
4. Linux x86_64, Intel compiler (dmpar)
5. Linux x86_64, Intel compiler, SGI MPT (serial)
6. Linux x86_64, Intel compiler, SGI MPT (dmpar)
7. Linux x86_64, gfortran compiler (serial)
8. Linux x86_64, gfortran compiler (dmpar)

Note: *If UPP is compiled with distributed memory, it must be linked to a dmpar compilation of WRF.*

Choose one of the configure options listed. Check the ***configure.upp*** file created and edit for compile options/paths, if necessary. For debug flag settings, the configure script can be run with a ***-d*** switch or flag.

To compile UPP, enter the following command:

./compile >& compile_upp.log &

When compiling with distributed memory (serial) this command should create 13 (14) UPP libraries in **UPPV2.2/lib/** (**libbacio.a**, **libCRTM.a**, **libg2.a**, **libg2tmpl.a**, **libgfsio.a**, **libip.a**, **(libmpi.a)**, **libnemsio.a**, **ibsfcio.a**, **libsigio.a**, **libsp.a**, **libw3emc.a**, **libw3nco.a**, **libxmlparse.a**) and three UPP executables in **bin/** (**unipost.exe**, **ndate.exe**, and **copygb.exe**).

To remove all built files, as well as the ***configure.upp***, type:

./clean

This action is recommended if a mistake is made during the installation process or a change is made to the configuration or build environment. There is also a *clean -a* option which will revert back to a pre-install configuration.

UPP Functionalities

The Unified Post Processor,

- is compatible with WRF v3.3 and higher.
- can be used to post-process WRF-ARW, WRF-NMM, GFS, and CFS forecasts (community support provided for WRF-based forecasts).
- can ingest WRF history files (*wrfout**) in two formats: netCDF and binary.

The Unified Post Processor is divided into two parts:

1. *Unipost*

- Interpolates forecasts from the model's native vertical coordinate to NWS standard output levels (e.g., pressure, height) and computes mean sea level pressure. If the requested parameter is on a model's native level, then no vertical interpolation is performed.
- Computes diagnostic output quantities (e.g., convective available potential energy, helicity, radar reflectivity). A full list of fields that can be generated by unipost is shown in Table 3.
- Except for new capabilities of post processing GFS/CFS and additions of many new variables, UPP uses the same algorithms to derive most existing variables as were used in WPP. The only three exceptions/changes from the WPP are:
 - Computes RH w.r.t. ice for GFS, but w.r.t. water for all other supported models. WPP computed RH w.r.t. water only.
 - The height and wind speed at the maximum wind level is computed by assuming the wind speed varies quadratically in height in the location of the maximum wind level. The WPP defined maximum wind level at the level with the maximum wind speed among all model levels.
 - The static tropopause level is obtained by finding the lowest level that has a temperature lapse rate of less than 2 K/km over a 2 km depth above it. The WPP defined the tropopause by finding the lowest level that has a mean temperature lapse rate of 2 K/km over three model layers.
- Outputs the results in NWS and WMO standard GRIB1 format (for GRIB documentation, see <http://www.nco.ncep.noaa.gov/pmb/docs/>).
- Destaggers the WRF-ARW forecasts from a C-grid to an A-grid.
- Outputs two navigation files, *copygb_nav.txt* (for WRF-NMM output only) and *copygb_hwrf.txt* (for WRF-ARW and WRF-NMM). These files can be used as input for *copygb*.
 - *copygb_nav.txt*: This file contains the GRID GDS of a Lambert

Conformal Grid similar in domain and grid spacing to the one used to run the WRF-NMM. The Lambert Conformal map projection works well for mid-latitudes.

- ***copygb_hwrf.txt***: This file contains the GRID GDS of a Latitude-Longitude Grid similar in domain and grid spacing to the one used to run the WRF model. The latitude-longitude grid works well for tropics.

2. ***Copygb***

- Destaggers the WRF-NMM forecasts from the staggered native E-grid to a regular non-staggered grid. (Since unipost destaggers WRF-ARW output from a C-grid to an A-grid, WRF-ARW data can be displayed directly without going through copygb.)
- Interpolates the forecasts horizontally from their native grid to a standard AWIPS or user-defined grid (for information on AWIPS grids, see <http://www.nco.ncep.noaa.gov/pmb/docs/on388/tableb.html>).
- Outputs the results in NWS and WMO standard GRIB1 format (for GRIB documentation, see <http://www.nco.ncep.noaa.gov/pmb/docs/>).

In addition to ***unipost*** and ***copygb***, a utility called ***ndate*** is distributed with the Unified Post Processor tarfile. This utility is used to format the dates of the forecasts to be posted for ingestion by the codes.

Setting up the WRF model to interface with UPP

The ***unipost*** program is currently set up to read a large number of fields from the WRF model history files. This configuration stems from NCEP's need to generate all of its required operational products. A list of the fields that are currently read in by ***unipost*** is provided for the WRF-NMM in Table 1 and WRF-ARW in Table 2. Tables for the GFS and CFS fields will be added in the future. When using the netCDF or mpi binary read, this program is configured such that it will run successfully even if an expected input field is missing from the WRF history file as long as this field is not required to produce a requested output field. If the pre-requisites for a requested output field are missing from the WRF history file, ***unipost*** will abort at run time.

Take care not to remove fields from the ***wrfout*** files, which may be needed for diagnostic purposes by the UPP package. For example, if isobaric state fields are requested, but the pressure fields on model interfaces (PINT for WRF-NMM, P and PB for WRF-ARW) are not available in the history file, ***unipost*** will abort at run time. In general, the default fields available in the ***wrfout*** files are sufficient to run UPP. The fields written to the WRF history file are controlled by the settings in the Registry file (see ***Registry.EM*** or ***Registry.NMM(_NEST)*** files in the ***Registry*** subdirectory of the main ***WRFV3*** directory).

UPP is written to process a single forecast hour, therefore, having a single forecast per output file is optimal. However, UPP can be run across multiple forecast times in a single output file to extract a specified forecast hour.

Note: It is necessary to re-compile the WRF model source code after modifying the Registry file.

Table 1. List of all possible fields read in by *unipost* for the WRF-NMM:

T	SFCEXC	NRDSW
U	VEGFRC	ARDSW
V	ACSNOW	ALWIN
Q	ACSNO	ALWOUT
CWM	CMC	NRDLW
F_ICE	SST	ARDLW
F_RAIN	EXCH_H	ALWTOA
F_RIMEF	EL_MYJ	ASWTOA
W	THZ0	TGROUN
PINT	QZ0	SOILTB
PT	UZ0	TWBS
PDTOP	VZ0	SFCSHX
FIS	QS	NSRFC
SMC	Z0	ASRFC
SH2O	PBLH	QWBS
STC	USTAR	SFCLHX
CFRACH	AKHS_OUT	GRNFLX
CFRACL	AKMS_OUT	SUBSHX
CFRACM	THS	POTEVP
SLDPTH	PREC	WEASD
U10	CUPREC	SNO
V10	ACPREC	SI
TH10	CUPPT	PCTSNO
Q10	LSPA	IVGTYP
TSHLTR	CLDEFI	ISLTYP
QSHLTR	HTOP	ISLOPE
PSHLTR	HBOT	SM
SMSTAV	HTOPD	SICE
SMSTOT	HBOTD	ALBEDO
ACFRCV	HTOPS	ALBASE
ACFRST	HBOTS	GLAT
RLWTT	SR	XLONG
RSWTT	RSWIN	GLON
AVRAIN	CZEN	DX_NMM
AVCNVC	CZMEAN	NPHS0
TCUCN	RSWOUT	NCLOD
TRAIN	RLWIN	NPREC
NCFRCV	SIGT4	NHEAT
NCFRST	RADOT	SFCEVP
SFROFF	ASWIN	
UDROFF	ASWOUT	

Note: For WRF-NMM, the period of accumulated precipitation is controlled by the *namelist.input* variable *tprec*. Hence, this field in the *wrfout* file represents an accumulation over the time period $tprec * INT[(fhr - \Sigma) / tprec]$ to fhr, where fhr represents

the forecast hour and Σ is a small number. The GRIB file output by *unipost* and by *copygb* contains fields with the name of accumulation period.

Table 2. List of all possible fields read in by *unipost* for the WRF-ARW:

T	MUB	SFROFF
U	P_TOP	UDROFF
V	PHB	SFCEVP
QVAPOR	PH	SFCEXC
QCLOUD	SMOIS	VEGFRA
QICE	TSLB	ACSNOW
QRAIN	CLDFRA	ACSNOB
QSNOW	U10	CANWAT
QGRAUP	V10	SST
W	TH2	THZ0
PB	Q2	QZ0
P	SMSTAV	UZ0
MU	SMSTOT	VZ0
QSFC	HGT	ISLTYP
Z0	ALBEDO	ISLOPE
UST	GSW	XLAND
AKHS	GLW	XLAT
AKMS	TMN	XLONG
TSK	HFX	MAPFAC_M
RAINC	LH	STEPBL
RAINNC	GRDFLX	HTOP
RAINCX	SNOW	HBOT
RAINNCX	SNOWC	

Note: For WRF-ARW, the accumulated precipitation fields (*RAINC* and *RAINNC*) are run total accumulations.

UPP Control File Overview

The user interacts with *unipost* through the control file, *parm/wrf_cntrl.parm*. The control file is composed of a header and a body. The header specifies the output file information. The body allows the user to select which fields and levels to process.

The header of the *wrf_cntrl.parm* file contains the following variables:

- **KGTYPE:** defines output grid type, which should always be 255.
- **IMDLTY:** identifies the process ID for AWIPS.
- **DATSET:** defines the prefix used for the output file name. Currently set to “*WRFPRS*”. Note: the run_* scripts assume “*WRFPRS*” is used.

The body of the *wrf_cntrl.parm* file is composed of a series of line pairs similar to the following:

```
(PRESS ON MDL SFCS ) SCAL=( 3.0)
L=(11000 00000 00000 00000 00000 00000 00000 00000 00000 00000 00000
00000 00000 00000)
```

where,

- The top line specifies the variable (e.g. PRESS) to process, the level type (e.g. ON MDL SFCS) a user is interested in, and the degree of accuracy to be retained (SCAL=3.0) in the GRIB output.
- SCAL defines the precision of the data written out to the GRIB format. Positive values denote decimal scaling (maintain that number of significant digits), while negative values describe binary scaling (precise to $2^{\{SCAL\}}$; i.e., SCAL=-3.0 gives output precise to the nearest 1/8). Because copygb is unable to handle binary precision at this time, negative numbers are discouraged.
- A list of all possible output fields for unipost is provided in Table 3. This table provides the full name of the variable in the first column and an abbreviated name in the second column. The abbreviated names are used in the control file. Note that the variable names also contain the type of level on which they are output. For instance, temperature is available on “model surface” and “pressure surface”.
- The second line specifies the levels on which the variable is to be posted. “0” indicates no output at this level and “1” indicates output the variable specified on the top line at the level specified by the position of the digit and the type of level defined for this variable. For flight/wind energy fields, a “2” may be specified, such that “2” requests AGL and “1” requests MSL.

Controlling which variables *unipost* outputs

To output a field, the body of the control file needs to contain an entry for the appropriate variable and output for this variable must be turned on for at least one level (see “*Controlling which levels unipost outputs*”). If an entry for a particular field is not yet available in the control file, two lines may be added to the control file with the appropriate entries for that field.

Controlling which levels *unipost* outputs

The second line of each pair determines which levels *unipost* will output. Output on a given level is turned off by a “0” or turned on by a “1”.

- For isobaric output, 47 levels are possible, from 2 to 1013 hPa (*8 levels above 75 mb and then every 25 mb from 75 to 1000 mb*). The complete list of levels is specified in *sorc/unipost/CTLBLK.f*.
 - Modify specification of variable LSMDEF to change the number of pressure levels: LSMDEF=47
 - Modify specification of SPLDEF array to change the values of pressure levels:
(/200.,500.,700.,1000.,2000.,3000.

&,5000.,7000.,7500.,10000.,12500.,15000.,17500.,20000., .../)

- For model-level output, all model levels are possible, from the highest to the lowest.
- When using the Noah LSM, the *soil layers* are 0-10 cm, 10-40 cm, 40-100 cm, and 100-200 cm.
- When using the RUC LSM, the *soil levels* are 0 cm, 5 cm, 20 cm, 40 cm, 160 cm, and 300 cm. For the RUC LSM it is also necessary to turn on two additional output levels in the *wrf_cntrl.parm* to output 6 levels rather than the default 4 layers for the Noah LSM.
- For PBL layer averages, the levels correspond to 6 layers with a thickness of 30 hPa each.
- For flight level, the levels are 30 m, 50 m, 80 m, 100 m, 305 m, 457 m, 610 m, 914 m, 1524 m, 1829 m, 2134 m, 2743 m, 3658 m, 4572 m, and 6000 m.
- For AGL RADAR Reflectivity, the levels are 4000 and 1000 m.
- For surface or shelter-level output, only the first position of the line needs to be turned on.
 - For example, the sample control file *parm/wrf_cntrl.parm* has the following entry for surface dew point temperature:

```
(SURFACE DEWPOINT  ) SCAL=( 4.0)
L=(00000 00000 00000 00000 00000 00000 00000 00000 00000 00000
00000 00000 00000 00000)
```

Based on this entry, surface dew point temperature will not be output by *unipost*. To add this field to the output, modify the entry to read:

```
(SURFACE DEWPOINT  ) SCAL=( 4.0)
L=(10000 00000 00000 00000 00000 00000 00000 00000 00000 00000
00000 00000 00000 00000)
```

Running UPP

Six scripts for running the Unified Post Processor package are included in the tar file:

```
run_unipost
run_unipostandgrads
run_unipostandgempak
run_unipost_frames
run_unipost_gracet
run_unipost_minute
```

Before running any of the above listed scripts, perform the following instructions:

1. *cd* to your **DOMAINPATH** directory.
2. Make a directory to put the UPP results.

mkdir postprd

3. Make a directory to put a copy of *wrf_cntrl.parm* file.

mkdir parm

4. Copy over the default *UPPV2.2/parm/wrf_cntrl.parm* to your working directory to customize *unipost*.
5. Edit the *wrf_cntrl.parm* file to reflect the fields and levels you want *unipost* to output.
6. Copy over the (*UPPV2.2/scripts/run_unipost**) script of your choice to the *postprd/*.
7. Edit the run script as outlined below.

Once these directories are set up and the edits outlined above are completed, the scripts can be run interactively from the *postprd* directory by simply typing the script name on the command line.

Overview of the scripts to run the UPP

Note: It is recommended that the user refer to the *run_unipost** scripts in the *script/* while reading this overview.

1. Set up environmental variables:
TOP_DIR: top level directory for source codes (*UPPV1* and *WRFV3*)
DOMAINPATH: directory where UPP will be run from
WRFPATH: path to your WRFV3 build; defaults to the environment variable used during the installation with the configure script
UNI_POST_HOME: path to your UPPV2.2 build
POSTEXEC: path to your UPPV2.2 executables

Note: The scripts are configured such that *unipost* expects the WRF history files (*wrfout** files) to be in *wrfprd/*, the *wrf_cntrl.parm* file to be in *parm/* and the postprocessor working directory to called *postprd/*, all under *DOMAINPATH*.
2. Specify dynamic core being run (“NMM” or “ARW”)
3. Specify the forecast cycles to be post-processed
startdate: YYYYMMDDHH of forecast cycle
fhr: first forecast hour
lastfhr: last forecast hour
incrementthr: increment (in hours) between forecast files (Do not set to 0 or the script will loop continuously)
4. Set naming convention for prefix and extension of output file name

- i. **comsp** is the initial string of the output file name (by default it is not set (and the prefix of the output file will be the string set in **wrf_cntrl.parm DATSET**), if set it will concatenate the setting to the front of the string specified in **wrf_cntrl.parm DATSET**)
 - ii. **tmmark** is used for the file extension (in **run_unipost**, **tmmark=tm00**, if not set it is set to **.GrbF**)
5. Set up how many domains will be post-processed
 For runs with a single domain, use “for domain d01”.
 For runs with multiple domains, use “for domain d01 d02 .. dnn”
6. Create namelist **itag** that will be read in by **unipost.exe** from stdin (unit 5). This namelist contains 4 lines:
 - i. Name of the WRF output file to be posted.
 - ii. Format of WRF model output (netcdf or binary or binarympiio).
 - iii. Forecast valid time (not model start time) in WRF format (the forecast time desired to be post-processed).
 - iv. Dynamic core used (NMM or NCAR).
7. Run **unipost** and check for errors.
 - The execution command in the distributed scripts is for a single processor:
./unipost.exe > outpost.
 - To run **unipost** using mpi (dmpar compilation), the command line should be (**note: at this time, the number of processors must be set to 1; N=1**):
 - LINUX-MPI systems: **mpirun -np N unipost.exe < itag > outpost** (Note: on some systems a host file also needs to be specified: **-machinefile “host”**)
 - IBM: **mpirun.lsf unipost.exe < itag > outpost**
8. Set up grid to post to (see full description under “Run **copygb**” below)
copygb is run with a pre-defined AWIPS grid
gridno: standard AWIPS grid to interpolate WRF model output to
copygb ingests a kgds definition on the command line
copygb ingests the contents of file **copygb_gridnav.txt** or **copygb_hwrf.txt** through variable **nav**
9. Run **copygb** and check for errors.
copygb.exe -xg“grid [kgds]” input_file output_file
 where **grid** refers to the output grid to which the native forecast is being interpolated.

The output grid can be specified in three ways:

- i. As the grid id of a pre-defined AWIPS grid:
copygb.exe -g\${gridno} -x input_file output_file

For example, using grid 218:

```
copygb.exe -xg"218" WRFPRS_$domain.${fhr} wrfprs_$domain.${fhr}
```

- ii. As a user defined standard grid, such as for grid 255:

```
copygb.exe -xg"255 kgds" input_file output_file
```

where the user defined grid is specified by a full set of kgds parameters determining a GRIB GDS (grid description section) in the *W3fi63* format. Details on how to specify the kgds parameters are documented in file *lib/w3lib/w3fi71.f*. For example:

```
copygb.exe -xg" 255 3 109 91 37719 -77645 8 -71000 10433 9966 0 64  
42000 42000" WRFPRS_$domain.${fhr} wrfprs_$domain.${fhr}
```

- iii. Specifying output grid as a file: When WRF-NMM output in is processed by *unipost*, two text files *copygb_gridnav.txt* and *copygb_hwrf.txt* are created. These files contain the GRID GDS of a Lambert Conformal Grid (file *copygb_gridnav.txt*) or lat/lon grid (*copygb_hwrf.txt*) similar in domain and grid spacing to the one used to run the WRF-NMM model. The contents of one of these files are read into variable *nav* and can be used as input to *copygb.exe*.

```
copygb.exe -xg"$nav" input_file output_file
```

For example, when using "*copygb_gridnav.txt*" for an application the steps include:

```
read nav < 'copygb_gridnav.txt'  
export nav  
copygb.exe -xg"$nav" WRFPRS_$domain.${fhr}  
wrfprs_$domain.${fhr}
```

If scripts *run_unipostandgrads* or *run_unipostandgempak* are used, additional steps are taken to create image files (see **Visualization** section below).

Upon a successful run, *unipost* and *copygb* will generate output files *WRFPRS_dnn.hhh* and *wrfprs_dnn.hhh*, respectively, in the post-processor working directory, where "*nn*" refers to the domain id and "*hhh*" denotes the forecast hour. In addition, the script *run_unipostandgrads* will produce a suite of gif images named *variablehh_GrADS.gif*, and the script *run_unipostandgempak* will produce a suite of gif images named *variablehh.gif*.

If the run did not complete successfully, a log file in the post-processor working directory called *unipost_dnn.hhh.out*, where "*nn*" is the domain id and "*hhh*" is the forecast hour, may be consulted for further information.

It should be noted that *copygb* is a flexible program that can accept several command line options specifying details of how the horizontal interpolation from the native grid to the output grid should be performed. Complete documentation of *copygb* can be found at: http://www.dtcenter.org/met/users/support/online_tutorial/METv4.0/copygb/copygb.txt

Visualization with UPP

GEMPAK

The GEMPAK utility *nagrib* is able to decode GRIB files whose navigation is on any non-staggered grid. Hence, GEMPAK is able to decode GRIB files generated by the Unified Post Processing package and plot horizontal fields or vertical cross sections.

A sample script named *run_unipostandgempak*, which is included in the *scripts* directory of the tar file, can be used to run *unipost*, *copygb*, and plot the following fields using GEMPAK:

- *Sfcmap_dnn_hh.gif*: mean SLP and 6 hourly precipitation
- *PrecipType_dnn_hh.gif*: precipitation type (just snow and rain)
- *850mbRH_dnn_hh.gif*: 850 mb relative humidity
- *850mbTempandWind_dnn_hh.gif*: 850 mb temperature and wind vectors
- *500mbHandVort_dnn_hh.gif*: 500 mb geopotential height and vorticity
- *250mbWindandH_dnn_hh.gif*: 250 mb wind speed isotacs and geopotential height

This script can be modified to customize fields for output. GEMPAK has an online users guide at:

http://www.unidata.ucar.edu/software/gempak/help_and_documentation/manual/.

In order to use the script *run_unipostandgempak*, it is necessary to set the environment variable *GEMEXEC* to the path of the GEMPAK executables. For example,

```
setenv GEMEXEC /usr/local/gempak/bin
```

Note: For GEMPAK, the precipitation accumulation period for WRF-NMM is given by the variable *incrementthr* in the *run_unipostandgempak* script.

GrADS

The GrADS utilities *grib2ctl.pl* and *gribmap* are able to decode GRIB files whose navigation is on any non-staggered grid. These utilities and instructions on how to use them to generate GrADS control files are available from:

<http://www.cpc.ncep.noaa.gov/products/wesley/grib2ctl.html>.

The GrADS package is available from: <http://grads.iges.org/grads/grads.html>. GrADS has an online User's Guide at: <http://grads.iges.org/grads/gadoc/> and a list of basic commands for GrADS can be found at: <http://www.iges.org/grads/gadoc/commandsatt.html>.

A sample script named *run_unipostandgrads*, which is included in the *scripts* directory of the Unified Post Processing package, can be used to run *unipost*, *copygb*, and plot the following fields using GrADS:

- *Sfcmaphh_dnn_GRADS.gif*: mean SLP and 6-hour accumulated precipitation.
- *850mbRHhh_dnn_GRADS.gif*: 850 mb relative humidity
- *850mbTempandWindhh_dnn_GRADS.gif*: 850 mb temperature and wind vectors
- *500mbHandVorthh_dnn_GRADS.gif*: 500 mb geopotential heights and absolute vorticity
- *250mbWindandHhh_dnn_GRADS.gif*: 250 mb wind speed isotacs and geopotential heights

In order to use the script *run_unipostandgrads*, it is necessary to:

1. Set the environmental variable **GADDIR** to the path of the GrADS fonts and auxiliary files. For example,

```
setenv GADDIR /usr/local/grads/data
```

2. Add the location of the GrADS executables to the **PATH**. For example

```
setenv PATH /usr/local/grads/bin:$PATH
```

3. Link script *cbar.gs* to the post-processor working directory. (This script is provided in UPP package, and the *run_unipostandgrads* script makes a link from *scripts/* to *postprd/*.) To generate the plots above, GrADS script *cbar.gs* is invoked. This script can also be obtained from the GrADS library of scripts at <http://grads.iges.org/grads/gadoc/library.html>.

Note: For GrADS, the precipitation accumulation period for WRF-NMM is plotted over the subintervals of the *tprec* hour (set in *namelist.input*).

Fields produced by *unipost*

Table 3 lists basic and derived fields that are currently produced by *unipost*. The abbreviated names listed in the second column describe how the fields should be entered in the control file (*wrf_cntrl.parm*).

Table 3: Fields produced by *unipost* (column 1), abbreviated names used in the *wrf_cntrl.parm* file (column 2), corresponding GRIB identification number for the field (column 3), and corresponding GRIB identification number for the vertical coordinate (column 4).

Field Name	Name In Control File	Grib ID	Vertical Level
Radar reflectivity on model surface	RADAR REFL MDL SFCS	211	109
Pressure on model surface	PRESS ON MDL SFCS	1	109
Height on model surface	HEIGHT ON MDL SFCS	7	109
Temperature on model surface	TEMP ON MDL SFCS	11	109
Potential temperature on model surface	POT TEMP ON MDL SFCS	13	109
Dew point temperature on model surface	DWPT TEMP ON MDL SFC	17	109
Specific humidity on model surface	SPEC HUM ON MDL SFCS	51	109
Relative humidity on model surface	REL HUM ON MDL SFCS	52	109
Moisture convergence on model surface	MST CNVG ON MDL SFCS	135	109
U component wind on model surface	U WIND ON MDL SFCS	33	109
V component wind on model surface	V WIND ON MDL SFCS	34	109
Cloud water on model surface	CLD WTR ON MDL SFCS	153	109
Cloud ice on model surface	CLD ICE ON MDL SFCS	58	109
Rain on model surface	RAIN ON MDL SFCS	170	109
Snow on model surface	SNOW ON MDL SFCS	171	109
Cloud fraction on model surface	CLD FRAC ON MDL SFCS	71	109
Omega on model surface	OMEGA ON MDL SFCS	39	109
Absolute vorticity on model surface	ABS VORT ON MDL SFCS	41	109
Geostrophic streamfunction on model surface	STRMFUNC ON MDL SFCS	35	109
Turbulent kinetic energy on model surface	TRBLNT KE ON MDL SFC	158	109
Richardson number on model surface	RCHDSN NO ON MDL SFC	254	109
Master length scale on model surface	MASTER LENGTH SCALE	226	109
Asymptotic length scale on model surface	ASYMPT MSTR LEN SCL	227	109
Radar reflectivity on pressure surface	RADAR REFL ON P SFCS	211	100
Height on pressure surface	HEIGHT OF PRESS SFCS	7	100
Temperature on pressure surface	TEMP ON PRESS SFCS	11	100
Potential temperature on pressure surface	POT TEMP ON P SFCS	13	100
Dew point temperature on pressure surface	DWPT TEMP ON P SFCS	17	100
Specific humidity on pressure surface	SPEC HUM ON P SFCS	51	100
Relative humidity on pressure surface	REL HUMID ON P SFCS	52	100
Moisture convergence on pressure surface	MST CNVG ON P SFCS	135	100
U component wind on pressure surface	U WIND ON PRESS SFCS	33	100
V component wind on pressure surface	V WIND ON PRESS SFCS	34	100
Omega on pressure surface	OMEGA ON PRESS SFCS	39	100
Absolute vorticity on pressure surface	ABS VORT ON P SFCS	41	100
Geostrophic streamfunction on pressure surface	STRMFUNC ON P SFCS	35	100
Turbulent kinetic energy on pressure surface	TRBLNT KE ON P SFCS	158	100
Cloud water on pressure surface	CLOUD WATR ON P SFCS	153	100
Cloud ice on pressure surface	CLOUD ICE ON P SFCS	58	100
Rain on pressure surface	RAIN ON P SFCS	170	100
Snow water on pressure surface	SNOW ON P SFCS	171	100
Total condensate on pressure surface	CONDENSATE ON P SFCS	135	100
Mesinger (Membrane) sea level pressure	MESINGER MEAN SLP	130	102
Shuell sea level pressure	SHUELL MEAN SLP	2	102
2 M pressure	SHELTER PRESSURE	1	105
2 M temperature	SHELTER TEMPERATURE	11	105
2 M specific humidity	SHELTER SPEC HUMID	51	105
2 M mixing ratio	SHELTER MIX RATIO	53	105
2 M dew point temperature	SHELTER DEWPOINT	17	105
2 M RH	SHELTER REL HUMID	52	105
10 M u component wind	U WIND AT ANEMOM HT	33	105

10 M v component wind	V WIND AT ANEMOM HT	34	105
10 M potential temperature	POT TEMP AT 10 M	13	105
10 M specific humidity	SPEC HUM AT 10 M	51	105
Surface pressure	SURFACE PRESSURE	1	1
Terrain height	SURFACE HEIGHT	7	1
Skin potential temperature	SURFACE POT TEMP	13	1
Skin specific humidity	SURFACE SPEC HUMID	51	1
Skin dew point temperature	SURFACE DEWPOINT	17	1
Skin Relative humidity	SURFACE REL HUMID	52	1
Skin temperature	SFC (SKIN) TEMPRATUR	11	1
Soil temperature at the bottom of soil layers	BOTTOM SOIL TEMP	85	111
Soil temperature in between each of soil layers	SOIL TEMPERATURE	85	112
Soil moisture in between each of soil layers	SOIL MOISTURE	144	112
Snow water equivalent	SNOW WATER EQUIVALNT	65	1
Snow cover in percentage	PERCENT SNOW COVER	238	1
Heat exchange coeff at surface	SFC EXCHANGE COEF	208	1
Vegetation cover	GREEN VEG COVER	87	1
Soil moisture availability	SOIL MOISTURE AVAIL	207	112
Ground heat flux - instantaneous	INST GROUND HEAT FLX	155	1
Lifted index—surface based	LIFTED INDEX—SURFCE	131	101
Lifted index—best	LIFTED INDEX—BEST	132	116
Lifted index—from boundary layer	LIFTED INDEX—BNDLYR	24	116
CAPE	CNVCT AVBL POT ENRGY	157	1
CIN	CNVCT INHIBITION	156	1
Column integrated precipitable water	PRECIPITABLE WATER	54	200
Column integrated cloud water	TOTAL COLUMN CLD WTR	136	200
Column integrated cloud ice	TOTAL COLUMN CLD ICE	137	200
Column integrated rain	TOTAL COLUMN RAIN	138	200
Column integrated snow	TOTAL COLUMN SNOW	139	200
Column integrated total condensate	TOTAL COL CONDENSATE	140	200
Helicity	STORM REL HELICITY	190	106
U component storm motion	U COMP STORM MOTION	196	106
V component storm motion	V COMP STORM MOTION	197	106
Accumulated total precipitation	ACM TOTAL PRECIP	61	1
Accumulated convective precipitation	ACM CONVCTIVE PRECIP	63	1
Accumulated grid-scale precipitation	ACM GRD SCALE PRECIP	62	1
Accumulated snowfall	ACM SNOWFALL	65	1
Accumulated total snow melt	ACM SNOW TOTAL MELT	99	1
Precipitation type (4 types) – instantaneous	INSTANT PRECIP TYPE	140	1
Precipitation rate - instantaneous	INSTANT PRECIP RATE	59	1
Composite radar reflectivity	COMPOSITE RADAR REFL	212	200
Low level cloud fraction	LOW CLOUD FRACTION	73	214
Mid level cloud fraction	MID CLOUD FRACTION	74	224
High level cloud fraction	HIGH CLOUD FRACTION	75	234
Total cloud fraction	TOTAL CLD FRACTION	71	200
Time-averaged total cloud fraction	AVG TOTAL CLD FRAC	71	200
Time-averaged stratospheric cloud fraction	AVG STRAT CLD FRAC	213	200
Time-averaged convective cloud fraction	AVG CNVCT CLD FRAC	72	200
Cloud bottom pressure	CLOUD BOT PRESSURE	1	2
Cloud top pressure	CLOUD TOP PRESSURE	1	3
Cloud bottom height (above MSL)	CLOUD BOTTOM HEIGHT	7	2
Cloud top height (above MSL)	CLOUD TOP HEIGHT	7	3
Convective cloud bottom pressure	CONV CLOUD BOT PRESS	1	242
Convective cloud top pressure	CONV CLOUD TOP PRESS	1	243
Shallow convective cloud bottom pressure	SHAL CU CLD BOT PRES	1	248
Shallow convective cloud top pressure	SHAL CU CLD TOP PRES	1	249
Deep convective cloud bottom pressure	DEEP CU CLD BOT PRES	1	251
Deep convective cloud top pressure	DEEP CU CLD TOP PRES	1	252
Grid scale cloud bottom pressure	GRID CLOUD BOT PRESS	1	206

Grid scale cloud top pressure	GRID CLOUD TOP PRESS	1	207
Convective cloud fraction	CONV CLOUD FRACTION	72	200
Convective cloud efficiency	CU CLOUD EFFICIENCY	134	200
Above-ground height of LCL	LCL AGL HEIGHT	7	5
Pressure of LCL	LCL PRESSURE	1	5
Cloud top temperature	CLOUD TOP TEMPS	11	3
Temperature tendency from radiative fluxes	RADFLX CNVG TMP TNDY	216	109
Temperature tendency from shortwave radiative flux	SW RAD TEMP TNDY	250	109
Temperature tendency from longwave radiative flux	LW RAD TEMP TNDY	251	109
Outgoing surface shortwave radiation - instantaneous	INSTN OUT SFC SW RAD	211	1
Outgoing surface longwave radiation - instantaneous	INSTN OUT SFC LW RAD	212	1
Incoming surface shortwave radiation - time-averaged	AVE INCMG SFC SW RAD	204	1
Incoming surface longwave radiation - time-averaged	AVE INCMG SFC LW RAD	205	1
Outgoing surface shortwave radiation - time-averaged	AVE OUTGO SFC SW RAD	211	1
Outgoing surface longwave radiation – time-averaged	AVE OUTGO SFC LW RAD	212	1
Outgoing model top shortwave radiation – time-averaged	AVE OUTGO TOA SW RAD	211	8
Outgoing model top longwave radiation – time-averaged	AVE OUTGO TOA LW RAD	212	8
Incoming surface shortwave radiation - instantaneous	INSTN INC SFC SW RAD	204	1
Incoming surface longwave radiation - instantaneous	INSTN INC SFC LW RAD	205	1
Roughness length	ROUGHNESS LENGTH	83	1
Friction velocity	FRICTION VELOCITY	253	1
Surface drag coefficient	SFC DRAG COEFFICIENT	252	1
Surface u wind stress	SFC U WIND STRESS	124	1
Surface v wind stress	SFC V WIND STRESS	125	1
Surface sensible heat flux - time-averaged	AVE SFC SENHEAT FX	122	1
Ground heat flux - time-averaged	AVE GROUND HEAT FX	155	1
Surface latent heat flux - time-averaged	AVE SFC LATHEAT FX	121	1
Surface momentum flux - time-averaged	AVE SFC MOMENTUM FX	172	1
Accumulated surface evaporation	ACC SFC EVAPORATION	57	1
Surface sensible heat flux – instantaneous	INST SFC SENHEAT FX	122	1
Surface latent heat flux - instantaneous	INST SFC LATHEAT FX	121	1
Latitude	LATITUDE	176	1
Longitude	LONGITUDE	177	1
Land sea mask (land=1, sea=0)	LAND/SEA MASK	81	1
Sea ice mask	SEA ICE MASK	91	1
Surface midday albedo	SFC MIDDAY ALBEDO	84	1
Sea surface temperature	SEA SFC TEMPERATURE	80	1
Press at tropopause	PRESS AT TROPOPAUSE	1	7
Temperature at tropopause	TEMP AT TROPOPAUSE	11	7
Potential temperature at tropopause	POTENTL TEMP AT TROP	13	7
U wind at tropopause	U WIND AT TROPOPAUSE	33	7
V wind at tropopause	V WIND AT TROPOPAUSE	34	7
Wind shear at tropopause	SHEAR AT TROPOPAUSE	136	7
Height at tropopause	HEIGHT AT TROPOPAUSE	7	7
Temperature at flight levels	TEMP AT FD HEIGHTS	11	103
U wind at flight levels	U WIND AT FD HEIGHTS	33	103
V wind at flight levels	V WIND AT FD HEIGHTS	34	103
Freezing level height (above mean sea level)	HEIGHT OF FRZ LVL	7	4
Freezing level RH	REL HUMID AT FRZ LVL	52	4
Highest freezing level height	HIGHEST FREEZE LVL	7	204
Pressure in boundary layer (30 mb mean)	PRESS IN BNDRY LYR	1	116
Temperature in boundary layer (30 mb mean)	TEMP IN BNDRY LYR	11	116
Potential temperature in boundary layers (30 mb mean)	POT TMP IN BNDRY LYR	13	116

Dew point temperature in boundary layer (30 mb mean)	DWPT IN BNDRY LYR	17	116
Specific humidity in boundary layer (30 mb mean)	SPC HUM IN BNDRY LYR	51	116
RH in boundary layer (30 mb mean)	REL HUM IN BNDRY LYR	52	116
Moisture convergence in boundary layer (30 mb mean)	MST CNV IN BNDRY LYR	135	116
Precipitable water in boundary layer (30 mb mean)	P WATER IN BNDRY LYR	54	116
U wind in boundary layer (30 mb mean)	U WIND IN BNDRY LYR	33	116
V wind in boundary layer (30 mb mean)	V WIND IN BNDRY LYR	34	116
Omega in boundary layer (30 mb mean)	OMEGA IN BNDRY LYR	39	116
Visibility	VISIBILITY	20	1
Vegetation type	VEGETATION TYPE	225	1
Soil type	SOIL TYPE	224	1
Canopy conductance	CANOPY CONDUCTANCE	181	1
PBL height	PBL HEIGHT	221	1
Slope type	SLOPE TYPE	222	1
Snow depth	SNOW DEPTH	66	1
Liquid soil moisture	LIQUID SOIL MOISTURE	160	112
Snow free albedo	SNOW FREE ALBEDO	170	1
Maximum snow albedo	MAXIMUM SNOW ALBEDO	159	1
Canopy water evaporation	CANOPY WATER EVAP	200	1
Direct soil evaporation	DIRECT SOIL EVAP	199	1
Plant transpiration	PLANT TRANSPIRATION	210	1
Snow sublimation	SNOW SUBLIMATION	198	1
Air dry soil moisture	AIR DRY SOIL MOIST	231	1
Soil moist porosity	SOIL MOIST POROSITY	240	1
Minimum stomatal resistance	MIN STOMATAL RESIST	203	1
Number of root layers	NO OF ROOT LAYERS	171	1
Soil moist wilting point	SOIL MOIST WILT PT	219	1
Soil moist reference	SOIL MOIST REFERENCE	230	1
Canopy conductance - solar component	CANOPY COND SOLAR	246	1
Canopy conductance - temperature component	CANOPY COND TEMP	247	1
Canopy conductance - humidity component	CANOPY COND HUMID	248	1
Canopy conductance - soil component	CANOPY COND SOILM	249	1
Potential evaporation	POTENTIAL EVAP	145	1
Heat diffusivity on sigma surface	DIFFUSION H RATE S S	182	107
Surface wind gust	SFC WIND GUST	180	1
Convective precipitation rate	CONV PRECIP RATE	214	1
Radar reflectivity at certain above ground heights	RADAR REFL AGL	211	105
MAPS Sea Level Pressure	MAPS SLP	2	102
Total soil moisture	TOTAL SOIL MOISTURE	86	112
Plant canopy surface water	PLANT CANOPY SFC WTR	223	1
Accumulated storm surface runoff	ACM STORM SFC RNOFF	235	1
Accumulated baseflow runoff	ACM BSFL-GDWR RNOFF	234	1
Fraction of frozen precipitation	FROZEN FRAC CLD SCHM	194	1
GSD Cloud Base pressure	GSD CLD BOT PRESSURE	1	2
GSD Cloud Top pressure	GSD CLD TOP PRESSURE	1	3
Averaged temperature tendency from grid scale latent heat release	AVE GRDSCL RN TMPTDY	241	109
Averaged temperature tendency from convective latent heat release	AVE CNVCT RN TMPTDY	242	109
Average snow phase change heat flux	AVE SNO PHSCNG HT FX	229	1
Accumulated potential evaporation	ACC POT EVAPORATION	228	1
Highest freezing level relative humidity	HIGHEST FRZ LVL RH	52	204
Maximum wind pressure level	MAX WIND PRESS LEVEL	1	6
Maximum wind height	MAX WIND HGHT LEVEL	7	6
U-component of maximum wind	U COMP MAX WIND	33	6
V-component of maximum wind	V COMP MAX WIND	34	6
GSD cloud base height	GSD CLD BOT HEIGHT	7	2

GSD cloud top height	GSD CLD TOP HEIGHT	7	3
GSD visibility	GSD VISIBILITY	20	1
Wind energy potential	INSTN WIND POWER AGL	126	105
U wind at 80 m above ground	U WIND AT 80M AGL	49	105
V wind at 80 m above ground	V WIND AT 80M AGL	50	105
Graupel on model surface	GRAUPEL ON MDL SFCS	179	109
Graupel on pressure surface	GRAUPEL ON P SFCS	179	100
Maximum updraft helicity	MAX UPDRAFT HELICITY	236	106
Maximum 1km reflectivity	MAX 1km REFLECTIVITY	235	105
Maximum wind speed at 10m	MAX 10m WIND SPEED	229	105
Maximum updraft vertical velocity	MAX UPDRAFT VERT VEL	237	101
Maximum downdraft vertical velocity	MAX DNDRAFT VERT VEL	238	101
Mean vertical velocity	MEAN VERT VEL	40	108
Radar echo top in KDT	ECHO TOPS IN KFT	7	105
Updraft helicity	UPDRAFT HELICITY PRM	227	106
Column integrated graupel	VERT INTEG GRAUP	179	200
Column integrated maximum graupel	MAX VERT INTEG GRAUP	228	200
U-component of 0-1km level wind shear	U COMP 0-1 KM SHEAR	230	106
V-component of 0-1km level wind shear	V COMP 0-1 KM SHEAR	238	106
U-component of 0-6km level wind shear	U COMP 0-6 KM SHEAR	239	106
V-component of 0-6km level wind shear	V COMP 0-6 KM SHEAR	241	106
Total precipitation accumulated over user-specified bucket	BUCKET TOTAL PRECIP	61	1
Convective precipitation accumulated over user-specified bucket	BUCKET CONV PRECIP	63	1
Grid-scale precipitation accumulated over user-specified bucket	BUCKET GRDSCALE PRCP	62	1
Snow accumulated over user-specified bucket	BUCKET SNOW PRECIP	65	1
Model level fraction of rain for Ferrier's scheme	F rain ON MDL SFCS	131	109
Model level fraction of ice for Ferrier's scheme	F ice ON MDL SFCS	132	109
Model level riming factor for Ferrier's scheme	F RimeF ON MDL SFCS	133	109
Model level total condensate for Ferrier's scheme	CONDENSATE MDL SFCS	135	109
Height of sigma surface	HEIGHT OF SIGMA SFCS	7	107
Temperature on sigma surface	TEMP ON SIGMA SFCS	11	107
Specific humidity on sigma surface	SPEC HUM ON S SFCS	51	107
U-wind on sigma surface	U WIND ON SIGMA SFCS	33	107
V-wind on sigma surface	V WIND ON SIGMA SFCS	34	107
Omega on sigma surface	OMEGA ON SIGMA SFCS	39	107
Cloud water on sigma surface	CLOUD WATR ON S SFCS	153	107
Cloud ice on sigma surface	CLOUD ICE ON S SFCS	58	107
Rain on sigma surface	RAIN ON S SFCS	170	107
Snow on sigma surface	SNOW ON S SFCS	171	107
Condensate on sigma surface	CONDENSATE ON S SFCS	135	107
Pressure on sigma surface	PRESS ON SIG SFCS	1	107
Turbulent kinetic energy on sigma surface	TRBLNT KE ON S SFCS	158	107
Cloud fraction on sigma surface	CLD FRAC ON SIG SFCS	71	107
Graupel on sigma surface	GRAUPEL ON S SFCS	179	107
LCL level pressure	LIFT PCL LVL PRESS	141	116
LOWEST WET BULB ZERO HEIGHT	LOW WET BULB ZERO HT	7	245
Leaf area index	LEAF AREA INDEX	182	1
Accumulated land surface model precipitation	ACM LSM PRECIP	154	1
In-flight icing	IN-FLIGHT ICING	186	100
Clear air turbulence	CLEAR AIR TURBULENCE	185	100
Wind shear between shelter level and 2000 FT	0-2000FT LLWS	136	106
Ceiling	CEILING	7	215
Flight restriction	FLIGHT RESTRICTION	20	2
Instantaneous clear sky incoming surface shortwave	INSTN CLR INC SFC SW	161	1
Pressure level riming factor for Ferrier's scheme	F_RimeF ON P SFCS	133	100
Model level vertical velocity	W WIND ON MDL SFCS	40	109

Brightness temperature	BRIGHTNESS TEMP	213	8
Average albedo	AVE ALBEDO	84	1
Ozone on model surface	OZONE ON MDL SFCS	154	109
Ozone on pressure surface	OZONE ON P SFCS	154	100
Surface zonal momentum flux	SFC ZONAL MOMEN FX	124	1
Surface meridional momentum flux	SFC MERID MOMEN FX	125	1
Average precipitation rate	AVE PRECIP RATE	59	1
Average convective precipitation rate	AVE CONV PRECIP RATE	214	1
Instantaneous outgoing longwave at top of atmosphere	INSTN OUT TOA LW RAD	212	8
Total spectrum brightness temperature	BRIGHTNESS TEMP NCAR	118	8
Model top pressure	MODEL TOP PRESSURE	1	8
Composite rain radar reflectivity	COMPOSITE RAIN REFL	165	200
Composite ice radar reflectivity	COMPOSITE ICE REFL	166	200
Composite radar reflectivity from convection	COMPOSITE CONV REFL	167	200
Rain radar reflecting angle	RAIN RADAR REFL AGL	165	105
Ice radar reflecting angle	ICE RADAR REFL AGL	166	105
Convection radar reflecting angle	CONV RADAR REFL AGL	167	105
Model level vertical velocity	W WIND ON P SFCS	40	100
Column integrated super cool liquid water	TOTAL COLD LIQUID	168	200
Column integrated melting ice	TOTAL MELTING ICE	169	200
Height of lowest level super cool liquid water	COLD LIQ BOT HEIGHT	7	253
Height of highest level super cool liquid water	COLD LIQ TOP HEIGHT	7	254
Richardson number planetary boundary layer height	RICH NO PBL HEIGHT	7	220
Total column shortwave temperature tendency	TOT COL SW T TNDY	250	200
Total column longwave temperature tendency	TOT COL LW T TNDY	251	200
Total column gridded temperature tendency	TOT COL GRD T TNDY	241	200
Total column convective temperature tendency	TOT COL CNVCT T TNDY	242	200
Radiative flux temperature tendency on pressure level	RADFLX TMP TNDY ON P	216	100
Column integrated moisture convergence	TOT COL MST CNVG	135	200
Time averaged clear sky incoming UV-B shortwave	AVE CLR INC UV-B SW	201	1
Time averaged incoming UV-B shortwave	AVE INC UV-B SW	200	1
Total column ozone	TOT COL OZONE	10	200
Average low cloud fraction	AVE LOW CLOUD FRAC	71	214
Average mid cloud fraction	AVE MID CLOUD FRAC	71	224
Average high cloud fraction	AVE HIGH CLOUD FRAC	71	234
Average low cloud bottom pressure	AVE LOW CLOUD BOT P	1	212
Average low cloud top pressure	AVE LOW CLOUD TOP P	1	213
Average low cloud top temperature	AVE LOW CLOUD TOP T	11	213
Average mid cloud bottom pressure	AVE MID CLOUD BOT P	1	222
Average mid cloud top pressure	AVE MID CLOUD TOP P	1	223
Average mid cloud top temperature	AVE MID CLOUD TOP T	11	223
Average high cloud bottom pressure	AVE HIGH CLOUD BOT P	1	232
Average high cloud top pressure	AVE HIGH CLOUD TOP P	1	233
Average high cloud top temperature	AVE HIGH CLOUD TOP T	11	233
Total column relative humidity	TOT COL REL HUM	52	200
Cloud work function	CLOUD WORK FUNCTION	146	200
Temperature at maximum wind level	MAX WIND TEMPERATURE	11	6
Time averaged zonal gravity wave stress	AVE Z GRAVITY STRESS	147	1
Time averaged meridional gravity wave stress	AVE M GRAVITY STRESS	148	1
Average precipitation type	AVE PRECIP TYPE	140	1
Simulated GOES 12 channel 2 brightness temperature	GOES TB – CH 2	213	8
Simulated GOES 12 channel 3 brightness temperature	GOES TB – CH 3	214	8
Simulated GOES 12 channel 4 brightness temperature	GOES TB – CH4	215	8
Simulated GOES 12 channel 5 brightness	GOES TB – CH5	216	8

temperature			
Cloud fraction on pressure surface	CLD FRAC ON P SFCS	71	100
U-wind on theta surface	U WIND ON THETA SFCS	33	113
V-wind on theta surface	V WIND ON THETA SFCS	34	113
Temperature on theta surface	TEMP ON THETA SFCS	11	113
Potential vorticity on theta surface	PV ON THETA SFCS	4	113
Montgomery streamfunction on theta surface	M STRMFUNC ON THETA	37	113
	S STAB ON THETA SFCS	19	113
Relative humidity on theta surface	RH ON THETA SFCS	52	113
U wind on constant PV surface	U WIND ON PV SFCS	33	117
V wind on constant PV surface	V WIND ON PV SFCS	34	117
Temperature on constant PV surface	TEMP ON PV SFCS	11	117
Height on constant PV surface	HEIGHT ON PV SFCS	7	117
Pressure on constant PV surface	PRESSURE ON PV SFCS	1	117
Wind shear on constant PV surface	SHEAR ON PV SFCS	136	117
Planetary boundary layer cloud fraction	PBL CLD FRACTION	71	211
Average water runoff	AVE WATER RUNOFF	90	1
Planetary boundary layer regime	PBL REGIME	220	1
Maximum 2m temperature	MAX SHELTER TEMP	15	105
Minimum 2m temperature	MIN SHELTER TEMP	16	105
Maximum 2m RH	MAX SHELTER RH	218	105
Minimum 2m RH	MIN SHELTER RH	217	105
Ice thickness	ICE THICKNESS	92	1
Shortwave tendency on pressure surface	SW TNDY ON P SFCS	250	100
Longwave tendency on pressure surface	LW TNDY ON P SFCS	251	100
Deep convective tendency on pressure surface	D CNVCT TNDY ON P SF	242	100
Shallow convective tendency on pressure surface	S CNVCT TNDY ON P SF	244	100
Grid scale tendency on pressure surface	GRDSCL TNDY ON P SFC	241	100
	VDIFF MOIS ON P SFCS	249	100
Deep convective moisture on pressure surface	D CNVCT MOIS ON P SF	243	100
Shallow convective moisture on pressure surface	S CNVCT MOIS ON P SF	245	100
Ozone tendency on pressure surface	OZONE TNDY ON P SFCS	188	100
Mass weighted potential vorticity	MASS WEIGHTED PV	139	100
Simulated GOES 12 channel 3 brightness count	GOES BRIGHTNESS-CH 3	221	8
Simulated GOES 12 channel 4 brightness count	GOES BRIGHTNESS-CH 4	222	8
Omega on theta surface	OMEGA ON THETA SFCS	39	113
Mixing height	MIXHT HEIGHT	67	1
Average clear-sky incoming longwave at surface	AVE CLR INC SFC LW	163	1
Average clear-sky incoming shortwave at surface	AVE CLR INC SFC SW	161	1
Average clear-sky outgoing longwave at surface	AVE CLR OUT SFC LW	162	1
Average clear-sky outgoing longwave at top of atmosphere	AVE CLR OUT TOA LW	162	8
Average clear-sky outgoing shortwave at surface	AVE CLR OUT SFC SW	160	1
Average clear-sky outgoing shortwave at top of atmosphere	AVE CLR OUT TOA SW	160	8
Average incoming shortwave at top of atmosphere	AVE INC TOA SW	204	8
Transport wind u component	TRANSPORT U WIND	33	220
Transport wind v component	TRANSPORT V WIND	34	220
Sunshine duration	SUNSHINE DURATION	191	1
Field capacity	FIELD CAPACITY	220	1
ICAO height at maximum wind level	ICAO HGHT MAX WIND	5	6
ICAO height at tropopause	ICAO HGHT AT TROP	5	7
Radar echo top	RADAR ECHO TOP	240	200
Time averaged surface Visible beam downward solar flux	AVE IN SFC VIS SW BE	166	1
Time averaged surface Visible diffuse downward solar flux	AVE IN SFC VIS SW DF	167	1
Time averaged surface Near IR beam downward solar flux	AVE IN SFC IR SW BE	168	1

Time averaged surface Near IR diffuse downward solar flux	AVE IN SFC IR SW DF	169	1
Average snowfall rate	AVE SNOWFALL RATE	64	1
Dust 1 on pressure surface	DUST 1 ON P SFCS	240	100
Dust 2 on pressure surface	DUST 2 ON P SFCS	241	100
Dust 3 on pressure surface	DUST 3 ON P SFCS	242	100
Dust 4 on pressure surface	DUST 4 ON P SFCS	243	100
Dust 5 on pressure surface	DUST 5 ON P SFCS	244	100
Equilibrium level height	EQUIL LEVEL HEIGHT	7	247
Lightning	LIGHTNING	187	1
Goes west channel 2 brightness temperature	GOES W TB – CH 2	241	8
Goes west channel 3 brightness temperature	GOES W TB – CH 3	242	8
Goes west channel 4 brightness temperature	GOES W TB – CH 4	243	8
Goes west channel 5 brightness temperature	GOES W TB – CH 5	244	8
In flight icing from NCAR’s algorithm	NCAR IN-FLIGHT ICING	168	100
Specific humidity at flight levels	SPE HUM AT FD HEIGHT	51	103
Virtual temperature based convective available potential energy	TV CNVCT AVBL POT EN	202	1
Virtual temperature based convective inhibition	TV CNVCT INHIBITION	201	1
Ventilation rate	VENTILATION RATE	241	220
Haines index	HAINES INDEX	250	1
Simulated GOES 12 channel 2 brightness temperature with satellite angle correction	GOESE TB-2 NON NADIR	213	8
Simulated GOES 12 channel 3 brightness temperature with satellite angle correction	GOESE TB-3 NON NADIR	214	8
Simulated GOES 12 channel 4 brightness temperature with satellite angle correction	GOESE TB-4 NON NADIR	215	8
Simulated GOES 12 channel 5 brightness temperature with satellite angle correction	GOESE TB-5 NON NADIR	216	8
Simulated GOES 11 channel 2 brightness temperature with satellite angle correction	GOESW TB-2 NON NADIR	241	8
Simulated GOES 11 channel 3 brightness temperature with satellite angle correction	GOESW TB-3 NON NADIR	242	8
Simulated GOES 11 channel 4 brightness temperature with satellite angle correction	GOESW TB-4 NON NADIR	243	8
Simulated GOES 11 channel 5 brightness temperature with satellite angle correction	GOESW TB-5 NON NADIR	244	8
Pressure at flight levels	PRESS AT FD HEIGHTS	1	103
Simulated AMSR-E channel 9 brightness temperature	AMSRE TB – CH 9	176	8
Simulated AMSR-E channel 10 brightness temperature	AMSRE TB – CH 10	177	8
Simulated AMSR-E channel 11 brightness temperature	AMSRE TB – CH 11	178	8
Simulated AMSR-E channel 12 brightness temperature	AMSRE TB – CH 12	179	8
SSM/I channel 4 brightness temperature	SSMI TB – CH 4	176	8
SSM/I channel 5 brightness temperature	SSMI TB – CH 5	177	8
SSM/I channel 6 brightness temperature	SSMI TB – CH 6	178	8
SSM/I channel 7 brightness temperature	SSMI TB – CH 7	179	8
Time-averaged percentage snow cover	TIME AVG PCT SNW CVR	238	1
Time-averaged surface pressure	TIME AVG SFC PRESS	1	1
Time-averaged 10m temperature	TIME AVG TMP AT 10M	11	105
Time-averaged mass exchange coefficient	TAVG MASS EXCH COEF	185	1
Time-averaged wind exchange coefficient	TAVG WIND EXCH COEF	186	1
Temperature at 10m	TEMP AT 10 M	11	105
Maximum U-component wind at 10m	U COMP MAX 10 M WIND	253	105
Maximum V-component wind at 10m	V COMP MAX 10 M WIND	254	105

VAPOR

VAPOR is the **V**isualization and **A**nalysis **P**latform for **O**cean, **A**tmosphere, and **S**olar **R**esearchers. VAPOR was developed at NCAR to provide interactive visualization and analysis of numerically simulated fluid dynamics. The current (2.3) version of VAPOR has many capabilities for 3D visualization of WRF-ARW simulation output, including the ability to directly import wrfout files, and support for calculating derived variables that are useful in visualizing WRF output.

Basic capabilities of VAPOR with WRF-ARW output

- *Direct Volume rendering (DVR)*
Any 3D variable in the WRF data can be viewed as a density. Users control transparency and color to view temperature, water vapor, clouds, etc. in 3D.
- *Flow*
 - Display barbs associated with 2D or 3D field magnitudes. Barbs can also be positioned at a specified height above the terrain and aligned to the WRF data grid.
 - Draw 2D and 3D streamlines and flow arrows, showing the wind motion and direction, and how wind changes in time.
 - Path tracing (unsteady flow) enables visualization of trajectories that particles take over time. Users control when and where the particles are released.
 - Flow images (image based flow visualization) can be used to provide an animated view of wind motion in a planar section, positioned anywhere in the scene.
 - Field line advection can be used to animate the motion of streamlines of any vector field in a moving wind field.
- *Isosurfaces*
The isosurfaces of variables are displayed interactively. Users can control iso-values, color and transparency of the isosurfaces. Isosurfaces can be colored according to the values of another variable.
- *Contour planes and Probes*
3D variables can be intersected with arbitrarily oriented planes. Contour planes can be interactively positioned. Users can interactively pinpoint the values of a variable and establish seed points for flow integration. Wind and other vector fields can be animated in the probe plane.
- *Two-dimensional variable visualization*
2D (horizontal) WRF variables can be color-mapped and visualized in the 3D scene. They can be viewed on a horizontal plane in the scene, or mapped onto the terrain surface.

- *Animation*
Control the time-stepping of the data, for interactive replaying and for recording animated sequences.
- *Image display*
Tiff images can be displayed in the 3D scene. If the images are georeferenced (i.e. geotiffs) then they can be automatically positioned at the correct latitude/longitude coordinates. Images can be mapped to the terrain surface, or aligned to an axis-aligned plane. Several useful georeferenced images are preinstalled with VAPOR, including political boundary maps, and the NASA Blue Marble earth image. VAPOR also provides several utilities for obtaining geo-referenced images from the Web. Images with transparency can be overlaid on the terrain images, enabling combining multiple layers of information.
- *Analysis capabilities*
VAPOR (versions 2.1+) has an embedded Python calculation engine. Derived variables can be easily calculated with Python expressions or programs and these will be evaluated as needed for use in visualization. VAPOR provides Python scripts to calculate the following variables from WRF output:
 - CTT: Cloud-top temperature
 - DBZ: 3D radar reflectivity
 - DBZ_MAX: radar reflectivity over vertical column
 - ETH: equivalent potential temperature
 - RH: relative humidity
 - PV: potential vorticity
 - SHEAR: horizontal wind shear
 - SLP: 2D sea-level pressure
 - TD: dewpoint temperature
 - TK: temperature in degrees KelvinInstructions for calculating and visualizing these and other variables are provided in the document, “[Using Python with VAPOR](#)” on the [VAPOR website](#).

Derived variables can also be calculated in IDL and imported into the current visualization session. Variables can also be calculated in other languages (e.g. NCL) and adjoined to the Vapor Data Collection. Documentation of these capabilities can be found in the Documentation menu on the VAPOR website <http://www.vapor.ucar.edu>.

VAPOR requirements

VAPOR is supported on Linux, Mac, and Windows systems. VAPOR works best with a recent graphics card (say 1-2 years old). The advanced features of VAPOR perform best with nVidia™, ATI™ or AMD™ graphics accelerators.

VAPOR is installed on NCAR visualization systems. Users with UCAR accounts can connect their (Windows, Linux or Mac) desktops to the NCAR visualization systems using NCAR's VNC-based remote visualization services, to run VAPOR and visualize the results remotely. Instructions for using NCAR visualization services are at:

https://www2.cisl.ucar.edu/resources/geyser_caldera/visualization

Contact dasg@ucar.edu or vapor@ucar.edu for assistance.

VAPOR support resources

The VAPOR website: <http://www.vapor.ucar.edu> includes software, documentation, example data, and links to other resources. The document "[Getting started with VAPOR and WRF](http://www.vapor.ucar.edu/docs/getting-started-vapor/getting-started-vapor-and-wrf)"

(<http://www.vapor.ucar.edu/docs/getting-started-vapor/getting-started-vapor-and-wrf>) has an overview of the various capabilities that are useful in visualizing WRF data with VAPOR.

The VAPOR Sourceforge website (<http://sourceforge.net/projects/vapor>) enables users to post bugs, request features, download software, etc.

Users of VAPOR on NCAR visualization systems should contact dasg@ucar.edu for support.

Users are encouraged to provide feedback. Questions, problems, bugs etc. should be reported to vapor@ucar.edu. The VAPOR development priorities are set by users as well as by the VAPOR steering committee, a group of turbulence researchers who are interested in improving the ability to analyze and visualize time-varying simulation results. Post a feature request to the VAPOR SourceForge website (<http://sourceforge.net/projects/vapor>), or e-mail vapor@ucar.edu if you have requests or suggestions about improving VAPOR capabilities.

Basic steps for using VAPOR to visualize WRF-ARW data

1. Install VAPOR

VAPOR installers for Windows, Macintosh and Linux are available on the VAPOR home page, <http://www.vapor.ucar.edu/>.

For most users, a binary installation is fine. Installation instructions are also provided in the VAPOR documentation pages, <http://www.vapor.ucar.edu/docs/install>.

After VAPOR is installed, it is necessary to perform user environment setup on Unix or Mac, before executing any VAPOR software. These setup instructions are provided on the VAPOR binary install documentation pages:

<http://www.vapor.ucar.edu/docs/install>.

2. (Optional) Convert WRF output data to VAPOR Data Collection

Starting with VAPOR 2.0, you can directly load WRF-ARW output files into VAPOR. From the VAPOR menu select “Import data into current session---WRF-ARW”. Alternately, if your data is very large, you will be able to visualize it more interactively by converting it to a Vapor Data Collection (VDC).


A VAPOR VDC consists of (1) a metadata file (file type .vdf) that describes an entire VAPOR data collection, and (2) a directory of multi-resolution data files where the actual data is stored. The metadata file is created by the command *wrfvdfcreate*, and the multi-resolution data files are written by the command *wrf2vdf*. The simplest way to create a VAPOR data collection is using the [vdcwizard](#) application, which is installed with VAPOR. Also there are command-line tools *wrfvdfcreate* and *wrf2vdf* that can be used to convert the WRF-ARW output data to a VDC.

Using *vdcwizard*, you specify the name of the .vdf file and all the wrfout files that are to be used. First the .vdf file is created, then all the wrfout files are processed creating a VDC.

3. Visualize the WRF data

From the command line, issue the command “*vaporgui*”, or double-click the VAPOR desktop icon (on Windows or Mac). This will launch the VAPOR user interface.

To directly import WRF-ARW (NetCDF) output files, click on the Data menu, and select “Import WRF output files into default session”. Then select all the wrfout files you want to visualize and click “open”. If instead you converted your data to a VAPOR Data Collection, then, from the Data menu, choose “Load a dataset into default session”, and select the metadata file that you associated with your converted WRF data.

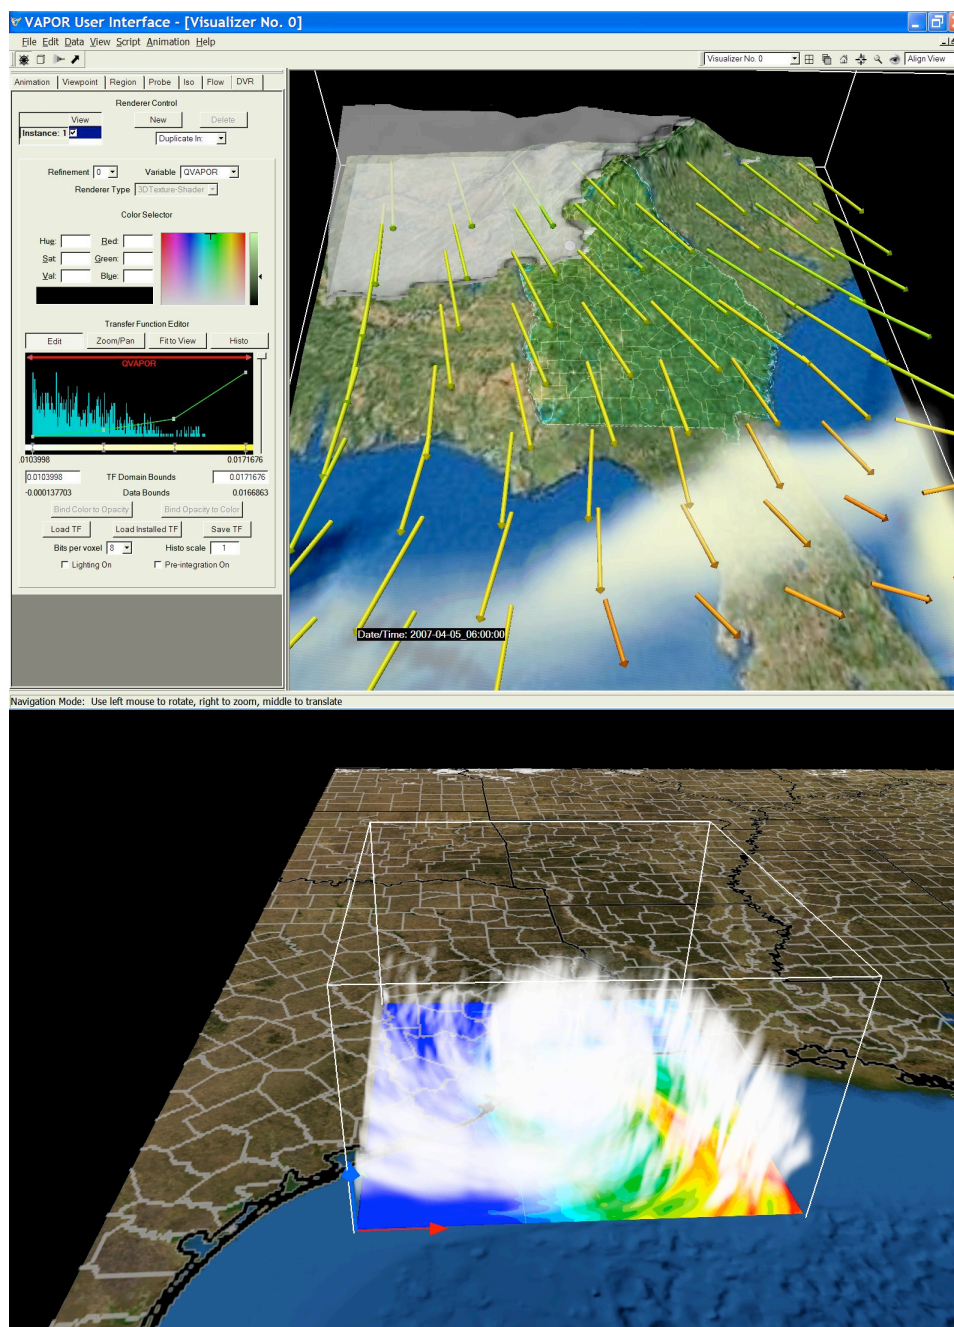

To visualize the data, select a renderer tab (DVR, Iso, Flow, 2D, Image, Barbs, or Probe), chose the variable(s) to display, and then, at the top of the tab, check the box labeled “Instance:1”, to enable the renderer. For example, the above top image combines volume, flow and isosurface visualization with a terrain image. The bottom image illustrates hurricane Ike, as it made landfall in 2008. The Texas terrain has a map of US Counties applied to it, and an NCL image of accumulated rainfall is shown at ground level in the current region.

4. Read the VAPOR Documentation

VAPOR documentation is provided on the Website <http://www.vapor.ucar.edu>. For a quick overview of capabilities of VAPOR with WRF data, see “[Getting started with VAPOR and WRF](#)”:

<http://www.vapor.ucar.edu/docs/getting-started-vapor/getting-started-vapor-and-wrf>.

A short tutorial, showing how to use VAPOR to visualize hurricane Katrina WRF output files, is provided at <http://docs.vapor.ucar.edu/tutorials/hurricane-katrina>.

Additional documents on the VAPOR website (<http://www.vapor.ucar.edu>) provide more information about visualization of WRF data. Information is also available in the VAPOR user interface to help users quickly get the information they need, and showing how to obtain the most useful visualizations. Note the following resources:

- The *Georgia Weather Case Study* (<http://www.vapor.ucar.edu/sites/default/files/docs/GeorgiaCaseStudy.pdf>) provides a step-by-step tutorial, showing how to use most of the VAPOR features that are useful in WRF visualization. However this material is based on an older version of VAPOR.
- Creation of geo-referenced images to use with WRF data is discussed in the web document “[Preparation of Georeferenced Images](#)”.
(<http://www.vapor.ucar.edu/docs/vapor-data-preparation/preparation-georeferenced-images>)
- “*Using NCL with VAPOR to visualize WRF-ARW data*”:
(<http://www.vapor.ucar.edu/sites/default/files/docs/VAPOR-WRF-NCL.pdf>)
is a tutorial that shows how to create geo-referenced images from NCL plots, and to insert them in VAPOR scenes.
- Fuller documentation of the capabilities of the VAPOR user interface is provided in the *VAPOR GUI General Guide*:
(<http://www.vapor.ucar.edu/docs/vaporgui-help>).
- The *VAPOR Users' Guide for WRF Typhoon Research*:
(<http://www.vapor.ucar.edu/sites/default/files/docs/Typhoon.pdf>)
provides a tutorial for using VAPOR on typhoon data, including instructions for preparing satellites images and NCL plots to display in the scene. This document is also fairly old.

To understand the meaning or function of an element in the VAPOR user interface: *Tool tips*: Place the cursor over a widget for a couple of seconds and a one-sentence description will be provided.

Context-sensitive help: From the Help menu, click on “?Explain This”, and then click with the left mouse button on a GUI element, to obtain a longer technical explanation of the functionality.

Web help: From the vaporgui Help menu, various help topics associated with the current context can be selected. These will launch a Web browser displaying detailed information about the selected topic.

Chapter 10: Utilities and Tools

Table of Contents

- [Introduction](#)
- [read_wrf_nc](#)
- [iowrf](#)
- [p_interp](#)
- [TC Bogus Scheme](#)
- [v_interp](#)
- [proc_oml.f](#)
- [Tools](#)

Introduction

This chapter contains a number of short utilities to read and manipulate WRF-ARW data.

Also included in this chapter are references to some basic third party software, which can be used to view/change input and output data files.

read_wrf_nc

This utility allows a user to look at a WRF netCDF file at a glance.

What is the difference between this utility and the netCDF utility ncdump?

- This utility has a large number of options, to allow a user to look at the specific part of the netCDF file in question.
- The utility is written in Fortran 90, which will allow users to add options.
- This utility can be used for both WRF-ARW and WRF-NMM cores.
It can be used for geogrid, metgrid and wrf input / output files.
Only 3 basic diagnostics are available, pressure / height / tk, these can be activated with the -diag option (*these are only available for wrfout files*)

Obtain the **read_wrf_nc** utility from the WRF Download page
(http://www2.mmm.ucar.edu/wrf/users/download/get_source.html)

Compile

The code should run on any machine with a netCDF library (*If you port the code to a different machine, please forward the compile flags to wrfhelp@ucar.edu*)

To compile the code, use the compile flags at the top of the utility.

e.g., for a *LINUX* machine you need to type:

```
pgf90 read_wrf_nc.f -L/usr/local/netcdf/lib
      -lnetcdf -lm -I/usr/local/netcdf/include
      -Mfree -o read_wrf_nc
```

If successful, this will create the executable: `read_wrf_nc`

Run

```
./read_wrf_nc wrf_data_file_name [-options]
```

```
options : [-h / help] [-att] [-m] [-M z] [-s]
          [-S x y z] [-v VAR] [-V VAR] [-w VAR]
          [-t t1 [t2]] [-times]
          [-ts xy X Y VAR VAR ....]
          [-ts ll lat lon VAR VAR ....]
          [-lev z] [-rot] [-diag]
          [-EditData VAR]
```

Options: (Note: options <code>[-att]</code> ; <code>[-t]</code> and <code>[-diag]</code> can be used with other options)	
<code>-h / help</code>	Print help information.
<code>-att</code>	Print global attributes.
<code>-m</code>	Print list of fields available for each time, plus the min and max values for each field.
<code>-M z</code>	Print list of fields available for each time, plus the min and max values for each field. The min and max values of 3d fields will be for the <code>z</code> level of the field.
<code>-s</code>	Print list of fields available for each time, plus a sample value for each field. Sample value is taken from the middle of model domain.
<code>-S x y z</code>	Print list of fields available for each time, plus a sample value for each field. Sample value is at point <code>x y z</code> in the model domain.
<code>-t t1 [t2]</code>	Apply options only to times <code>t1</code> to <code>t2</code> . <code>t2</code> is optional. If not set, options will only apply to <code>t1</code> .
<code>-times</code>	Print only the times in the file.

-ts	Generate time series output. A full vertical profile for each variable will be created. -ts xy X Y VAR VAR will generate time series output for all VAR's at location X/Y -ts ll lat lon VAR VAR will generate time series output for all VAR's at x/y location nearest to lat/lon
-lev z	Work only with option -ts Will only create a time series for level z
-rot	Work only with option -ts Will rotate winds to Earth coordinates
-diag	Add if you want to see output for the diagnostics temperature (K), full model pressure and model height (<i>tk, pressure, height</i>)
-v VAR	Print basic information about field VAR.
-V VAR	Print basic information about field VAR, and dump the full field out to the screen.
-w VAR	Write the full field out to a file VAR.out
	Default Options are [-att -s]

SPECIAL option: -EditData VAR

This option allows a user to **read** a WRF netCDF file, **change** a specific field, and **write** it BACK into the WRF netCDF file.

This option will **CHANGE** your CURRENT WRF netCDF file so **TAKE CARE** when using this option.

ONLY one field at a time can be changed; therefore, if you need 3 fields changed, you will need to run this program 3 times, each with a different "VAR"

IF you have multiple times in your WRF netCDF file – **by default ALL times** for variable "VAR" WILL be changed. *If you only want to change one time period, also use the "-t" option.*

HOW TO USE THIS OPTION:

Make a **COPY of your WRF netCDF file before using this option**

EDIT the subroutine USER_CODE

ADD an IF-statement block for the variable you want to change. This is to prevent a variable getting overwritten by mistake.

For REAL data arrays, work with the array "data_real" and for INTEGER data arrays, work with the array "data_int".

Example 1:

If you want to change all (all time periods too) values of U to a constant 10.0 m/s, you would **add** the following IF-statement:

```
else if ( var == 'U') then  
  data_real = 10.0
```

Example 2:

If you want to change a section of the LANDMASK data to SEA points:

```
else if ( var == 'LANDMASK') then  
  data_real(10:15,20:25,1) = 0
```

Example 3:

Change **all** ISLTYP category 3 values into category 7 values (NOTE this is an INTEGER field):

```
else if ( var == 'ISLTYP') then  
  where (data_int == 3 )  
    data_int = 7  
  end where
```

Compile and run the program.

You will be asked if this is really what you want to do.

ONLY the answer "yes" will allow the change to take effect.

iowrf

This utility allows a user to do some basic manipulation on WRF-ARW netCDF files.

- The utility allows a user to thin the data; de-stagger the data; or extract a box from the data file.

Obtain the **iowrf utility** from the WRF Download page:
(http://www2.mmm.ucar.edu/wrf/users/download/get_source.html).

Compile

The code should run on any machine with a netCDF *library* (If you port the code to a different machine, please forward the compile flags to wrfhelp@ucar.edu).

To compile the code, use the compile flags at the top of the utility.

e.g., for a *LINUX* machine you need to type:

```
pgf90 iowrf.f -L/usr/local/netcdf/lib -lnetcdf -lm
        -I/usr/local/netcdf/include -Mfree -o iowrf
```

If successful, this will create the executable: iowrf

Run

```
./iowrf wrf_data_file_name [-options]
```

```
options : [-h / help] [-thina X] [-thin X] [-box {}]
          [-A] [-64bit]
```

-thina X	Thin the data with a ratio of 1:X Data will be averaged before being fed back
-thin X	Thin the data with a ratio of 1:X No averaging will be done
-box {}	Extract a box from the data file. X/Y/Z can be controlled independently. e.g., -box x 10 30 y 10 30 z 5 15 -box x 10 30 z 5 15 -box y 10 30 -box z 5 15
-A	De-stagger the data – no thinning will take place
-64bit	Allow large files (> 2GB) to have read / write access

p_interp

This utility interpolates WRF-ARW netCDF output files to user-specified pressure levels. Several new capabilities have been supported in **p_interp** since October 2010. These includes:

- The ability to output fields needed to create *met_em* files, which can be used as input to *real.exe*. This output can be used to change the vertical resolution of WRF input files. Output from **p_interp** can also be used as input to TC bogusing or OBSGRID.
- A new namelist option is included to split input files containing multiple times into multiple output files, each with a separate time.
- **p_interp** can be compiled and ran in parallel to improve the time needed to processes large input files.
- Output from **p_interp** can now also be read directly by MET (<http://www.dtcenter.org/met/users/index.php>), removing the requirement to first run WPP before WRF-ARW data can be processed by the MET toolkit.

Obtain the **p_interp** utility from the WRF Download page:
(http://www2.mmm.ucar.edu/wrf/users/download/get_source.html).

Compile

The code should run on any machine with a netCDF *library* (If you port the code to a different machine, please forward the compile flags to wrfhelp@ucar.edu)

To compile the code, use the compile flags at the top of the utility.

e.g., for a serial compile on a LINUX machine you need to type:

```
pgf90 p_interp.F90 -L/usr/local/netcdf/lib
      -lnetcdf -lm -I/usr/local/netcdf/include
      -Mfree -o p_interp
```

e.g., for a parallel compile on an IBM machine you need to type:

```
mpxlf_r -qfree=f90 -L/usr/local/netcdf/lib -lnetcdf
      -lm -I/usr/local/netcdf/include -o p_interp
      p_interp.F90 -WF,-D_MPI
```

If successful, this will create the executable: **p_interp**

Edit the Namelist

Edit the associated *namelist.pinterp* file. (see *namelist options* below).

&io	Default value	Description
<i>path_to_input</i>	<code>./</code>	Path to input data
<i>input_name</i>	None – must be set in namelist	File name(s) of wrfout files. <i>Use wild character if more than one file is processed.</i>
<i>path_to_output</i>	<code>./</code>	Path where output data will be written
<i>output_name</i>	<code>` '</code>	If no name is specified, the output will be written to <i>input_name_PLEV</i>
<i>process</i>	<code>`all'</code>	Indicate which fields to process. 'all' fields in wrfout file (<i>diagnostics PRES, TT, HGT & RH will automatically be calculated</i>); 'list' of fields as indicated in 'fields'
<i>fields</i>	<code>` '</code>	List of fields to process, if 'list' is used in parameter 'process'
<i>debug</i>	<code>.false.</code>	Set to <code>.true.</code> for more debugging
<i>mpi_debug</i>	<code>.false.</code>	Set to <code>.true.</code> for additional output that may be helpful when debugging parallel code.
<i>bit64</i>	<code>.false.</code>	Allow large files (> 2GB) to have read / write access.
<i>met_em_output</i>	<code>.false.</code>	Set to <code>.true.</code> to calculate the output fields needed in a <i>met_em</i> file. These files are used as input to <i>real.exe</i> .
<i>split_output</i>	<code>.false.</code>	<code>.true.</code> will output each time in the input file to a separate output file.

&interp_in	Default Value	Description
<i>interp_levels</i>	<code>-99999.</code>	List of pressure levels to interpolate data to
<i>extrapolate</i>	<code>0</code>	0 - set values below ground and above model top to

		missing values (<i>default</i>) 1 - extrapolate below ground, and set above model top to model top values
<i>interp_method</i>	1	1 - linear in p-interpolation (<i>default</i>) 2 - linear in log-p-interpolation
<i>unstagger_grid</i>	.false.	Set to .true. to unstagger the data on output

If `met_em_output` is set to `.true.` in the namelist, other options also need to be set:

```
split_output    = .true.
unstagger_grid  = .false.
extrapolate     = 1
process         = 'all'
```

If you do not set any of the first 3 options as shown above, they will be reset automatically in the code. If `process` is set to `'list'`, the code will stop and the user will have to set `process` to `'all'`.

Also note that **p_interp** will stop if `met_em*` files already exist in the `path_to_output` directory. This is to reduce the change of overwriting any `met_em*` files created by `metgrid.exe`.

Run

To run **p_interp** compiled with the serial options, type

```
./p_interp
```

For distributed memory systems, some form of **mpirun** will be needed to run the executable. To run **p_interp** (*compiled with parallel options*) interactively, and using `x` processors, the command may look like:

```
mpirun -np x ./p_interp
```

On some systems, parallel interactive jobs may not be an option, in which case the command would be

```
mpirun ./p_interp
```

to run in a batch script. On some IBM systems, the parallel job launcher may be **poe** or **mpirun.lsf**, rather than **mpirun**.

TC Bogus Scheme

The ARW core for the WRF modeling system provides a simple Tropical Cyclone (TC) Bogussing scheme. It can remove an existing tropical storm, and may optionally bogus in a Rankine vortex for the new tropical storm. The input to the program is a single time-period and single domain of **metgrid** data, and a few namelist variables from the **namelist.input** file that describes the bogus TC's location and strength. The output is also a **metgrid**-like file. The scheme is currently only set up to process isobaric data. After running the **tc.exe** program, the user must manually rename the files so that the **real.exe** program can read the modified input.

Namelist Options

The namelist information for the TC scheme is located in an optional namelist record **&tc**. Only a single domain is processed. Users with multiple domains should horizontally-interpolate the generated meteorological fields to the fine-grid domains. Alternatively, users may run the **tc.exe** program on separate **metgrid** output files for different domains, though this is not recommended.

insert_bogus_storm	logical, insert a bogus storm
remove_storm	logical, removes an existing storm
num_storm	integer, number of storms to bogus, currently must be set to 1
latc_loc	real, latitude of bogus storm (+ north, - south)
lonc_loc	real, longitude of bogus storm (+ east, - west)
vmax_meters_per_second	real, maximum observed sustained wind speed (m/s)
rmax	real, radius from the cyclone center to where the maximum wind speed occurs (m)
vmax_ratio	real, scale factor for model's Rankine vortex

Note: If **insert_bogus_storm** is set to *true* then **remove_storm** should be set to *false*. If **remove_storm** is set to *true* then **insert_bogus_storm** should be set to *false*.

The value for **vmax_ratio** should be about 0.75 for a 45-km domain and about 0.90 for a 15-km domain. This is a representativeness scale factor. The observed maximum wind speed is not appropriate for an entire grid cell when the domain is fairly coarse.

For example, assume that a cyclone report came in with the storm centered at 25° N and 75° W, where the maximum sustained winds were observed to be 120 kts, with the maximum winds about 90 km from the storm center. With a 45-km coarse grid model domain, the **namelist.input** file would be:

```
&tc
insert_bogus_storm = .true.
remove_storm = .false.
latc_loc = 25.0
lonc_loc = -75.0
vmax_meters_per_second = 61.7
rmax = 90000.0
vmax_ratio = 0.75
/
```

Program tc.exe

The program **tc.exe** is automatically built along with the rest of the ARW executables. This, however, is a serial program. For the time being, it is the best to build this program using serial and no-nesting options.

Running tc.exe

- 1) Run all of the WPS programs as normal (**geogrid**, **ungrib**, and **metgrid**).
- 2) As usual, link-in the metgrid output files into either the **test/em_real** or the **run** directory.
- 3) Edit the **namelist.input** file for usage with the **tc.exe** program. Add-in the required fields from the **&tc** record, and only process a single time period.
- 4) Run **tc.exe**
- 5) Rename the output file, **auxinput1_d01_<date>** to the name that the **real.exe** program expects, **met_em.d01.<date>**, note that this will overwrite your original **metgrid.exe** output file for the initial time period.
- 6) Edit the **namelist.input** file to process all of the time periods for the **real.exe** program.

v_interp

This utility can be used to add vertical levels in WRF-ARW netCDF input. An example of the usage would be one-way nesting, via the program `ndown`. Since the program `ndown` does not do ‘vertical nesting’ prior to Version 3.2, namely adding vertical levels, this program can be used after running `ndown` to achieve the same results. Starting from Version 3.2, vertical levels may be added in the program `ndown`, via the namelist option ‘`vert_refine_fact`’, which allows one to refine vertical levels by an integer factor.

The **v_interp** utility program can be obtained from the WRF Download page:
(http://www2.mmm.ucar.edu/wrf/users/download/get_source.html)

Compile

The code should be easily built and ran on any machine with a netCDF library. To compile the code, use the compile flags shown at the top of the utility program.

e.g., for a *LINUX* machine and *pgf90* compiler, one may type:

```
pgf90 v_interp.f -L/usr/local/netcdf/lib -lnetcdf \  
      -I/usr/local/netcdf/include \  
      -Mfree -o v_interp
```

If successful, this will create the executable: `v_interp`

Run

Edit the namelist file `namelist.v_interp` (see *namelist options below*) for the number of new vertical levels (`nvert`) and the new set of levels (`nlevels`). To find out the existing model levels, check the original WRF `namelist.input` file used to create the input files, or type the following:

```
ncdump -v ZNW wrfinput_d01
```

The executable takes two arguments on the command line:

```
./v_interp file file_new
```

where `file` is the input file you want to add the vertical levels to, and `file_new` is the output file that contains more vertical levels. To run the program for `wrfinput` file, type

```
./v_interp wrfinput_d01 wrfinput_d01_new
```

For the `wrfbdy` file, type

```
./v_interp wrfbdy_d01 wrfbdy_d01_new
```

namelists:

&newlevels	
<i>nvert</i>	Number of new vertical levels (staggered)
<i>nlevels</i>	Values of new model levels

Program Notes:

When adding vertical levels, please keep the first- and the last-half levels the same as in the input file, itself. A problem may occur if levels are added outside the range.

For the `wrfbdy` file, please keep the input file name as `wrfbdy_*` since the program keys-in on the file name in order to do the interpolation for special boundary arrays.

proc_oml.f

This utility may be used to process 3D HYCOM (<http://www.hycom.org>) ocean model temperature data in netCDF format to produce initial ocean mixed layer depth field (HOML) for use in a WRF simulation that uses the simple ocean mixed layer model option (omlcall = 1, and oml_hml0 < 0). The program estimates two fields from the HYCOM data: 1) effective mixed layer depth based on the idea of ocean heat content (HOML); and 2) mean ocean temperature in the top 200 m depth (TMOML). This is used as the lower limit for cooling SST's in the wake of a hurricane.

To download the **proc_oml.f** utility, please see:

<http://www2.mmm.ucar.edu/wrf/users/hurricanes/util.html>

Compile

To compile the code, use the compile flags shown at the top of the utility program. For example, for a LINUX machine and pgf90 compiler one may type:

```
pgf90 proc_oml.f -L/usr/local/netcdf/lib -lnetcdf \
      -I/usr/local/netcdf/include -Mfree -o proc_oml.f
```

If successful, this will create the executable: `proc_oml`

Run

To run the program, type

```
./proc_oml ocean-data-file.nc yyyymmddhh
```

where 'ocean-data-file.nc' is the HYCOM ocean data file, and yyyymmddhh is the 10-digit date when the data is valid for (e.g. 2005082700). Successfully running the program will produce an output file, MLD, which is in intermediate format as if it were produced by the WPS/ungrib program.

To use this field in WPS/metgrid, add it to 'constant_name' as below:

```
constant_name = 'MLD',
```

V3.2 WPS/metgrid has the additional fields in METGRID.TBL for proper horizontal interpolation. For more information, please refer to the following presentation, at http://www2.mmm.ucar.edu/wrf/users/tutorial/hurricanes/AHW_nest_ocean.pdf

Tools

Below is a list of tools that are freely available, and can be used very successfully to manipulate model data (both WRF model data, as well as other GRIB and netCDF datasets).

Converting Graphics

ImageMagick

ImageMagick is a software suite to create, edit, and compose bitmap images. It can read, convert and write images in a variety of formats (over 100) including DPX, EXR, GIF, JPEG, JPEG-2000, PDF, PhotoCD, PNG, Postscript, SVG, and TIFF. Use ImageMagick to translate, flip, mirror, rotate, scale, shear and transform images, adjust image colors, apply various special effects, or draw text, lines, polygons, ellipses and B_zier curves.

The software package is freely available from, <http://www.imagemagick.org>. Download and installation instructions are also available from this site.

Examples of converting data with ImageMagick software:

```
convert file.pdf file.png
convert file.png file.bmp
convert file.pdf file.gif
convert file.ras file.png
```

ImageMagick cannot convert ncgm (NCAR Graphics) file format to other file formats.

Converting ncgm (NCAR Graphics) file format

NCAR Graphics has tools to convert ncgm files to raster file formats. Once files are in raster file format, ImageMagick can be used to translate the files into other formats.

For *ncgm* files containing a single frame, use *ctrans*.

```
ctrans -d sun file.ncgm file.ras
```

For *ncgm* files containing multiple frames, first use *med* (metafile frame editor) and then *ctrans*. *med* will create multiple single frame files called *medxxx.ncgm*

```
med -e '1,$ split $' file.ncgm
ctrans -d sun_ med001.ncgm > med001.ras
```

Basic Unix Commands

The WRF model is run on any Unix/Linux machine. Some basic Unix commands are required to work in this environment. There are numerous web sites one can visit to learn more about basic and advanced Unix commands. A couple of basic Unix commands are listed below, as well as some web sites where users can obtain more information.

<i>mkdir / rmdir</i>	To make (<i>mkdir</i>) or remove (<i>rmdir</i>) directories.
<i>cd</i>	To change to a new directory.
<i>ls</i>	List the files and directories in a directory .
<i>ls -l</i>	Lists your files in 'long format', which contains lots of useful information, e.g. the exact size of the file, who owns the file and who has the right to look at it, and when it was last modified.
<i>ls -lrt</i>	Lists your files in 'long format', in order of time stamp, and reverse order.
<i>rm</i>	Remove files.
<i>more</i>	Shows the first part of a file, just as much as will fit on one screen. Just hit the space bar to see more or q to quit.
<i>cat</i>	Shows the entire file on the screen.
<i>head</i>	Shows the first couple of lines of a file on screen.
<i>tail</i>	Shows the last couple of lines of a file on screen.
<i>grep</i>	Find lines that match patterns in files.
<i>mv</i>	Rename or move a file.
<i>cp</i>	Copy a file to a different name or location.
<i>pwd</i>	Shows the directory path you are currently in.
<i>ln -sf</i>	Makes a symbolic (<i>-s</i>) link (<i>ln</i>) of a file. The file will appear to be in two locations, but is only physically in one location. (<i>The -f option ensures that if the target file already exists, then it will first be unlink so that the link may occur correctly.</i>)
<i>vi / emacs</i>	File editors. For new users, emacs may be an easier editor to work with, as vi requires some extra understanding to navigate between the <i>command</i> and <i>insert</i> modes, whereas emacs functions more like a conventional editor.

<http://mally.stanford.edu/~sr/computing/basic-unix.html>

<http://pangea.stanford.edu/computing/unix/shell/commands.php>

<http://www.math.harvard.edu/computing/unix/unixcommands.html>

<http://www.washington.edu/computing/unix/unixqr.html>

<http://www.kb.iu.edu/data/afsk.html>

http://en.wikipedia.org/wiki/List_of_Unix_utilities

<http://www.cs.colostate.edu/helpdocs/vi.html>

Design WRF model domains

WPS/util/plotgrids.ncl

Is an NCL script, which can either plot the domain on screen, or create a variety of different output types (pdf, ps, ncgm). This script must be ran in the same directory where the `namelist.wps` resides. This script only works with NCL version 6.1.0 or newer. If you still have an older version of NCL you can still use the `plotgrids_old.ncl` script.

Read more about this utility in Chapter 3 of this Users Guide.

Display ungrib (intermediate) files

WPS/util/plotfmt.ncl

Is an NCL script that can be used to display intermediate files created by `WPS/ungrib.exe`.

If you have created intermediate files manually, it is a very good practice to use this utility to display the data in your files first before running `WPS/metgrid.exe`.

***Note:** If you plan on manually creating intermediate files, refer to http://www2.mmm.ucar.edu/wrf/OnLineTutorial/Basics/IM_files/index.html for detailed information about the file formats and sample programs.*

This script reads intermediate files and can output the graphics in a variety of different output formats (on the screen, pdf, ps, ncgm). The script requires NCL version 6.2.0 or newer. An input file much be supplied, e.g:

```
ncl plotfmt.ncl 'filename="FILE:2005-06-01_00"'
```

WPS/util/int2nc.exe, can be used to convert intermediate files created by `WPS/ungrib.exe` into netCDF files.

WPS/util/plotfmt_nc.ncl

Is an NCL script, which can plot the netCDF output files created by `int2nc.exe`. This script must be run in the same directory where the netCDF files reside. The file to be plotted should be entered on the command line, e.g.,

```
ncl plotfmt_nc.ncl `inputFILE="FILE:2005-06-01_00.nc"'
```

Read more about these utilities in **Chapter 3** of this Users Guide.

netCDF data

netCDF stands for **n**etwork **C**ommon **D**ata **F**orm.

Most of the information below can be used for WRF netCDF data, as well as other netCDF datasets.

netCDF is one of the current supported data formats chosen for WRF I/O API.

Advantages of using netCDF?

Most graphical packages support netCDF file formats

netCDF files are platform-independent (big-endian / little-endian)

A lot of software already exists that can be used to process/manipulate netCDF data

Documentation:

<http://www.unidata.ucar.edu/> (General netCDF documentation)

<http://www.unidata.ucar.edu/software/netcdf/docs/netcdf-f90/> (NETCDF User's Guide for FORTRAN)

Utilities:

ncdump

This is part of the netCDF libraries. Reads a netCDF file and prints information about the dataset. e.g.

```
ncdump -h file (print header information)
```

```
ncdump -v VAR file (print header information and the  
full field VAR)
```

```
ncdump -v Times file (a handy way to see how many  
times are available in a WRF output file)
```

ncview

Displays netCDF data graphically. No overlays, no maps and no manipulation of data possible.

http://meteora.ucsd.edu/~pierce/ncview_home_page.html

ncBrowse

Displays netCDF data graphically. Some overlays, maps and manipulation of data are possible.

<http://www.epic.noaa.gov/java/ncBrowse/>

read_wrf_nc

A utility to display basic information about WRF netCDF files.

iowrf

A utility to do some basic file manipulation on WRF-ARW netCDF files.

p_interp

A utility to interpolate WRF-ARW netCDF output files to user specified pressure levels.

netCDF operators

<http://nco.sourceforge.net/>

Stand-alone programs that can be used to manipulate data (by performing grid point averaging / file differencing / file ‘appending’). *A couple of available programs are listed below, see the above link for a list of all available programs.*

ncdiff

Difference between two files; e.g.

```
ncdiff input1.nc input2.nc output.nc
```

ncrcat

Writes specified variables / times to a new file; e.g.

```
ncrcat -v RAINNC wrfout* RAINNC.nc
```

```
ncrcat -d Time,0,231 -v RAINNC wrfout* RAINNC.nc
```

ncra

Averages variables and writes to a new file; e.g.

```
ncra -v OLR wrfout* OLR.nc
```

ncks (nc kitchen sink)

Combination of NCO tools all in one (handy: one tool for multiple operations).

An especially handy use of this tool is to split large files into smaller files, e.g.

```
ncks -A -F -d Time,1,1 wrfout* -o wrfout_time1.nc
```


GRIB data

Documentation and Decoders

Documentation and decoders for both GRIB1 and GRIB2 can be found here: <http://rda.ucar.edu/#!/GRIB>

Some of the utilities that are worth looking at is the `unpackgrib2.c` and `grib2to1.c` code.

GRIB codes

It is important to understand the GRIB codes to know which fields are available in your dataset. For instance, NCEP uses the GRIB1 code 33 for the U-component of the wind, and 34 for the V-component. *Other centers may use different codes, so always obtain the GRIB codes from the center you get your data from.*

GRIB2 uses 3 codes for each field - **product**, **category** and **parameter**. We would most often be interested in **product 0** (*Meteorological products*). **Category** refers to the type of field; e.g., category 0 is temperature, category 1 is moisture and category 2 is momentum. **Parameter** is the field number. So whereas GRIB1 only uses code 33 for the U-component of the wind, GRIB2 will use 0,2,2, for the U-component, and 0,2,3 for the V-component.

Display GRIB header/field information

GRIB1 data

WPS/util/g1print.exe
wgrib

GRIB2 data

WPS/util/g2print.exe
wgrib2

Both wgrib and wgrib2 are available from the <http://rda.ucar.edu/#!/GRIB> web site.

Convert GRIB data to netCDF format

ncl_grib2nc (http://www.ncl.ucar.edu/Document/Tools/ncl_convert2nc.shtml)

Displaying GRIB files

GRIB data can, *amongst other*, be displayed with GrADS with the use of the grib2ctl.pl script (<http://www.cpc.ncep.noaa.gov/products/wesley/grib2ctl.html>) and Panoply (<http://www.giss.nasa.gov/tools/panoply/>).

Model Verification

MET is designed to be a highly configurable, state-of-the-art suite of verification tools. It was developed using output from the Weather Research and Forecasting (WRF) modeling system, but may be applied to the output of other modeling systems as well.

MET provides a variety of verification techniques, including:

- Standard verification scores, comparing gridded model data to point-based observations
- Standard verification scores, comparing gridded model data to gridded observations
- Object-based verification method, comparing gridded model data to gridded observations

<http://www.dtccenter.org/met/users/index.php>

Appendix A: WRF-Fire

Table of Contents

- [Introduction](#)
- [WRF-Fire in idealized cases](#)
- [Fire variables in namelist.input](#)
- [namelist.fire](#)
- [Running WRF-Fire on real data](#)
 - [Building the code](#)
 - [Fire variables in namelist.wps](#)
 - [Geogrid](#)
 - [Conversion to geogrid format](#)
 - [Editing GEOGRID.TBL](#)
 - [Ungrib and Metgrid](#)
 - [Running real case and WRF-Fire](#)
- [Fire state variables](#)
- [WRF-Fire software](#)
 - [WRF-Fire coding conventions](#)
 - [Parallel execution](#)
 - [Software layers](#)
 - [Initialization in idealized case](#)

Introduction

A wildland fire module named WRF-Fire has been added to WRF ARW to allow users to model the growth of a wildland fire and the dynamic feedbacks with the atmosphere. It is implemented as a physics package with two-way coupling between the fire behavior and the atmospheric environment allowing the fire to alter the atmosphere surrounding it, i.e. ‘create its own weather’. Here we address the mechanics, options, parameters, and datasets for using this module.

The wildland fire module is currently a simple two-dimensional model of a surface fire, that is, a fire that spreads through fuels on the ground, such as grass, shrubs, and the litter from trees that has fallen to the surface. It does not yet contain the algorithms needed to represent crown fires, which consume and spread through the tree canopies. The user specifies the time, location, and shape of a fire ignition. The evolution of the fireline, the interface enclosing the burning region, is implemented by the level set method. The level set function is advanced by the Runge-Kutta method of order 2, with spatial discretization by the Godunov method. The rate at which this interface expands is calculated at all

points along it using a point-based semi-empirical formula for estimating the rate of spread of the surface fire based upon the Rothermel (1972) formula, which calculates the fire rate of spread as a function of local fuel conditions, wind, and terrain slope. A semi-empirical formula is used as a parameterization since turbulent combustion cannot be resolved at the spatial scales of atmospheric models; thus, all physical processes involved in propagating the fire are assumed to be represented in this relationship. Importantly, the winds used to drive the fire are interpolated from nearby low-level wind velocities, which are themselves perturbed by the fire. Once the fireline has passed by, the ignited fuel continues to burn - the mass of fuel is assumed to decay exponentially with time after ignition, the rate depending on the size of the fuel particles making up the fuel complex: fine fuels such as grass are consumed rapidly, while fuels with larger diameters such as twigs and downed logs are consumed slowly. The fuel burned in each time step is converted to sensible and latent heat source terms for the lowest levels of the WRF atmospheric model state, where the water vapor source arises from the release of the intrinsic moisture in cellulosic fuels and the additional moisture absorbed by fuels from their environment, the fuel moisture content. The e-folding depth over which the heat and vapor distributed is set by the user, based on results from wildland fire measurements. The fire may not progress to locations where the local fuel moisture content is greater than the moisture content of extinction.

Additional parameters and datasets beyond a standard WRF atmospheric simulation are required and are described here. The surface fuel available to be burned at each point is categorized using the Anderson classification system for “fuel models” (3 grass-dominated types, 4 shrub-dominated types, 3 types of forest litter, and 3 levels of logging slash) which we will henceforth refer to as “fuel categories” to limit confusion. Each of these fuel categories is assigned a set of typical properties consisting of the fuel load (the mass per unit area) and numerous physical properties having to do with fuel geometry, arrangement, and physical makeup. The user may make the fuels spatially homogeneous by using one fuel category for the whole domain, alter fuel properties, add custom fuel categories, or (for real data experiments) project a spatially heterogeneous map of fuel categories onto the domain from fuel mapping datasets. The user also sets the number of ignitions, their time, location, and shape, and the fuel moisture content, an important factor in fire behavior.

One time step of the fire model is performed for every WRF time step. The fire model runs on a refined grid that covers the same region as the innermost WRF domain. The fire module supports both distributed and shared memory parallel execution.

Other References

- Users may wish to review Anderson’s fuel classification system (Anderson, H. E. 1982. *Aids to determining fuel models for estimating fire behavior*. USDA For. Serv. Gen. Tech. Rep. INT-122, 22p. Intermt. For. and Range Exp. Stn., Ogden, Utah 84401) at http://www.fs.fed.us/rm/pubs_int/int_gtr122.pdf (verified 1/4/10).
- The original report introducing Rothermel’s semi-empirical formulas (Rothermel,

R. C. 1972. *A mathematical model for predicting fire spread in wildland fuels*. Res. Pap. INT-115. Ogden, UT: U.S. Department of Agriculture, Intermountain Forest and Range Experiment Station. 40 p.) is available at <http://www.treesearch.fs.fed.us/pubs/32533> (verified 1/4/10).

- The following paper describes the WRF-Fire module and applies WRF with WRF-Fire in simulations to test the sensitivity of fire growth to environmental factors such as wind speed, fuel load and moisture, and fuel model in the daytime convective boundary layer:

Coen, J. L. , M. Cameron, J. Michalakes, E. Patton, P. Riggan, and K. Yedinak, 2013: WRF-Fire: Coupled Weather-Wildland Fire Modeling with the Weather Research and Forecasting Model. *J. Appl. Meteor. Climatol.*, **52**, 16-38.
<http://journals.ametsoc.org/doi/abs/10.1175/JAMC-D-12-023.1>

WRF-Fire in idealized cases

To perform a simulation including a fire, follow the installation instructions in Chapter 5 to configure WRF and set up the environment. For an idealized case, use

```
./compile em_fire
```

to build WRF for one of the several supplied ideal examples. This will create the links `wrf.exe` and `ideal.exe` in the directory `test/em_fire`. The examples are in its subdirectories. The links `wrf.exe` and `ideal.exe` in the subdirectories point to the parent directory.

The directory `test/em_fire` contains the directories `hill_simple` and `two_fires`. Each directory contains all files needed to run the example, namely `namelist.input`, `namelist.fire`, and `input_sounding`.

To run the `hill_simple` idealized example, type

```
cd test/em_fire

cp -f /hill_simple/* .

./ideal.exe

./wrf.exe
```

The file `namelist.input` contains an additional section `&fire` with parameters of the fire model and ignition coordinates. The file `namelist.fire` contains an additional `namelist` used to enter custom fuel properties.

Fire variables in namelist.input

Variable names	Value	Description
<code>&domains</code>		Domain definition
<code>sr_x</code>	10	The fire mesh is 10 times finer than the innermost atmospheric mesh in the <i>x</i> direction. This number must be even.
<code>sr_y</code>	10	The fire mesh is 10 times finer than the innermost atmospheric mesh in the <i>y</i> direction. This number must be even.
<code>&fire</code>		Fire ignition and fuel parameters
<code>ifire</code>	0	No fires will be simulated.
	1	Fires will be simulated, using the tracer scheme to represent the flaming front interface (not active).
	2	Fires will be simulated, using the level set method to represent the movement of the interface.
<code>fire_fuel_read</code>	0	How to set the fuel data -1: real data from WPS 0: set to a homogeneous distribution of <code>fire_fuel_cat</code> everywhere 1: The spatial distribution of fuel categories is to be specified as a function of terrain altitude. (The user specifies a custom function.)
<code>fire_num_ignitions</code>	3	Number of ignition lines, max. 5 allowed
<code>fire_ignition_start_x1</code>	1000.	<i>x</i> coordinate of the start point of the ignition line 1. All ignition coordinates are given in m from the lower left corner of the innermost domain
<code>fire_ignition_start_y1</code>	500.	<i>y</i> coordinate of the start point of the ignition line 1
<code>fire_ignition_end_x1</code>	1000.	<i>y</i> coordinate of the end point of the ignition line 1. Point ignition (actually a small circle) is obtained by specifying the end point the same as the start point.
<code>fire_ignition_end_y1</code>	1900.	<i>y</i> coordinate of the end point of the ignition line 1

<code>fire_ignition_radius1</code>	18.	Everything within <code>fire_ignition_radius1</code> meters from the ignition location will be ignited.
<code>fire_ignition_time1</code>	2.	Time of ignition in s since the start of the run
<code>fire_ignition_start_x2</code>		Up to 5 ignition lines may be given. Ignition parameters with the number higher than <code>fire_num_ignitions</code> are ignored.
...		
<code>fire_ignition_time5</code>		
<code>fire_print_msg</code>	1	0: no messages from the fire scheme 1: progress messages from the fire scheme
<code>fire_print_file</code>	0	0: no files written (leave as is) 1: fire model state written every 10 s into files that can be read in Matlab.

There are several more variables in the namelist for developers' use only to further develop and tune the numerical methods. Do not alter unless directed to do so.

namelist.fire

This file serves to redefine the fuel categories if the user wishes to alter the default fuel properties.

Variable names	Description
<code>&fuel_scalars</code>	Scalar fuel constants
<code>cmbcnst</code>	The energy released per unit fuel burned for cellulosic fuels (constant, $1.7433\text{e}7 \text{ J kg}^{-1}$).
<code>hfgl</code>	The threshold heat flux from a surface fire at which point a canopy fire is ignited above (in W m^{-2}).
<code>fuelmc_g</code>	Surface fuel, fuel moisture content (in percent expressed in decimal form, from 0.00 – 1.00).
<code>nfuelcats</code>	Number of fuel categories defined (default: 13)
<code>no_fuel_cat</code>	The number of the dummy fuel category specified to be used where there is no fuel
<code>&fuel_categories</code>	Domain specifications
<code>fgi</code>	The initial mass loading of surface fuel (in kg m^{-2}) in each fuel category
<code>fueldepthm</code>	Fuel depth (m)
<code>savr</code>	Fuel surface-area-to-volume-ratio (m^{-1})
<code>fuelmce</code>	Fuel moisture content of extinction (in percent expressed in decimal form, from 0.00 – 1.00).

fueldens	Fuel particle density lb ft ⁻³ (32 if solid, 19 if rotten)
st	Fuel particle total mineral content. (kg minerals/kg wood)
se	Fuel particle effective mineral content. (kg minerals – kg silica)/kg wood
weight	Weighting parameter that determines the slope of the mass loss curve. This can range from about 5 (fast burn up) to 1000 (i.e. a 40% decrease in mass over 10 minutes).
ichap	Is this a chaparral category to be treated differently using an empirical rate of spread relationship that depends only on wind speed? (1: yes, this is a chaparral category and should be treated differently; 0: no, this is not a chaparral category or should not be treated differently). Primarily used for Fuel Category 4.

Running WRF-Fire on real data

Building the code

Running WRF with real data is a complicated process of converting data formats and interpolating to the model grid. This process is simplified by the WRF Preprocessing System (WPS). The purpose of this section is to summarize the use of this system and to highlight the differences in its use between fire and ordinary atmospheric simulations. For more complete documentation of WPS, see Chapter 3 of the WRF-ARW User's Guide.

WPS consists of three utility programs: `geogrid.exe`, `ungrib.exe`, and `metgrid.exe`. Each program is designed to take existing data sets and convert/interpolate them into an intermediate format. The build system for WPS is similar to that of WRF. NetCDF must be installed and the environment variable `NETCDF` should be set to the installation prefix. Run the configure script in the main WPS directory, pick a configuration option from the list, and then run `compile`. Note that WRF itself must be built prior to compiling WPS. In addition, the build process assumes that WRF exists in `../WRFV3/`. WRF should be configured as described in Section 3 and compiled with the command

```
./compile em_real >& compile.log
```

The WPS can be configured from inside the top level directory `wrf-fire/WPS` with the command

```
./configure
```

and compiled in the same directory with the command

```
./compile >& compile.log
```

Upon successful completion the three binaries listed above should exist in the current directory.

Because the WPS programs are, for the most part, not processor intensive, it is not generally necessary to compile these programs for parallel execution, even if they do support it. Typical usage of WRF with real data involves doing all of the preprocessing work either locally on a workstation or on the head node of a supercomputer. The intermediate files are all architecture independent, so they can be transferred between computers safely. If you intend to use a supercomputer for the main simulation, it is advisable to generate the WPS output locally and transfer the `met_em` files to the computer you will be using for WRF-Fire. The `met_em` files are much smaller than the `wrfinput` and `wrfbdy` files and can be transported easily. This also eases the process of dealing with the dependencies of the python scripts described below because it may not be easy or even possible to meet these requirements on a shared parallel computer.

Fire variables in `namelist.wps`

The simulation domain is described in the file `namelist.wps`. This namelist contains four sections, one for each of the main binaries created in WPS and one shared among them all. This file, as distributed with WRF-Fire, is set up for a test case useful for testing, but in general one needs to modify it for each simulation domain. The following table lists namelist options that can be modified. Other options in this file are generally not necessary to change for WRF-Fire simulations. See the WRF-ARW User's Guide for more information.

Variable names	Description
<code>&share</code>	Shared name list options
<code>max_dom</code>	Number of nested domains to use
<code>start_date/end_date</code>	Starting/ending date and time to process atmospheric data in the format YYYY-MM-DD_hh:mm:ss. These times should coincide with reanalysis cycles for your atmospheric data (hours 00,03,06,09,12, etc. for 3 hour NARR data). The simulation window in which you are interested in running must be inside this interval.
<code>Subgrid_ratio_[xy]</code>	The refinement ratio from the atmospheric grid to the fire grid.
<code>interval_seconds</code>	Number of seconds between each atmospheric dataset. (10800 for 3 hour NARR data)

&geogrid	Domain specifications
parent_id	When using nested grids, the parent of the current grid, or 0 if it is the highest level.
parent_grid_ratio	The refinement ratio from the parent grid (ignored for top level grid) (only 3 or 5 is supported by WRF)
[ij]_parent_start	The indices on the parent grid of the lower left corner of the current grid (ignored for top-level grid)
E_we/e_sn	The size of the grid in the x/y axis
dx/dy	Resolution of the grid in the x/y axis
map_proj, true_lat[12], stand_lon	Projection specifications. Lambert is typically used for central latitudes such as the continental US. For small domains, the projection used does not matter much.
ref_x/ref_y	Grid index of a reference point with known geographic location. Defaults to the center of the domain.
ref_lon/ref_lat	The location (longitude/latitude) of the reference point.
geog_data_path	Absolute or relative path to geogrid data released with WPS (http://www.mmm.ucar.edu/wrf/src/wps_files/geog_v3.1.tar.gz)

Geogrid

The geogrid executable acts exclusively on static datasets (those that don't change from day to day) such as surface elevation and land use. Because these datasets are static, they can be obtained as a single set of files from the main WPS distribution website in resolutions of 10 minutes, 2 minutes, and 30 seconds. The geogrid executable extracts from these global data sets what it needs for the current domain. While resolutions of this magnitude are acceptable for ordinary atmospheric simulations, these datasets are too coarse for a high-resolution fire simulation. In particular, a WRF-Fire simulation will require two additional data sets not present in the standard data.

NFUEL_CAT

The variable NFUEL_CAT contains Anderson 13 fuel category data. This data can be obtained for the US from the USGS seamless data access server at: <http://landfire.cr.usgs.gov/viewer/>. Using the zooming and panning controls, the user can select the desired region with LANDFIRE 13 Anderson Fire Behavior Fuel Models box selected. This will open a new window where the user can request the data in specific projections and data formats.

ZSF

The variable ZSF contains high resolution terrain height information similar to that in the HGT variable present in atmospheric simulations; however, the standard topographical data set is only available at a maximum resolution of 30 arc seconds (about 900 meters). For a simulation using the WRF-Fire routines, data resolution of at least 1/3 of an arc second is desirable to include the effect of local terrain slope on the rate of spread. Such a dataset is available for the US at <http://seamless.usgs.gov/>. This is another USGS seamless data access server similar to that of LANDFIRE. The desired dataset on this

server is listed under elevation and is called 1/3" NED.

Conversion to geogrid format

Once one has collected the necessary data from USGS servers or elsewhere, it is necessary to convert it from the given format (such as geotiff, Arcgrid, etc.) into geogrid format. The format specification of the geogrid format is given in the WPS section of the WRF users guide. The process of this conversion is somewhat technical; however, work is in progress to automate it.

Editing GEOGRID.TBL

In order to include your custom data into the WPS output, you must add a description of it in the GEOGRID.TBL file, which is located, by default, in the geogrid subdirectory of the main WPS distribution. In addition to the standard options described in the WPS users guide, there is one additional option that is necessary for defining data for fire grid variables. For them, there is a subgrid option, which is off by default. For fire grid data, one should add the option `subgrid=yes` to indicate that the variable should be defined on a refined subgrid with a refinement ratio defined by the `subgrid_ratio_[xy]` option in the WPS namelist. For example, typical table entries would appear as follows:

```
=====
name=NFUEL_CAT
    priority=1
    dest_type=categorical
    dominant_only=NFUEL_CAT
    z_dim_name=fuel_cat
    halt_on_missing=yes

interp_option=default:nearest_neighbor+average_16pt+search
    rel_path=default:landfire/
    subgrid=yes
=====
name = ZSF
    priority = 1
    dest_type = continuous
    halt_on_missing=yes
    interp_option = default:four_pt
    rel_path=default:highres_elev/
    subgrid=yes
```

This table assumes that the converted data resides as a subdirectory of the standard data directory given in the namelist under the option `geog_data_path`. The NFUEL_CAT data should reside in `landfire/` and ZSF in `highres_elev/`. In general, the only options that should be modified by the user are the `rel_path` or `abs_path` options.

Once the data has been obtained and converted and the geogrid table has been properly set up, the user can run:

```
./geogrid.exe
```

which will create files such as `geo_em.d01.nc` that contain the interpolated static data fields.

Ungrib and Metgrid

The ungrib executable performs initial processing on atmospheric data. There are many different datasets that can be used as input to ungrib. One must obtain this data manually for a given simulation. Because fire simulations will be at a much higher resolution than most atmospheric simulations, it is advisable to get as high resolution data as possible. The 32 km resolution data from the North American Regional Reanalysis (NARR) is likely a good choice. This data is available freely from https://dss.ucar.edu/datazone/dsszone/ds608.0/NARR/3HRLY_TAR/. For real data WRF runs, three individual datasets from this website are required: 3d, flx, and sfc. To use them, download the files for the appropriate date/time and extract them somewhere on your file system. The files have the naming convention, NARR3D_200903_0103.tar. NARR indicates it comes from the NARR model, 3D indicates that it is the atmospheric data fields, and 200903_0103 indicates that it contains data from March 1st through 3rd of 2009. Once these files are extracted, they must be linked into the main WPS directory with the command `link_grib.csh`. It takes as arguments all of the files extracted from the dataset. For example, if you extracted these files to `/home/joe/mydata`, then you would issue the command:

```
./link_grib.csh /home/joe/mydata/*
```

into the top level WPS directory. Each atmospheric dataset requires a descriptor table known as a variable table to be present. WPS comes with several variable tables that work with most major data sources. These files reside in `WPS/ungrib/Variable_Tables/`. The appropriate file must be linked into the top level WPS directory as the file `Vtable`. For NARR data, type:

```
ln -sf ungrib/Variable_Tables/Vtable.NARR Vtable
```

Once this has been done, everything should be set up properly to run the ungrib command:

```
./ungrib.exe
```

Finally, the program metgrid combines the output of ungrib and geogrid to create a series of files, which can be read by WRF's `real.exe`. This is accomplished by

```
./metgrid.exe
```

Assuming everything completed successfully, you should now have a number of files named something like `met_em.d01.2009-03-01_12:00:00.nc`. These should be copied or linked to your `WRFV3/test/em_real` directory. If any errors occur during execution of ungrib or metgrid, then make sure you have downloaded all of the necessary atmospheric data and that the variable table and namelist are configured properly.

Running real case and WRF-Fire

First copy or link the `met_em` files generated by `metgrid` into `test/em_real`. If the simulation is being done locally, this can be accomplished by running in `wrf-fire/WRFV3/test/em_real`

```
ln -sf ../../../../WPS/met_em* .
```

The namelist for WRF in the file `namelist.input` must now be edited to reflect the domain configured in WPS. In addition to the fire-specific settings listed in Section 4.3 regarding the ideal simulation, a number of other settings must be considered as listed below. See Chapter 5 for more details on these settings.

Variable	Description
<code>&time_control</code>	
<code>start_xxx/end_xxx</code>	These describe the starting and ending date and time of the simulation. They must coincide with the <code>start_date/end_date</code> given in <code>namelist.wps</code> .
<code>run_xxx</code>	The amount of time to run the simulation.
<code>interval_seconds</code>	Must coincide with interval seconds from <code>namelist.wps</code> .
<code>restart_interval</code>	A restart file will be generated every x minutes. The simulation can begin from a restart file rather than <code>wrfinput</code> . This is controlled by the namelist variable 'restart'.
<code>&domains</code>	All grid settings must match those given in the <code>geogrid</code> section of <code>namelist.wps</code> .
<code>num_metgrid_levels</code>	The number of vertical levels of the atmospheric data being used. This can be determined from the <code>met_em</code> files: <code>ncdump -h met_em* grep 'num_metgrid_levels ='</code>
<code>sr_x/sr_y</code>	Fire grid refinement. This must match that given in <code>namelist.wps</code> as <code>subgrid_ratio_x/subgrid_ratio_y</code> .
<code>p_top_requested</code>	The default is 5000, but may need to be edited if there is an error executing <code>real</code> . If so, just set this to whatever it tells you in the error message.

Once the namelist is properly configured, run the `real` executable:

```
./real.exe
```

and then run `wrf`:

```
./wrf.exe
```

Fire state variables

A number of array variables were added to the registry to the WRF state in order to support the fire model. They are available in the `wrfout*` files created when running WRF. All fire array variables are based at the centers of the fire grid cells. Their values in the strips at the upper end of width `sr_x` in the *x* direction and `sr_y` in the *y* direction are unused and are set to zero by WRF.

The following variables can be used to interpret the fire model output.

LFN	level set function. Node (i,j) is on fire if $LFN(i,j) \leq 0$
FXLONG, FXLAT	longitude and latitude of the nodes
FGRNHFX	ground heat flux from the fire (W/m^2), averaged over the cell
FGRNQFX	ground heat flux from the fire (W/m^2), averaged over the cell
ZSF	terrain elevation above sea level (m)
UF, VF	surface wind
FIRE_AREA	approximate part of the area of the cell that is on fire, between 0 and 1

WRF-Fire software

This section is intended for programmers who wish to modify or extend the fire module.

WRF-Fire coding conventions

The fire module resides in WRF physics layer and conforms to *WRF Coding Conventions*. The wildland fire-related subroutines maintain the conventions as they apply to on atmospheric grids, adapts them to 2D surface-based computations, and follows analogous conventions on the fire grid. In particular, these routines may not maintain any variables or arrays that persist between calls, and may not use common blocks, allocatable variables, or pointer variables. Work arrays with variable bounds may be declared only as automatic; thus, they are freed between on exit from the subroutine where they are declared. All grid-sized arrays that should persist between calls to the wildland fire-related subroutines must be created in WRF through the registry mechanism, and passed to these as arguments.

In addition, the wildland fire-related subroutines may not call any WRF routines directly but only through a utility layer. All variables in the wildland fire-related subroutines are based at grid centers. Grid dimensions are passed in argument lists as

```

ifds,ifde,jfds,jfde, & ! fire domain dims
ifms,ifme,jfms,jfme, & ! fire memory dims
ifps,ifpe,jfps,jfpe, & ! fire patch dims (may be omitted)
ifts,ifte,jfts,jfte, & ! fire tile dims

```

Atmosphere grid 2D variables are declared with `dimension(ims:ime, jms:jme)`. Fire grid variables are declared with `dimension(ifms:ifme, jfms:jfme)`. Loops on the fire grid are always over a tile. The index variable names, the order of the loops, and the bounds are required exactly as in the code fragment below.

```

do j=jfts,jfte
  do i=ifts,ifte
    fire_variable(i,j)=...

```

In loops that need to index more than one grid at the same time (such as computations on a submesh, or interpolation between atmosphere and fire) the index variable names must always begin with `i j`.

Parallel execution

In these routines, all computational subroutines are called from a thread that services a single tile. There is no code running on a patch. Loops may update only array entries within in the tile but they may read other array entries in adjacent tiles, for example for interpolation or finite differences. The values of arrays that may be read between adjacent tiles are synchronized outside of the computational routines. Consequently, the values of a variable that was just updated may be used from an adjacent tile only in the next call to the computational subroutines, after the required synchronization was done outside. Synchronization within a patch is by exiting the OpenMP loop. Synchronization of the values between patches is by explicit HALO calls on the required variables and with the required width. HALOs are provided by the WRF infrastructure and specified in the registry.

The overall structure of the parallelism is spread over multiple software layers, subroutines and source files. The computation is organized in stages, controlled by the value of `ifun`.

```

! the code executes on a single patch
! if distributed memory, we are one of the MPI processes

do ifun=ifun_start,ifun_end ! what to do

  if(ifun.eq.1)then ! this HALO needed before stage ifun=1
    #include "SOME_HALO.inc" ! communicate between patches
  endif
...

```

```
!$OMP PARALLEL DO
  do ij=1,num_tiles ! parallel loop over tiles

    if(ifun.eq.1)then ! one of the initialization stages
      call some_atmosphere_to_fire_interpolation(...)
    endif

    ...
    call fire_model(...,ifun,...) ! call the actual model
    ! for some values of ifun, fire_model may do nothing

    if(ifun.eq.6)then ! fire step done
      call some_fire_to_atmosphere_computation(...)
    endif

  enddo ! end parallel loop over tiles
  ! array variables are synchronized between tiles now

enddo ! end ifun loop
```

Software layers

The wildland fire-related subroutines are called from WRF file `dyn_em/module_first_rk_step_part1`. The output of these routines (the heat and moisture tendencies) are stored on exit from these routines and added to the tendencies in WRF later in a call to `update_phy_ten` from `dyn_em/module_first_rk_step_part2`.

The wildland fire-related subroutines themselves consist of the following files in the `phys` directory, each constituting a distinct software layer:

`module_fr_fire_driver.F` **Fire driver** layer. These subroutines are called directly from WRF. All parallelism is contained here. The rest of the routines are called on a single tile.

`module_fr_fire_atm.F` **Atmosphere-fire interaction** layer. These routines are the interface between the fire and the atmosphere and interpolate between them.

`module_fr_fire_model.F` **Fire front representation and advancement** layer. This routine calls the core and the physics layers. Formulated in terms of the fire grid only, it is intended to be independent of particular mathematical methods used in the core layer.

`module_fr_fire_core.F` **Core** layer: This contains numerical algorithms for fire front advancement and the rate of fuel consumption calculation. It calls the physics layer for the fire spread rate.

`module_fr_fire_phys.F` **Fire physics** layer. This contains algorithms for

calculating the rate of spread of the fire front in terms of the fire environment and associated initialization .

`module_fr_fire_util.F` **Utilities** layer. This layer is used by all other layers. It declares scalar switches and parameters and contains all interpolation and other service routines that may be general in nature and the interface to WRF routines such as messages and error exits. To maintain independence in WRF, this is the only layer that may call any WRF routines.

`fr_fire_params_args.h` This include file contains subroutine argument lists to pass through all arguments that are needed in the fire rate of spread algorithm in the physics layer. It is only necessary to write this long argument list once given the WRF requirement that arrays may be passed as arguments only, and not shared globally, say, as pointers. Also, it maintains the independence of the core layer from the physics layer and the modularity of the wildland fire-related subroutines in WRF.

`fr_fire_params_decl.h` Include file with the matching declarations.

Initialization in idealized case

The initialization of model arrays in the idealized case is done in the file `dyn_em/module_initialize_fire.F`

This file was adapted from other initialization files in the same directory and extended to deal with wildland fire-related variables.

a. Vertically stretched grid

Because of the fine meshes used in fire modeling, the user may wish to search for the text `grid%znw(k)` and modify the following loop to assure a desired refinement of the vertical atmospheric grid near the Earth surface:

```
DO k=1, kde
    grid%znw(k) = (exp(-(k-1)/float(kde-1)/z_scale) &
        - exp(-1./z_scale)) / (1.-exp(-1./z_scale))
ENDDO
```

b Topography

The relevant code is found by searching for the text

```
!***** set terrain height
```

The terrain height needs to be set consistently in the atmosphere model in the array

`grid%ht` and in the fire model array `grid%zsf` at the finer resolution. In the supplied examples, controlled by `namelist.input` variables `fire_mountain_type`, `fire_mountain_start_x`, `fire_mountain_start_y`, `fire_mountain_end_x`, `fire_mountain_end_y`, and `fire_mountain_height`, both arrays are set consistently from an algebraic formula (a cosine hill or a cosine ridge).

It is possible, though not recommended, to set only `grid%ht` and have the fire module interpolate the terrain height from the atmosphere mesh by specifying `fire_topo_from_atm=1` in `namelist.input`. This will result in blocky terrain with discontinuous terrain gradients, which will affect fire spread patterns.

Note that in a real run, the user should leave `fire_topo_from_atm=0` and both terrain height arrays are set consistently at the best available resolution from the WPS.

The user should not modify the code immediately after the setting of the terrain height arrays, which initializes a number of atmosphere variables consistently with the terrain height.