

Nesting Setup


WRF Nesting: Set Up and Run

Wei Wang
NCAR/MMM



Outline

- General comments
- Nest namelist options
- Running WRF with nests
 - two-way nesting
 - moving nest
 - one-way nesting
- Summary




Before You Run ..

- Make sure you have selected **basic nest** compile options and appropriate executables are created in **WRFV3/main/** directory:

For ARW:

- **ideal.exe**
- **real.exe**
- **wrf.exe**
- **ndown.exe**
- **tc.exe**

- If you are running a real-data case, be sure that files for *nest* domains from WPS are generated:
 - **met_em.d01.<date>**, **met_em.d0*<date>** for ARW or



Steps to Run (same as before)

1. cd to *run/* or one of the *test case* directories
2. Link or copy WPS output files to the directory for real-data cases
3. Edit *namelist.input* file for the appropriate grid and times of the case
4. Run initialization program (*real.exe*) as in the single domain case
5. Run model executable, *wrf.exe*




All in the namelist...


- Nearly all controls for a nested run can be achieved by editing the namelist file.
- Look at nest specific namelist options

Important to note:

- Key variable: **max_dom** must be set to ≥ 2
- Need to pay attention to multi-column namelists



Nest namelist Options



&time_control

```
run_days      = 0,  
run_hours     = 24,  
run_minutes   = 0,  
run_seconds   = 0,  
start_year    = 2000, 2000, 2000,  
start_month   = 01, 01, 01,  
start_day     = 24, 24, 24,  
start_hour    = 12, 12, 12,  
start_minute  = 00, 00, 00,  
start_second  = 00, 00, 00,  
end_year      = 2000, 2000, 2000,  
end_month     = 01, 01, 01,  
end_day       = 25, 25, 25,  
end_hour      = 12, 12, 12,  
end_minute    = 00, 00, 00,  
end_second    = 00, 00, 00,  
interval_seconds = 21600
```

First column: domain 1 option

These controls the start and end times of the nests. They can be different from the parent domain, but must fit in the time window of the parent domain



&time_control

```
interval_seconds      = 21600  
history_interval      = 180, 60, 60,  
frame_per_outfile    = 1000, 1000, 1000,  
restart_interval      = 360,
```

History files may be split into multiple pieces

- History files are written separately for each domains
- History intervals may be different for different domains
- restart files are also written one per domain



&time_control

```
input_from_file = .true., .true., .true.,  
fine_input_stream = 0, 2, 2,
```

Specify what fields to use in nest input: they can be all (0), or data specified in I/O stream 2 in Registry (2). Useful for nest starting at a later time.

Whether to produce in *real* and use nest wrfinput files in *wrf*. This is usually the case for real-data runs. For idealized nest runs, set it to *.false.* .




&domains

```
max_dom = 3,  
e_we    = 74, 112, 94,  
e_sn    = 61, 97, 91,  
e_vert  = 28, 28, 28,  
grid_id      = 1, 2, 3,  
parent_id    = 0, 1, 2,  
i_parent_start = 0, 31, 30,  
j_parent_start = 0, 17, 30,
```

Activate nests: no. of domains to run

Dimensions of all domains; same as in WPS.

Make sure the nest domain parameters match those defined in WPS

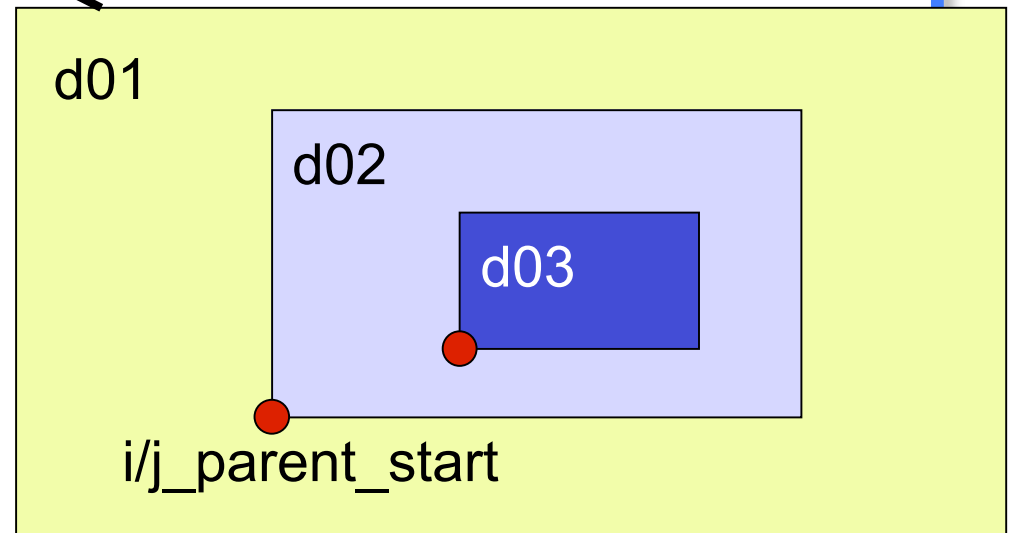

&domains

```
dx = 30000, 10000, 3333.33,  
dy = 30000, 10000, 3333.33,  
parent_grid_ratio = 1, 3, 3,  
parent_time_step_ratio = 1,3,3,
```

All 4 variables must be specified. *Grid ratio* can be any integer, and *time step ratio* can be different from grid ratio. Grid distance is in meters, even for lat/lon map projection



&domains

```
feedback      = 1,  
smooth_option = 2,
```

When feedback is on, this option can be selected to smooth the area in the parent domain where nest is. Valid values are 0,1,2.

Whether nest will overwrite parent domain results. Setting *feedback=0* → 'one-way' nesting in a concurrent run.



&bdy_control

```
spec_bdy_width = 5,  
spec_zone      = 1, (ARW only)  
relax_zone     = 4, (ARW only)  
specified      = .T., .F., .F.,  
nested         = .F., .T., .T.,
```

Boundary condition
option for domain 1.

Boundary condition
option for nests.

May change *relax_zone*
and *spec_bdy_width*



Other notes on namelists

- Use same physics options for all domains.
 - An exception is cumulus scheme. One may need to turn it off for a nest that has grid distance of a few kilometers.
- Also use same physics calling frequency (e.g. **radt**, **cudt**, etc.) in all domains.



Where do I start?

- Always start with a *namelist* template provided in a test case directory, whether it is a ideal case, or real data case.
- Not all namelists are function of domains. If in doubt, check [Registry.EM](#) and [registry.io_boilerplate](#) (look for string 'namelist').
- Use document to guide the modification of the namelist values:
 - run/README.namelist
 - User's Guide, Chapter 5



Running Nested Case



Running Nested Cases

- Files available from WPS:

`met_em.d01.<date>`

`met_em.d02.<date>` (at least one time)

...

- Link or copy WPS output files to the run directory:


```
cd test/em_real
```

```
ln -s ../../../../WPS/met_em.* .
```



Running Nested Cases

- Edit `namelist.input` file for runtime options (set `max_dom >= 2` in `&domains` for a nested run)
- Run the real-data initialization program:
 `./real.exe`, if compiled serially / SMP, or
 `mpirun -np N ./real.exe`, for a MPI job
 where `N` is the number of processors requested



Running Nested Cases

- Successfully running this program will create model initial and boundary files:

wrfinput_d01
wrfinput_d02
wrfbdy_d01

*Single time level
data at model's start
time for all domains*

*Multiple time level data
at the lateral boundary,
and only for domain 1*



Running Nested Cases

- Run the model executable by typing:

```
./wrf.exe >& wrf.out &
```

or

```
mpirun -np N ./wrf.exe &
```

- Successfully running the model will create model *history* files, one for each domain:

```
wrfout_d01_2005-08-28_00:00:00
```

```
wrfout_d02_2005-08-28_00:00:00
```


And *restart* file if selected:

```
wrfirst_d01_<date>, wrfirst_d02_<date>
```



Moving Nest Case

- The main reason for using this option is to run the model economically.
- Must choose correct compile options when creating **configure.wrf** file
 - Choose **preset move**, or **vortex following**
- Other options are controlled by the namelists.
- Can do specified move, and automatic vortex tracking (for tropical cyclone application).
- All nest domains can move.



Specified Moving Case

- Namelists in **&domains:**

`num_moves, move_id, move_interval,
move_cd_x, move_cd_y, corral_dist`

→ only one-grid-cell move at a time

- Must specify initial nest location




Automatic Moving Case

- Tropical cyclone applications only.
- Works better for well developed storms.
- Namelists in **&domains**:
 - `vortex_interval` (default 15 min)
 - `max_vortex_speed` (default 40 m/s)
 - `corral_dist` (default 8 coarse grid cells)
 - `track_level` (default 50000 Pa)
 - `time_to_move` (default is 0 h for all nests)
- Must specify initial nest location



One-way Nesting: Two separate runs

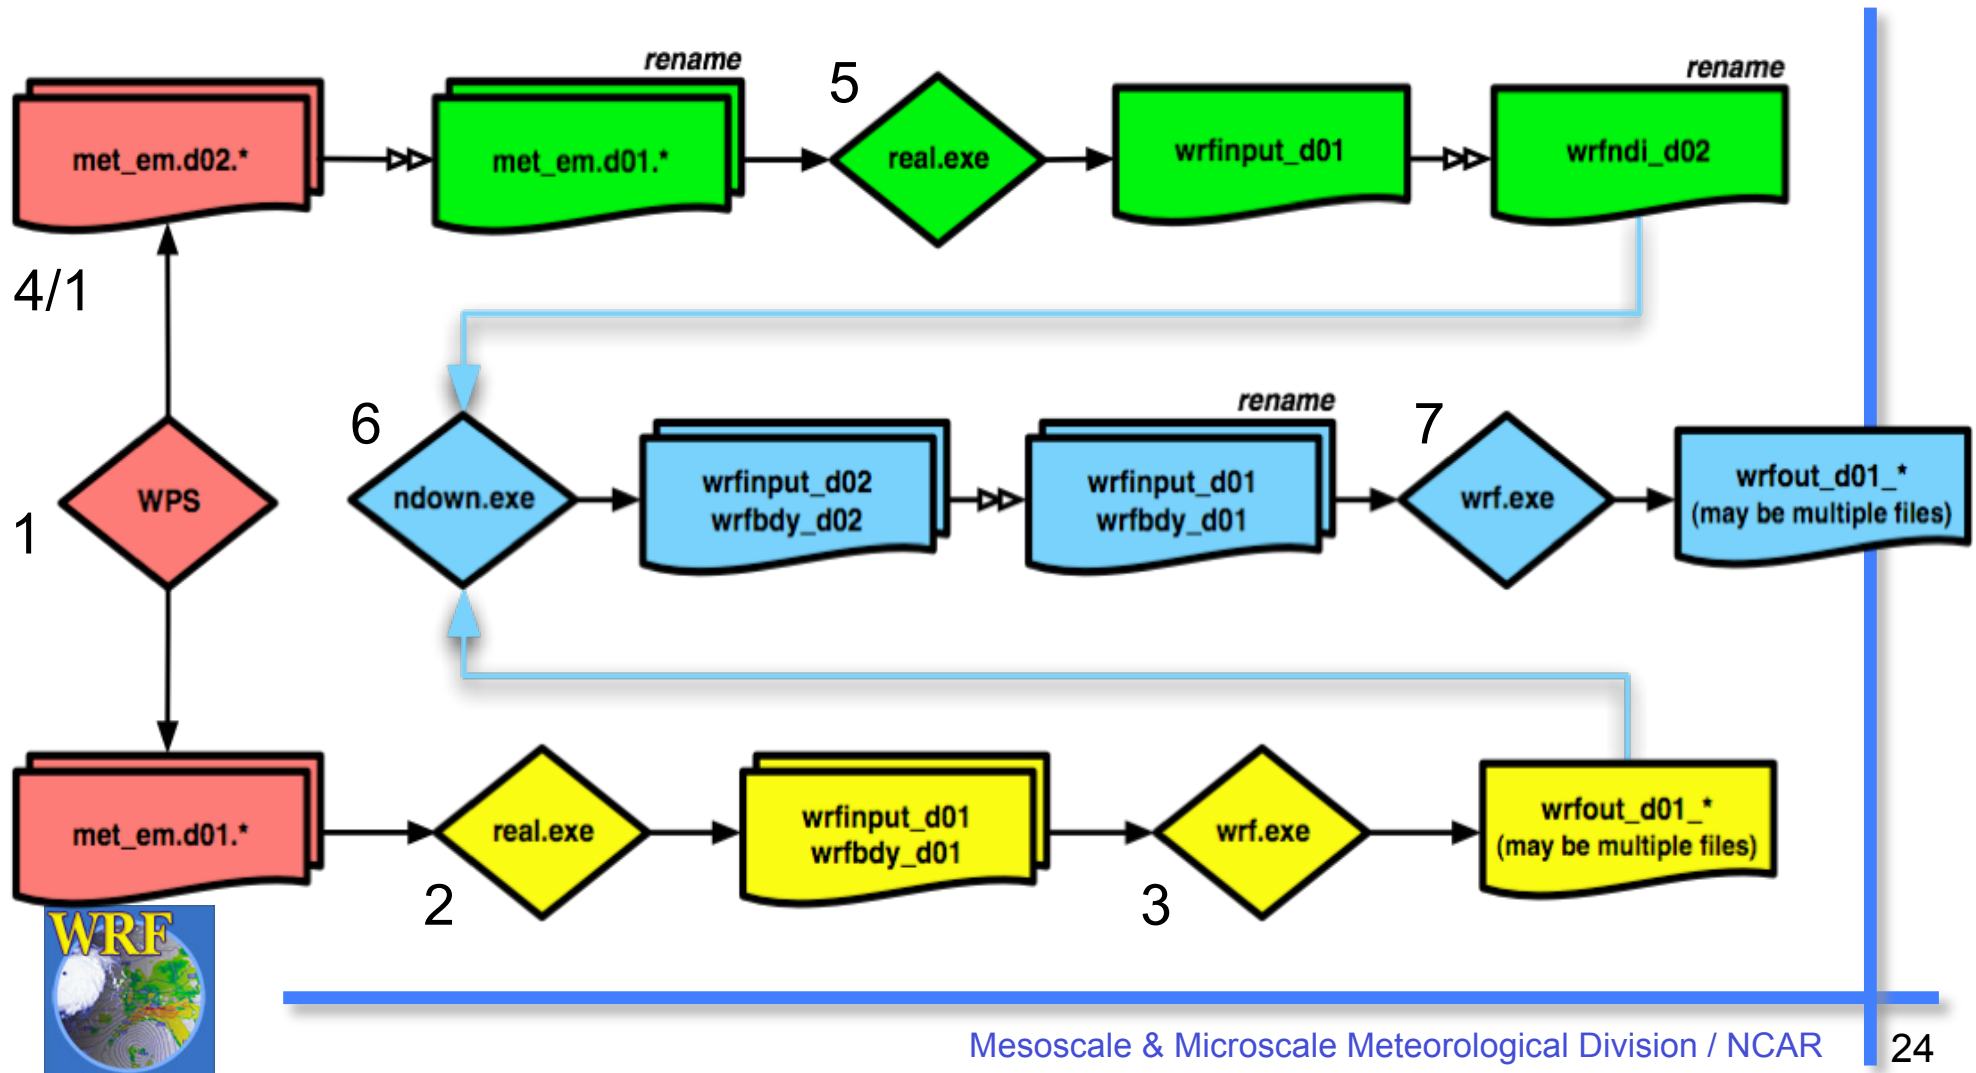

Summary

- Two-way, without nest input files (`input_from_file=.f.`)
- Two-way, with nest input files (`input_from_file = .t.`)
- Two-way, with static nest input only (`input_from_file=.t., fine_input_stream = 2`)
- One-way, concurrent run (`feedback = 0`)
- One-way, separate runs (treated like two single domain runs, with *ndown*)
- Two-way, specified moving nest run
- Two-way, automatic vortex tracking run



References

- Information on compiling and running WRF with nests, and a more extensive list of namelist options and their definition / explanations can be found in the [User's Guide, Chapter 5](#)
- Start with namelist templates in test/ directory
- Practice with online tutorial, and in the class.

