

Dynamics: Introduction

The Advanced Research WRF (ARW) Dynamics Solver

1. What is a dynamics solver?
2. Variables and coordinates
3. Equations
4. Time integration scheme
5. Grid staggering
6. Advection (transport) and conservation
7. Time step parameters
8. Filters
9. Map projections and global configuration
10. Boundary condition options

WRF ARW Tech Note

A Description of the Advanced Research WRF Version 3 (June 2008, 2012 update)

<http://www.mmm.ucar.edu/wrf/users/pub-doc.html>

We are in the process of updating the technical note to Version 4

WRF Tutorial July 2018

Bill Skamarock (skamaroc@ucar.edu)


Dynamics: 1. What is a *dynamics solver*?

A *dynamical solver* (or a *dynamical core*, or *dycore*) performs a time (t) and space (x,y,z) integration of the equations of motion.

Given the 3D atmospheric state at time t , $S(x,y,z,t)$, we integrate the equations forward in time from $t \rightarrow T$, i.e. we run the model and produce a forecast.

The equations cannot be solved analytically, so we *discretize* the equations on a *grid* and compute *approximate* solutions.

The accuracy of the solutions depend on the numerical method and the mesh spacing (grid).

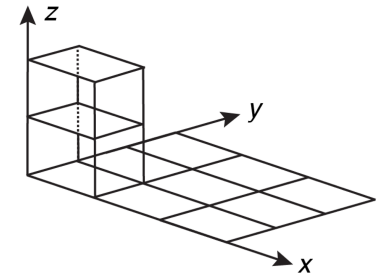

WRF Tutorial July 2018

Bill Skamarock (skamaroc@ucar.edu)

Dynamics: 2. Variables and coordinates


Vertical coordinates: (1) Traditional terrain-following mass coordinate

Dry hydrostatic pressure π_d

Column mass (per unit area) $\mu_d = \pi_s - \pi_t$

Vertical coordinate $\eta = \frac{(\pi_d - \pi_t)}{\mu_d}$

Layer mass (per unit area) $\mu_d \Delta\eta = \Delta\pi_d = -g\rho_d \Delta z$, Pressure $\pi_d(\eta) = \eta\mu_d + \pi_t$

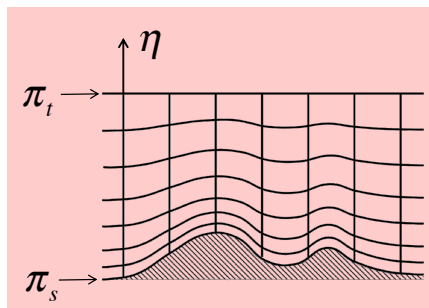

WRF Tutorial July 2018

Bill Skamarock (skamaroc@ucar.edu)

Dynamics: 2. Variables and coordinates

Vertical coordinates: (2) Hybrid terrain-following mass coordinate

Isobaric coordinate (constant pressure):


$$\eta = \frac{\pi_d}{\pi_0 - \pi_t}$$

Hybrid terrain-following coordinate:

$$\pi_d(\eta) = B(\eta)\mu_d + \pi_t \quad (\text{Terrain-following}) \\ + [\eta - B(\eta)](\pi_0 - \pi_t) \quad (\text{Isobaric})$$

level at which $B \rightarrow 0$,
i.e. transition between
isobaric and
terrain-following coordinate.

Default WRFV4 configuration:
Hybrid coordinate is enabled, $\eta_c = 0.2$

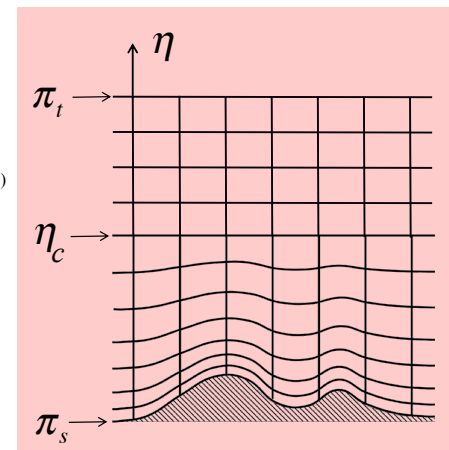

WRF Tutorial July 2018

Bill Skamarock (skamaroc@ucar.edu)

Dynamics: 2. Variables and coordinates

Variables:

Grid volume mass (per unit area):


$$\mu_d = \frac{\partial \pi_d}{\partial \eta} = B_\eta (\pi_s - \pi_t) + (1 - B_\eta)(\pi_0 - \pi_t)$$

Conserved state (prognostic) variables:

$$\mu_d, \quad U = \mu_d u, \quad V = \mu_d v, \\ W = \mu_d w, \quad \Theta = \mu_d \theta$$

Non-conserved state variable:

$$\phi = gz$$

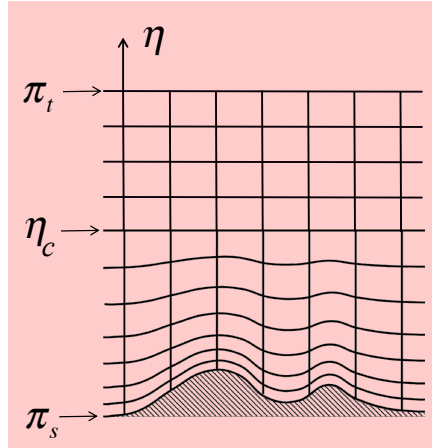

Dynamics: 2. Variables and coordinates

Vertical momentum eqn.
$$\frac{\partial W}{\partial t} + g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right) = - \frac{\partial U w}{\partial x} - \frac{\partial \Omega w}{\partial \eta}$$


Subscript d denotes *dry*, and

$$\alpha_d = \frac{1}{\rho_d} \quad \alpha = \alpha_d (1 + q_v + q_c + q_r \dots)^{-1} \\ \rho = \rho_d (1 + q_v + q_c + q_r \dots)$$

covariant (u, ω) and
contravariant w velocities

$$u = \frac{dx}{dt}, \quad w = \frac{dz}{dt}, \quad \omega = \frac{d\eta}{dt}$$

$$U = \mu u, \quad W = \mu w, \quad \Omega = \mu \omega$$

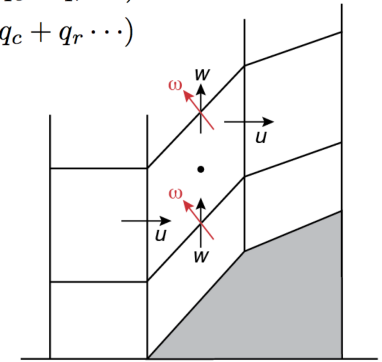

Dynamics: 3. Equations

$$\begin{aligned} \frac{\partial U}{\partial t} &= \\ \frac{\partial V}{\partial t} &= \\ \frac{\partial W}{\partial t} &= \\ \frac{\partial \mu_d}{\partial t} &= \\ \frac{\partial \Theta}{\partial t} &= \\ \frac{\partial \mu_d q_j}{\partial t} &= \\ \frac{\partial \phi}{\partial t} &= \end{aligned}$$

Dynamics: 3. Equations

transport

$$\begin{aligned} \frac{\partial U}{\partial t} &= - \frac{\partial U u}{\partial x} - \frac{\partial V u}{\partial y} - \frac{\partial \Omega u}{\partial \eta} \\ \frac{\partial V}{\partial t} &= - \frac{\partial U v}{\partial x} - \frac{\partial V v}{\partial y} - \frac{\partial \Omega v}{\partial \eta} \\ \frac{\partial W}{\partial t} &= - \frac{\partial U w}{\partial x} - \frac{\partial V w}{\partial y} - \frac{\partial \Omega w}{\partial \eta} \\ \frac{\partial \mu_d}{\partial t} &= - \frac{\partial U}{\partial x} - \frac{\partial V}{\partial y} - \frac{\partial \Omega}{\partial \eta} \\ \frac{\partial \Theta}{\partial t} &= - \frac{\partial U \theta}{\partial x} - \frac{\partial V \theta}{\partial y} - \frac{\partial \Omega \theta}{\partial \eta} \\ \frac{\partial \mu_d q_j}{\partial t} &= - \frac{\partial U q_j}{\partial x} - \frac{\partial V q_j}{\partial y} - \frac{\partial \Omega q_j}{\partial \eta} \\ \frac{\partial \phi}{\partial t} &= -u \frac{\partial \phi}{\partial x} - v \frac{\partial \phi}{\partial y} - \omega \frac{\partial \phi}{\partial \eta} \end{aligned}$$

Dynamics: 3. Equations

	transport	pressure gradient
$\frac{\partial U}{\partial t} =$	$-\frac{\partial U u}{\partial x} - \frac{\partial V u}{\partial y} - \frac{\partial \Omega u}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial x} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x}$
$\frac{\partial V}{\partial t} =$	$-\frac{\partial U v}{\partial x} - \frac{\partial V v}{\partial y} - \frac{\partial \Omega v}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial y} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial y}$
$\frac{\partial W}{\partial t} =$	$-\frac{\partial U w}{\partial x} - \frac{\partial V w}{\partial y} - \frac{\partial \Omega w}{\partial \eta}$	$-g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right)$
$\frac{\partial \mu_d}{\partial t} =$	$-\frac{\partial U}{\partial x} - \frac{\partial V}{\partial y} - \frac{\partial \Omega}{\partial \eta}$	
$\frac{\partial \Theta}{\partial t} =$	$-\frac{\partial U \theta}{\partial x} - \frac{\partial V \theta}{\partial y} - \frac{\partial \Omega \theta}{\partial \eta}$	
$\frac{\partial \mu_d q_j}{\partial t} =$	$-\frac{\partial U q_j}{\partial x} - \frac{\partial V q_j}{\partial y} - \frac{\partial \Omega q_j}{\partial \eta}$	
$\frac{\partial \phi}{\partial t} =$	$-u \frac{\partial \phi}{\partial x} - v \frac{\partial \phi}{\partial y} - \omega \frac{\partial \phi}{\partial \eta}$	

Dynamics: 3. Equations

	transport	pressure gradient	
$\frac{\partial U}{\partial t} =$	$-\frac{\partial U u}{\partial x} - \frac{\partial V u}{\partial y} - \frac{\partial \Omega u}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial x} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x}$	$+ R_u + Q_u$
$\frac{\partial V}{\partial t} =$	$-\frac{\partial U v}{\partial x} - \frac{\partial V v}{\partial y} - \frac{\partial \Omega v}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial y} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial y}$	$+ R_v + Q_v$
$\frac{\partial W}{\partial t} =$	$-\frac{\partial U w}{\partial x} - \frac{\partial V w}{\partial y} - \frac{\partial \Omega w}{\partial \eta}$	$-g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right)$	$+ R_w + Q_w$
$\frac{\partial \mu_d}{\partial t} =$	$-\frac{\partial U}{\partial x} - \frac{\partial V}{\partial y} - \frac{\partial \Omega}{\partial \eta}$		
$\frac{\partial \Theta}{\partial t} =$	$-\frac{\partial U \theta}{\partial x} - \frac{\partial V \theta}{\partial y} - \frac{\partial \Omega \theta}{\partial \eta}$		$+ R_\theta + Q_\theta$
$\frac{\partial \mu_d q_j}{\partial t} =$	$-\frac{\partial U q_j}{\partial x} - \frac{\partial V q_j}{\partial y} - \frac{\partial \Omega q_j}{\partial \eta}$		$+ R_{q_j} + Q_{q_j}$
$\frac{\partial \phi}{\partial t} =$	$-u \frac{\partial \phi}{\partial x} - v \frac{\partial \phi}{\partial y} - \omega \frac{\partial \phi}{\partial \eta}$		$+ g w$

↑
 numerical filters,
 physics,
 projection terms
 ←
 ← geopotential eqn term

Dynamics: 3. Equations

	transport	pressure gradient	
$\frac{\partial U}{\partial t} =$	$-\frac{\partial U u}{\partial x} - \frac{\partial V u}{\partial y} - \frac{\partial \Omega u}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial x} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x}$	$+ R_u + Q_u$
$\frac{\partial V}{\partial t} =$	$-\frac{\partial U v}{\partial x} - \frac{\partial V v}{\partial y} - \frac{\partial \Omega v}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial y} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial y}$	$+ R_v + Q_v$
$\frac{\partial W}{\partial t} =$	$-\frac{\partial U w}{\partial x} - \frac{\partial V w}{\partial y} - \frac{\partial \Omega w}{\partial \eta}$	$-g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right)$	$+ R_w + Q_w$
$\frac{\partial \mu_d}{\partial t} =$	$-\frac{\partial U}{\partial x} - \frac{\partial V}{\partial y} - \frac{\partial \Omega}{\partial \eta}$		
$\frac{\partial \Theta}{\partial t} =$	$-\frac{\partial U \theta}{\partial x} - \frac{\partial V \theta}{\partial y} - \frac{\partial \Omega \theta}{\partial \eta}$		$+ R_\theta + Q_\theta$
$\frac{\partial \mu_d q_j}{\partial t} =$	$-\frac{\partial U q_j}{\partial x} - \frac{\partial V q_j}{\partial y} - \frac{\partial \Omega q_j}{\partial \eta}$		$+ R_{q_j} + Q_{q_j}$
$\frac{\partial \phi}{\partial t} =$	$-u \frac{\partial \phi}{\partial x} - v \frac{\partial \phi}{\partial y} - \omega \frac{\partial \phi}{\partial \eta}$		$+ g w$

↑
 numerical filters,
 physics,
 projection terms
 ←
 ← geopotential eqn term

Dagnostic relations: $\frac{\partial \phi}{\partial \eta} = -\alpha_d \mu_d, p = \left(\frac{R_d \Theta_m}{p_o \mu_d \alpha_d} \right)^\gamma, \Theta_m = \Theta \left(1 + \frac{R_v}{R_d} q_v \right)$

Dynamics: 4. Time integration scheme

3rd Order Runge-Kutta time integration


$\frac{\partial U}{\partial t} = RHS_u$	advance $\phi^t \rightarrow \phi^{t+\Delta t}$
$\frac{\partial V}{\partial t} = RHS_v$	$\phi^* = \phi^t + \frac{\Delta t}{3} RHS(\phi^t)$
$\frac{\partial W}{\partial t} = RHS_w$	$\phi^{**} = \phi^t + \frac{\Delta t}{2} RHS(\phi^*)$
$\vdots$	
$\vdots$	
$\vdots$	$\phi^{t+\Delta t} = \phi^t + \Delta t RHS(\phi^{**})$

Amplification factor $\phi_t = i k \phi; \phi^{n+1} = A \phi^n; |A| = 1 - \frac{(k \Delta t)^4}{24}$

Dynamics: 4. Time integration scheme – time splitting

$$U_t = L_{\text{fast}}(U) + L_{\text{slow}}(U)$$

3rd order Runge-Kutta, 3 steps

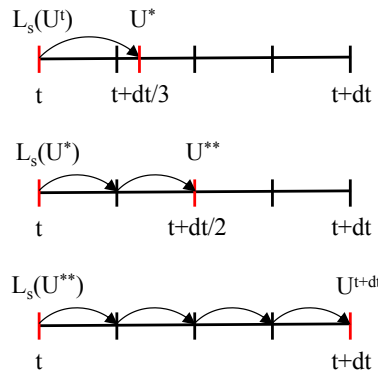

fast: acoustic and gravity wave terms.

slow: everything else.

- RK3 is 3rd order accurate for linear eqns, 2nd order accurate for nonlinear eqns.
- Stable for centered and upwind advection schemes.
- Stable for Courant number $Udt/dx < 1.73$
- Three $L_{\text{slow}}(U)$ evaluations per timestep.


Dynamics: 4. Time integration scheme – acoustic step

$$\begin{aligned}
 U^{t+\Delta t}, V^{t+\Delta t} & \quad \frac{\partial U}{\partial t} + \left(\mu_d \alpha \frac{\partial p}{\partial x} + \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x} \right)^\tau = R_U^t \\
 \mu_d^{\tau+\Delta\tau}, \Omega^{\tau+\Delta\tau} & \quad \frac{\partial \mu_d}{\partial t} + \frac{\partial U^{\tau+\Delta\tau}}{\partial x} + \frac{\partial \Omega^{\tau+\Delta\tau}}{\partial \eta} = 0 \\
 \Theta^{\tau+\Delta\tau} & \quad \frac{\partial \Theta}{\partial t} + \left(\frac{\partial U \Theta^t}{\partial x} + \frac{\partial \Omega \Theta^t}{\partial \eta} \right)^{\tau+\Delta\tau} = R_\Theta^t \\
 W^{\tau+\Delta\tau} & \quad \frac{\partial W}{\partial t} + g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right)^\tau = R_W^t \\
 \phi^{\tau+\Delta\tau} & \quad \left\{ \begin{aligned} \mu_d^t \frac{\partial \phi}{\partial t} + U^{\tau+\Delta\tau} \frac{\partial \phi^t}{\partial x} + \Omega^{\tau+\Delta\tau} \frac{\partial \phi^t}{\partial \eta} - g \bar{W}^\tau &= R_\phi^t \end{aligned} \right.
 \end{aligned}$$

- Forward-backward differencing on U , Θ , and μ equations
- Vertically implicit differencing on W and ϕ equations

Dynamics: 4. Time integration scheme - implementation


Begin time step

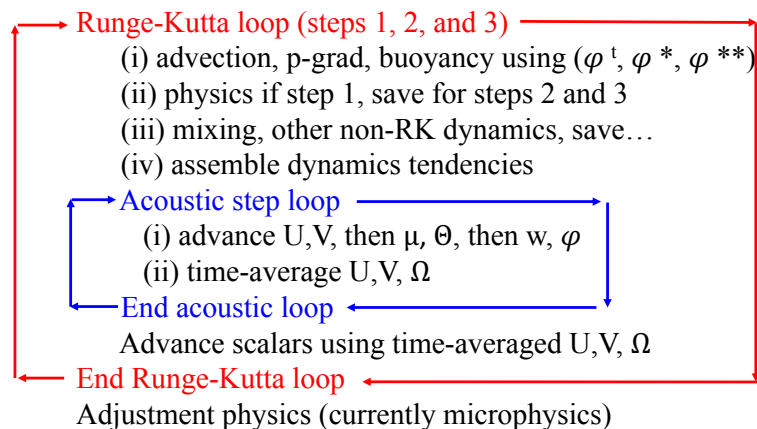

End time step

Dynamics: 5. Grid staggering – horizontal and vertical

C-grid staggering

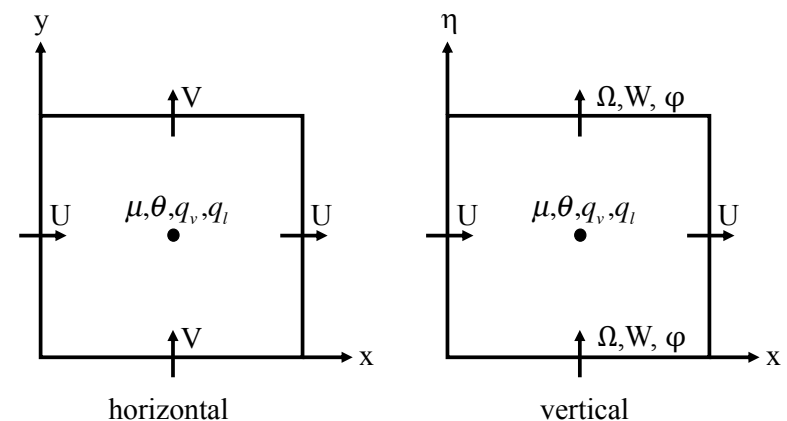


Dynamics: 6. Advection (transport) and conservation – dry-air mass

	transport	pressure gradient
$\frac{\partial U}{\partial t} =$	$-\frac{\partial U u}{\partial x} - \frac{\partial V u}{\partial y} - \frac{\partial \Omega u}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial x} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x} + R_u + Q_u$
$\frac{\partial V}{\partial t} =$	$-\frac{\partial U v}{\partial x} - \frac{\partial V v}{\partial y} - \frac{\partial \Omega v}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial y} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial y} + R_v + Q_v$
$\frac{\partial W}{\partial t} =$	$-\frac{\partial U w}{\partial x} - \frac{\partial V w}{\partial y} - \frac{\partial \Omega w}{\partial \eta}$	$-g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right) + R_w + Q_w$
$\frac{\partial \mu_d}{\partial t} =$	$-\frac{\partial U}{\partial x} - \frac{\partial V}{\partial y} - \frac{\partial \Omega}{\partial \eta}$	
$\frac{\partial \Theta}{\partial t} =$	$-\frac{\partial U \theta}{\partial x} - \frac{\partial V \theta}{\partial y} - \frac{\partial \Omega \theta}{\partial \eta}$	$+ R_\theta + Q_\theta$
$\frac{\partial \mu_d q_j}{\partial t} =$	$-\frac{\partial U q_j}{\partial x} - \frac{\partial V q_j}{\partial y} - \frac{\partial \Omega q_j}{\partial \eta}$	$+ R_{q_j} + Q_{q_j}$
$\frac{\partial \phi}{\partial t} =$	$-u \frac{\partial \phi}{\partial x} - v \frac{\partial \phi}{\partial y} - \omega \frac{\partial \phi}{\partial \eta}$	$+ g w$

Next:
Dry-air mass
conservation in
WRF

Diagnostic relations: $\frac{\partial \phi}{\partial \eta} = -\alpha_d \mu_d, p = \left(\frac{R_d \Theta_m}{p_o \mu_d \alpha_d} \right)^\gamma, \Theta_m = \Theta \left(1 + \frac{R_v}{R_d} q_v \right)$

Dynamics: 6. Advection (transport) and conservation – dry-air mass

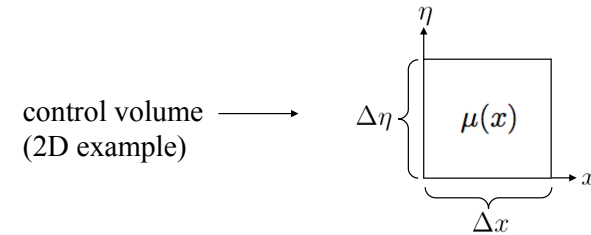

Mass in a control volume is proportional to

$$(\Delta x \Delta \eta)(\mu)^t$$

since $\mu(x) \Delta \eta = \Delta \pi = -g \rho \Delta z$

Dynamics: 6. Advection (transport) and conservation – dry-air mass

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$
2D example

Mass conservation equation

$$\Delta t^{-1} (\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

Change in mass over a time step


mass fluxes through
control volume faces

Dynamics: 6. Advection (transport) and conservation – dry-air mass

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$

Mass conservation equation

$$\Delta t^{-1} (\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

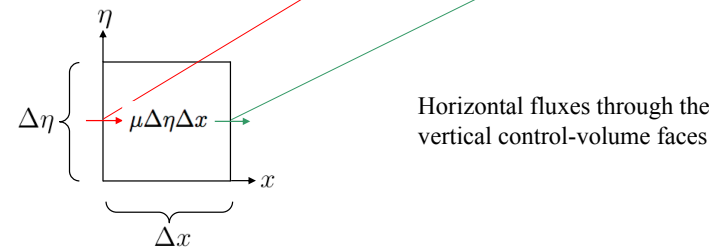


Dynamics: 6. Advection (transport) and conservation – dry-air mass

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$

Mass conservation equation


$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

Vertical fluxes through the horizontal control-volume faces



Dynamics: 6. Advection (transport) and conservation – dry-air mass

The same mass fluxes are used for neighboring grid cells - hence mass is conserved locally and globally.

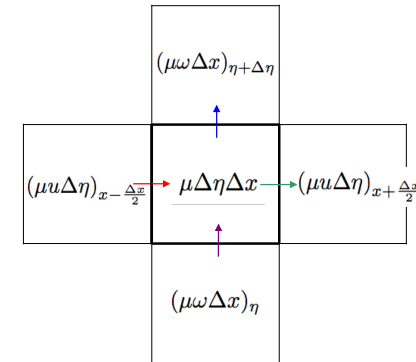

Dynamics: 6. Advection (transport) and conservation

	transport	pressure gradient
$\frac{\partial U}{\partial t} = -\frac{\partial U u}{\partial x} - \frac{\partial V u}{\partial y} - \frac{\partial \Omega u}{\partial \eta} - \alpha \mu_d \frac{\partial p}{\partial x} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x} + R_u + Q_u$		
$\frac{\partial V}{\partial t} = -\frac{\partial U v}{\partial x} - \frac{\partial V v}{\partial y} - \frac{\partial \Omega v}{\partial \eta} - \alpha \mu_d \frac{\partial p}{\partial y} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial y} + R_v + Q_v$		
$\frac{\partial W}{\partial t} = -\frac{\partial U w}{\partial x} - \frac{\partial V w}{\partial y} - \frac{\partial \Omega w}{\partial \eta} - g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right) + R_w + Q_w$		
$\frac{\partial \mu_d}{\partial t} = -\frac{\partial U}{\partial x} - \frac{\partial V}{\partial y} - \frac{\partial \Omega}{\partial \eta}$		
$\frac{\partial \Theta}{\partial t} = -\frac{\partial U \theta}{\partial x} - \frac{\partial V \theta}{\partial y} - \frac{\partial \Omega \theta}{\partial \eta} + R_\theta + Q_\theta$		
$\frac{\partial \mu_d q_j}{\partial t} = -\frac{\partial U q_j}{\partial x} - \frac{\partial V q_j}{\partial y} - \frac{\partial \Omega q_j}{\partial \eta} + R_{q_j} + Q_{q_j}$		
$\frac{\partial \phi}{\partial t} = -u \frac{\partial \phi}{\partial x} - v \frac{\partial \phi}{\partial y} - \omega \frac{\partial \phi}{\partial \eta} + g w$		

Entropy and scalar mass conservation in WRF

Diagnostic relations: $\frac{\partial \phi}{\partial \eta} = -\alpha_d \mu_d, p = \left(\frac{R_d \Theta_m}{p_o \mu_d \alpha_d} \right)^\gamma, \Theta_m = \Theta \left(1 + \frac{R_v}{R_d} q_v \right)$

Dynamics: 6. Advection (transport) and conservation – scalars

Mass in a control volume $(\Delta x \Delta \eta)(\mu)^t$

Scalar mass $(\Delta x \Delta \eta)(\mu \phi)^t$

Mass conservation equation:

$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu)^{t+\Delta t} - (\mu)^t] = [(\mu u \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \Delta x)_{x, \eta+\Delta \eta/2}]$$

change in mass over a time step mass fluxes through control volume faces

Scalar mass conservation equation:

$$\Delta t^{-1}(\Delta x \Delta \eta) \cdot [(\mu \phi)^{t+\Delta t} - (\mu \phi)^t] = [(\mu u \phi \Delta \eta)_{x-\Delta x/2, \eta} - (\mu u \phi \Delta \eta)_{x+\Delta x/2, \eta}] + [(\mu \omega \phi \Delta x)_{x, \eta-\Delta \eta/2} - (\mu \omega \phi \Delta x)_{x, \eta+\Delta \eta/2}]$$

change in tracer mass over a time step tracer mass fluxes through control volume faces

Dynamics: 6. Advection (transport) and conservation

	transport	pressure gradient	
$\frac{\partial U}{\partial t} =$	$-\frac{\partial U u}{\partial x} - \frac{\partial V u}{\partial y} - \frac{\partial \Omega u}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial x} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial x} + R_u + Q_u$	
$\frac{\partial V}{\partial t} =$	$-\frac{\partial U v}{\partial x} - \frac{\partial V v}{\partial y} - \frac{\partial \Omega v}{\partial \eta}$	$-\alpha \mu_d \frac{\partial p}{\partial y} - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \frac{\partial \phi}{\partial y} + R_v + Q_v$	
$\frac{\partial W}{\partial t} =$	$-\frac{\partial U w}{\partial x} - \frac{\partial V w}{\partial y} - \frac{\partial \Omega w}{\partial \eta}$	$-g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right) + R_w + Q_w$	
$\frac{\partial \mu_d}{\partial t} =$	$-\frac{\partial U}{\partial x} - \frac{\partial V}{\partial y} - \frac{\partial \Omega}{\partial \eta}$		
$\frac{\partial \Theta}{\partial t} =$	$-\frac{\partial U \theta}{\partial x} - \frac{\partial V \theta}{\partial y} - \frac{\partial \Omega \theta}{\partial \eta}$	$+ R_\theta + Q_\theta$	
$\frac{\partial \mu_d q_j}{\partial t} =$	$-\frac{\partial U q_j}{\partial x} - \frac{\partial V q_j}{\partial y} - \frac{\partial \Omega q_j}{\partial \eta}$	$+ R_{q_j} + Q_{q_j}$	
$\frac{\partial \phi}{\partial t} =$	$-u \frac{\partial \phi}{\partial x} - v \frac{\partial \phi}{\partial y} - \omega \frac{\partial \phi}{\partial \eta}$	$+ g w$	

Transport schemes: flux divergence (transport) options in WRF

Diagnostic relations: $\frac{\partial \phi}{\partial \eta} = -\alpha_d \mu_d, p = \left(\frac{R_d \Theta_m}{p_o \mu_d \alpha_d} \right)^\gamma, \Theta_m = \Theta \left(1 + \frac{R_v}{R_d} q_v \right)$

Dynamics: 6. Advection (transport) and conservation

2nd, 3rd, 4th, 5th and 6th order centered and upwind-biased schemes are available in the ARW model.

Example: 5th order scheme

$$\frac{\partial(U\psi)}{\partial x} = \frac{1}{\Delta x} \left(F_{i+\frac{1}{2}}(U\psi) - F_{i-\frac{1}{2}}(U\psi) \right)$$

where

$$F_{i-\frac{1}{2}}(U\psi) = U_{i-\frac{1}{2}} \left\{ \frac{37}{60}(\psi_i + \psi_{i-1}) - \frac{2}{15}(\psi_{i+1} + \psi_{i-2}) + \frac{1}{60}(\psi_{i+2} + \psi_{i-3}) \right\} \\ - \text{sign}(1, U) \frac{1}{60} \left\{ (\psi_{i+2} - \psi_{i-3}) - 5(\psi_{i+1} - \psi_{i-2}) + 10(\psi_i - \psi_{i-1}) \right\}$$

Dynamics: 6. Advection (transport) and conservation


For constant U, the 5th order flux divergence tendency becomes

$$\Delta t \frac{\delta(U\psi)}{\Delta x} \Big|_{5th} = \Delta t \frac{\delta(U\psi)}{\Delta x} \Big|_{6th} - \underbrace{\left[\frac{U \Delta t}{\Delta x} \frac{1}{60} (-\psi_{i-3} + 6\psi_{i-2} - 15\psi_{i-1} + 20\psi_i - 15\psi_{i+1} + 6\psi_{i+2} - \psi_{i+3}) \right]}_{\frac{Cr}{60} \frac{\partial^6 \psi}{\partial x^6} + H.O.T.}$$

The odd-ordered flux divergence schemes are equivalent to the next higher ordered (even) flux-divergence scheme plus a dissipation term of the higher even order with a coefficient proportional to the Courant number.

Dynamics: 6. Advection (transport) and conservation – shape preserving

1D advection

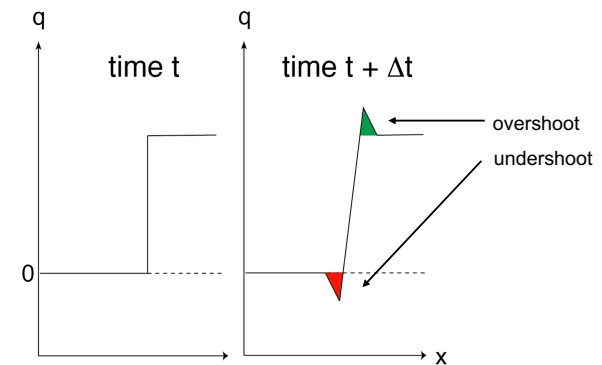

ARW transport is conservative, but not positive definite nor monotonic.

Removal of negative q ■ results in spurious source of q ■.

Dynamics: 6. Advection (transport) and conservation – shape preserving

Scalar update, last RK3 step

$$(\mu\phi)^{t+\Delta t} = (\mu\phi)^t - \Delta t \sum_{i=1}^n \delta_{x_i} [f_i] \quad (1)$$

(1) Decompose flux: $f_i = f_i^{upwind} + f_i^c$


(2) Renormalize high-order correction fluxes f_i^c such that solution is positive definite or monotonic: $f_i^c = R(f_i^c)$

(3) Update scalar eqn. (1) using $f_i = f_i^{upwind} + R(f_i^c)$

Dynamics: 6. Advection (transport) and conservation – examples

1D Example: Top-Hat Advection

1D Top-hat transport Cr = 0.5, 1 revolution, 200 steps

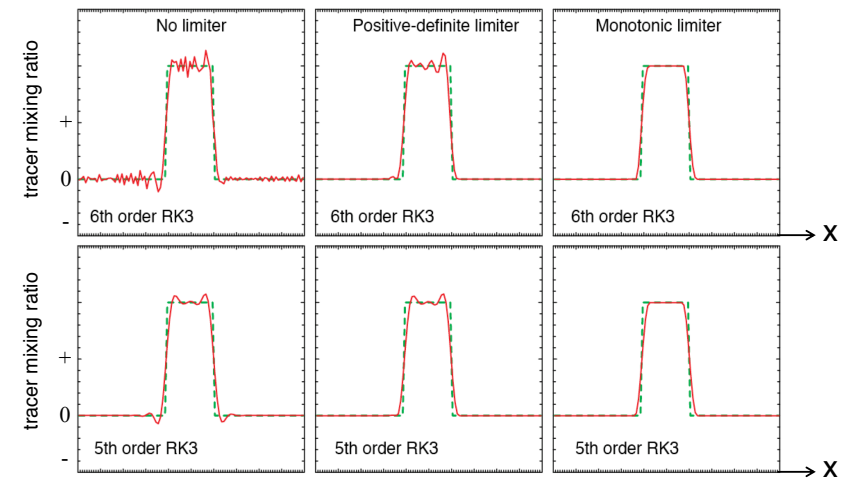

Dynamics: 6. Advection (transport) and conservation

Where are the transport-scheme parameters?

The namelist.input file:

&dynamics

$\left. \begin{array}{l} h_mom_adv_order \\ v_mom_adv_order \\ h_sca_adv_order \\ v_sca_adv_order \end{array} \right\}$ **scheme_order** (2, 3, 4, or 5)
defaults:
horizontal (h_*) = 5
vertical (v_*) = 3

$\rightarrow$ **momentum_adv_opt**
= 1 standard scheme
= 3 5th order WENO
default: 1

$\left. \begin{array}{l} moist_adv_opt \\ scalar_adv_opt \\ chem_adv_opt \\ tracer_adv_opt \\ tke_adv_opt \end{array} \right\}$ **options:**
= 1, 2, 3 : no limiter,
positive definite (PD),
monotonic
= 4 : 5th order WENO
= 5 : 5th order PD WENO

Dynamics: 6. Advection (transport) and conservation

Where are the transport-scheme parameters?

The namelist.input file:

&dynamics

- The positive definite limiter (option 2) is enabled in the default WRF configuration.
- Chemistry applications typically use the monotonic limiter (option 3).
- Option 5 (PD WENO) is used in some applications employing multi-moment microphysics.

scheme_order (2, 3, 4, or 5)
defaults:
horizontal (h_*) = 5
vertical (v_*) = 3

= 1 standard scheme
= 3 5th order WENO
default: 1

$\left. \begin{array}{l} moist_adv_opt \\ scalar_adv_opt \\ chem_adv_opt \\ tracer_adv_opt \\ tke_adv_opt \end{array} \right\}$ **options:**
= 1, 2, 3 : no limiter,
positive definite (PD),
monotonic
= 4 : 5th order WENO
= 5 : 5th order PD WENO

Dynamics: 7. Time step parameters

3rd order Runge-Kutta time step Δt_{RK}

Courant number limited, 1D: $C_r = \frac{U\Delta t}{\Delta x} < 1.43$ (5th order adv.)

Generally stable using a timestep approximately twice as large as used in a leapfrog model.

Where?

The namelist.input file:

&domains

time_step (integer seconds)

time_step_fract_num

time_step_fract_den

Dynamics: 7. Time step parameters

3rd order Runge-Kutta time step Δt_{RK} (&domains *time_step*)

Acoustic time step

2D horizontal Courant number limited: $C_r = \frac{C_s \Delta \tau}{\Delta h} < \frac{1}{\sqrt{2}}$
 $\Delta \tau_{sound} = \Delta t_{RK} / (\text{number of acoustic steps})$

Where?

The namelist.input file:

&dynamics

time_step_sound (integer)

Dynamics: 7. Time step parameters

3rd order Runge-Kutta time step Δt_{RK} (&domains *time_step*)

Acoustic time step [&dynamics *time_step_sound* (integer)]

Guidelines for time step

Δt_{RK} in seconds should be about $6 * \Delta x$ (grid size in kilometers). Larger Δt can be used in smaller-scale dry situations, but *time_step_sound* (default = 4) should increase proportionately if larger Δt is used.

If ARW blows up (aborts) quickly, try:

Decreasing Δt_{RK} (that also decreases Δt_{sound}),

Or increasing *time_step_sound* (that decreases Δt_{sound} but does not change Δt_{RK})

Dynamics: 8. Filters – divergence damping

Purpose: filter acoustic modes (3-D divergence, $D = \nabla \cdot \rho \mathbf{V}$)

$$\left\{ \frac{\partial \rho \mathbf{V}}{\partial t} + \nabla p + \dots = \gamma'_d \nabla D \right\}$$

$$\nabla \cdot \left\{ \right\} \rightarrow \frac{\partial D}{\partial t} + \nabla^2 p + \dots = \gamma'_d \nabla^2 D$$

From the pressure equation: $p_t \simeq c^2 D$

$$\frac{\partial \rho \mathbf{V}}{\partial t} + \nabla [p_\tau + \gamma_d (p^\tau - p^{\tau - \Delta \tau})] + \dots = 0$$

$\gamma_d = 0.1$ recommended (default) (&dynamics *smdiv*)

(Illustrated in height coordinates for simplicity)

Dynamics: 8. Filters – time off-centering the vertical acoustic modes

Purpose: damp vertically-propagating acoustic modes

$$\frac{\partial W}{\partial t} + g \left(\mu_d - \frac{\alpha}{\alpha_d} \frac{\partial p}{\partial \eta} \right)^\tau = \dots$$

$$\frac{\partial \phi}{\partial t} - \frac{g}{\mu_d^t} \overline{W}^\tau = \dots$$

$$\overline{(\quad)}^\tau = \frac{1+\beta}{2} \overline{(\quad)}^{\tau+\Delta\tau} + \frac{1-\beta}{2} \overline{(\quad)}^\tau$$

Slightly forward centering the vertical pressure gradient damps
3-D divergence as demonstrated for the divergence damper

$\beta = 0.1$ recommended (default) [`&dynamics epssm`]

Dynamics: 8. Filters – external mode filter

Purpose: filter the external mode

Vertically integrated horizontal divergence, $D_h = \int_1^0 (\nabla_\eta \cdot \mu \mathbf{V}_h) d\eta$

$$\left\{ \frac{\partial \mu \mathbf{V}_h}{\partial t} + \dots = -\gamma_e \nabla_\eta D_h \right\}$$

$$\int_1^0 \nabla_\eta \cdot \left\{ \right\} d\eta \rightarrow \frac{\partial D_h}{\partial t} + \dots = \gamma_e \nabla^2 D_h$$

Continuity equation: $\frac{\partial \mu}{\partial t} = -\nabla_\eta \cdot \mu \mathbf{V}_h - \frac{\partial \mu \dot{\eta}}{\partial \eta} = D_h$

$$\frac{\partial \mu \mathbf{V}_h}{\partial \tau} + \dots = -\gamma_e \frac{\Delta x^2}{\Delta \tau^2} \nabla_\eta (\mu^\tau - \mu^{\tau-\Delta\tau})$$

$\gamma_e = 0.01$ recommended (default) [`&dynamics emdiv`]

(Primarily for real-data applications)

Dynamics: 8. Filters – vertical velocity damping

Purpose: damp anomalously-large vertical velocities

(usually associated with anomalous physics tendencies)

Additional term:

$$\partial_t W = \dots - \mu_d \text{sign}(W) \gamma_w (Cr - Cr_\beta)$$

$$Cr = \left| \frac{\Omega dt}{\mu d\eta} \right|$$

$Cr_\beta = 1.0$ typical value (default)

[`share/module_model_constants.F w_beta`]

$\gamma_w = 0.3 \text{ m/s}^2$ recommended (default)

[`share/module_model_constants.F w_alpha`]

[`&dynamics w_damping 0 (off; default) 1 (on)`]

Dynamics: 8. Filters – 2D Smagorinsky

2nd-Order Horizontal Mixing,
Horizontal-Deformation-Based K_h

Purpose: mixing on horizontal coordinate surfaces

(real-data applications) [`&dynamics diff_opt=1, km_opt=4`]

$$K_h = C_s^2 l^2 \left[0.25 (D_{11} - D_{22})^2 + \overline{D_{12}^2}^{xy} \right]^{\frac{1}{2}}$$

where $l = (\Delta x \Delta y)^{1/2}$

$$D_{11} = 2m^2 [\partial_x(m^{-1}u) - z_x \partial_z(m^{-1}u)]$$

$$D_{22} = 2m^2 [\partial_y(m^{-1}v) - z_y \partial_z(m^{-1}v)]$$

$$D_{12} = m^2 [\partial_y(m^{-1}u) - z_y \partial_z(m^{-1}u) + \partial_x(m^{-1}v) - z_x \partial_z(m^{-1}v)]$$

$C_s = 0.25$ (Smagorinsky coefficient, default value)

[`&dynamics c_s`]

Dynamics: 8. Filters – gravity-wave absorbing layer

Implicit Rayleigh w Damping Layer for Split-Explicit
Nonhydrostatic NWP Models (gravity-wave absorbing layer)

$$W^{\tau+\Delta\tau} = W^{*\tau+\Delta\tau} - \Delta\tau R_w(\eta) W^{\tau+\Delta\tau}$$

$$R_w(\eta) = \begin{cases} \gamma_r \sin^2 \left[\frac{\pi}{2} \left(1 - \frac{z_{top}-z}{z_d} \right) \right] & \text{for } z \geq (z_{top} - z_d); \\ 0 & \text{otherwise,} \end{cases} \quad \begin{array}{l} R_w(\eta) \text{- damping rate (t}^{-1}\text{)} \\ z_d \text{- depth of the damping layer} \\ \gamma_r \text{- damping coefficient} \end{array}$$


[&dynamics damp_opt = 3 (default = 0)]

[&dynamics damp_coef = 0.2 (recommended, = 0. default)]

[&dynamics zdamp = 5000. (z_d (meters); default); height below
model top where damping begins]

Dynamics: 8. Filters – gravity-wave absorbing layer example

Model Initialized 04 Dec 2007 00 UTC

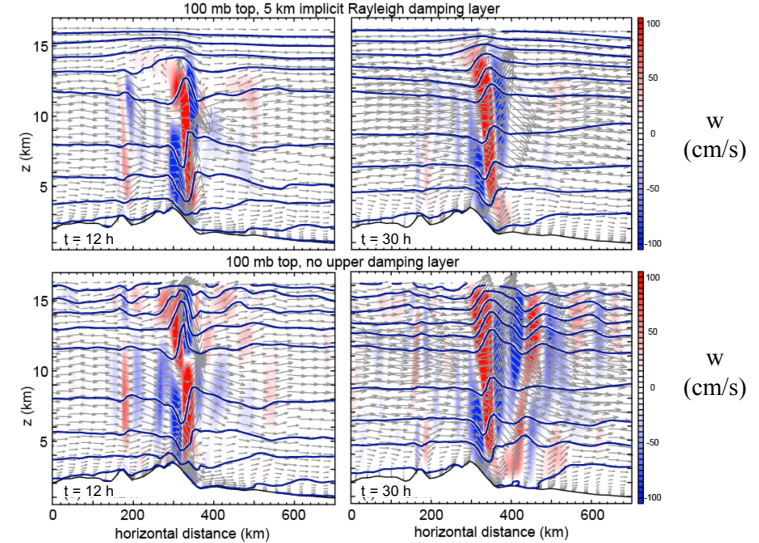

Dynamics: 9. Map projections and global configuration

ARW Model: projection options

1. Cartesian geometry:
idealized cases
2. Lambert Conformal:
mid-latitude applications
3. Polar Stereographic:
high-latitude applications
4. Mercator:
low-latitude applications
5. Latitude-Longitude global, regional

Projections 1-4 are isotropic ($m_x = m_y$)

Latitude-longitude projection is anisotropic ($m_x \neq m_y$)



Dynamics: 9. Map projections and global configuration

Global ARW – Polar filters

Converging gridlines severely limit timestep.
The polar filter removes this limitation.

Filter procedure - Along a grid latitude circle:

1. Fourier transform variable.
2. Filter Fourier coefficients.
3. Transform back to physical space.



$$\hat{\phi}(k)_{\text{filtered}} = a(k) \hat{\phi}(k), \quad \text{for all } k$$

$$a(k) = \min \left[1., \max \left(0., \left(\frac{\cos \psi}{\cos \psi_o} \right)^2 \frac{1}{\sin^2(\pi k/n)} \right) \right]$$

k = dimensionless wavenumber


$\hat{\phi}(k)$ = Fourier coefficients from forward transform

$a(k)$ = filter coefficients

ψ = latitude ψ_o = polar filter latitude, filter when $|\psi| > \psi_o$

Dynamics: 9. Map projections and global configuration

An alternative to
global ARW...

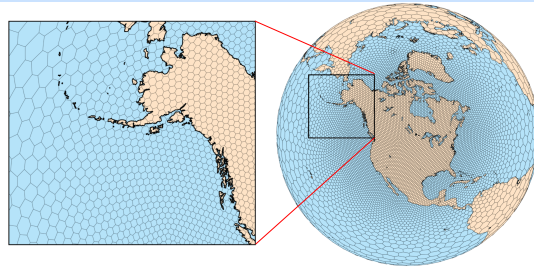

- Global, nonhydrostatic, C-grid Voronoi mesh
- Numerics similar to WRF; WRF-NRCM physics
- No pole problems
- Variable-resolution mesh – no nested BC problems

Available at: <http://mpas-dev.github.io/>



WRF Tutorial July 2018

Bill Skamarock (skamaroc@ucar.edu)

Dynamics: 10. Boundary condition options

ARW Model: Boundary Condition Options

Lateral boundary conditions

1. Specified (Coarse grid, real-data applications).
2. Open lateral boundaries (gravity-wave radiative).
3. Symmetric lateral boundary condition (free-slip wall).
4. Periodic lateral boundary conditions.
5. Nested boundary conditions (specified).

Top boundary conditions

1. Constant pressure.


Bottom boundary conditions

1. Free slip.
2. Various B.L. implementations of surface drag, fluxes.

WRF Tutorial July 2018

Bill Skamarock (skamaroc@ucar.edu)

Dynamics: Where are things?

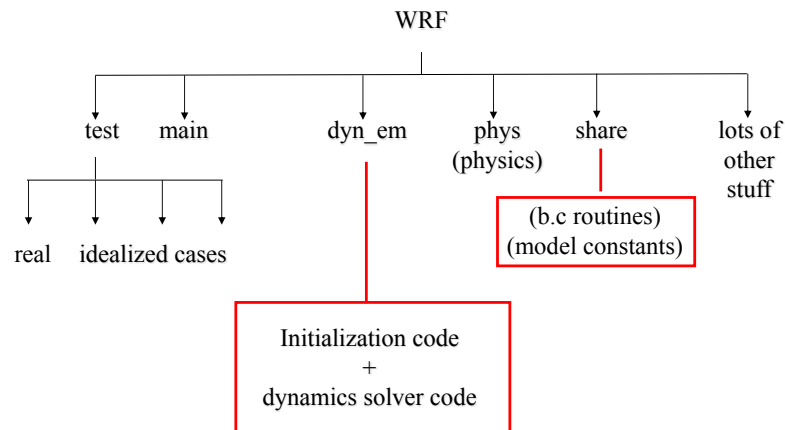

WRF ARW Tech Note

A Description of the Advanced Research WRF Version 3 (June 2008, 2012 update)

<http://www.mmm.ucar.edu/wrf/users/pub-doc.html>

We are in the process of updating the technical note to Version 4

WRF Tutorial July 2018

Bill Skamarock (skamaroc@ucar.edu)